

Technical Information Bulletin

LED Puck Light



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67187
 Description: UCP/WIRES/12V/2W/30K/FR/WH/STD
 UPC: 6954967187
 Case quantity: 240

PHYSICAL DATA

Type: Bare wires LED Puck Light
 Size: 2 7/8" (71.6mm)
 Shape: Round
 Finish: White
 Lens Finish: Frosted
 Mounting: Recessed
 Wire gauge (AWG): 24



PERFORMANCE DATA

Watts (W): 2
 Volts (VDC): 12
 Colour temp. (K)¹: 3 000
 Lumen output (lm): 120
 Lumen per Watts (lm/W): 60
 CRI: 90
 Life L70 (h)²: 50 000
 Beam angle (°): 120
 Operating temp. range: -20°C to 40°C (-4°F to 104°F)



¹ Typical colour temperature range: +/- 5 %
² Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations



COMPATIBLE ACCESSORIES

Order code	Description	Type
67180	UCP/TRIM/BACKPLATE/WH/STD	White trim and back plate
67181	UCP/TRIM/BACKPLATE/BLK/STD	Black trim and back plate
67183	UCP/ACC/HUB6/STD	Hub for 6 LED Puck Lights
67185	UCP/ACC/DIMMER/STD	Dimmer Switch
67186	UCP/ACC/MOTIONSENSOR/STD	Motion Sensor

TECHNICAL DRAWINGS AND DIMENSIONS

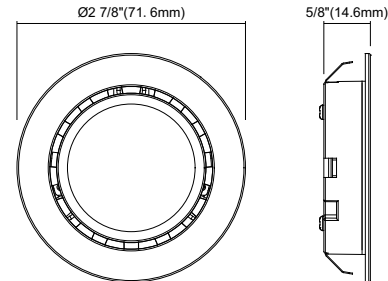

COMPATIBLE DRIVERS

Order code	Description
67184	LED/DRIVER/12W/12V/PLUG/ND/STD
62665	LED/TAPE/36W/12V/WW+CW/PS/ND/STD
65743	LED/DRIVER/10W/12V/HW/ND/STD
65744	LED/DRIVER/20W/12V/HW/ND/STD
65740	LED/DRIVER/50W/12V/HW/D/STD
65745	LED/DRIVER/60W/12V/HW/ND/VS/STD
65746	LED/DRIVER/60W/12V/HW/ND/STD
67071	DRIVER-DIMMER/12V/60W/WH/STD

DESCRIPTION AND OTHER OPTIONS

UCP	/	WIRES	/	12V	/	2W	/	30K	/	FR	/	WH	/	STD
Family		Type		Volts		Watts		Colour Temperature		Lens Finish		Trim Colour		Brand
UCP		WIRE		12V		2W		30K		FR		WH		STD
		Bare wires		12 Volts		2 Watts		3 000 K		Frosted		White		STANDARD

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. February 14, 2019