



300Mbps Wireless N PCI Express Adapter

N300 Desktop Wi-Fi with
Proven 300Mbps Wi-Fi Reliability

TL-WN881ND



300Mbps Wi-Fi



Advanced Security



Low-Profile Bracket

Highlights


N300 Stability for Your Daily Needs

With 2x2 MIMO for more efficient data transfer, the TL-WN881ND reaches Wi-Fi speeds of up to 300Mbps, ideal for streaming, gaming and internet calls.



Extra Low-Profile Bracket for Better Compatibility

The extra low-profile bracket provided allows for installation in slim desktop towers through the changing of the bracket.

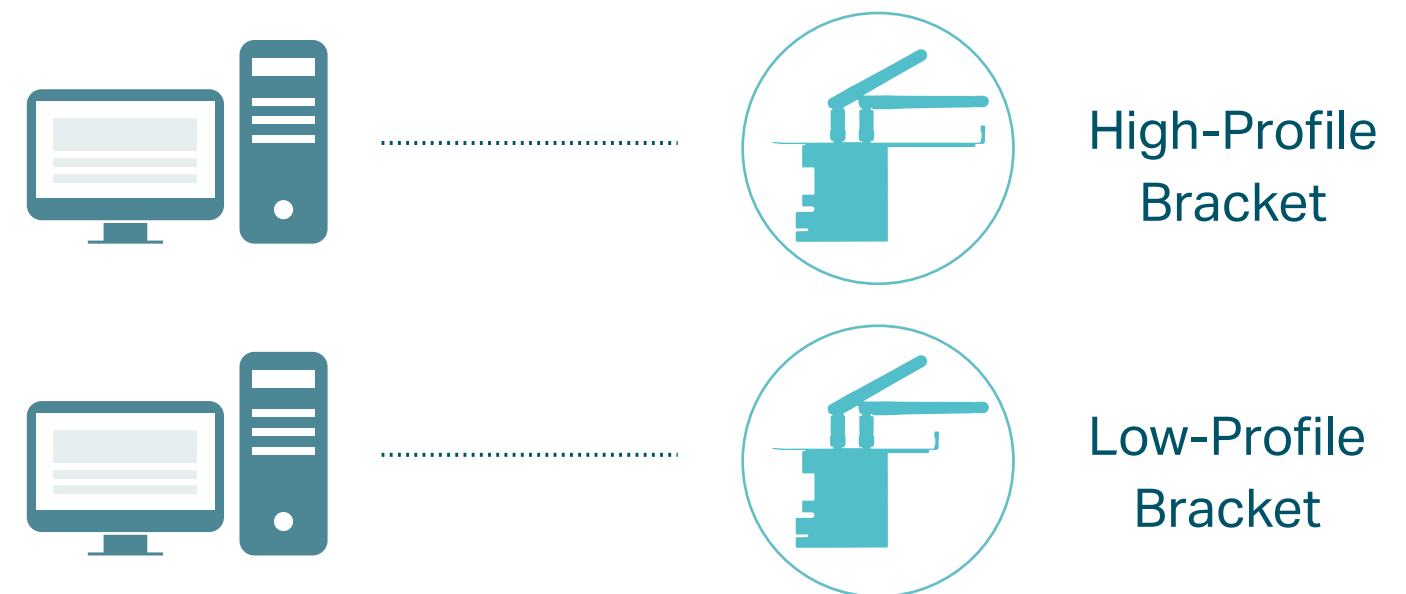

Specifications

Wireless

- Wireless Standard: IEEE 802.11b/g/n
- Frequency: 2.4-2.4835GHz
- Signal Rate: 300Mbps at 2.4GHz
- Wireless Mode: Ad-Hoc/Infrastructure Mode
- Wireless Security: WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
- Modulation Technology: DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM

Hardware

- Interface: PCI Express
- Antenna: 2 Detachable External Antennas
- LED: Status
- Dimensions: 4.8 × 3.1 × 0.8 in. (120.8 × 78.5 × 21.5 mm)

Others

- Package Contents
 - 300Mbps Wireless N PCI Express Adapter TL-WN881ND
 - Low-Profile Bracket
 - Quick Installation Guide
 - Resource CD
- Certification
 - FCC, CE, RoHS
- System Requirements
 - Windows10/8.1/8/7, Linux
- Environment
 - Operating Temperature: 0°C~40°C (32°F ~104°F)
 - Storage Temperature: -40°C~70°C (-40°F ~158°F)
 - Operating Humidity: 10%~90% non-condensing
 - Storage Humidity: 5%~90% non-condensing



For more information, please visit

<http://www.tp-link.com/products/details/?model=TL-WN881ND>

or scan the QR code left

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright ©2018 TP-Link Technologies Co., Ltd. All rights reserved.
*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage are not guaranteed and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, connection quality, and client condition.

www.tp-link.com