

# A perfect blend of design, performance and value

## LYTEPRO LED SMALL FLOODLIGHT 40W LPF2



### PHILIPS KEENE LYTEPRO LED SMALL FLOODLIGHT 40W LPF2

The Philips Keene LytePro LED Small Floodlight allows precision and flexibility in a compact design. The LPF2 features state-of-the-art long-life LED technology and is ideal for landscapes, accenting signage or displays, facades, and many other lighting applications.



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Catalog No: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_  
 Mfg: \_\_\_\_\_ Lamps: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Notes: \_\_\_\_\_

#### Ordering guide<sup>1</sup>

example: LPF2-E-4K-FL-K-F1-PCB-1-BZ

Series / # of COB <sup>2</sup>	Drive Current	Color Temperature	Distribution	Mounting	Options	Voltage	Finish
LPF2 -	E -	- -	FL -	K -	-	-	-
<b>LPF2</b> LytePro LED Small Floodlight 40W	<b>E</b> 500 mA	<b>4K</b> 4000K <sup>3</sup> <b>5K</b> 5000K <sup>3</sup>	<b>FL</b> Flood	<b>K</b> Knuckle 1/2" NPT	<b>F1<sup>4</sup></b> Single Fusing <b>F2<sup>5</sup></b> Double Fusing <b>F3<sup>6</sup></b> Double Fusing, Canada <b>PCB<sup>7</sup></b> Photocontrol <b>DM25<sup>8,9</sup></b> Dynadimmer	<b>1</b> 120V <b>2</b> 208V <b>3</b> 240V <b>4</b> 277V <b>6</b> 347V <b>8</b> 120-277V	<b>BZ</b> Textured Dark Bronze <b>WH</b> Textured White <b>DGY</b> Textured Dark Gray

#### Accessories – Ordering Guide (must be ordered separately)

Catalog #	Description
<b>LPF2WG<sup>10,11</sup></b>	Wire Guard
<b>LPF2SG<sup>10,11</sup></b>	Stone Guard
<b>LPFW10BZ<sup>10,11</sup></b>	Bronze Wall Adapter
<b>LPFW10WH<sup>12</sup></b>	White Wall Adapter
<b>LPFW10DGY<sup>12</sup></b>	Textured Dark Gray Wall Adapter

#### Stocked Luminaires – Ordering Guide<sup>13,14,15,16</sup>

Catalog #	Description	Master Pack, QTY	UPC Code
<b>STKLPF2K-8</b>	LPF2, Knuckle Mount, 120-277V	Yes, 4	786034956932
<b>STKLPF2K-6</b>	LPF2, Knuckle Mount, 347V	Yes, 4	786034957762

#### Footnotes:

- MTO configurations are assembled in the USA.
- COB denotes Chip On Board LED platform.
- Both 4K and 5K options have a minimum 80 CRI.
- 'F1' for 120, 277, 347V.
- 'F2' for 208, 240V.
- 'F3' for 208, 240V Canadian double pull.
- Specify voltage. 'PCB' not available with '8' universal voltage option.
- 'DM25' only available 120-277V and dims to 25% for 6 hours.
- Dynadimmer is suitable for use from -30°C to 40° temperature ambient only.
- Limited quantities stocked in our Cornwall Distribution facility.
- Contact factory for availability of large order quantities.
- LPFW10WH and DGY are Made to Order only.
- All stock products are 'BZ' Textured Dark Bronze, '4K' Neutral White and 'FL' Flood Optics.
- Stock LPF products ship out of our Cornwall Distribution facility.
- Always consult factory for current inventory levels. Larger quantities may be converted to MTO if necessary.
- LPF2 is provided with full 4-color POP packaging.



**PHILIPS  
KEENE**

# LYTEPRO LED SMALL FLOODLIGHT 40W LPF2

## Features

- LPF2 delivers 3,460 lumens at 40W, with an efficacy of 87 lumens per watt
- Effectively replaces equivalent 150W HID at minimum
- 4000K neutral white is standard, 5000K cool white is optional, minimum 80 CRI
- DLC certified optics provide excellent uniformity ideal for general facade, target and landscape illumination
- Fixtures are IP66 rated and suitable for use in ambients from -40°C to 40°C
- Rated system life of 100K hours for the driver and LED (>L<sub>70</sub>) at ambients up to 30°C
- 5-year limited warranty
- LPF2 stocked in dark bronze, 120-277V or 347V, and 4000K Neutral White
- Additional made to order versions available that are assembled in the USA, consult factory for current lead time


## Performance Specifications

Beam Specs	Flood (FL)
Initial Lumens (4K and 5K) <sup>17</sup>	3,460
Average Wattage <sup>18</sup>	40W
Lumens/Watt	87
NEMA Beam	6H x 6V
50% beam (horizontal X vertical)	93° x 79°
10% beam (horizontal X vertical)	127° x 105°
Max Candela	1,974 cd

17. Lumen values based on photometric tests performed in compliance with IESNA LM-79.  
18. System input wattage may vary based on input voltage, by up to +/- 8%, and based on manufacturer forward voltage, by up to +/- 4%.

## Photometrics

### Flood (FL)

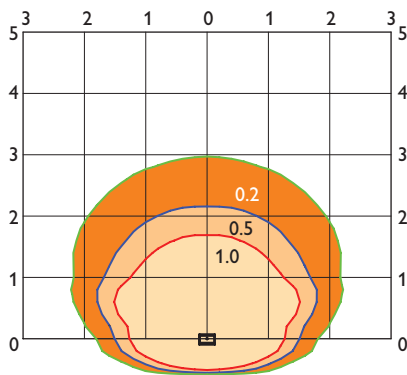


### LPF2 40W - 12' Mounting Height, 30° Tilt

Mounting Height	18	15	12	10	8
Multiplier	0.32	0.56	1.0	1.5	2.5


**Notes:** Grid is in multiples of mounting height and values shown are in footcandles. Values shown are based on initial lumens.

## Dimensions

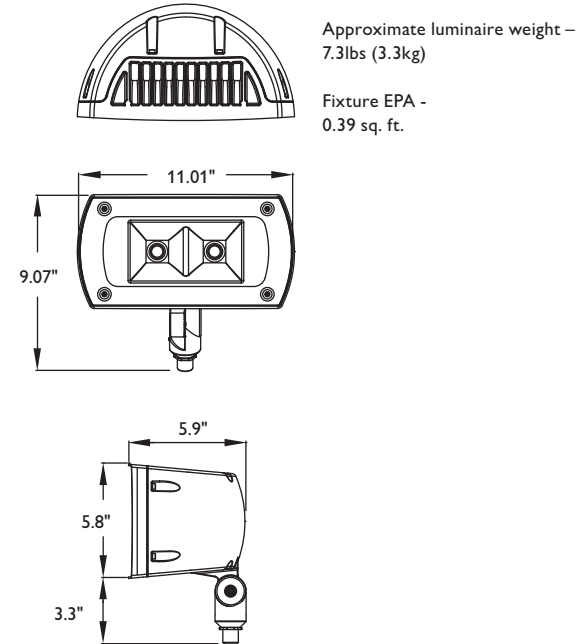


## Accessory Details (must be ordered separately)


LPF2WG wire guard (field installed)



LPF2SG stone guard (field installed)



LPFW10 wall adapter (field installed)



# LYTEPRO LED SMALL FLOODLIGHT 40W LPF2

## Specifications

### General Description

The Philips Keene LytePro LED Small Floodlight 40W LPF2 combines excellent performance, design and value to meet the needs for the energy and budget conscious. The LPF2 is available with a 1/2" NPT knuckle for ease of installation and an all-purpose Flood optical distribution suitable for use on a wide range of applications. Two primary SKUs are available in stock for 2-day quick ship while a more comprehensive offering is available made-to-order with multiple offerings that include fusing, photocontrol, Dynadimmer, NW and CW color temps and three standard finishes.

### Housing

Die-cast housing houses both the LED and driver assemblies. Design incorporates integrated heatsinking to maximize thermal performance and reliability.

### Mounting

The LPF2 comes standard with a 1/2" NPT knuckle mount to allow for wide range of aiming and adjustability. Optional LPFW10 mounting accessory can be field installed to allow for easy installation to a wall or surface. Caution: Philips Keene is not responsible for failure of mounting components supplied by others. Proper care should be exercised in mounting component selection and installation to insure adequate luminaire support, given system weight, vibration potential, exposure to the elements, thermal conditions present in the given application, etc. If luminaires are not properly supported and installed correctly per local codes and requirements, this may result in damage or injury caused by the luminaire, for which Philips Keene is not responsible.

### IP Rating

Entire fixture is rated IP66 rated, including driver and optical assemblies. Use of field installed LPFW10 wall mount accessory is rated to IP54, but luminaire housing remains IP66.

### LED Board and Array

The LPF2 utilizes two Citizen CLL032 COB (Chip On Board) LEDs. Provides 87 lm/W at the system level. Standard color temp is 4000K +/- 250K, with optional 5000K available. Both color temps have a minimum 80 CRI.

### LED Thermal Management

Housing design integrates thermal heatsinking between the optical and driver assemblies, allowing for pass-through convective cooling which promotes airflow for improved and maximum heat dissipation. This results in maximized performance and reliability of critical components to ensure long LED system life.

### Optical Systems

LPF2 is standard with a specular vacuum metalized reflector that provides a very uniform and highly efficient all purpose flood distribution, suitable for use in wide range of applications.

### Energy saving benefits and controls

The LPF2 has a system efficacy of 87 lm/W at a system wattage of 40W. It provides significant energy savings over traditional HID systems less controls. Optional Dynadimmer controls provides additional maximum energy savings by dimming to 25% low for 6 hours.

### Electrical

Driver efficiency (>90% standard). 120-347V available (restrictions apply). Temp range: -40°C (-40°F) to 40°C (104°F). Open/short circuit protection. RoHS compliant. Surge protector standard and is in accordance with IEEE / ANSI C62.41.2 guidelines, with a surge current rating of 10,000 amps (10KVA).

### Listings

Product is UL and cUL listed to the UL1598 standard, suitable for Wet Locations. Suitable for use in ambients from -40°C to 40°C (-40°F to 104°F). The LPF2 luminaire with either 4K Neutral White or 5K Cool White LEDs and flood optics is DesignLights Consortium® qualified. Stock SKUs of the LPF family are made in China while all made-to-order configurations are assembled in the USA.

### Finish

Each luminaire receives a fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) textured polyester powdercoat finish. Standard finish on all stocked LPF luminaires is Textured Dark Bronze. Textured White and Dark Gray are also available as optional colors for made-to-order products.

### Warranty

LPF2 luminaires, the LED arrays, and the drivers are all covered by a 5-year limited warranty.

## Predicted Lumen Depreciation Data<sup>19</sup>

Ambient Temp. °C	TM-21 Calculated L <sub>70</sub> hrs <sup>19,20</sup>	Reported L <sub>70</sub> Per TM-21 <sup>20,21</sup>	Lumen Maint. % @60,000 hrs
up to 40°C	269,000 hrs	>48,000 hrs	91.5%

19. Calculated performance derived from LED manufacturer's data and engineering design estimates, based on IESNA LM-80 methodology. Actual experience may vary due to field application conditions.  
20. L<sub>70</sub> is the predicted time when LED performance depreciates to 70% of initial lumen output.  
21. Reported per IESNA TM21-11. Published L<sub>70</sub> hours limited to 6 times actual LED test hours.

