




Pass & Seymour

Specification Grade PlugTail™ Receptacles 15 & 20A, 125V

PT5262, PT5362

PlugTail™ — The fastest, most consistent and reliable wiring devices – ever.

Factory-terminated devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each receptacle. The connector simply snaps into the back of the device — no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required. Now device installation is a snap!

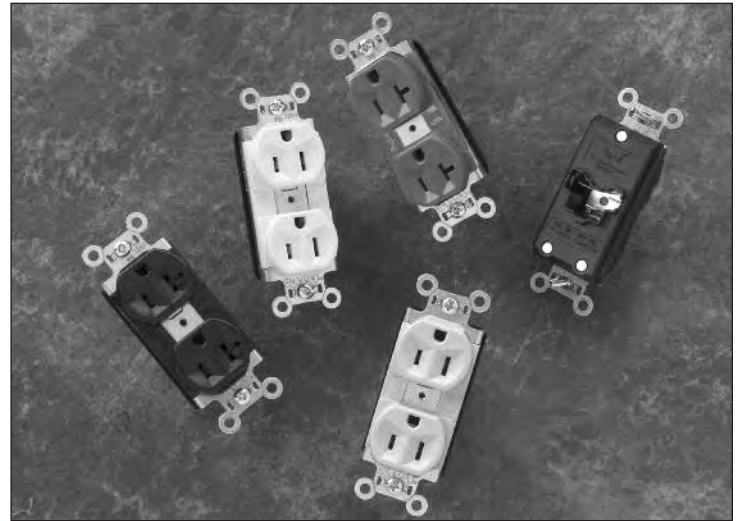

FEATURES & BENEFITS

Auto-ground clip assures positive ground.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.

Three drive screws anchor strap to back body and face.

Plated steel wrap strap design for maximum durability and corrosion resistance.

Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.

Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

No exposed terminals create a finger safe application before, during, and after installation.



PT5362-LA

FIELD USES/VERTICAL MARKETS


- Education
- Institutional
- Retail
- Office
- Hospitality/Lodging
- Multiple Dwelling

Specification Grade PlugTail™ Receptacles 15 & 20A, 125V

ORDERING INFORMATION

| Catalog Number | Rating | | Color | NEMA Config. No. |
|---------------------------|--------|-----|--------------|---------------------|
| | A. | V. | | |
| Duplex Receptacles | | | | |
| PT5262-I | 15 | 125 | Ivory | 5-15R |
| PT5262-W | 15 | 125 | White | 5-15R |
| PT5262 | 15 | 125 | Brown | 5-15R |
| PT5262-GRY | 15 | 125 | Gray | 5-15R |
| PT5262-BL | 15 | 125 | Blue | 5-15R |
| PT5262-RED | 15 | 125 | Red | 5-15R |
| PT5262-LA | 15 | 125 | Light Almond | 5-15R |
| PT5362-I | 20 | 125 | Ivory | 5-20R |
| PT5362-W | 20 | 125 | White | 5-20R |
| PT5362 | 20 | 125 | Brown | 5-20R |
| PT5362-GRY | 20 | 125 | Gray | 5-20R |
| PT5362-BL | 20 | 125 | Blue | 5-20R |
| PT5362-RED | 20 | 125 | Red | 5-20R |
| PT5362-LA | 20 | 125 | Light Almond | 5-20R |

| Catalog Number | Wire Type | Wire Length |
|--|-----------|-------------|
| PlugTail Connectors — Right Angle | | |
| PTRA6STR | Stranded | 6" |
| PTRA6SOL | Solid | 6" |



For more information on these and other P&S products refer to our Catalog or visit our web site.

Specification Grade PlugTail™ Receptacles 15 & 20A, 125V



TECHNICAL SPECIFICATIONS

3rd Party Compliance

cULus Listed, File Number E140596, Standard UL498.
Federal Specification WC596.

Performance

Electrical


| | |
|-------------------------|--|
| Dielectric Voltage | Withstands 2000V minimum |
| Maximum Working Voltage | 125V |
| Current Interrupting | Certified for current interrupting at full-rate current (receptacle only) |
| Temperature Rise | Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current |

Mechanical

| | |
|-----------------------------------|--|
| PlugTail Connector Identification | #12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only |
| Product Identification | Ratings are a permanent part of the device |

Environmental

| | |
|-----------------------|--|
| Flammability | UL94 V2 |
| Operating Temperature | Maximum continuous +60°C, minimum -40°C without impact |

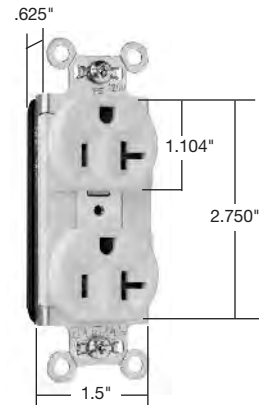

Dimensions for
15 & 20 Amp



PlugTail™ GFCI Receptacle Materials


| | | | |
|----------------|-------------------------|------------------------|-------------------|
| Face | Nylon | Internal Ground System | .036 260 Brass |
| Body | PVC | Assembly Drive Screw | Zinc-Plated Steel |
| Contacts | .036 688 Brass | Aut-Ground Clip | Steel |
| Mounting Strap | .042" Zinc-Plated Steel | Mounting Screws | Tri-Drive Steel |

Plug Tail Connector Materials

| | | | |
|---------|---------------|----------|------------|
| Housing | Polycarbonate | Contacts | .030 Brass |
|---------|---------------|----------|------------|

Warranty

1 Year

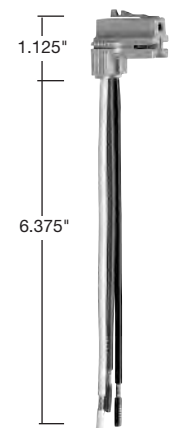

PTR6STR