





SHOCKWAVE IMPACT DUTY™ SOCKETS

CONTINUED

6 PT DEEP

SHOCKWAVE Impact Duty™ 1/2" Drive Deep Sockets



Part Number	Description	Depth	Diameter	Type	L	D1	D2	Min Hex Depth
49-66-6282	1/2" Drive	Deep	21mm	A	78	30	30	11.7
49-66-6283	1/2" Drive	Deep	22mm	B	78	31.8	30	12.5
49-66-6284	1/2" Drive	Deep	23mm	B	78	33.8	30	12.7
49-66-6285	1/2" Drive	Deep	24mm	B	78	34.2	30	13.9
49-66-6286	1/2" Drive	Deep	25mm	B	78	35.8	30	14
49-66-6287	1/2" Drive	Deep	26mm	B	78	37	30	14.6
49-66-6288	1/2" Drive	Deep	27mm	B	78	38.2	30	15.8
49-66-6289	1/2" Drive	Deep	28mm	B	78	39.8	30	15.4
49-66-6290	1/2" Drive	Deep	29mm	B	78	42	30	16.7
49-66-6291	1/2" Drive	Deep	30mm	B	78	42.8	30.5	16.7

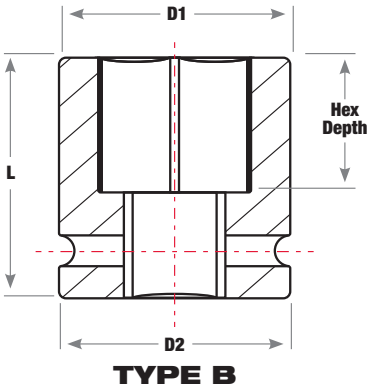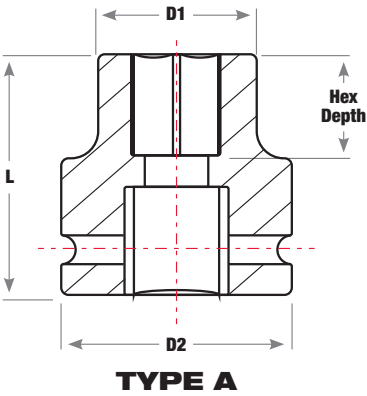

6 PT STANDARD

SHOCKWAVE Impact Duty™ 3/4" Drive Standard Sockets

Part Number	Optional Retaining Ring	Description	Depth	Diameter	Type	L	D1	D2	Min Hex Depth
49-66-6300	49-66-6743	3/4" Drive	Standard	9/16"	A	53	27	41.4	6.3
49-66-6301		3/4" Drive	Standard	5/8"	A	53	29.9	41.4	7.1
49-66-6302		3/4" Drive	Standard	11/16"	A	53	30.7	41.4	8.1
49-66-6303		3/4" Drive	Standard	3/4"	A	53	32	41.4	9
49-66-6304		3/4" Drive	Standard	13/16"	A	53	34.9	41.4	10.6
49-66-6305		3/4" Drive	Standard	7/8"	A	53	36	41.4	12.2
49-66-6306		3/4" Drive	Standard	15/16"	A	53	38	41.4	12.4
49-66-6307		3/4" Drive	Standard	1"	A	53	40	41.4	12.4
49-66-6308	49-66-6744	3/4" Drive	Standard	1-1/16"	A	53	40.5	44.2	12.4
49-66-6309		3/4" Drive	Standard	1-1/8"	B	53	44.2	44.2	16.1
49-66-6310		3/4" Drive	Standard	1.3/16"	B	53	46	44.2	16.1
49-66-6311		3/4" Drive	Standard	1-1/4"	B	53	48	44.2	16.1
49-66-6312		3/4" Drive	Standard	1-5/16"	B	57	51	44.2	18.8
49-66-6313		3/4" Drive	Standard	1-3/8"	B	57	52	44.2	18.8
49-66-6314		3/4" Drive	Standard	1-7/16"	B	57	54.8	44.2	18.8
49-66-6315		3/4" Drive	Standard	1-1/2"	B	57	56	44.2	21.5
49-66-6316		3/4" Drive	Standard	1-9/16"	B	58	58	44.2	21.5
49-66-6317		3/4" Drive	Standard	1-5/8"	B	58	59	44.2	21.5
49-66-6318		3/4" Drive	Standard	1-11/16"	B	58	65	44.2	24.6
49-66-6319		3/4" Drive	Standard	1-3/4"	B	62	65	44.2	24.9
49-66-6320		3/4" Drive	Standard	1-13/16"	B	62	66	44.2	25.1
49-66-6321		3/4" Drive	Standard	1-7/8"	B	65	68	44.2	27
49-66-6322		3/4" Drive	Standard	1-15/16"	B	65	69.8	44.2	27.2
49-66-6323		3/4" Drive	Standard	2"	B	65	72	44.2	27
49-66-6356	49-66-6744	3/4" Drive	Standard	17mm	B	58	63	44.4	25.4
49-66-6357		3/4" Drive	Standard	19mm	B	58	63	44.4	25.4
49-66-6358		3/4" Drive	Standard	20mm	B	62	65	44.4	24.3
49-66-6359		3/4" Drive	Standard	21mm	B	62	65.2	44.4	24.9
49-66-6360		3/4" Drive	Standard	22mm	B	62	66.2	44.4	28.6
49-66-6361		3/4" Drive	Standard	23mm	B	62	68	44.4	26
49-66-6362		3/4" Drive	Standard	24mm	B	65	69	44.4	26.5
49-66-6363		3/4" Drive	Standard	25mm	B	65	72	44.4	27.1
49-66-6364		3/4" Drive	Standard	26mm	B	65	72	44.4	29.8
49-66-6365		3/4" Drive	Standard	27mm	B	70	84	44.4	33.2
49-66-6366		3/4" Drive	Standard	28mm	A	90	27	41.4	6.3
49-66-6367		3/4" Drive	Standard	29mm	A	90	29.9	41.4	7.1
49-66-6368		3/4" Drive	Standard	30mm	A	90	30.7	41.4	8.1
49-66-6369		3/4" Drive	Standard	31mm	A	90	32	41.4	9
49-66-6370		3/4" Drive	Standard	32mm	A	90	34.9	41.4	10.6
49-66-6371		3/4" Drive	Standard	33mm	A	90	35	41.4	12.2
49-66-6372		3/4" Drive	Standard	34mm	A	90	38	41.4	12.4
49-66-6373		3/4" Drive	Standard	35mm	A	90	40	41.4	12.4
49-66-6374		3/4" Drive	Standard	36mm	A	90	40.5	44.2	12.4
49-66-6375		3/4" Drive	Standard	37mm	A	90	44.2	44.2	16.1
49-66-6376		3/4" Drive	Standard	38mm	B	90	46	44.2	16.1

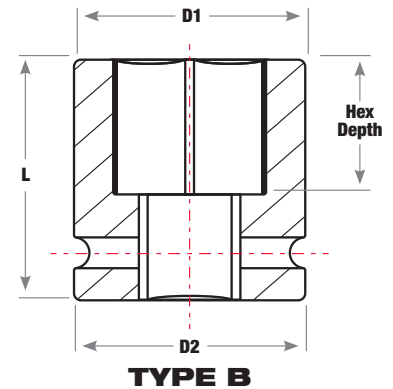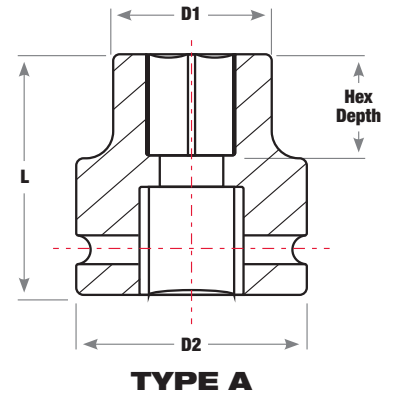


CONTINUED

6 PT STANDARD

SHOCKWAVE Impact Duty™ 3/4" Drive Standard Sockets

Part Number	Optional Retaining Ring	Description	Depth	Diameter	Type	L	D1	D2	Min Hex Depth
49-66-6377	49-66-6744	3/4" Drive	Standard	39mm	B	90	48	44.2	16.1
49-66-6378		3/4" Drive	Standard	40mm	B	90	51	44.2	18.8
49-66-6379		3/4" Drive	Standard	41mm	B	90	52	44.2	18.8
49-66-6380		3/4" Drive	Standard	42mm	B	90	54.8	44.2	18.82
49-66-6381		3/4" Drive	Standard	43mm	B	90	56	44.2	21.5
49-66-6382		3/4" Drive	Standard	44mm	B	90	58	44.2	21.5
49-66-6383		3/4" Drive	Standard	45mm	B	90	59	44.2	21.5
49-66-6384		3/4" Drive	Standard	46mm	B	90	65	44.2	24.6
49-66-6385		3/4" Drive	Standard	47mm	B	90	65	44.2	24.9
49-66-6386		3/4" Drive	Standard	48mm	B	90	66	44.2	25.1
49-66-6387		3/4" Drive	Standard	49mm	B	90	68	44.2	27
49-66-6388		3/4" Drive	Standard	50mm	B	90	69.8	44.2	27.2
49-66-6392		3/4" Drive	Standard	60mm	B	90	72	44.2	27

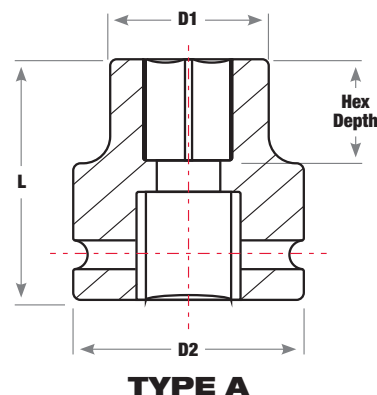

6 PT DEEP

SHOCKWAVE Impact Duty™ 3/4" Drive Deep Sockets

Part Number	Optional Retaining Ring	Description	Depth	Diameter	Type	L	D1	D2	Min Hex Depth
49-66-6332	49-66-6743	3/4" Drive	Deep	9/16"	A	53	30	44	9.6
49-66-6333		3/4" Drive	Deep	5/8"	A	53	33	44	11.1
49-66-6334		3/4" Drive	Deep	11/16"	A	53	34	44	11.5
49-66-6335		3/4" Drive	Deep	3/4"	A	53	35	44	11.7
49-66-6336		3/4" Drive	Deep	13/16"	A	53	36	44	12.5
49-66-6337		3/4" Drive	Deep	7/8"	A	53	37.6	44	12.7
49-66-6338		3/4" Drive	Deep	15/16"	A	53	38	44	13.9
49-66-6339		3/4" Drive	Deep	1"	A	53	40.5	44	14
49-66-6340	49-66-6744	3/4" Drive	Deep	1-1/16"	A	53	40.8	44	14.6
49-66-6341		3/4" Drive	Deep	1-1/8"	A	53	41	44	15.8
49-66-6342		3/4" Drive	Deep	1-3/16"	B	53	45.2	44	16.3
49-66-6343		3/4" Drive	Deep	1-1/4"	B	53	46	44	16.7
49-66-6344		3/4" Drive	Deep	1-5/16"	B	53	46	44	16.7
49-66-6345		3/4" Drive	Deep	1-3/8"	B	53	47	44	17.8
49-66-6346		3/4" Drive	Deep	1-7/16"	B	57	48	44	18.3
49-66-6347		3/4" Drive	Deep	1-1/2"	B	57	50	44	19.1
49-66-6348		3/4" Drive	Deep	1-9/16"	B	57	51	44	20
49-66-6349		3/4" Drive	Deep	1-5/8"	B	57	52	44	20.1
49-66-6350		3/4" Drive	Deep	1-11/16"	B	57	53.5	44	22.3
49-66-6351		3/4" Drive	Deep	1-3/4"	B	57	54.8	44	20.4
49-66-6352		3/4" Drive	Deep	1-13/16"	B	57	58	44	22.3
49-66-6353		3/4" Drive	Deep	1-7/8"	B	57	58	44	21.5
49-66-6354		3/4" Drive	Deep	1-15/16"	B	58	59.5	44	22.8
49-66-6355		3/4" Drive	Deep	2"	B	58	59.5	44.4	24.9

