
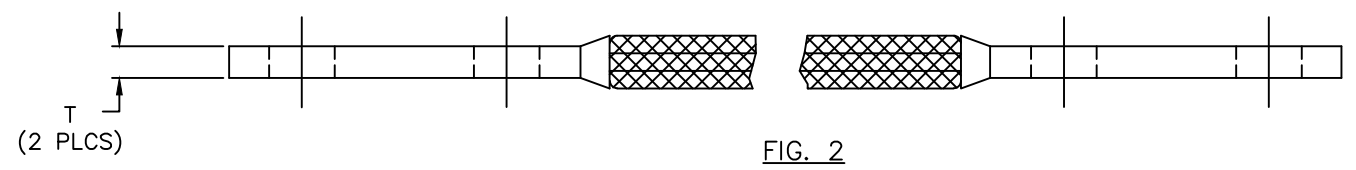
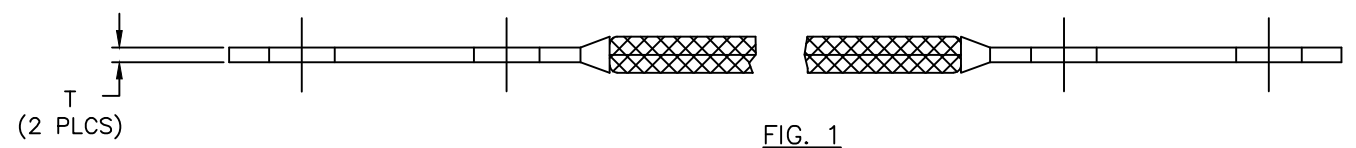


CATALOG NUMBER	NO. OF BRAIDS IN FERRULE	FIG. NO.	DIMENSIONS							APPROX. AMP RATING	
			C	D	E	K DIA	L	N	T	INDOOR	OUTDOOR
			4								
B2D12	2	1	.94 [24]	2.50 [64]	1.25 [32]	.44 [11]	12.00 [305]	.62 [16]	.25 [6]	380	395
B2D12N			.94 [24]	3.00 [76]	1.75 [44]	.56 [14]	12.00 [305]	.62 [16]	.25 [6]	380	395
B2E12			1.62 [41]		1.50 [38]	.44 [11]		.75 [19]		530	635
B2E12N			1.62 [41]		1.75 [44]	.56 [14]	12.00 [305]	.62 [16]	.25 [6]	530	635
B2E30N			1.62 [41]		1.75 [44]	.56 [14]	30.00 [762]	.62 [16]	.25 [6]	530	635
B2F12			1.38 [35]		1.50 [38]	.44 [11]		.75 [19]	.38 [10]	600	720
B2G12			1.50 [38]		1.50 [38]	.44 [11]	12.00 [305]	.75 [19]	.50 [13]	700	840
B2G12N			1.50 [38]	3.00 [76]	1.75 [44]	.56 [14]		.62 [16]	.50 [13]	700	840
B2G42N			1.50 [38]	3.00 [76]	1.75 [44]	.56 [14]	42.00 [1067]	.62 [16]	.50 [13]	700	840
B3D12			3	2	1.19 [30]	2.50 [64]	1.25 [32]	.44 [11]	12.00 [305]	.62 [16]	.25 [6]
B3D12N	1.19 [30]	3.00 [76]			1.75 [44]	.56 [14]	12.00 [305]	.62 [16]	.25 [6]	470	560
B3D14N	1.19 [30]				1.75 [44]	.56 [14]	14.00 [356]	.62 [16]	.25 [6]	470	560
B3D16N	1.19 [30]				1.75 [44]	.56 [14]	16.00 [406]	.62 [16]	.25 [6]	470	560
B3D18N	1.19 [30]				1.75 [44]	.56 [14]	18.00 [457]	.62 [16]	.25 [6]	470	560
B3D24N	1.19 [30]				1.75 [44]	.56 [14]	24.00 [610]	.62 [16]	.25 [6]	470	560
B3D90N	1.19 [30]				1.75 [44]	.56 [14]	90.00 [2286]	.62 [16]	.25 [6]	470	560
B3E12	1.64 [42]				1.50 [38]	.44 [11]	12.00 [305]	.75 [19]	.31 [8]	700	840
B3E12N	1.64 [42]				1.75 [44]	.56 [14]		.62 [16]	.31 [8]	700	840
B3E30N	1.64 [42]				1.75 [44]	.56 [14]	30.00 [762]	.62 [16]	.31 [8]	700	840
B3E36NU	1.64 [42]		---	6	36.00 [914]	---	.31 [8]	700	840		
B3F12	1.44 [37]		1.50 [38]	.44 [11]		.75 [19]	.56 [14]	820	980		
B3G12	1.69 [43]	3.00 [76]	1.50 [38]	.44 [11]	12.00 [305]	.75 [19]	.69 [18]	960	1150		

REV.	DATE	DESCRIPTION	ECO	BY	C'K'D.
E	4/15/2019	ADDED PART TO TABLE	50913	JL	BE

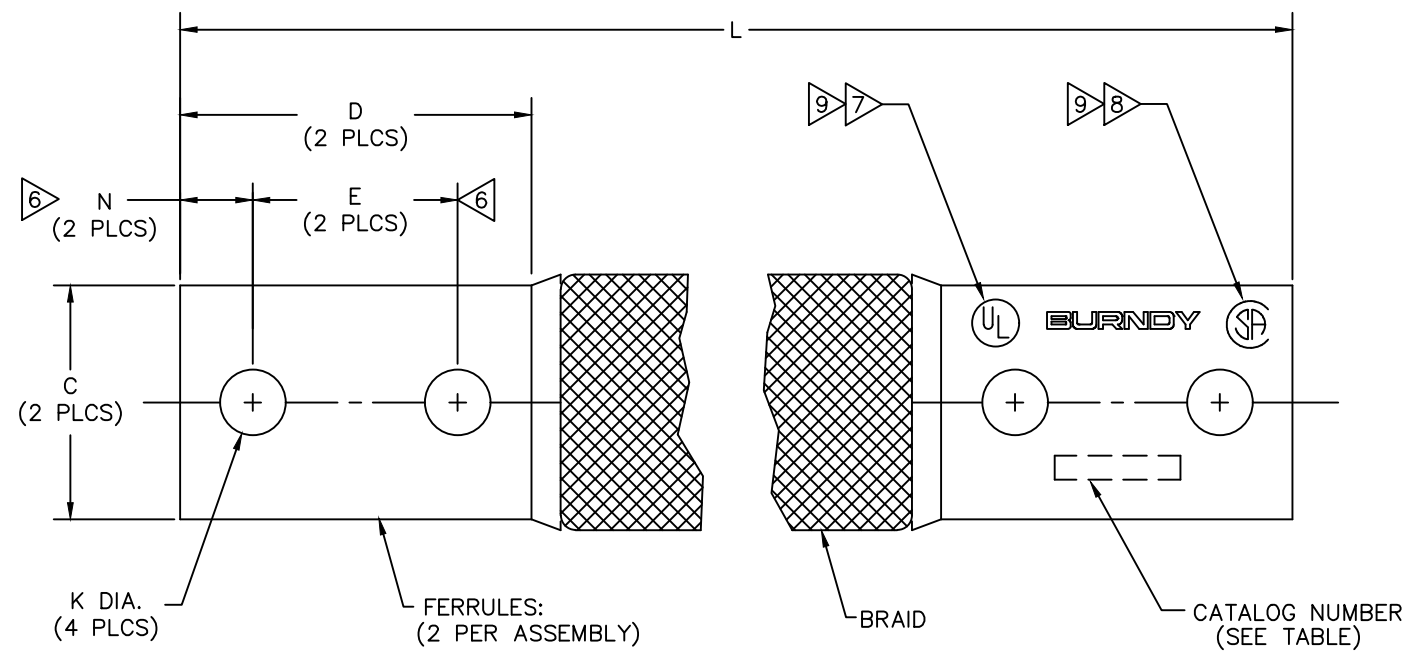

- NOTES:**
- MATERIAL: FERRULES - COPPER
BRAID - TINNED COPPER
 - FINISH: UNPLATED CAN BE ORDERED WITH PLATED FERRULES BY ADDING SUFFIX AS SHOWN BELOW:
"NK" - FOR NICKEL PLATING "SV" - FOR SILVER PLATING "TN" - FOR TIN PLATING "W" - FOR HOT TIN DIPPED
 - CATALOG NUMBERS ENDING IN 'N' INDICATES THE FERRULES ARE TWO HOLE NEMA DRILLED.
 - THIS RATING MAY VARY WITH AMBIENT CONDITIONS, ORIENTATION OF THE BRAID, AND OTHER SERVICE CONDITIONS.
 - DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.
 - SUFFIX LETTER "U" IN CATALOG NUMBER DENOTES FERRULES ARE UNDRILLED.
 - ALL SIZES ARE LISTED TO UL 467 GROUNDING & BONDING EQUIPMENT STANDARDS.
 - SPECIFIC SIZES AS INDICATED ARE LISTED TO CSA C22.2 NO.41 GROUNDING & BONDING EQUIPMENT STANDARDS.
 - BRAID SIZES MAY BE DESIGNATED BY SUFFIXES REPRESENTING VARIATIONS IN LENGTH, QUANTITY & SIZE OF MOUNTING HOLES, PAD SIZE AND FINISH. (REF. NOTES 7, 8)

TO ORDER BURNDY® PRODUCTS CALL UNITED STATES: 1-800-346-4175 (LONDONDERRY, NH) CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES) FOR PRODUCT INFO: http://www.burndy.com		FLEXIBLE BRAID JUMPER	
		ITEM NO: N/A	CAT NO: B2-, B3- (SEE TABLE)
SCALE: 1/1 DRAWN BY: R. PERRAULT 11/03/95 CHECKER: J. MICHAUD 11/03/95 DSN APPVL: W. ZAHLMAN 11/14/95 MFG APPVL: --- QC APPVL: D. VARIO 11/14/95 MKT APPVL: C. CHADBOURNE 11/03/95		BURNDY®	
PROD FAM: --- PROJECT #: --- REL LEVEL: AutoCAD		DRAWING NO	REV
		SE210201	E
		SHEET 2 OF 3	