



# TWX3 LED

## LED Wall Luminaire



Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.



### Introduction

TWX LED wall pack family, a ground-up design that has the low initial cost customers demand while providing superior performance and a traditional form. The TWX3 LED is energy efficient, saving up to 84% in energy costs when replacing a metal halide luminaire. Offering an expected service life of more than 20 years, the TWX3 LED eliminates frequent lamp and ballast replacements associated with traditional technologies.

The Adjustable Light Output (ALO) feature allows the contractor to set the light output during installation, to a level perfectly suited for the job site. The TWX3 LED ALO luminaires can replace anything from a 100W to 400W metal halide luminaire.

### Specifications

**Depth:** 5.0"  
**Height:** 14.0"  
**Width:** 18.0"  
**Weight:** 21 lbs  
 (without options)

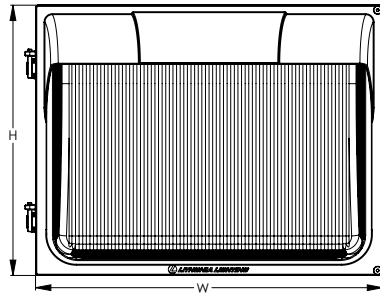

### TWX LED Family Overview

Luminaire	Voltage	Photocell	Lumens (4000K)			
			P1	P2	P3	P4
TWX1 LED	MVOLT (120-277V)	YES	1,600	2,950	--	--
TWX2 LED	MVOLT (120-277V), 347V, 480V	YES	3,250	4,400	5,250	6,850
TWX3 LED	MVOLT (120-277V), 347V	YES	8,800	10,650	12,900	13,850

### Ordering Information

**EXAMPLE: TWX3 LED ALO 40K MVOLT DDBXD**

Series	Package	Color Temperature	Voltage	Options	Finish	
TWX3 LED	P1	8,800 lumens	MVOLT (120-277V) 347	PE Photocell, Button Type	DDBXD Dark bronze	
	P2	10,650 lumens			40K 4000K	DBLXD Black
	P3	12,900 lumens			50K 5000K	DWHXD White
	P4	13,850 lumens			DNAXD Natural aluminum	
	ALO	2,900 - 13,850 lumens				DDBTXD Textured dark bronze
					DBLTXD Textured black	
					DWHGXD Textured White	
					DNATXD Textured natural aluminum	

### FEATURES & SPECIFICATIONS

#### INTENDED USE

The TWX3 LED is an energy-efficient, low maintenance LED wall pack for replacing up to a 400W MH fixture, providing the same footprint on the wall. TWX3 is ideal for higher mounting height applications such as industrial buildings, warehouses and schools.

#### CONSTRUCTION

Two-piece die-cast aluminum housing to optimize thermal management through conductive and convective cooling. The door is hinged on the side and can be removed for easy installation. The housing is completely sealed against moisture and environmental contaminants (IP65) and is suitable for the hose-down applications.

#### FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling.

#### OPTICS

The advanced optical design uses both reflector and refractor technologies that work together to create superior illumination and further throw, getting the light where it is needed. The US-made borosilicate glass refractor is specifically designed to maximize light extraction and create a fully luminous luminaire for a better nighttime look.

#### ELECTRICAL

Light engine consists of high-efficacy LEDs mounted to housing to maximize heat dissipation and promote long-life (up to L81/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%.

#### INSTALLATION

Designed for wall mounting above four feet from the ground. Housing is configured for mounting directly over a standard junction box (by others) or for surface wiring via any of three 1/2" threaded entry hubs.

#### LISTINGS

CSA certified to U.S. and Canadian standards. IP65 rated for outdoor applications. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

#### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
 © 2020-2022 Acuity Brands Lighting, Inc. All rights reserved.

TWX3 LED  
 Rev. 03/02/22

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	30K (3000K, 80 CRI)		40K (4000K, 80 CRI)		50K (5000K, 80 CRI)	
		Lumens	LPW	Lumens	LPW	Lumens	LPW
P1	65W	8,450	130	8,800	135	8,800	135
P2	79W	10,200	129	10,650	135	10,650	135
P3	97W	12,300	127	12,900	133	12,900	133
P4/ALO	108W	13,250	123	13,850	128	13,850	128

### Electrical Load

Performance Package	System Watts	Current (A)				
		120V	208V	240V	277V	347V
P1	65W	0.538	0.310	0.269	0.233	0.186
P2	79W	0.656	0.379	0.328	0.284	0.227
P3	97W	0.806	0.465	0.403	0.349	0.279
P4/ALO	108W	0.900	0.519	0.450	0.390	0.311

### Adjustable Lumen Output (ALO) Table

Setting	System Watts	Lumen Output	Replaces Metal Halide
8*	108W	13,850	400W
7	102W	13,250	
6	85W	11,400	
5	71W	9,900	250W
4	57W	8,200	
3	44W	6,450	150/175W
2	29W	4,500	
1	18W	2,900	100W

\* Factory default setting is #8

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
10°C	50°F	1.03
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11). To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.


Operating Hours	0	25,000	50,000	60,000	100,000
Lumen Maintenance Factor	1.0	>0.95	>0.90	>0.88	>0.81

## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting TWX LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards

#### LEGEND

<span style="color: yellow;">■</span>	0.25 fc
<span style="color: orange;">■</span>	0.5 fc
<span style="color: red;">■</span>	1.0 fc
<span style="color: darkred;">■</span>	3.0 fc

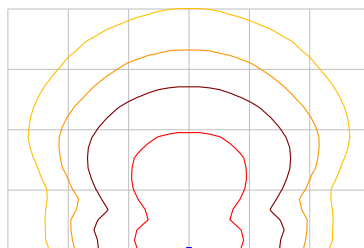

TWX3 LED ALO

MH = 18ft  
Grid = 18ft x 18ft  
ISO lines = 0.25fc, 0.5fc, 1.0fc, 3.0fc