


Eaton XTOE1P6BCS

Catalog number: XTOE1P6BCS

Eaton C440 electronic overload relay, XT IEC Electronic Overload Relay, 0.33-1.65A overload range, 45 mm Frame size, NO-NC contact configuration, Direct to contactor mounting, Selectable - 10A, 10, 20, 30 trip type

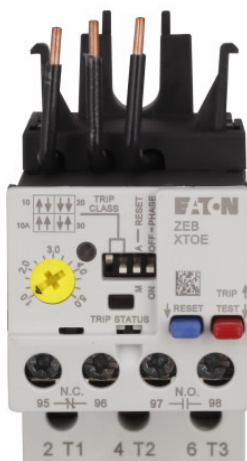

General specifications

| | |
|--|---|
| Product Name | Catalog Number |
| Eaton C440 electronic overload relay | XTOE1P6BCS |
| UPC | Product Length/Depth |
| 786685416397 | 1.77 in |
| Product Height | Product Width |
| 4.33 in | 1.42 in |
| Product Weight | Compliances |
| .87 lb | CE Marked RoHS Compliant ATEX Compliant |
| Certifications | |
| EN 60947 UL Listed CSA Certified IEC 60947 | |

defaultTaxonomyAttributeLabel

Frame size

45 mm

Contact configuration

NO, NC

Overload range

0.33-1.65A

Type

Electronic overload relay

Mounting method

Direct

Trip type

Selectable 10 A, class 10 ,20, 30

Resources

Brochures

[C440 Electronic Overload Relay](#)

Catalogs

[Eaton's Volume 5—Motor Control and Protection](#)

Drawings

[XTOE_B AutoCAD 2D Footprint \(mm\)](#)

[XTOE_B 3D Model Xchange](#)

[XTOE_B 3D Inventor](#)

[XTOE_B 2D Drawing Xchange](#)

[XTOE_B 2D PDF](#)

[XTOE_B AutoCAD 2D Footprint](#)

Installation instructions

[XTOE/ZEB IEC Electronic Overload - Self Powered](#)

Specifications and datasheets

[Eaton Specification Sheet - XTOE1P6BCS](#)



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2022 Eaton
All Rights Reserved

Eaton is a registered trademark.

All other trademarks are
property of their respective
owners.



[Eaton.com/socialmedia](https://www.eaton.com/socialmedia)