

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

TRADITIONAL LED CEILING LUMINAIRE

14"

ORDERING INFORMATION

Order code: 68048
Model number: CLWH14-R26W-A/30K
UPC: 069549013759
Case quantity: 5

PHYSICAL DATA

Size in. (mm): 13" 25/32 (350)
Shape: Round
Type: Ceiling
Lens material: Frosted Plastic
Mounting: Surface Mount/Flush-mount

PERFORMANCE DATA

Watts (W): 26
Volts (VAC): 120
Colour temperature (K)¹: 3 000
Lumen output (lm)²: 1 820
Lumen per Watts (lm/W): 70
CRI: 80
Life L70 (h)³: 50 000
Beam angle (°): 120
Power factor: 0.9
Frequency (Hz): 60
Operating temp. range: -10 °C to 35 °C / 14 °F to 95 °F
Dimmer type: Phase-cut dimming / reverse phase

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from Energy Star reported data

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

COMPATIBLE DIMMERS

Brand	Model
LEVITON	6672-1LW
LUTRON	MACL-153MR-WH, SCL-153P-WH, PD-6WCL-WH, CTCL-153P-WH, MSCL-OP153M-WH, DVCL-153P-WH




ICES 005



This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


DIMENSIONS

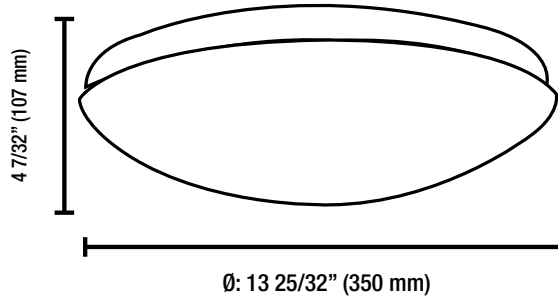

PHOTOMETRIC DATA¹

68048 • CLWH14-R26W-A/30K • 2 372.5 lm

Polar candela distribution

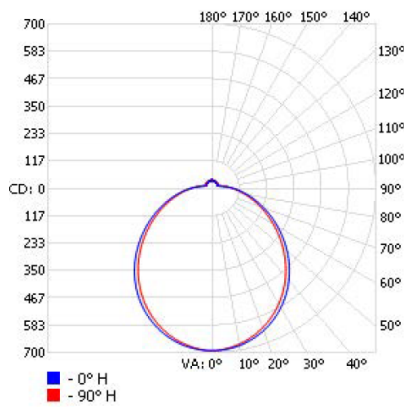

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	533.2	22.5
0-40	871.8	36.7
0-60	1 544.7	65.1
60-90	585.9	24.7
70-100	396.2	16.7
90-120	145.2	6.1
0-90	2 130.5	89.8
90-180	242.0	10.2
0-180	2 372.5	100

Illuminance at a distance

	Center beam fc	Beam width	
1.7'	240	5.3'	4.9'
3.3'	63.6	10.4'	9.5'
5.0'	27.2	15.7'	14.4'
6.7'	15.4	21.1'	19.3'
8.3'	10.0	26.1'	23.9'
10.0'	6.92	31.5'	28.8'

■ Vert. spread: 115.1°
■ Horiz. spread: 110.5°

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.