

DRAWING NO.
CWSC34886-01


4

3

2

1

REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
A	11/29/2007 1:45:00 PM	UPDATE NOTES AND ADD NOTES 9 & 10	14544	RLB	PRL

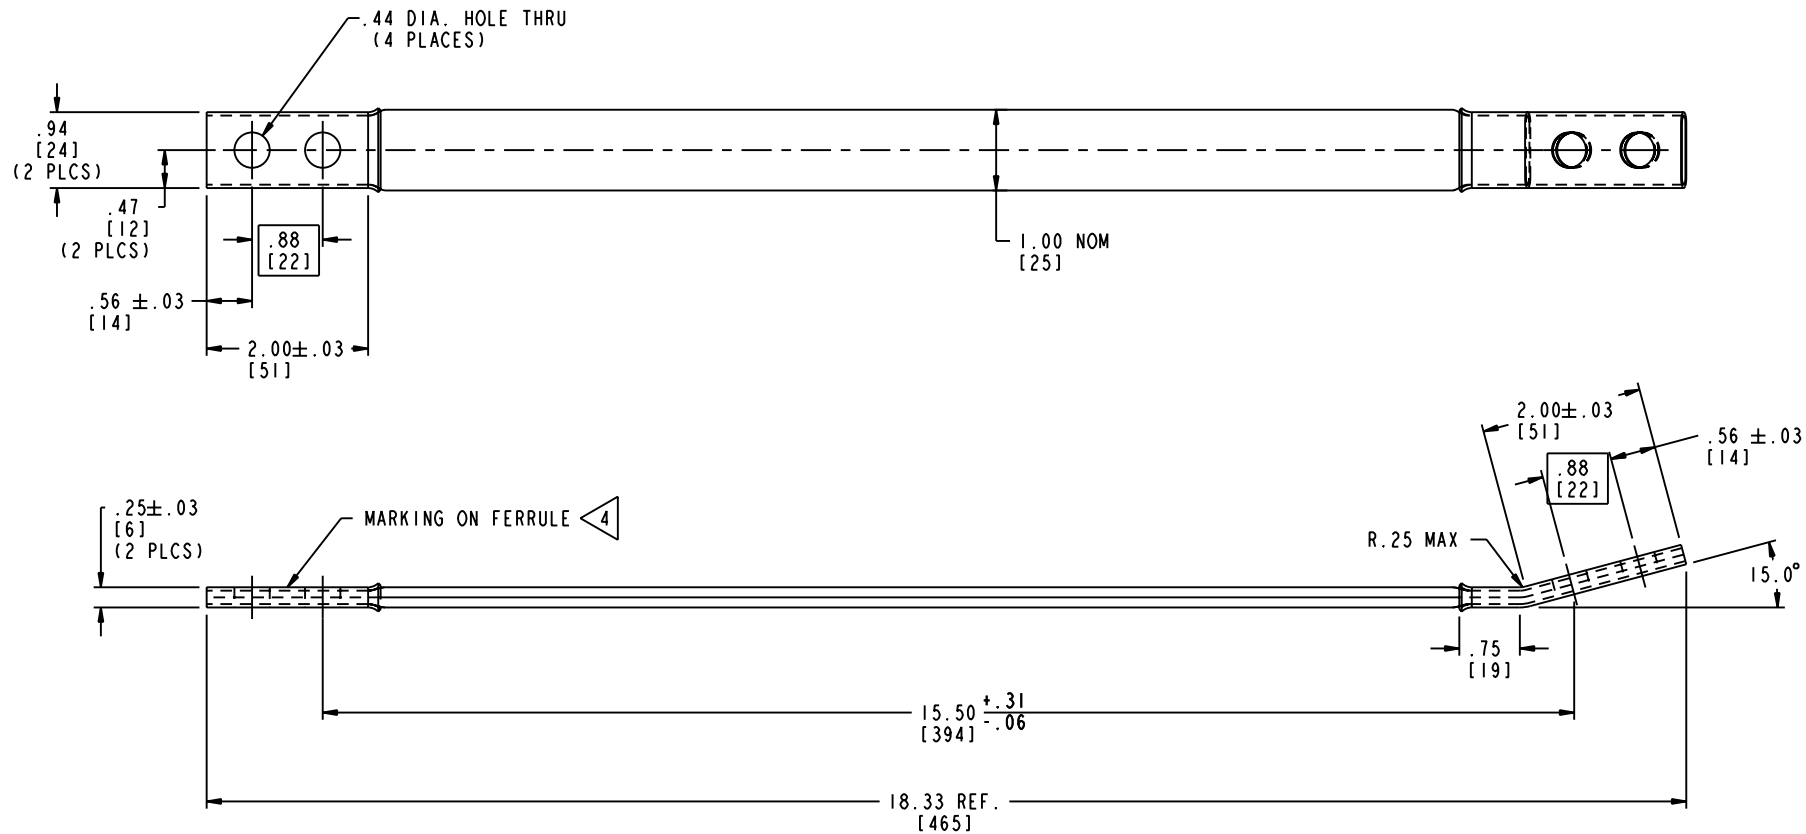

NOTES:

- DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.
- MATERIALS:
FERRULES - COPPER PER INTERNAL SPEC. M4100.
BRAID - TIN-PLATED COPPER PER DA7914
- FINISH: TIN-PLATE THE FERRULES PER INTERNAL SPEC. F4383, TYPE T3.
- MARKINGS ETCHED ONTO SURFACE OF FERRULE:
CATALOG NUMBER
MANUFACTURER'S MARK
- ALL BRAID CONTACT SURFACES TO BE COVERED WITH PENETROX™ E' OXIDE INHIBITOR PRIOR TO BRAID ASSEMBLY (BY BOMBARDIER)
- RECOMMENDED BOLT TORQUE VALUE FOR 3/8"-16 BOLT: 240 IN-LBS
- AMPACITY:
380 AMPS - INDOOR
395 AMPS - OUTDOOR
- WEIGHT: 0.89 LBS.

BOMBARDIER #871001325

TO ORDER BURNDY PRODUCTS CALL 1-800-346-4175 MANCHESTER, NH 03109, USA FOR PRODUCT INFO = http://www.fciconnect.com	
BRAID	
ITEM NO: 10043335	
CAT. NO: B2D18D33TNCG1	
DRAWN BY: BJC	05/07/04
CHECKER: PW	05/10/04
DSN APPVL: W. ZAHLMAN	06/11/07
MFG APPVL: --	--
QA APPVL: J. BRODEUR	06/11/07
MKT APPVL: --	--
SCALE: 0.700	
PROD FAM: --	DRAWING NO
PROJECT #: --	SIZE
DOCUMENT TYPE: --	CWSC34886-01
REL LEVEL: Released	SHEET 1 OF 1

A

REV: PE0200

4

3

2

1