
A

T&B® Cable Tray

Metallic cable tray



—
A

T&B Cable Tray

Metallic cable tray



Table of contents

Section A

Introduction	A4
Technical information	A6
Aluminum cable tray	A32
Steel cable tray	A116
One-piece cable tray	A174
Channel tray	A208
Common accessories	A235
Grounding and bonding	A239
Superstrut® support systems	A242

T&B Cable tray

Introduction

Cable tray wiring systems offer significant advantages over conduit pipe and other wiring systems. Cable tray is more cost efficient, more reliable, more adaptable to changing needs and easier to maintain. In addition, its design does not contribute to potential safety problems associated with other wiring systems.

The benefits of cable tray

An evaluation of the costs and benefits of various wiring systems should be done in the design phase. Avoiding the system selection process or deferring it until construction, often results in higher costs, scheduling delays and a system that will not meet future needs.

Selection of a wiring system that is not the most suitable for a particular application in terms of cost, potential corrosion and electrical considerations can lead to numerous problems, including excessive initial cost, poor design, faulty installation, extra maintenance, future power outages and unnecessary safety concerns.

Cost efficiency

Extensive experience has shown that the overall cost of a cable tray installation (including conductor, material and installation labor costs) may be as much as 60% less than a comparable conduit wiring system.

Cable tray systems, including trays, supports, fittings and other materials, are generally much less expensive than conduit wiring systems. In addition, major cost savings are generated by the relative ease of installation. Labor costs of installing a cable tray system can run up to 50% less. Total cost savings will vary with the complexity and size of the installation.

Direct cost savings are easy to calculate during the design phase of an installation, but the enormous advantages of cable tray may accrue only over time. The system's reliability, adaptability, ease of maintenance and inherent safety features result in many other types of cost savings, including:

- Lower engineering and maintenance costs
- Less need to reconfigure system as needs change
- Less down time for electrical and data handling systems
- Fewer environmental problems resulting from loss of power to essential equipment

Reliability

Cable tray systems offer unsurpassed reliability, resulting in less maintenance and down time – important considerations for all installations and especially for industries such as data communications and financial services.

In addition, since cable tray is an open system, moisture build-up problems are eliminated and damage to cable insulation during installation is also greatly reduced.

Adaptability

A major advantage of cable tray systems derives from their adaptability to new needs and technology. The pace of change in the economy, constantly shifting competitive pressures and rapid introduction of innovative technologies are all accelerating. More than ever before, businesses must be prepared to quickly expand facilities, change products or introduce new processes. The flexibility of the wiring system is a key consideration.

Modifying a cable tray system or adding cables to meet new needs is relatively easy because cables can enter or exit a tray at any point, and initial design considerations can build in extra capacity as part of the planning process. Cable tray's inherent adaptability allows rewiring for future expansion, building redesign or new technologies without disruption or need to replace the entire wiring system.

Maintenance

Cable tray wiring systems require less maintenance than conduit systems. When maintenance is necessary, it is easier, less time-consuming and less labor intensive.

The physical condition and status of both the cable tray and cables can be inspected visually, something that is not possible with conduit systems. In addition, it is also easy to see if there is sufficient capacity in the trays for additional cables. As was noted above, changing or adding cables can also be accomplished easily.

Another comparative benefit of cable tray systems is that they do not act as channels of moisture paths, as conduit wiring systems do. Conduit systems tend to collect condensation resulting from changes in temperature and then channel the moisture to electrical equipment, where it can lead to corrosion and failure.

Cable tray and tray cable are also less susceptible to fire loss than conduit. An external fire usually results in damage to only a few feet of a cable tray system, while wire insulation inside a conduit suffers significant damage and thermoplastic insulation may actually fuse to the conduit.

Safety

Cable wiring systems lack the inherent safety concerns of conduit systems.

By its nature, a conduit wiring system can serve as a flow-through for corrosive, explosive and toxic gases in the same way that it channels moisture.

The conduit installation process can also present a safety issue for electricians. The process requires that a conduit system be installed from one enclosure to another before pulling in the conductors, leaving the electricians exposed to any live, energized equipment that may be in the enclosures. In contrast, installers can pull tray cables from near one termination enclosure to the next before they are inserted into the enclosures and then terminated.

Finally, in installations where cable tray can be used as the equipment grounding conductor (per NEC standards), it is easy to visually check the system components as well as conduct checks for electrical continuity.

Technical information

Glossary of terms

Accessories

Devices that are used to supplement the function of straight sections and fittings, and include such items as drop outs, covers, conduit adapters, hold-down devices and dividers.

Cable tray connector

A device that joins cable tray straight sections or fittings, or both. The basic types of connectors are:

- Rigid
- Expansion
- Adjustable
- Reducer

Cable tray fitting

A device that is used to change the direction, elevation or width of a cable tray system.

Cable tray support

A device that provides adequate means for supporting cable tray sections or fittings, or both. The basic types of cable tray supports are:

- Cantilever bracket
- Trapeze
- Individual and suspension

Channel cable tray

A prefabricated metal structure consisting of a one-piece ventilated bottom or solid bottom channel section, or both, not exceeding 6 inches in width.

Ladder cable tray

A prefabricated metal structure consisting of two longitudinal side rails connected by individual transverse members.

Solid bottom cable tray

A prefabricated metal structure consisting of a bottom with no openings within integral or separate longitudinal side rails.

One-piece/unit cable tray

A prefabricated metal structure consisting of a one-piece solid or ventilated bottom.

Horizontal cross

A cable tray fitting that is suitable for joining cable trays in four directions at 90° intervals in the same plane.

Horizontal bend

A cable tray fitting that changes the direction in the same plane.

Horizontal tee

A cable tray fitting that is suitable for joining cable trays in three directions at 90° intervals in the same plane.

Metallic cable tray system

A metallic assembly of cable tray straight sections, fittings, and accessories that forms a rigid structural system to support cables.

Reducer

A cable tray fitting that is suitable for joining cable trays of different widths in the same plane. A straight reducer has two symmetrical offset sides. A right-hand reducer, when viewed from the large end, has a straight side on the right. A left-hand reducer, when viewed from the large end, has a straight side on the left.

Straight section

A length of cable tray that has no change in direction or size.

Ventilated bottom

A cable tray bottom having openings sufficient for the passage of air and utilizing 75% or less of the plane area of the surface to support cables.

Vertical bend

A cable tray fitting that changes direction to a different plane. An inside vertical elbow changes direction upward from the horizontal plane. An outside vertical elbow changes direction downward from the horizontal plane.

Technical information

Unique design features

01 I-beam side rail (aluminum)

Maximum structural strength.

02 Alternating rungs (aluminum and steel)

Alternating rungs for top and bottom accessory installation and cable lashing.

03 Ty-Rap® cable tie slots (aluminum and steel)

Exclusive Ty-Rap cable tie slots 1 in. center to center on all ladder ventilated and solid bottoms. Secure cables without kinks and keep cables uniform.

04 Extra wide rung design (aluminum and steel)

Extra wide rung design for maximum cable bearing surface.

05 Snap-in splice plates (aluminum)

Snap-in aluminum splice plates for easy installation.

06 Continuous open slot (aluminum and steel)


Rungs have continuous open slot to accept standard strut pipe clamps and provide complete barrier strip adjustability.

07 Added support (aluminum and steel)


Aluminum and steel solid bottoms are constructed with a flat sheet for added cable protection.

08 Adjustable barrier strips (aluminum and steel)


Barrier strips are fully adjustable (side to side) for use in straight sections and fittings.

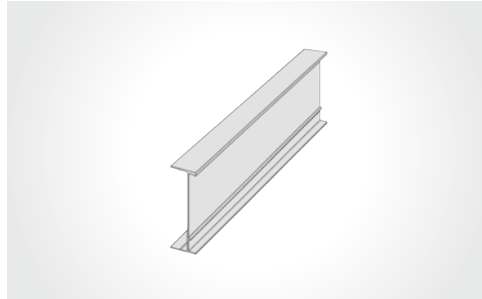


01

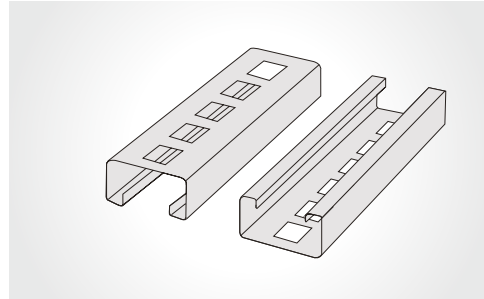


02

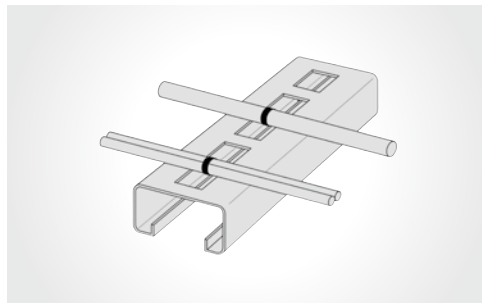


03

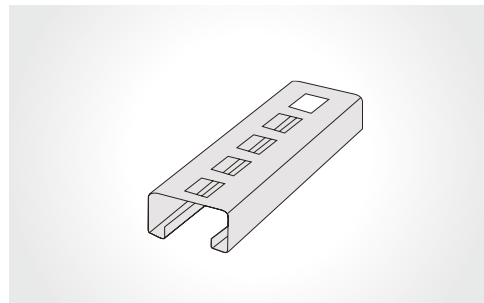


04

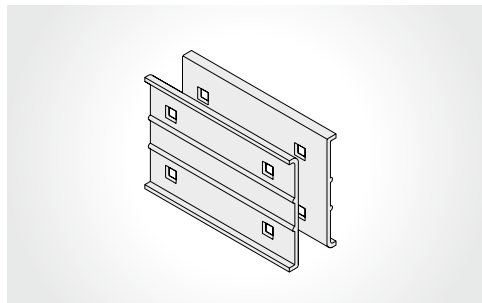


05

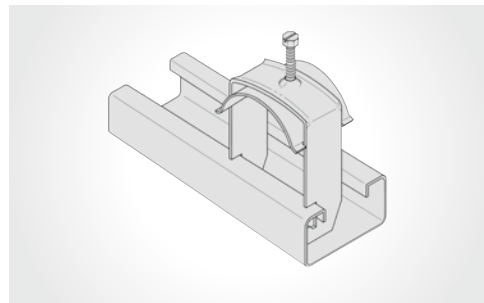

06

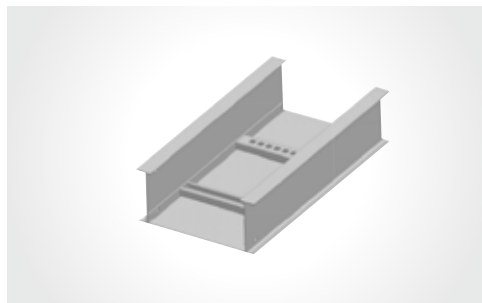


07

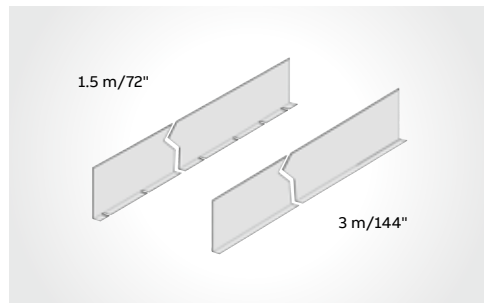

08

Technical information

Sample plant layout

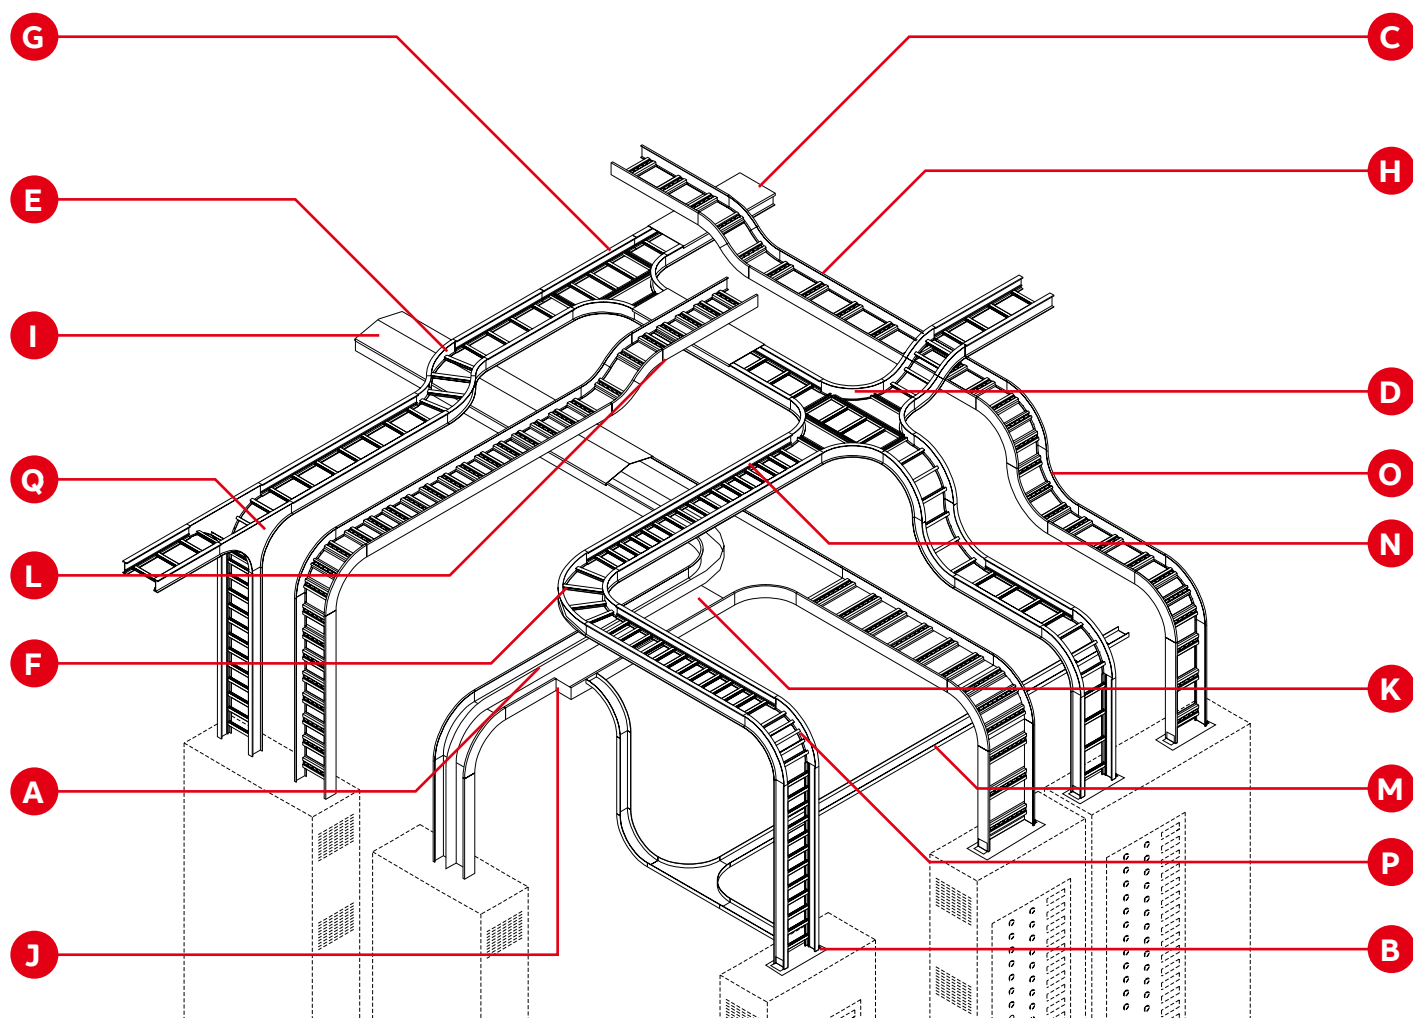

Application

Commercial:

- Schools
- Hospitals
- Office buildings
- Airports
- Casinos
- Stadiums

Industrial:

- Petrochemical plants
- Automotive plants
- Paper plants
- Food processing
- Power plants
- Refineries
- Manufacturing
- Mining

Legend


- A – Barrier strip
- B – Box connector
- C – Flat cover
- D – Horizontal cross
- E – Horizontal 45°
- F – Horizontal 90°
- G – Horizontal tee
- H – Ladder tray

- I – Peaked cover
- J – Right reducer
- K – Solid tray
- L – Splice connector
- M – Solid channel tray
- N – Ventilated tray
- O – Vertical 90° inside
- P – Vertical 90° outside
- Q – Vertical tee

Technical information

Selection process

A number of basic decisions must be made before a cable tray system can be specified. ABB has developed a simple eight-step process to guide you in the process:

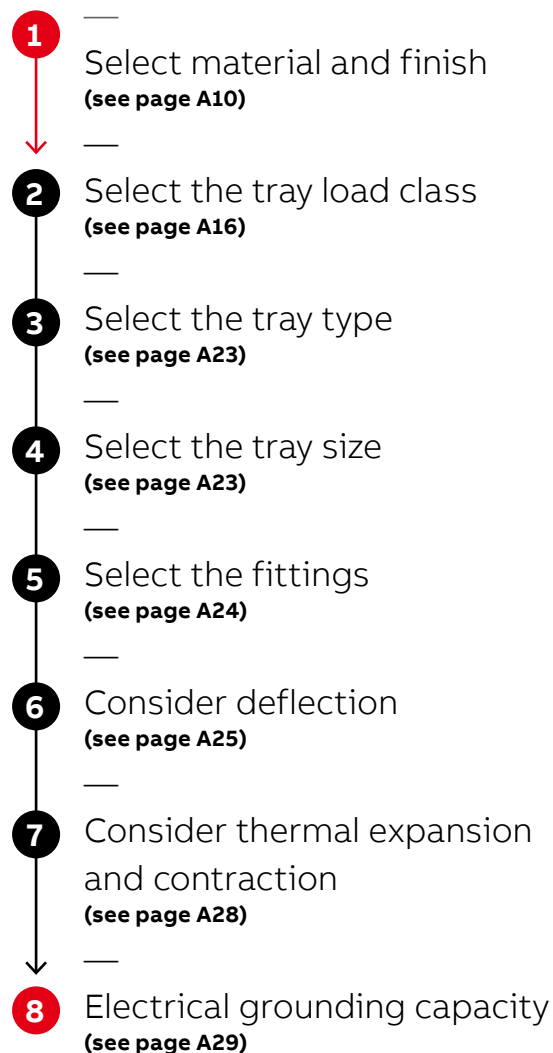

Each step is described in detail in the following pages. For many applications, however, you may also have to take the following into account:

- **Weight of the installation**, which affects the cost of the support structure and the ease of installation.
- **Corrosion resistance of the material** is one of the most important selection criteria. Cable tray materials may not respond the same way in different environments. Chemicals or combinations of chemicals have a corrosive effect on some materials that can be compounded by temperature or even the speed at which the corrosive elements contact the cable tray. For example, some grades of stainless steel may be resistant to salt water at high flow rates (perfect for heat exchangers), while exhibiting some corrosion pitting in standing salt water. Only the designer can quantify the various elements that affect the corrosion resistance of the cable tray system in a specific application. While ABB can provide guidance, the designer is responsible for the final selection. For more information, see “Corrosion” section.
- **Melting point and flammability rating** are primarily concerns for nonmetallic tray. Local building codes may restrict the use of a given product if certain performance levels are not met. Check with the appropriate inspection authorities before specifying the product.
- **Relative cost** varies dramatically, including material costs that float with the commodity index. For example, stainless steel prices may vary significantly according to daily changes in the market.

Selection process

1. Select material and finish

The most suitable material and finish for your application will depend on cost, the potential for corrosion and electrical considerations. ABB offers cable tray systems fabricated from corrosion-resistant steel, stainless steel and aluminum alloys along with corrosion-resistant finishes, including zinc and epoxy. Special paint is also available.

Materials

Most cable tray systems are fabricated from a corrosion-resistant metal (stainless steel or an aluminum alloy) or from a metal with a corrosion-resistant finish (zinc or epoxy). The choice of material for any particular installation depends on the installation environment (corrosion and electrical considerations) and cost.

Aluminum

Cable trays fabricated of extruded aluminum are often used for their high strength-to-weight ratio, superior resistance to certain corrosive environments and ease of installation. They also offer the advantages of being light weight (approximately less than 50% that of a steel tray) and maintenance-free, and since aluminum cable trays are non-magnetic, electrical losses are reduced to a minimum.

ABB cable tray products are formed from the 6063 series alloys, which by design are copper-free alloys for marine applications. These alloys contain silicon and magnesium in appropriate proportions to form magnesium silicide, allowing them to be heat treated. These magnesium silicon alloys possess good formability and structural properties, as well as excellent corrosion resistance.

The unusual resistance to corrosion, including weathering, exhibited by aluminum is due to the self-healing aluminum oxide film that protects the surface. Aluminum's resistance to chemicals in the application environment should be tested before installation.

Steel

ABB steel cable trays are fabricated from structural quality steels using a continuous roll-formed process. Forming and extrusions increase the mechanical strength.

The main benefits of steel cable tray are its high strength and low cost.

The rate of corrosion will vary depending on many factors such as the environment, coating or protection applied and the composition of the steel. ABB offers finishes and coatings to improve the corrosion resistance of steel. These include pregalvanized, hot dip galvanized (after fabrication), epoxy and special paints.

Stainless steel

Stainless steel offers high yield strength and high creep strength, at high ambient temperatures.

ABB stainless steel cable tray is roll-formed from AISI Type 316/316L stainless steel.

Stainless steel is resistant to dyestuffs, organic chemicals, and inorganic chemicals at elevated temperatures. Higher levels of chromium and nickel and a reduced level of carbon serve to increase corrosion resistance and facilitate welding. Type 316 includes molybdenum to increase high temperature strength and improve corrosion resistance, especially to chloride and sulfuric acid.

Finishes

Electrogalvanized coatings

The most widely used coating for cable tray is galvanizing. It is cost-effective, protects against a wide variety of environmental chemicals and is self-healing if an area becomes unprotected through cuts or scratches.

Steel is coated with zinc through electrolysis by dipping steel into a bath of zinc salts. A combination of carbonates, hydroxides and zinc oxides forms a protective film to protect the zinc itself. Resistance to corrosion is directly related to the thickness of the coating and the harshness of the environment.

Pregalvanized

Pregalvanized, also known as mill-galvanized or hot dip mill-galvanized, is produced in a rolling mill by passing steel coils through molten zinc. These coils are then slit to size and fabricated.

Areas not normally coated during fabrication, such as cuts and welds, are protected by neighboring zinc, which works as a sacrificial anode. During welding, a small area directly affected by heat is also left bare, but the same self-healing process occurs.

G90 requires a coating of 0.90 ounces of zinc per square foot of steel, or 0.32 ounces per square foot on each side of the metal sheet. In accordance with A653/A653M-06a, pregalvanized steel is not generally recommended for outdoor use or in industrial environments.

Hot-dipped galvanized

After the steel cable tray has been manufactured and assembled, the entire tray is immersed in a bath of molten zinc, resulting in a coating of all surfaces, as well as all edges, holes and welds.

Coating thickness is determined by the length of time each part is immersed in the bath and the speed of removal. Hot-dip galvanizing after fabrication creates a much thicker coating than the pregalvanized and electrogalvanized process, a minimum of 3.0 ounces per square foot of steel or 1.50 ounces per square foot on each side of the sheet (according to ASTM A123, grade 65).

The process is recommended for cable tray used in most outdoor environments and many harsh industrial environment applications.

Other coatings

Epoxy and special paint coatings are available on request.

Corrosion

Corrosion of metal occurs naturally when the metal is exposed to chemical or electrochemical attack. The atoms on the exposed surface of the metal come into contact with a substance, leading to deterioration of the metal through a chemical or electrochemical reaction. The corroding medium can be a liquid, gas or solid.

Although all metals are susceptible to corrosion, they corrode in different ways and at various speeds. Pure aluminum, bronze, brass, most stainless steels and zinc corrode relatively slowly, but some aluminum alloys, structural grades of iron and steel and the 400 series of stainless steels corrode quickly unless protected.

Electrochemical corrosion

Electrochemical corrosion is caused by an electrical current flow between two dissimilar metals, or if a difference of potential exists, between two areas of the same metal surface.

The energy flow occurs only in the presence of an electrolyte, a moist conductor that contains ions, which carry an electric charge. Solutions of acids, alkalies and salts contain ions, making water – especially salt water – an excellent electrolyte.

Common types of corrosion

Galvanic corrosion

Galvanic corrosion results from the electrochemical reaction that occurs in the presence of an electrolyte when two dissimilar metals are in contact. The strength of the reaction and the extent of the corrosion depend on a number of factors, including the conductivity of the electrolyte and potential difference of the metals. The metal with less resistance becomes anodic and more subject to corrosion, while the more resistant becomes cathodic.

The galvanic series table, developed through laboratory tests on industrial metal alloys in sea water (a powerful electrolyte), list metals according to their relative resistance to galvanic corrosion. Those less resistant to galvanic corrosion (anodic) are at the top, and those more resistant (cathodic) are at the bottom.

The metals grouped together are subject to only slight galvanic effect when in contact, and metals at the top will suffer galvanic corrosion when in contact with metals at the bottom (in the presence of an electrolyte). The farther apart two metals are on the table, the greater the potential corrosion.

Galvanic series table

Anodic end	
1. Magnesium	23. Type 410 stainless steel (passive)
2. Magnesium alloys	24. Type 316 stainless steel (passive)
3. Zinc	25. 50Pb-50Sn solder
4. Galvanized steel	26. Silver (passive)
5. Naval brass (C46400)	27. Type 304 stainless steel (active)
6. Aluminum 5052H	28. Type 316 stainless steel (active)
7. Aluminum 3004	29. Lead
8. Aluminum 3003	30. Tin
9. Aluminum 1100	31. Muntz metal (C28000)
10. Aluminum 6053	32. Manganese bronze (C67500)
11. Alclad aluminum alloys	33. Nickel (active)
12. Aluminum bronze (C61400)	34. Inconel (active)
13. Cadmium	35. Cartridge brass (C26000)
14. Copper (C11000)	36. Admiralty metal (C44300)
15. Aluminum 2017	37. Red brass (C23000)
16. Aluminum 2024	38. Silicon bronze (C 65100)
17. Low-carbon steel	39. Copper nickel, 30% (C71500)
18. Wrought iron	40. Nickel (passive)
19. Cast iron	41. Inconel (passive)
20. Monel	42. Gold
21. Ni-resist	43. Platinum
22. Type 304 stainless steel (passive)	Cathodic end

Pitting corrosion

Pitting corrosion is localized and is identified by a cavity with a depth equal to or greater than the cavity's surface diameter. Pits may have different sizes and depths and most often appear randomly distributed. Aluminum and stainless steels in chloride environments are especially susceptible to pitting.

Pitting begins when surface defects, foreign particles or other variations in the metal lead to fixation of anodic (corroded) and cathodic (protected) sites on the metal surface. Acidic metal chlorides, which form and accumulate in the pit as a result of anodes attracting chloride ions, accelerate the pitting process over time. The nature of pitting often makes it difficult to estimate the amount of damage.

Crevice corrosion

Crevice corrosion is a specialized form of pitting that particularly attacks metals or alloys protected by oxide films or passive layers. It results from a relative lack of oxygen in a crevice, with the metal in the crevice becoming anodic to the metal outside. For the crevice to corrode, it must be large enough to admit the electrolyte, but small enough to suffer oxygen depletion.

Erosion corrosion

While erosion is a purely mechanical process, erosion corrosion combines mechanical erosion with chemical or electrochemical reaction. The process is accelerated by the generally rapid flow of liquid or gas over an eroded metal surface, removing dissolved ions and solid particles. As a result, the metal surface develops grooves, gullies, waves, rounded holes and valleys.

Erosion corrosion can damage most metals, especially soft ones like aluminum that are susceptible to mechanical wear, and those that depend for protection on a passive surface film, which can be eroded. Resulting damage can also be enhanced by particles or gas bubbles in a suspended state.

Intergranular corrosion

Intergranular corrosion occurs between the crystals (or grains) that formed when the metal solidified. The composition of the areas between the crystals differs from that of the crystals themselves, and these boundary areas can become subject to intergranular corrosion. Weld areas of austenitic stainless steels are often affected by this form of corrosion, and the heat-treatable aluminum alloys are also susceptible.

Corrosion resistance guide

The following table has been compiled as a guide for selecting appropriate cable trays for various industrial environments. The information can only be used as a guide because corrosion processes are dictated by the unique circumstances of any particular assembly.

Corrosion is significantly affected by trace impurities which, at times, can become concentrated through wet/dry cycles in locations that are prone to condensation and evaporation. It is not uncommon to find aggressive mists created from contaminant species, notably from sulfur or halogen sources.

Temperature greatly influences corrosion, sometimes increasing the rate of metal loss, (a rule-of-thumb guide is that a 30 °C change in temperature results in a 10X change in corrosion rate). Sometimes corrosion attack slows down at higher temperatures because oxygen levels in aqueous solutions are lowered as temperatures increase. If an environment completely dries out then there can be no corrosion.

Stress-associated corrosion might occur when assemblies are poorly installed and/or fabricated, e.g., on-site welding or mechanical fastening. Premature failure can result from: corrosion fatigue, which can occur in any environment; stress corrosion cracking, which occurs in the presence of a specific chemical when the metal is under a tensile stress, which may be residual or applied, (e.g., from poor fabrication or welding); fretting, where two adjacent surfaces (under load) are subjected to an oscillatory motion across the mating surfaces.

Design should minimize the risk of stress concentrations within a structure. Examples include sharp profiles, abrupt section changes and threaded screws. These measures are particularly important for metals that are prone to stress corrosion cracking in specific media. Design plays a significant role in exacerbating corrosion. Non-draining locations create liquid traps; local metal-to-metal (or metal-to-non-metal) contact points (e.g., mechanical assembly bolts with washers or spacers), permit crevice corrosion and/or galvanic corrosion to occur.

Areas that are poorly maintained, (e.g., surfaces are not regularly or properly washed and stubborn deposits remain on the metal surface), are particularly prone to localized corrosion damage due to different levels of oxygen under and adjacent to the location in question (differential aeration). Resulting damage from these situations is in the form of small holes (pits). In each of the examples just quoted, there is a restricted supply of oxygen. Thus, metals (e.g., aluminum, stainless steels, zinc) that rely on oxygen to form protective corrosion films (oxides, hydroxides, carbonates, etc.) may be prone to localized pitting and/or crevice corrosion.

A further example of localized corrosion occurs when dissimilar metals contact each other in the presence of a corrodent, i.e., galvanic corrosion. Each metal will corrode, but the one that is most active (anode) can be more corroded, especially when there is a large surrounding area of the less active (cathodic) metal. It is wise to avoid small anodic areas. Some examples include: steel bolts (small area of anodic metal) in stainless steel plate (large area of cathodic metal); steel bolts in copper plate – the steel corrodes. There can be environmental influences, for example, a fluid that contains active metallic species, like copper ion, contacts with aluminum (copper picked up from aqueous solutions conveyed in copper pipe) – the aluminum corrodes. A further dramatic example is provided when trace quantities of mercury contact aluminum – the aluminum corrodes very rapidly. These are examples of deposit corrosion.

Technical information

Corrosion resistance guide

Corrosion resistance guide

Chemical species	Aluminum	HDG/Steel	316SS
Acetaldehyde	++	+	++
Acetic acid – aerated	(+) ^{T,C}	X	(++) ^T
Acetone	++	++	++
Acetylene	++	nd	++
Allyl alcohol	+	nd	++
Aluminum chloride – dry	+	nd	(+) ^{T,P}
Aluminum chloride – wet	X	X	(-) ^P
Aluminum sulfate – satd.	X	nd	+
Ammonia – anhydrous	++	++	++
Ammonia – gas	-	+	(+) ^T
Ammonium acetate	+	nd	+
Ammonium bicarbonate	-	nd	(+) ^T
Ammonium carbonate – satd.	+	X	+
Ammonium chloride – 28%	X	X	(+) ^{P,S}
Ammonium chloride – 50%	X	X	X
Ammonium hydroxide	+	+	(++) ^C
Ammonium chloride – 28%	X	X	(+) ^{P,S}
Ammonium chloride – 50%	X	X	X
Ammonium hydroxide	+	+	(++) ^C
Ammonium nitrate	+	X	(++) ^S
Ammonium phosphate – 40%	X	nd	+
Ammonium sulfate – to 30%	X	-	+
Amyl acetate	++	++	++
Asphalt	++	+	+
Beer	++	X	++
Benzene (benzol)	++	+	(+) ^P
Benzoic acid	+	nd	+
Benzol – see benzene			
Boric acid (boracic acid)	++	nd	(++) ^{T,P}
Bromine – wet	X	X	X
Butadiene (butylene)	+	+	+
Butyl alcohol (butanol)	++	++	++
Butyric acid	+	X	+
Cadmium sulfate	+	nd	++
Calcium carbonate	-	nd	+
Calcium chloride – satd.	+	X	(+) ^S
Calcium hydroxide – satd.	X	nd	+
Calcium hypochlorite – satd.	X	X	(-) ^P
Carbon dioxide – wet	++	+	+
Carbon disulfide (bisulfide)	++	+	++
Carbon tetrachloride	X	+	(++) ^{P,S}
Carbolic acid – see phenol			
Carbonic acid – see carbon dioxide			

This guide provides an indication of the suitability of a potential candidate material for a specific chemical environment. These tables should be regarded only as a GUIDE to anticipated performance because of possible contributions from temperature, pollutant (contaminant) species, etc.

Chemical species	Aluminum	HDG/Steel	316SS
Caustic potash – see potassium hydroxide			
Caustic soda – see sodium hydroxide			
Chlorine gas – wet	X	++	(-) ^{P,S}
Chloroform	(+) ^{dry}	+	(+) ^{T,S}
Chromic acid	+	nd	(+) ^P
Citric acid – dilute	(+) ^{T,C}	X	(++) ^P
Copper chloride	X	X	(-) ^P
Copper nitrate	X	nd	++
Copper sulfate	X	-	+
Cresol	+	+	+
Crude oil	++	++	++
Diethylamine	+	++	++
Dimethyl ketone – see acetone			
Ethyl acetate	(++) ^{dry}	++	+
Ethyl alcohol (ethanol)	++	++	++
Ethylene dichloride	(-) ^{dry}	++	(+) ^{P,S}
Ethylene glycol (glycol)	++	++	++
Ferric chloride	X	X	X
Ferric nitrate – 10%	X	nd	+
Ferrous sulfate	+	nd	(+) ^P
Formaldehyde (methanal)	(+) ^P	++	(++) ^{T,C}
Fluorine gas – moist	X	X	X
Formalin – see formaldehyde			
Formic acid (methanoic acid) – 10%	(+) ^T	X	(+) ^{P,C}
Furfural (furfuraldehyde)	+	nd	+
Furol – see furfural			
Gelatin	++	+	++
Glycerine (glycerol)	++	++	++
Hexamine – 80%	++	nd	++
Hydrobromic acid	X	X	X
Hydrochloric acid (muriatic acid)	X	X	X
Hydrocyanic acid – dilute	+	nd	+
Hydrocyanic acid – conc.	X	nd	+
Hydrofluoric acid	X	X	X
Hydrogen chloride gas – dry	X	X	(++) ^S
Hydrogen chloride gas – wet	X	X	+
Hydrogen fluoride	(-) ^T	nd	+
Hydrogen peroxide – to 40%	++	nd	+
Hydrogen sulfide – wet	(+) ^P	nd	(+) ^{P,S}
Hypo – see sodium thiosulfate			
Hypochlorous acid	X	X	X
Iodine solution – satd.	X	X	X
Lactic acid	(+) ^T	nd	(+) ^{P,I}

Technical information

Corrosion resistance guide

Corrosion resistance guide

Chemical species	Aluminum	HDG/Steel 316SS
Latex	++	- ++
Lithium chloride – to 30%	X	nd ++
Linseed oil	+	nd ++
Magnesium chloride – 50%	X	X (+) ^{P,S}
Magnesium hydroxide	+	nd ++
Magnesium sulfate	+	X +
Maleic acid (maleinic acid) – 20%	+	nd +
Methyl alcohol (methanol)	++	++ ++
Methyl ethyl ketone	+	++ +
Milk	++	X ++
Molasses	+	nd ++
Naptha	+	+ +
Natural fats	++	++ ++
Nickel chloride	X	nd (+) ^{P,S}
Nickel sulfate	X	nd +
Nitric acid	X	X (++) ^I
Oleic acid	(++) ^T	nd ++
Oxalic acid – dilute	-	nd +
Oxalic acid – saturated	(+) ^T	X X
Paraformaldehyde – to 30%	+	nd ++
Perchloroethylene	+	X (++) ^P
Phenol (carbolic acid)	+	+ ++
Phosphoric acid – dilute	X	X ++
Phosphoric acid – 50%	X	X (++) ^I
Picric acid	++	nd +
Potassium bicarbonate – 30%	X	nd ++
Potassium carbonate	X	nd ++
Potassium chloride – to 25%	X	X (++) ^P
Potassium dichromate – 30%	(++) ^T	X ++
Potassium hydroxide	X	nd (+) ^S
Potassium nitrate	++	++ +
Potassium sulfate	++	++ ++
Propionic acid (propanoic acid)	(+) ^T	X (+) ^T
Propyl alcohol (propane)	++	++ ++
Prussic acid – see hydrocyanic acid		
Pyridine	+	nd ++
Soaps	+	- +
Sodium bicarbonate – 20%	+	nd ++
Sodium bisulfate	X	X (+) ^T
Sodium bisulfite	X	X +
Sodium chloride – to 30%	X	X (+) ^{P,S}
Sodium cyanide	X	nd (+) ^T
Sodium hydroxide – 10-30%	X	X (+) ^S

Chemical species	Aluminum	HDG/Steel 316SS
Sodium hydroxide – 50%	X	X (++) ^S
Sodium hydroxide – conc	X	X ++
Sodium hypochlorite – conc	X	+ (-) ^{P,S}
Sodium nitrate	++	X ++
Sodium peroxide – 10%	+	nd +
Sodium silicate	++	nd ++
Sodium sulfate	(++) ^{30%}	X ++
Sodium sulfide – to 50%	X	nd (+) ^T
Sodium thiosulfate	+	nd +
Steam	(+) ^P	++ ++
Stearic acid	+	nd ++
Sorbital (hexahydric alcohol)	++	+ ++
Sulfur dioxide – dry	+	+ ++
Sulfur dioxide – wet	X	X (+) ^T
Sulfuric acid – to 80%	X	X X
Sulfuric acid – 80-90%	X	X (-) ^I
Sulfuric acid – 98%	X	X (+) ^I
Tannic acid (tannin)	X	X +
Tartaric acid – to 50%	(+) ^T	nd ++
Toluene (Toluol; methyl benzene)	++	++ ++
Trichloroethylene	(++) ^T	+ (+) ^P
Turpentine	+	++ ++
Water – acid, mine	X	- (++) ^P
Water – potable	+	+ ++
Water – sea	+	+ ++
Zinc chloride – dilute	++	nd (++) ^{P,S}

Symbols:

++ First choice; very low corrosion rate, typically <5 mpy, or <0.005 inch/year, (1 mil = 1/1000 inch)

+ Good choice; low corrosion rate, typically <20 mpy, or <0.02 ipy

- Can use; corrosion rate up to 50 mpy (0.05 ipy); some limitations may apply

x Not recommended

(-) Brackets indicate probable limitations, e.g., at higher temperatures, [symbol "T"]; at higher concentrations, [symbol "C"]; due to pitting, [symbol "P"]; due to local grain boundary attack in the metal – intergranular corrosion, [symbol "I"]; or, due to stress corrosion cracking, [symbol "S"]

nd No available data

Selection process

2. Select the tray class/load capacity (loading)

The standard classes of cable trays, as related to their maximum design loads and to the associated design support spacing based on a simple beam span requirement, shall be designated in accordance with Table 1. Please note the load ratings in Table 1 are those most commonly used. Other load ratings are acceptable.
(according to NEMA VE-1/CSA C22.2 No 126.1-02).

Costs vary between different load classes. Since labor and coupling costs are similar for a given length of tray, the heavier classes are less cost-effective on a load length basis. The designer

should therefore specify the lightest class of tray compatible with the weight requirements of the cable tray.


Table 1 – Span/load class designation – USA

Load		Span. m (ft.)				
kg/m	(lb/ft.)	1.5 (5)	2.4 (8)	3.0 (10)	3.7 (12)	6.0 (20)
37	(25)	5AA	8AA	10AA	12AA	20AA
74	(50)	5A	8A	10A	12A	20A
112	(75)	–	8B	–	12B	20B
149	(100)	–	8C	–	12C	20C

Note: These ratings are also used in Mexico

Table 2 – Span/load class designation – Canada

Load		Span. m (ft.)							
kg/m	(lb/ft.)	1.5 (5)	2.0 (6.5)	2.5 (8.2)	3.0 (10)	4.0 (13)	5.0 (16.4)	6.0 (20)	
37	(25)	–	–	–	A	–	–	–	–
45	(30)	–	–	A	–	–	–	–	–
62	(42)	–	A	–	–	–	–	–	–
67	(45)	–	–	–	–	–	–	–	D
82	(55)	–	–	–	–	–	D	–	–
97	(65)	–	–	–	C	–	–	–	–
99	(67)	A	–	–	–	–	–	–	–
112	(75)	–	–	–	–	–	–	–	E
113	(76)	–	–	–	–	D	–	–	–
119	(80)	–	–	C	–	–	–	–	–
137	(92)	–	–	–	–	–	E	–	–
164	(110)	–	C	–	–	–	–	–	–
179	(120)	–	–	–	D	–	–	–	–
189	(127)	–	–	–	–	E	–	–	–
259	(174)	C	–	–	–	–	–	–	–
299	(200)	–	–	–	E	–	–	–	–

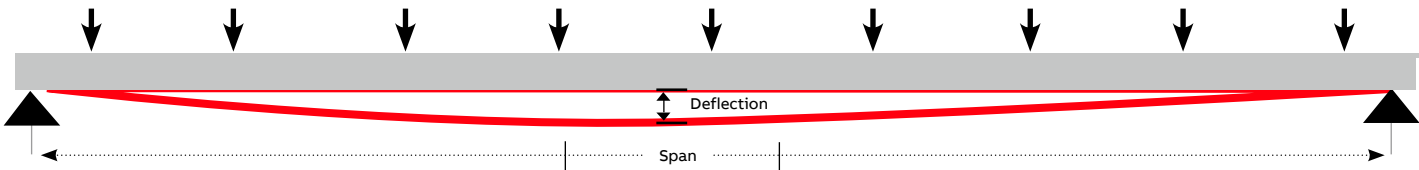

Cable loads

The cable load is the total weight, expressed in (kg/m), of all the cables that will be placed in the cable tray.

Snow loads

The additional design load from snowfall should be determined using the building codes that apply for each installation.

Ice loads

The additional load design due to ice is determined by the following formula:

$$W_i = W \times T_i \times D_i / 144$$

Where:

W_i = ice load (lb/ft.)

W = width of the tray (inches)

T_i = maximum ice thickness (inches)

D_i = 57 lb/ft.³ ice density

$$W_i = W \times T_i \times D_i / 10^6$$

Where:

W_i = ice load (kg/m)

W = width of the tray (mm)

T_i = maximum ice thickness (mm)

D_i = 913 kg / m³ ice density

Ice thickness will vary depending on installation location. A value of ½ inch can be used as a conservative standard for Canada.

Wind loads

The additional loading to be considered is the effect of the impact pressure normal to the side rail. This loading is determined by the following formula:

$$W_p = 0.00256 \times V^2 \times H / 12$$

Where:

W_p = loading due to the wind (lb)

V = wind velocity (mph)

H = height of the side rail (inches)

It is important to note that cable tray is not designed to support personnel. The user should display appropriate warnings to prevent the use of cable tray as walkways.

Concentrated loads

A concentrated static load is not included in Table 1. Some user applications may require that a given concentrated static load be imposed over and above the working load.

Such a concentrated static load represents a static weight applied on the centerline of the tray at midspan. When so specified, the concentrated static load may be converted to an equivalent uniform load (W_e) in kilograms/meter (pounds), using the following formula, and added to the static weight of cable in the tray:

$$W_e = \frac{2 \times (\text{concentrated static load, kg (lb)})}{\text{Span length, m (ft.)}}$$

Seismic loads

It is now known that cable tray systems can withstand stronger earthquakes than previously thought. The tray itself and the support material are highly ductile, and the cables moving within the tray tend to dissipate energy. However, if you have specific seismic specifications for selected cable tray, please consult ABB to ensure your specifications are met.

Loading for grades B, C and D

General loading requirements and maps (IEEE: Section 25 loading for grades B, C and D)

General

1. It is necessary to estimate the loadings that may be expected to occur on a line because of wind and ice during all seasons of the year. These weather loadings shall be the values of loading resulting from the application of Rules 250B or 250C. Where both rules apply, the required loading shall be the one that, when combined with the appropriate overload capacity factors, has the greater effect on strength requirements.
2. Where construction or maintenance loads exceed those imposed by Rule 250A1, which may occur more frequently in light loading areas, the assumed loadings shall be increased accordingly.
3. It is recognized that loadings actually experienced in certain areas in each of the loading districts may be greater, or in some cases, may be less than those specified in these rules. In the absence of a detailed loading analysis, no reduction in the loadings specified therein shall be made without the approval of the administrative authority.

Combined ice and wind loading

Three general angles of loading due to weather conditions are recognized and are designated as heavy, medium and light loading. Figure 250-1 shows the districts in which these loadings are normally applicable.

Figure 250-1 shows the radial thickness of ice and the wind pressures to be used in calculating loading. Ice is assumed to weigh 57 lb/ft.³ (913 kg/m³).

Extreme wind loading

If any portion of a structure or its supported facilities exceeds 60 ft. (18 m) above ground or water level, the applicable horizontal wind speed of Figure 250-2, as determined by the linear interpolation, shall be used to calculate horizontal wind pressures. These pressures shall be applied to the entire structure and supported facilities without ice loading.

The following formulas shall be used to calculate wind pressures on cylindrical surfaces:

$$\text{pressure in lb/ft.}^2 = 0.00256 (v \text{ m/h})^2$$

$$\text{pressure in pascals} = 0.613 (v \text{ m/h})^2$$

Where:

m = meters

s = seconds

Figure 250-2 lists the conversions of velocities to pressures for typical wind speeds as calculated by the formulas listed above. If no portion of the structure or its supported facilities exceeds 60 ft. (18 m) above ground or water level, the provisions of this rule are not required.

For Canadian customers, please refer to Annex A (page A232) for figure 250-1CDN and figure 250-2CDN.

For American customers, please refer to Annex B (page A232) for figure 250-1USA and figure 250-2USA.

Structural design

An installed cable tray system functions as a beam under a uniformly distributed load. The four basic beam configurations found in cable installations are simple, continuous, cantilever and fixed. Each is attached to the cable tray support in a different way.

Continuous beam

Cable tray sections forming spans constitute a continuous beam configuration, the most common found in cable tray installations. This configuration exhibits characteristics of the simple beam and the fixed beam. For example, with loads applied to all spans at the same time, the ends spans function like simple beams, while the counterbalancing loads on either side of a support function like a fixed beam. As the number of spans increases, the continuous beam behaves increasingly like a fixed beam, and the maximum deflection continues to decrease. As this occurs, the system's load carrying capability increases.

Simple beam

A straight section of cable tray supported at both ends but not fastened functions as a simple beam. Under a load, the tray will exhibit deflection. The load carrying capacity of a cable tray unit should be based on simple beam loading, since this type of loading occurs at run ends, offsets, etc., in any tray system. The NEMA/CSA Load Test is a simple beam, uniformly distributed load test, used primarily because it is easy to test and represents the worst case beam condition compared to continuous or fixed configurations. The only criterion for NEMA/CSA acceptance is the ability to support 150% of the rated load.

Fixed beam

Like the cantilever beam, a fixed beam applies more to the cable tray supports than the tray itself, because both ends of a fixed beam are firmly attached to the supports. The rigid attachment prevents movement and increases load bearing ability.

Cantilever beam

A cantilever beam has more to do with the cable tray supports than the tray. Attaching one end of a beam to a support while the other end remains unsupported, as when wall mounting a bracket, creates a cantilever beam configuration. Obviously, with one end unsupported, the load rating of a cantilever beam is significantly less than that of a simple beam.

Design loadings

Basic cable trays are designed on the basis of maximum allowable stress for a certain section and material. The allowable cable load varies with the span, type and width of the tray.

Splicing

Since the need for a continuous system requires that side rails be spliced, splice plates must be both strong and easy to install. The ABB aluminum snap-in splice plate allows hands-free installation of hardware for easier assembly. If practical, splices in a continuous span cable tray system should be installed at points of minimum stress. Unspliced straight sections should be used on all simple spans and on end spans of continuous span runs. Straight section lengths should be equal to or greater than the span length to ensure not more than one splice between supports.

Examples of splicing configurations are shown on page A25.

Basic design stresses

Allowable working stresses are the basis for all structural design. Since they must be of such magnitude as to assure the safety of the structure against failure, their selection is a matter of prime importance. In practice, a basic design stress is determined by dividing the strength of the material by a factor of safety. The determining factors in establishing a set of basic design stresses for a structure are therefore the mechanical properties of the materials and suitable factors of safety. Yield strength and ultimate strength are the mechanical properties most commonly considered to govern design. Values for these properties are readily obtainable. In determining the factor of safety, the designer must usually be guided by current practice – the “standard specifications” adopted by various technical societies and associations – and his or her own judgment and experience.

Structural design (continued)

Factors of safety

Since a low value for the factor of safety results in economy of material, the designer seeks to establish a value as low as is practical, based on sound engineering judgment and experience. In making the determination, consideration of the following factors are highly important:

- **The accuracy with which the loads to represent service conditions are selected and assumed.**

If there is much doubt concerning these loads, the basic design stress will have to be more conservative than under conditions where the loads are known with considerable accuracy.

- **The accuracy with which the stresses in the members of a structure are calculated.**

Many approximations are used in structural design to estimate stress distribution. The choice of a factor of safety should be consistent with how accurate the analysis is. The more precise the method, the greater the allowable unit stress may be.

- **The significance of the structure being designed.**

The designer must keep in mind the relative importance of the structure and appraise the possibility of its failure causing significant property damage or loss of life. In this respect, the significance of the design will govern the choice of a factor of safety to a considerable extent.

The factors of safety used in designing most common types of structures are an outgrowth of the experience gained from many applications and tests – even failures. The trend in recent years has been to reduce the factors of safety in line with improved quality of material and increasing knowledge of stress distribution. Further reductions may be made in the future as greater accuracy in determinations becomes possible and practicable.

Application of design stresses to cable tray systems

A cable tray manufacturer must design standard products to accommodate the great variations encountered in applications. The factors affecting the selection of a suitable basic design stress necessarily result in more conservative stresses than might otherwise be required.

An engineer who is in a position to determine specific stress requirements with a far greater degree of accuracy may consider that the manufacturer's basic design stresses are too conservative for a particular project. Using individual experience and judgment, he or she would establish a new set of basic design stresses, selecting those safety factors that would result in a cable tray system best suited to meet the projected service conditions. With these stresses, the engineer can easily calculate an increase or decrease in the manufacturer's loading data, since the load is always in direct proportion to the stress.

The factors of safety used in determining maximum allowable stresses are as follows:

Aluminum alloys

- For tension: the lower of $\frac{1}{3}$ the minimum ultimate strength or $\frac{1}{2}$ the minimum yield strength in tension.
- For compression: the lower of $\frac{1}{3}$ the minimum ultimate strength or $\frac{3}{4}$ the minimum yield strength in compression.
- For shear: the lower of $\frac{1}{3}$ the minimum ultimate strength or $\frac{1}{2}$ the minimum yield strength in shear.

For hot rolled steels

- For tension: the lower of $\frac{1}{2}$ the minimum ultimate strength or the minimum yield point in tension times 0.61.
- For compression: the lower of $\frac{1}{2}$ the minimum ultimate strength or the minimum yield point in compression times 0.61.
- For shear: maximum stress not to exceed a value of $\frac{2}{3}$ the basic design stress for tension.


Design efficiency

A tray designed to perform its required function with the minimum weight (which facilitates installation) requires the material to be used in the most effective manner. The design requirements of side rails are different from those of rungs or ventilated bottom; fabricated tray allows the designer to use different shapes and thicknesses of metal to the best advantage. The strength of the side rail and rungs is increased by the proper use of metal in the high strength heat-treated aluminum or continuously rolled cold-worked steel sections.

Loading

Cantilever beams

Uniform load



Reaction: $R = wL = W$


Moment at any point: $M = \frac{wX^2}{2} = \frac{WX^2}{2L}$

Maximum moment $M_{max} = \frac{wL^2}{2} = \frac{WL}{2}$

Maximum deflection: $D = \frac{wL^4}{8EI} = \frac{WL^3}{8EI}$

Maximum shear: $V = wL$

Concentrated load at free end



Reaction: $R = P$

Moment at any point: $M = Px$

Maximum moment $M_{max} = PL$


Maximum deflection: $D = \frac{PL^3}{3EI}$

Maximum shear: $V = P$

Loading

Continuous beams

Two span




$W = wL$


Four span



Three span



Five Span




Loading

Simple beams

Uniform load

w per unit of length, total load w



Reaction: $R_L = R_R = \frac{wL}{2} = \frac{W}{2}$


Moment at any point: $M = \frac{wX(L-X)}{2} = \frac{WX(L-X)}{2L}$

Maximum moment at center $M_{max} = \frac{wL^2}{8} = \frac{WL}{8}$

Maximum deflection: $D = \frac{5wL^4}{384EI} = \frac{5WL^3}{384EI}$

Maximum shear: $V = \frac{wL}{2}$

Concentrated load at any point



Reaction: $R_L = \frac{Pb}{L}, R_R = \frac{Pa}{L}$


Moment at any point: $X \leq a, M = R_L X = \frac{PbX}{L}$
 $X \geq a, M = R_R (L-X) = \frac{Pa(L-X)}{L}$

Maximum moment: At $X = a, M_{max} = \frac{Pab}{L}$

Maximum deflection: $D = \frac{Pab(L+b)3a(L+b)}{27EIL}$

Maximum shear: $V = \frac{Pa}{L}$, when $a > b$

Concentrated load at center



Reaction: $R_L = R_R = \frac{P}{2}$

Moment at any point: $X \leq \frac{L}{2}, M = \frac{PX}{2}$
 $X \geq \frac{L}{2}, M = \frac{P(L-X)}{2}$

Maximum moment at center $M_{max} = \frac{PL}{4}$

Maximum deflection: $D = \frac{PL^3}{48EI}$

Maximum shear: $V = \frac{P}{2}$

Selection process

3. Select the tray type

—
Cable tray is available with three styles of bottom:

Ladder cable tray is a prefabricated structure consisting of two longitudinal side rails connected by individual transverse members.

Ventilated cable tray is a prefabricated structure consisting of a ventilated bottom within integral or separate longitudinal side rails, with no openings exceeding 4 in. in a longitudinal direction.

Solid bottom cable tray is a prefabricated structure without openings in the bottom.

Ladder tray is most often used because of its cost-effectiveness. The designer has a choice of four nominal rung spacings: 6, 9, 12 and 18 inches. The greatest rung spacing compatible with an adequate cable bearing surface area should be selected. Heavy power cables often require greater cable bearing area due to the possibility of creep in the jacket material of the cable. If this is a concern, consult the cable manufacturer.

This condition may require the use of ventilated tray, which also offers additional mechanical protection for the cables. Local building codes may require totally enclosed cable tray systems under certain conditions. The designer should verify these before specifying the type of tray to be used.

Selection process

4. Select the tray size

The width or height of a cable tray is a function of the number, size, spacing and weight of the cables in the tray. Available nominal widths are 6, 9, 12, 18, 24, 30, 36 and 42 inches.

When specifying width, it is important to remember that the load rating does not change as the width increases. Even with six times the volume, a 36 in. wide tray cannot hold any more weight than a 6 in. wide tray. If the load rating of the tray permits, cable can be piled deeper in the tray. Most tray classes are available in a nominal 3%, 4, 5, 6 and 7 inches (8 inch height also available as a special – see appendix).

Cable ties or other spacing devices may be used to maintain the required air space between cables.

Selection process

5. Select the fittings

Fittings are used to change the size or direction of the cable tray. The most important decision to be made in fitting design concerns radius. The radius of the bend, whether horizontal or vertical, can be 12, 24, 36 or 48 in., or even greater on a custom basis.


The selection requires a compromise with the considerations being available space, minimum bending radius of cables, ease of cable pulling and cost.

The typical radius is 24 in. Fittings are also available for 30°, 45°, 60° and 90° angles.


When a standard angle will not work, field fittings or adjustable elbows can be used. It may be necessary to add supports to the tray at these points. Refer to NEMA VE2 installation guidelines for suggested support locations. Note that fittings are not subject to NEMA/CSA load ratings.

Support locations for fittings


Horizontal elbows

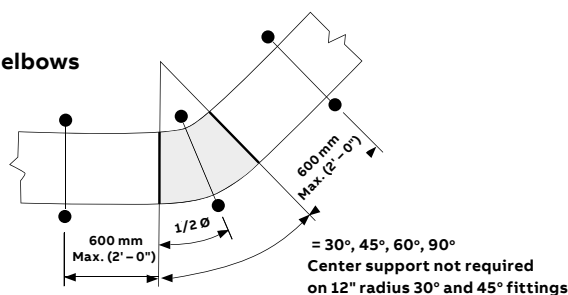


Horizontal tee

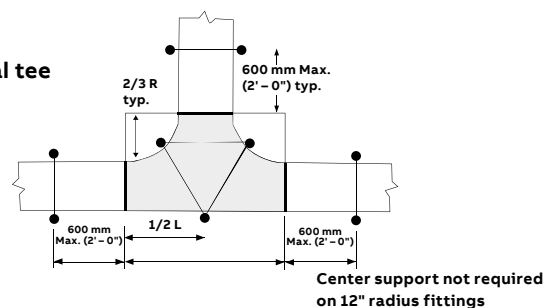


Horizontal wye

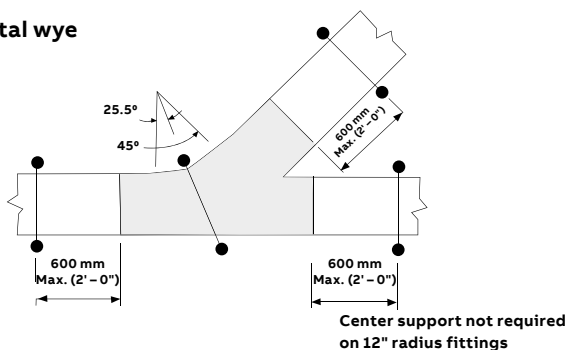


Horizontal cross

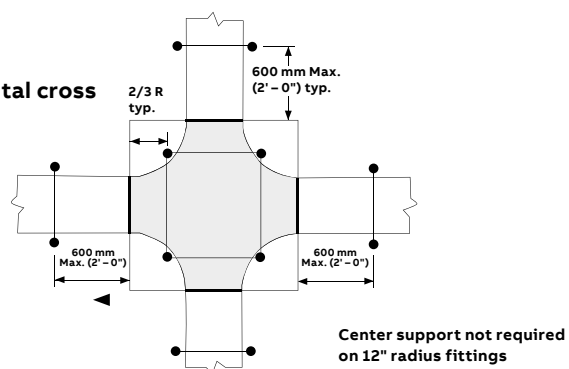

Reducer

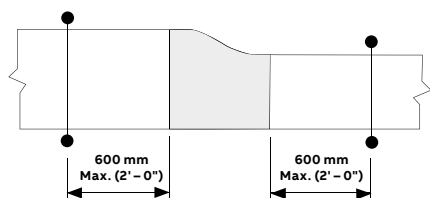

Vertical elbows (side view)

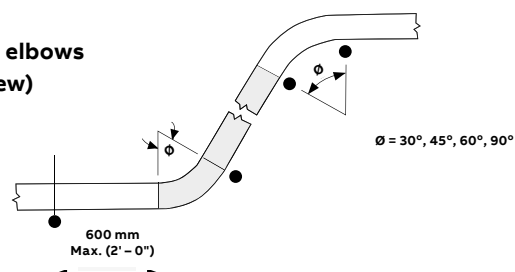

Selection process

6. Consider deflection

Deflection of the cable tray affects the appearance of an installation, but it is not a structural issue. In the case of nonmetallic cable tray, deflection may be affected by elevated temperatures.


—
01 Test load = 1.5 x
rated load x length

The NEMA/CSA load test is a simple beam, uniformly distributed load test (see Figure 1). This type of test was initially selected because:

- It was easiest to test.
 - It represents the worst case beam condition compared to continuous or fixed configurations.
- When consulting the manufacturer's catalogue for deflection information, the designer must verify whether the data shown represents simple or continuous beam deflection. If continuous beam deflection is shown, the calculation factor should be given.

NEMA/CSA has one criterion for acceptance under their load test: the ability to support 150% of the rated load.

—
01

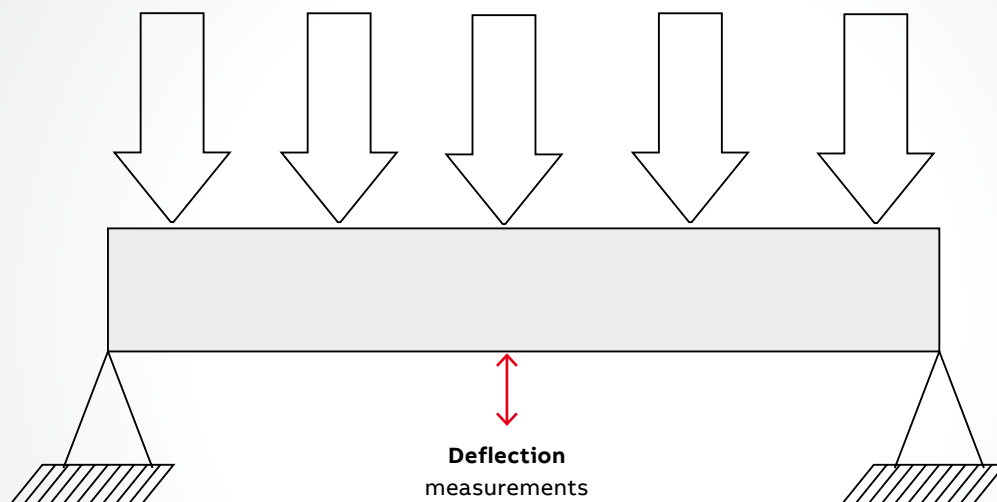

01 Simple beam
Uniformly distributed
load

02 Continuous
beam – two spans
Uniformly distributed
load

6. Consider deflection (continued)

Simple vs. continuous beam deflection
Theoretical maximum deflection for a simple beam,
uniformly distributed load may be calculated as:

0.0130 $\frac{wL^4}{EI} \times 1728 = 22.5 \frac{wL^4}{EI}$


Where: **w** = Load in lb/ft.
L = Length in ft.
E = Modulus of elasticity lbf/in.² (psi)
I = Moment of inertia in in.⁴

The maximum deflection calculation for a
continuous beam of two spans with a uniformly
distributed load is:


0.00541 $\frac{wL^4}{EI}$

A continuous beam of two spans therefore has a
theoretical maximum deflection of only 42% of its
simple beam deflection. As the number of spans
increases, the beam behaves increasingly like a
fixed beam, and the maximum deflection continues
to decrease. As this occurs, the system's load
carrying capability increases.

01

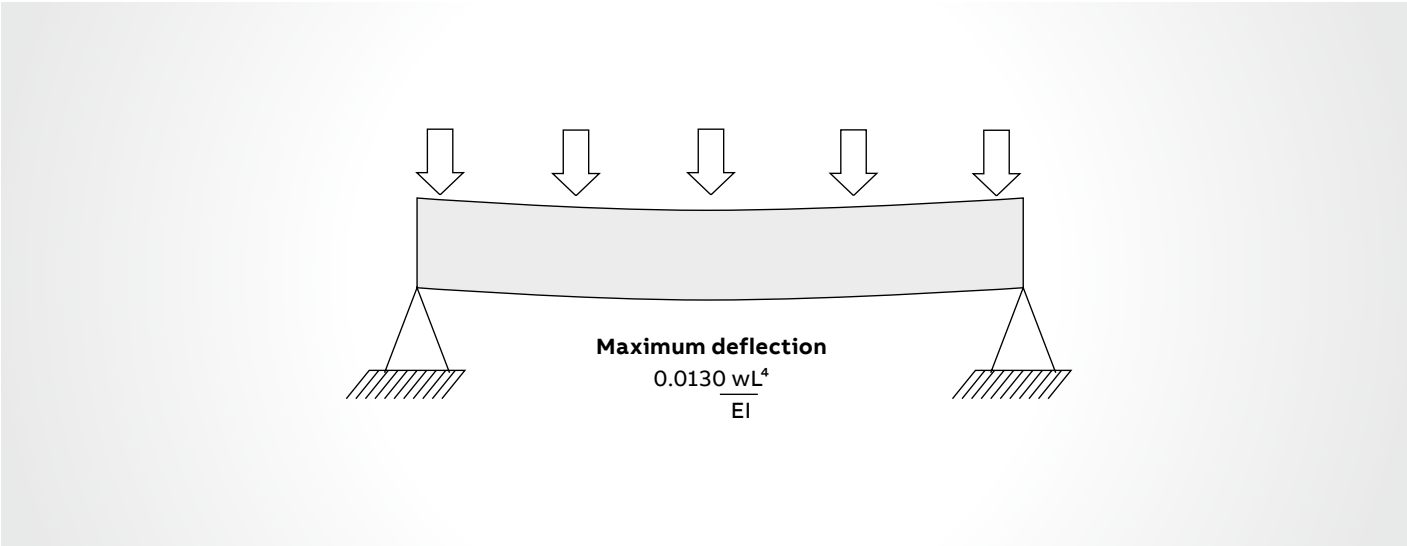

02

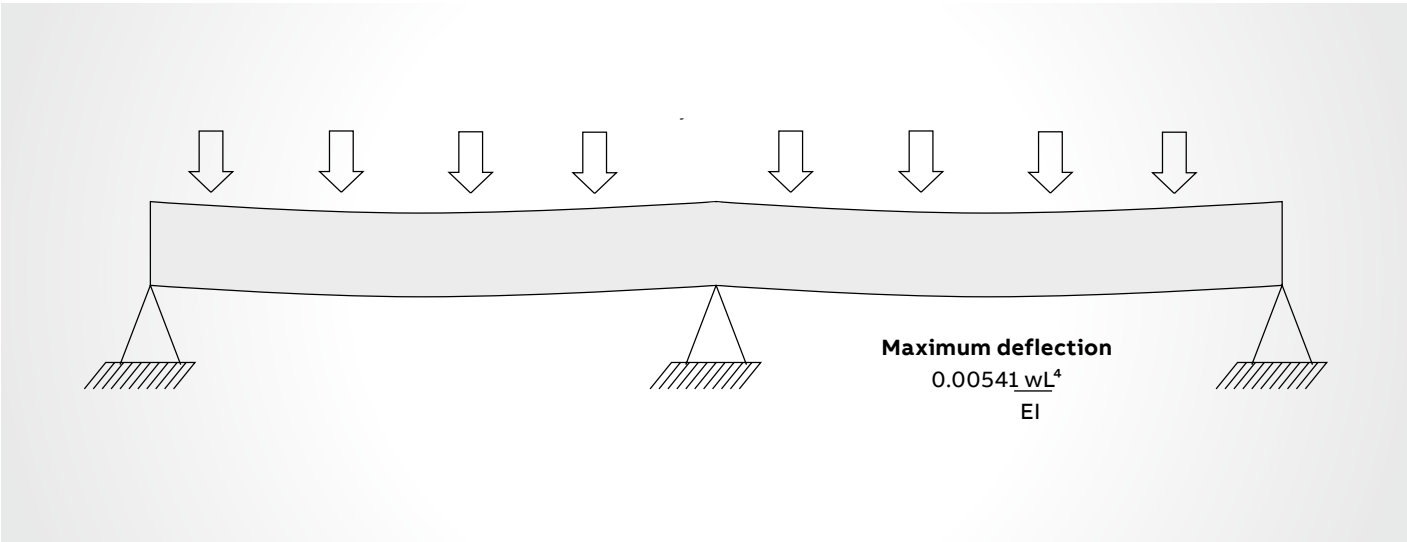

- 03 Couplers at supports
— not recommended
- 04 Couplers at $\frac{1}{4}$
span from supports
— ideal layout

Location of couplings


Since different bending moments are created in each span, there is no simple factor to approximate deflection as the number of spans increases. It is possible to calculate these deflections at any given point by using second integration of the basic differential equation for beams. Testing shows that the center span of a three-tray continuous beam can deflect less than 10 % of its simple beam deflection.

The support span should not be greater than the straight section length, to ensure no more than one splice is located between supports.


Location of couplers

(See Figure 4) The location of the coupler dramatically affects the deflection of a cable tray system under equal loading conditions. Testing indicates that the maximum deflection of the center span of a three-span tray run can decrease four times if the couplers are moved to the one-quarter point from the above supports. This can be a major concern for designers considering modular systems for tray and pipe racks.

—
03

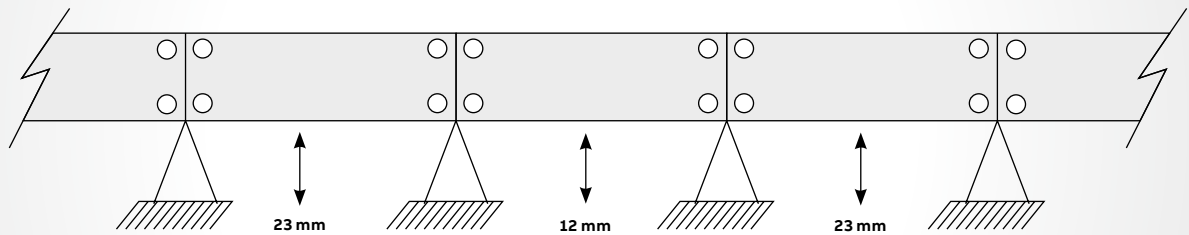

—
04

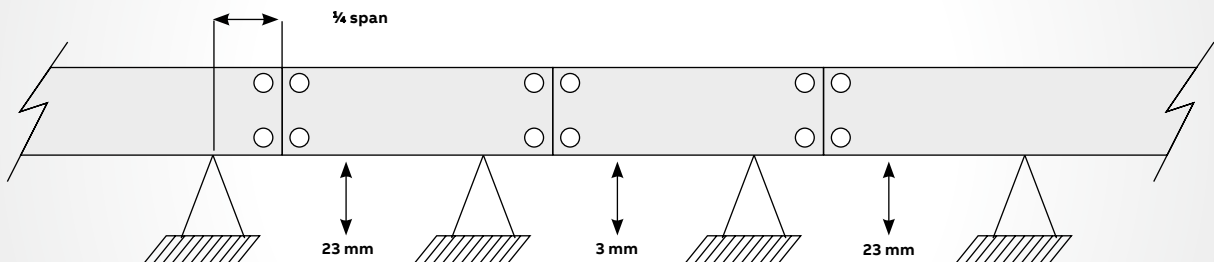

Selection process

7. Consider thermal expansion and contraction

Table 1 – Maximum distance between expansion joints (for 1 in. movement)


Temperature Differential		316 Stainless Steel		Steel		Aluminum	
°C	°F	m	Feet	m	Feet	m	Feet
14	25	115	379	156	512	79	260
28	50	58	189	78	256	40	130
42	75	38	126	52	171	27	87
56	100	29	95	39	128	20	65
70	125	23	76	31	102	16	52
83	150	19	63	26	85	13	43
97	175	16	54	22	73	11	37

Note: Every pair of expansion splice plates requires two bonding jumpers for grounding continuity.

A cable tray system may be affected by thermal expansion and contraction, which must be taken into account during installation.

To determine the number of expansion splice plates you need, decide the length of the straight cable tray runs and the total difference between the minimum winter and maximum summer temperatures. To function properly, expansion splice plates require accurate gap settings between trays. To find the gap, see Figure 2.

Figure 2 – Gap setting of expansion splice plate

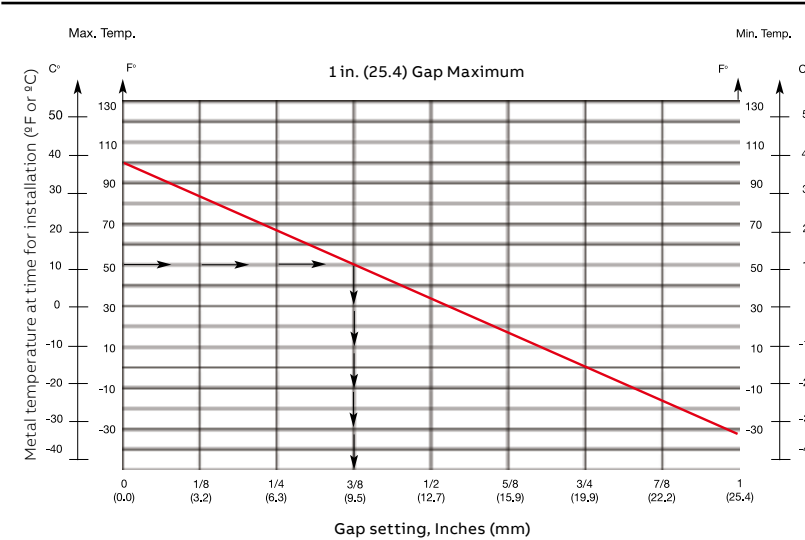


Plot your gap setting

- Locate the lowest metal temperature on low temperature line.
- Locate the highest metal temperature on high temperature line.
- Connect these two points.
- Locate installation temperature and plot to high/low line.
- Drop plot to gap setting.

The support nearest the midpoint between expansion splice plates should be anchored, allowing the tray longitudinal movement in both directions. All other support location should be secured by expansion guides. (See Figure 3.)

Figure 3 – Typical cable tray installation

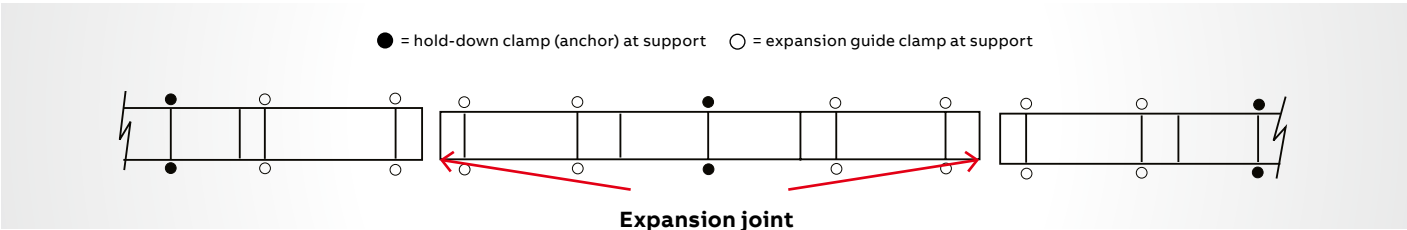

Selection process

8. Electrical grounding capacity

The National Electrical Code, Article 392-7 allows cable tray to be used as an equipment grounding conductor. All ABB standard cable trays are classified by Underwriter's Laboratories per US NEC Table 392-7 based on their cross-sectional area.

The corresponding cross-sectional area for each side rail design (2 side rails) is listed on the label. This cable tray label is attached to each straight section that is UL classified. Fittings are not subject to CSA or UL.

NEC Table 392.7 (B)

Metal area requirements for cable trays used as equipment grounding conductors.

For SI units: 1 in.² = 645 mm²

NEC Table 392.7 (B) – Metal area requirements for cable trays used as equipment grounding conductors.

Maximum fuse ampere rating, circuit breaker ampere trip setting or circuit breaker protective relay ampere trip setting for ground fault protection of any cable circuit in the cable tray system	Minimum cross-sectional area of metal* in square inches	
	Steel cable trays	Aluminum cable trays
60	0.20	0.20
100	0.40	0.20
200	0.70	0.20
400	1.00	0.40
600	1.50**	0.40
1000	–	0.60
1200	–	1.00
1600	–	1.50
2000	–	2.00**

* Total cross-sectional area of both side rails for ladder or trough-type cable trays; or the minimum cross-sectional area of metal in channel-type cable trays or cable trays of one-piece construction.

** Steel cable trays shall not be used as equipment grounding conductors for circuits with ground-fault protection above 600 amperes. Aluminum cable trays shall not be used as equipment grounding conductors for circuits with ground-fault protection above 2000 amperes. For larger ampere ratings, an additional grounding conductor must be used.

See pages A237 to A239 for grounding and bonding products.

For more information on grounding and bonding cable tray, refer to section 4.7 of the NEMA VE 2-2006 cable tray installation guidelines.

Engineering cable tray

Specification

Cable tray

- Cable tray shall be by one manufacturer and shall consist of straight sections, fittings and accessories per NEMA VE1-2006/CSA C22.2 No. 126.1-02. Cable tray must be listed by UL as equipment grounding conductor. There shall be no burrs, projections or sharp edges to damage the cable insulation.

Material

- **Aluminum** – All side rails, and rungs shall be of extruded aluminum type 6063-T6. Side rails shall be of I-beam construction.
- **Pregalvanized steel** – All side rails and rungs shall be of steel conforming to the requirements of ASTM A653/A653M-06a with G90 coating thickness. Side rail shall be reinforced with flanges turned inward.
- **Hot-dipped galvanized steel** – All side rails and rungs shall be made from steel conforming to the requirements of A1008/A1008M-07, SS grade 33, type 2 or A1011/A1011-06b SS, grade 33 and shall be hot-dipped galvanized after manufacture per ASTM A123 providing a minimum thickness of 1.50 oz per ft.²
- **Stainless steel** – All cable tray and accessories shall be of type AISI 316 stainless steel.

Tray types

- **Ladder** – Ladder tray shall incorporate two side rails connected by lateral rungs. Rungs shall provide minimum 1 in. bearing surface and have slots perpendicular to the centerline of the rung on 1 in. centers for attachment of cable ties. Rungs shall also have an open slot to facilitate attachment of pipe straps and other accessories. Rungs shall be installed at 6, 9, 12 or 18 in. spacing. The rungs shall not be below the bottom of the side rail.
- **Solid Bottom** – Solid bottom tray shall incorporate two side rails connected by rungs on 12 in. centers with a solid sheet applied below the rungs.
- **Ventilated trough** – Ventilated trough tray shall incorporate two side rails connected by rungs at 4 in. spacing.

Dimensions

- **Side rail height** – Side rails heights shall be 3½, 4, 5, 6 and 7 in. Minimum loading depths shall be 2½, 3, 4, 5, and 6 in.
- **Length** – All cable tray straight sections shall be supplied in 12 ft., 24 ft., 3 m and 6 m lengths.
- **Width** – Cable tray shall be supplied in 6, 9, 12, 18, 24, 30 and 36 in. widths as required.
- **Radius fittings** – For all fittings requiring a radius, that radius shall be 12, 24, 36 or 48 in. and shall be measured to the nearest perpendicular surface.

Accessories

- **Covers and accessories** – Covers shall be supplied to protect tray cable where needed. Appropriate hold-downs shall be supplied to properly attach the covers to the tray.
- **Splice plates** – Aluminum splice plates shall be designed to snap into tray side rail and shall be supplied with four square neck carriage bolts and hex nuts for attachment. Steel splice plates shall be supplied with four square neck carriage bolts and hex nuts for attachment.

Loading capabilities

- Cable tray shall meet specified NEMA/CSA load ratings with safety factor of 1.5. The cable tray should also be able to support a 200 lb concentrated load at midspan over and above stated cable load.

Design and manufacture

- Cable tray design shall be that of T&B Cable Tray systems as manufactured by ABB.

Selection of ABB series of cable tray

Please refer to Table 2 for aluminum and Table 3 for steel

Table 1a – Span/load class designation – USA
(See Clauses 4.8.1, 4.8.2 and 6.1.2 (c).)

Load kg/m (lb/ft.)		Span, m (ft.)				
kg/m	(lb/ft.)	1.5 (5)	2.4 (8)	3.0 (10)	3.7 (12)	6.0 (20)
37	(25)	5AA	8AA	10AA	12AA	20AA
74	(50)	5A	8A	10A	12A	20A
112	(75)	–	8B	–	12B	20B
149	(100)	–	8C	–	12C	20C

Note: These ratings are also used in Mexico.

Table 1b – Span/load class designation – CANADA
(See Clauses 4.8.1, 4.8.2 and 6.1.2 (c).)

Load kg/m (lb/ft.)		Span, m (ft.)						
kg/m	(lb/ft.)	1.5 (5)	2.0	2.53.0 (10)	4.0	5.0	6.0 (20)	
37	(25)	–	–	–	A	–	–	–
45	(30)	–	–	A	–	–	–	–
62	(42)	–	A	–	–	–	–	–
67	(45)	–	–	–	–	–	–	D
82	(55)	–	–	–	–	–	D	–
97	(65)	–	–	–	C	–	–	–
99	(67)	A	–	–	–	–	–	–
112	(75)	–	–	–	–	–	–	E
113	(76)	–	–	–	–	D	–	–
119	(80)	–	–	C	–	–	–	–
137	(92)	–	–	–	–	–	E	–
164	(110)	–	C	–	–	–	–	–
179	(120)	–	–	–	D	–	–	–
189	(127)	–	–	–	–	E	–	–
259	(174)	C	–	–	–	–	–	–
299	(200)	–	–	–	E	–	–	–

Table 2 – Aluminum load/span class designation

Side rail height (in.)	Series	Load depth (in.) nominal	NEMA class	CSA class
4	AH14	3	12A	C/3m
4	AH34	3	12C	D/6m
4	AH54	3	20B	E/6m
5	AH25	4	12C	D/6m
5	AH45	4	20B	E/6m
6	AH16	5	12C	D/6m
6	AH36	5	20B	E/6m
6	AH46	5	20C	–
6	AH56	5	20C	–
6	AH66	5	20C	–
6	AH76	5	–	–
7	AH37	6	20C	–
7	AH47	6	20C	–
8	AH18	7	–	–

Table 3 – Steel load/span class designation

Side rail height (in.)	Series	Load depth (in.) nominal	NEMA class	CSA class
3½	SH13/SP13/SS13	2½	12A	C/3m
4	SH14/SP14/SS14	3	12C	D/3m
4	SH34/SP34/SS34	3	20A	D/6m
5	SH25/SP25/SS25	4	20A	D/6m
5	SH45/SP45/SS45	4	20B	E/6m
5	SH55/SP55	4	20C	–
6	SH16/SP16/SS16	5	20A	D/6m
6	SH36/SP36/SS36	5	20B	E/6m
6	SH46/SP46/SS46	5	20C	–
7	SH37/SP37/SS37	6	20C	–



Aluminum cable tray

Overview

Features

- Straight side rail design: Extruded I-beam; nominal height 4 in. to 8 in.; loading height 3 in. to 7 in.
- Snap-in splice plate connection
- Reverse position of every other rung for bottom or top mounting of cable ties
- Versatile continuous open slot rungs (strut profile)
- Holes spaced 1 in. designed based on the exclusive Ty-Rap® cable tie slots ($\frac{5}{8}$ x $\frac{5}{8}$)
- Extra wide rung
- Four bolt connection
- Choice of two styles of fitting (U and H) side rails

Applications

Commercial:

- Schools
- Hospitals
- Office buildings
- Airports
- Casinos
- Stadiums

Industrial:

- Petrochemical plants
- Automotive plants
- Paper plants
- Food processing
- Power plants
- Refineries
- Manufacturing
- Mining

Accessories

- Each pair of splice plates comes with $\frac{3}{8}$ in. mounting hardware
- Complete line of accessories and support systems

Material

- 6063 aluminum alloy

Compliance

- CSA, NEMA, NEC, UL

Load ratings

- 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray (side rail, rung, etc.) above and beyond published load class.

Aluminum cable tray

Straight lengths



Tray bottom types: ladder, ventilated and solid trough

Ladder

Extra wide aluminum rungs are welded to extruded aluminum I-beam side rails. Every second rung is reversed to allow for easy top or bottom mounting of cable ties and clamps. All edges and welds are rounded and smooth to prevent cable damage.

Ventilated*

A fabricated structure consisting of integral or separate longitudinal rails and a bottom having openings sufficient for the passage of air and utilizing 75% or less of the plan area of the surface to support cables. The maximum open spacings between cable support surfaces of transverse elements do not exceed 102 mm (4 in.) in the direction parallel to the tray side rails (rung edge to rung edge).

Solid trough**

A fabricated structure consisting of a bottom without ventilation openings within separate longitudinal side rails.

* For load CSA class C/3M, NEMA 8C or less, please see alternative ventilated series of cable tray called One-Piece found on pages A174 to A207 of the catalogue.

** Fast and easy snap-in splice plates are provided with each straight section.


Straight lengths number selection

How to create part numbers

ABB has created a numbering system based on the order of selection criteria. For example, the first selection issue is the environment to which the cable tray will be subjected. This selection will lead to the best material for your application. For complete details on the cable tray selection process, see page A9 in the technical section.

Methods

- 1. Select the material best suited to your environment. Refer to technical section page A9.
- 2. Determine the tray series using the NEMA/CSA load/span designations page A16, and sizing cable tray page A23.
- 3. Select nominal depth and width of tray based on cable loading. See sizing cable tray page A23.
- 4. Select the bottom type based on cables and spacing requirements.
- 5. The last number is the length of the cable tray in meters or inches.

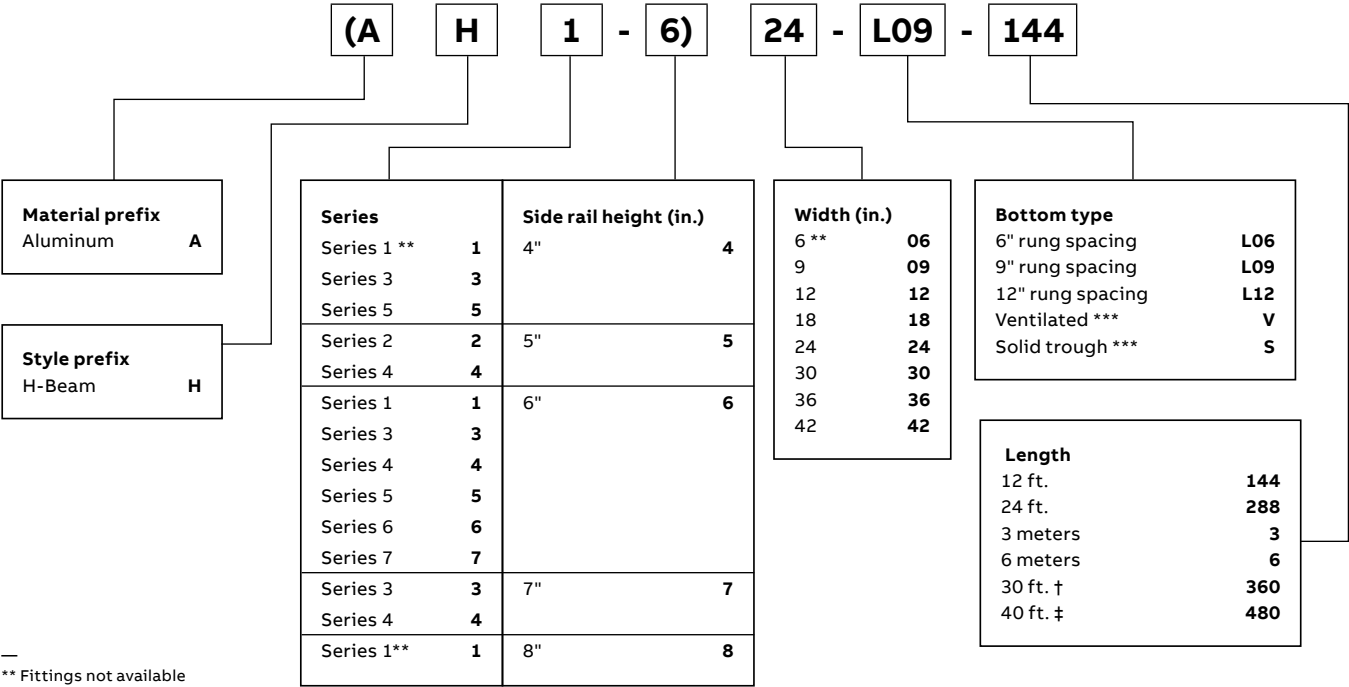

** Fittings not available for 8 in. side rail series 1.

*** For load CSA Class C/3M, NEMA 8C or less, please see an alternative ventilated series of cable tray called One-Piece found on pages A174 to A207 of this catalogue. Not offered in 40 ft. length.

† For series 76, 47 and 18 only.

‡ Only offered with series 1, 8 in. side rail height, width between 12 to 36 in.

Aluminum straight lengths

4 in. Straight sections/series 1-4 – Ladder, ventilated and solid trough



Technical specifications


All calculations and data are based on 42 in. wide cable trays with rungs spaced on 12 in. centers with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection can be calculated by multiplying the load by the deflection factor.

4 in. Straight sections/series 1-4 – Ladder, ventilated and solid trough

		Support span (feet)							
Series		6	8	10	12	14	16	18	20
AH1-4	Load (lb)/ft.)	300	169	108	75	–	–	–	–
	Deflection (in.)	0.339	0.602	0.94	1.354	–	–	–	–
	Deflection factor	0.0011	0.0036	0.0087	0.0181	–	–	–	–

Straight section number selection

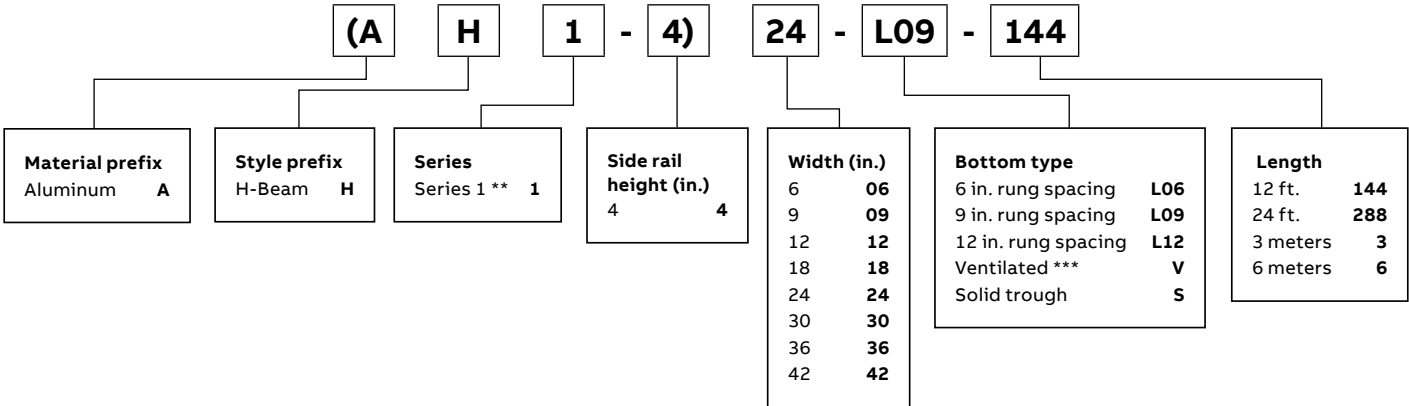

** Series 1 is available in 12 ft. or less.

*** For load CSA class C/3M, NEMA 8C or less, please see an alternative ventilated series of cable tray called One-Piece found on pages A174 to A207 of this catalogue.

For fittings, consult pages A48 to A98.

Dimensions


AH1-4			
	W (in.)	Wo (in.)	Wi (in.)
	6	8.86	4.86
	9	11.86	7.86
	12	14.86	10.86
	18	20.86	16.86
	24	26.86	22.86
	30	32.86	28.86
	36	38.86	34.86
	42	44.86	40.86

Technical specifications

Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray (side rail, rung, etc.) above and beyond published load class.

Load ratings: 1.5 safety factor

	Series	Side rail design factors 1 pair	Classifications		
			NEMA	CSA	UL
AH1-4	AH1-4	$I_x = 2.58 \text{ in.}^4$ $S_x = 1.22 \text{ in.}^3$ Area = 0.97 in.^2	12B, 8C	C/3m	UL cross sectional area: 0.60 in.^2



Aluminum straight lengths

4 in. Straight sections/series 3-4, 5-4 – Ladder, ventilated and solid trough



Technical specifications


All calculations and data are based on 42 in. wide cable trays with rungs spaced on 12 in. centers with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

4 in. Straight sections/series 3-4, 5-4 – Ladder, ventilated and solid trough


		Support span (feet)							
Series		6	8	10	12	14	16	18	20
AH3-4	Load (lb)/ft.)	567	319	204	142	104	80	63	51
	Deflection (in.)	0.473	0.842	1.315	1.894	2.578	3.367	4.261	5.261
	Deflection factor	0.0008	0.0026	0.0064	0.0134	0.0248	0.0423	0.0677	0.1032
AH5-4	Load (lb)/ft.)	1044	588	376	261	192	147	116	94
	Deflection (in.)	0.572	1.017	1.588	2.287	3.113	4.066	5.147	6.354
	Deflection factor	0.0005	0.0017	0.0042	0.0088	0.0162	0.0277	0.0443	0.0676

Straight section number selection

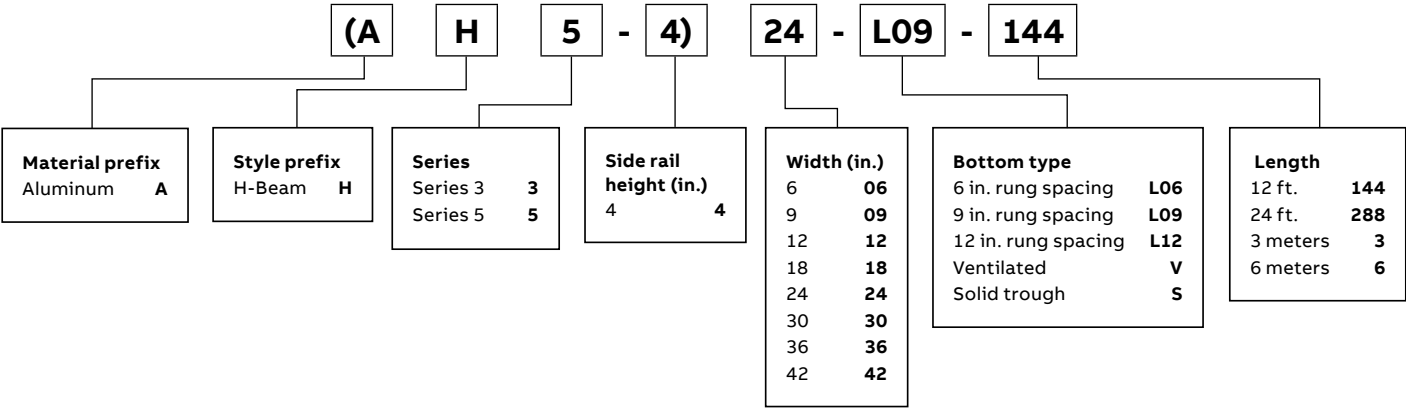

For fittings, consult pages A48 to A98.


Dimensions

	AH3-4			AH5-4	
	W (in.)	Wo (in.)	Wi (in.)	Wo (in.)	Wi (in.)
	6	8.86	4.86	8.86	4.86
	9	11.86	7.86	11.86	7.86
	12	14.86	10.86	14.86	10.86
	18	20.86	16.86	20.86	16.86
	24	26.86	22.86	26.86	22.86
	30	32.86	28.86	32.86	28.86
	36	38.86	34.86	38.86	34.86
	42	44.86	40.86	44.86	40.86


Technical specifications

Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray (side rail, rung, etc.) above and beyond published load class.

Load ratings: 1.5 safety factor

	Series	Side rail design factors 1 pair	Classifications		
			NEMA	CSA	UL
	AH3-4	$I_x = 3.49 \text{ in.}^4$ $S_x = 1.64 \text{ in.}^3$ Area = 1.28 in. ²	12C, 16B	D/6m	UL cross sectional area: 1.00 in. ²
	AH5-4	$I_x = 5.33 \text{ in.}^4$ $S_x = 2.36 \text{ in.}^3$ Area = 1.93 in. ²	20B, 16C	E/6m	UL cross sectional area: 1.50 in. ²

AH5-4



Aluminum straight lengths

5 in. Straight sections/series 2-5, 4-5 – Ladder, ventilated and solid trough



Technical specifications


All calculations and data are based on 42 in. wide cable trays with rungs spaced on 12 in. centers with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

4 in. Straight sections/series 3-4, 5-4 – Ladder, ventilated and solid trough


		Support span (feet)							
Series		6	8	10	12	14	16	18	20
AH2-5	Load (lb)/ft.)	556	313	200	139	102	78	62	50
	Deflection (in.)	0.302	0.536	0.838	1.206	1.642	2.144	2.714	3.351
	Deflection factor	0.0005	0.0017	0.0042	0.0087	0.0161	0.0274	0.0440	0.0670
AH4-5	Load (lb)/ft.)	900	506	324	225	165	127	100	81
	Deflection (in.)	0.340	0.604	0.944	1.359	1.849	2.416	3.057	3.774
	Deflection factor	0.0004	0.0012	0.0029	0.0060	0.0112	0.0191	0.0306	0.0466

Straight section number selection

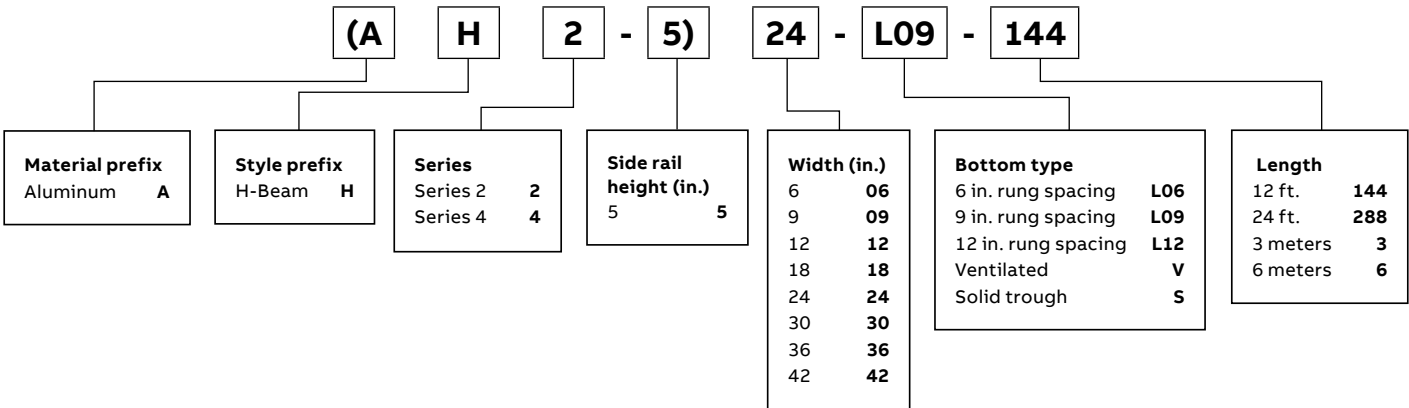

For fittings, consult pages A48 to A98.


Dimensions

	AH2-5		AH4-5	
	W (in.)	Wo (in.)	Wi (in.)	Wo (in.)
	6	8.86	4.86	8.86
	9	11.86	7.86	11.86
	12	14.86	10.86	14.86
	18	20.86	16.86	20.86
	24	26.86	22.86	26.86
	30	32.86	28.86	32.86
	36	38.86	34.86	38.86
	42	44.86	40.86	44.86


Technical specifications

Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray (side rail, rung, etc.) above and beyond published load class.

Load ratings: 1.5 safety factor

	Series	Side rail design factors 1 pair	Classifications		
			NEMA	CSA	UL
AH2-5 	AH2-5	$I_x = 5.37 \text{ in.}^4$ $S_x = 2.02 \text{ in.}^3$ Area = 1.39 in.^2	12C, 16A	D/6m	UL cross sectional area: 1.00 in.^2
	AH4-5	$I_x = 7.73 \text{ in.}^4$ $S_x = 2.92 \text{ in.}^3$ Area = 1.94 in.^2	20B	E/6m	UL cross sectional area: 1.50 in.^2

AH4-5



Aluminum straight lengths

6 in. Straight sections/series 1-6, 3-6 – Ladder, ventilated and solid trough



Technical specifications


All calculations and data are based on 36 in. wide cable trays with rungs spaced on 12 in. centers with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

6 in. Straight sections/series 1-6, 3-6 – Ladder, ventilated and solid trough

		Support span (feet)							
Series		6	8	10	12	14	16	18	20
AH1-6	Load (lb)/ft.)	567	319	204	142	104	80	63	51
	Deflection (in.)	0.190	0.338	0.527	0.760	1.034	1.350	1.709	2.110
	Deflection factor	0.0003	0.0011	0.0026	0.0054	0.0099	0.0169	0.0271	0.0414
AH3-6	Load (lb)/ft.)	889	500	320	222	163	125	99	80
	Deflection (in.)	0.203	0.360	0.563	0.810	1.103	1.440	1.823	2.250
	Deflection factor	0.0002	0.0007	0.0018	0.0036	0.0068	0.0115	0.0185	0.0281


Straight section number selection

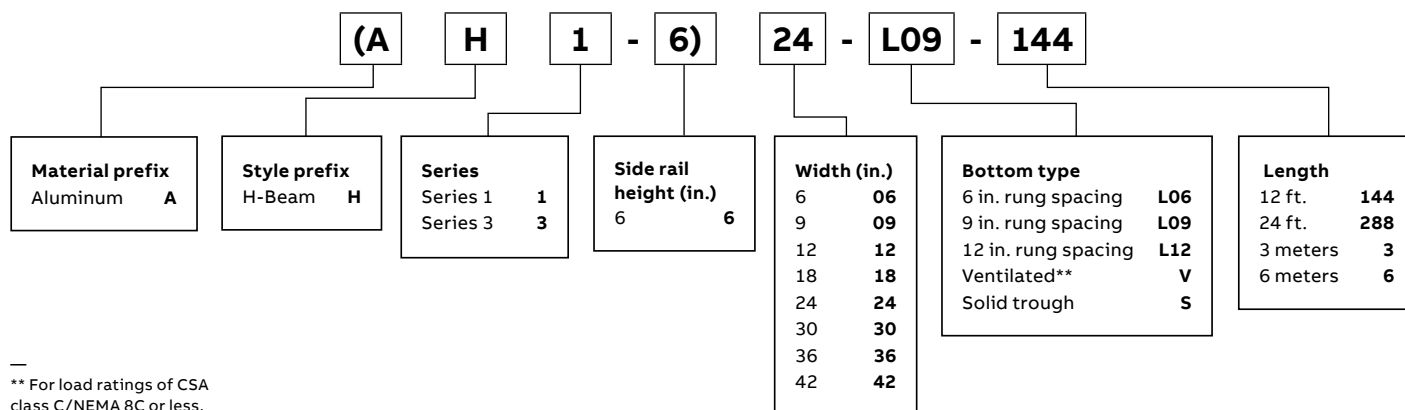

** For load ratings of CSA class C/NEMA 8C or less, please see an alternative ventilated series of cable tray called One-Piece found on pages A174 to A207 of this catalogue.

For fittings, consult pages A48 to A98.


Dimensions

	AH1-6		AH3-6	
	W (in.)	Wo (in.)	Wi (in.)	Wo (in.)
	6	8.86	4.86	8.86
	9	11.86	7.86	11.86
	12	14.86	10.86	14.86
	18	20.86	16.86	20.86
	24	26.86	22.86	26.86
	30	32.86	28.86	32.86
	36	38.86	34.86	38.86
	42	44.86	40.86	44.86


Technical specifications

Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray (side rail, rung, etc.) above and beyond published load class.

Load ratings: 1.5 safety factor

	Series	Side rail design factors 1 pair	Classifications		
			NEMA	CSA	UL
	AH1-6	$I_x = 8.7 \text{ in.}^4$ $S_x = 2.71 \text{ in.}^3$ Area = 1.55 in.^2	12C, 16A	D/6m	UL cross sectional area: 1.00 in.^2
	AH3-6	$I_x = 12.8 \text{ in.}^4$ $S_x = 3.77 \text{ in.}^3$ Area = 2.07 in.^2	20B	E/6m	UL cross sectional area: 2.00 in.^2

AH3-6



Aluminum straight lengths

6 in. Straight sections/series 4-6, 5-6, 6-6, 7-6 – Ladder, ventilated and solid trough



Technical specifications


All calculations and data are based on 42 in. wide cable trays with rungs spaced on 12 in. centers with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

6 in. Straight sections/series 1-6, 3-6 – Ladder, ventilated and solid trough

		Support span (feet)												
Series		6	8	10	12	14	16	18	20	22	24	26	28	30
AH4-6	Load (lb)/ft.)	1111	625	400	278	204	156	123	100	–	–	–	–	–
	Deflection (in.)	0.235	0.418	0.653	0.940	1.280	1.672	2.115	2.612	–	–	–	–	–
	Deflection factor	0.0002	0.0007	0.0016	0.0034	0.0063	0.0107	0.0171	0.0261	–	–	–	–	–
AH5-6	Load (lb)/ft.)	–	750	480	333	245	188	148	120	–	–	–	–	–
	Deflection (in.)	–	0.441	0.690	0.993	1.352	1.766	2.234	2.759	–	–	–	–	–
	Deflection factor	–	0.0006	0.0014	0.0030	0.0055	0.0094	0.0151	0.0230	–	–	–	–	–
AH6-6	Load (lb)/ft.)	–	1031	660	458	337	258	204	165	126	106	91	78	68
	Deflection (in.)	–	0.504	0.788	1.134	1.544	2.016	2.552	3.151	3.536	4.208	4.938	5.727	6.575
	Deflection factor	–	0.0005	0.0012	0.0025	0.0046	0.0078	0.0125	0.0191	0.0280	0.0396	0.0545	0.0734	0.0967
AH7-6	Load (lb)/ft.)	–	1153	738	513	377	288	228	185	152	128	109	94	82
	Deflection (in.)	–	0.484	0.756	1.089	1.482	1.936	2.451	3.025	3.661	4.537	5.113	5.930	6.807
	Deflection factor	–	0.0004	0.0010	0.0021	0.0039	0.0067	0.0108	0.0164	0.0240	0.0340	0.0468	0.0630	0.0830

Straight section number selection

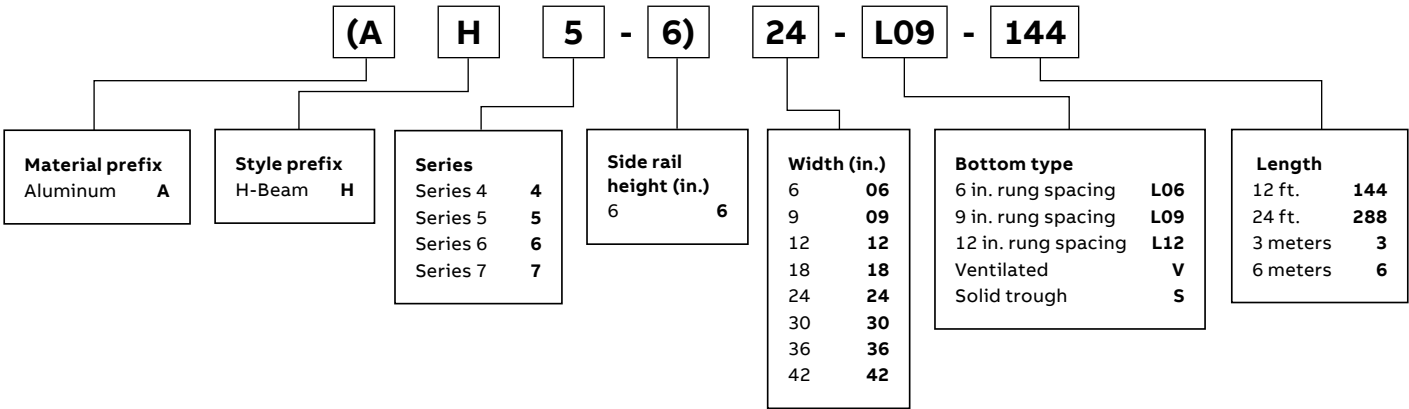


For fittings, consult pages A48 to A98.

Dimensions

	AH4-6		AH5-6	
	W (in.)	Wo (in.)	Wi (in.)	Wo (in.)
6		8.86	4.86	8.86
9		11.86	7.86	11.86
12		14.86	10.86	14.86
18		20.86	16.86	20.86
24		26.86	22.86	26.86
30		32.86	28.86	32.86
36		38.86	34.86	38.86
42		44.86	40.86	44.86





	AH6-6		AH7-6	
	W (in.)	Wo (in.)	Wi (in.)	Wo (in.)
6		8.86	4.86	8.86
9		11.86	7.86	11.86
12		14.86	10.86	14.86
18		20.86	16.86	20.86
24		26.86	22.86	26.86
30		32.86	28.86	32.86
36		38.86	34.86	38.86
42		44.86	40.86	44.86



Technical specifications

Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray (side rail, rung, etc.) above and beyond published load class.

Load ratings: 1.5 safety factor

		Series	Side rail design factors 1 pair	Classifications		
				NEMA	CSA	UL
AH4-6 	AH5-6 	AH4-6	$I_x = 13.78 \text{ in.}^4$ $S_x = 4.05 \text{ in.}^3$ Area = 2.32 in.^2	20C	Exceeds E/6m	UL cross sectional area: 2.00 in.^2
		AH5-6	$I_x = 15.66 \text{ in.}^4$ $S_x = 4.64 \text{ in.}^3$ Area = 2.67 in.^2	Exceeds 20C	Exceeds E/6m	UL cross sectional area: 2.00 in.^2
		AH6-6	$I_x = 18.85 \text{ in.}^4$ $S_x = 5.53 \text{ in.}^3$ Area = 3.26 in.^2	Exceeds 20C	Exceeds E/6m	UL cross sectional area: 2.00 in.^2
		AH7-6	$I_x = 21.95 \text{ in.}^4$ $S_x = 6.32 \text{ in.}^3$ Area = 3.82 in.^2	Exceeds 20C	Exceeds E/6m	UL cross sectional area: 2.00 in.^2
AH6-6 	AH7-6 					

Aluminum straight lengths

7 in. and 8 in. Straight sections/series 3-7, 4-7, 1-8 – Ladder, ventilated and solid trough



Technical specifications

All calculations and data for AH3-7 and AH4-7 series are based on 42" wide cable tray with rungs spaced on 12" centers with tray supported as simple spans with deflection measured at the midpoint.

All calculations and data for AH1-8 series are based on cable tray with rungs spaced on 12" centers with tray supported as simple spans with deflection measured at the midpoint.

Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

7 in. Straight sections/series 3-7, 4-7, ventilated and solid trough


		Support span (feet)												
Series		6	8	10	12	14	16	18	20	22	24	26	28	30
AH3-7	Load (lb)/ft.)	–	925	592	411	302	231	183	148	97	81	–	–	–
	Deflection (in.)	–	0.335	0.524	0.755	1.027	1.342	1.698	2.097	2.009	2.391	–	–	–
	Deflection factor	–	0.0004	0.0009	0.0018	0.0034	0.0058	0.0093	0.0142	0.0208	0.0294	–	–	–
AH4-7	Load (lb)/ft.)	–	–	909	631	464	355	281	227	188	158	134	116	101
	Deflection (in.)	–	–	0.556	0.800	1.089	1.422	1.800	2.222	2.689	3.200	3.756	4.356	5.000
	Deflection factor	–	–	0.0006	0.0013	0.0023	0.0040	0.0064	0.0098	0.0143	0.0203	0.0279	0.0376	0.0495

8 in. Straight sections/series 1-8 – Ladder trough


		Support span (ft.)											
Series		18	20	22	24	26	28	30	32	34	36	38	40
AH1-8	Load (lb)/ft.)	528	428	353	297	253	218	190	167	148	132	118	112
	Deflection (in.)	2.136	2.637	3.191	3.797	4.457	5.169	5.933	6.751	7.625	8.548	9.486	11.054
	Deflection factor	0.004	0.0062	0.009	0.0128	0.0176	0.0237	0.0312	0.0404	0.0515	0.0648	0.0804	0.0987

For detailed width load testing, please refer to <http://tnb.ca/en/pdf-catalogues/cable-tray-systems/technical-bulletin/>.

Straight section number selection

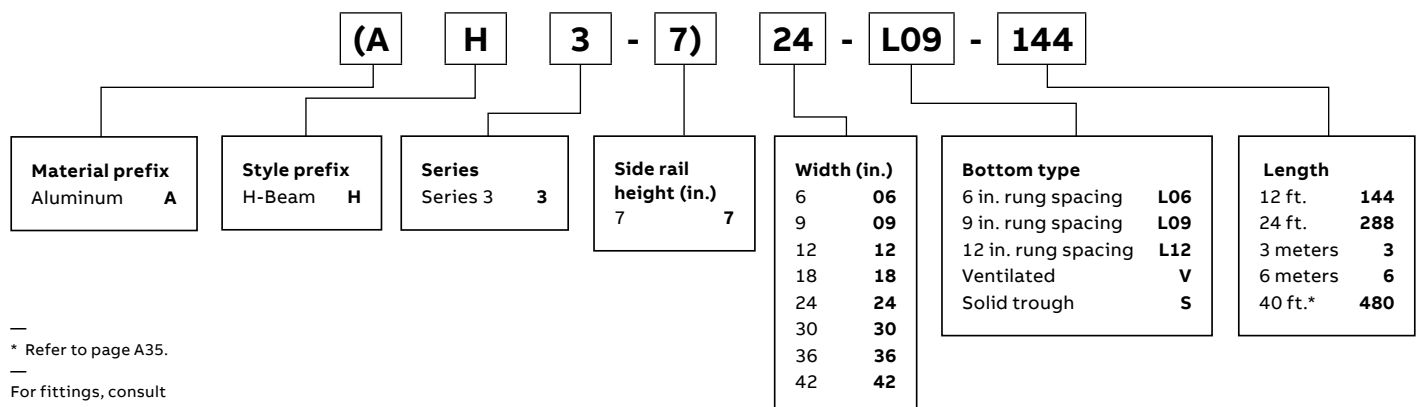


Dimensions


	AH3-7			AH4-7		AH1-8	
	W (in.)	Wo (in.)	Wi (in.)	Wo (in.)	Wi (in.)	Wo (in.)	Wi (in.)
	6	8.86	4.86	8.86	4.86	7.82	1.82
	9	11.86	7.86	11.86	7.86	10.82	4.82
	12	14.86	10.86	14.86	10.86	13.82	7.82
	18	20.86	16.86	20.86	16.86	19.82	13.82
	24	26.86	22.86	26.86	22.86	25.82	19.82
	30	32.86	28.86	32.86	28.86	31.82	25.82
	36	38.86	34.86	38.86	34.86	37.82	31.82
	42	44.86	40.86	44.86	40.86	43.82	37.82

Technical specifications

Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray (side rail, rung, etc.) above and beyond published load class.

Load ratings: 1.5 safety factor

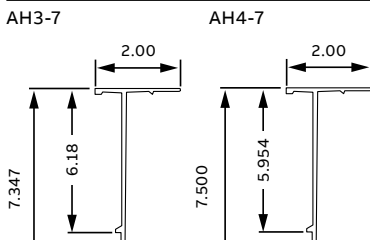
				Classifications		
		Series	Side rail design factors 1 pair	NEMA	CSA	UL
	AH3-7	AH3-7	$I_x = 25.41 \text{ in.}^4$ $S_x = 6.46 \text{ in.}^3$ Area = 3.29 in.^2	Exceeds 20C	Exceeds E/6m	UL cross sectional area: 2.00 in.^2
	AH4-7	AH4-7	$I_x = 36.81 \text{ in.}^4$ $S_x = 9.08 \text{ in.}^3$ Area = 4.63 in.^2	Exceeds 20C	Exceeds E/6m	UL cross sectional area: 2.00 in.^2
	AH1-8	AH1-8	$I_x = 58.36 \text{ in.}^4$ $S_x = 13.37 \text{ in.}^3$ Area = 5.86 in.^2	Exceeds 20C	Exceeds E/6m	UL cross sectional area: 2.00 in.^2



Aluminum cable tray

Fittings – Explaining the fitting styles

U-style

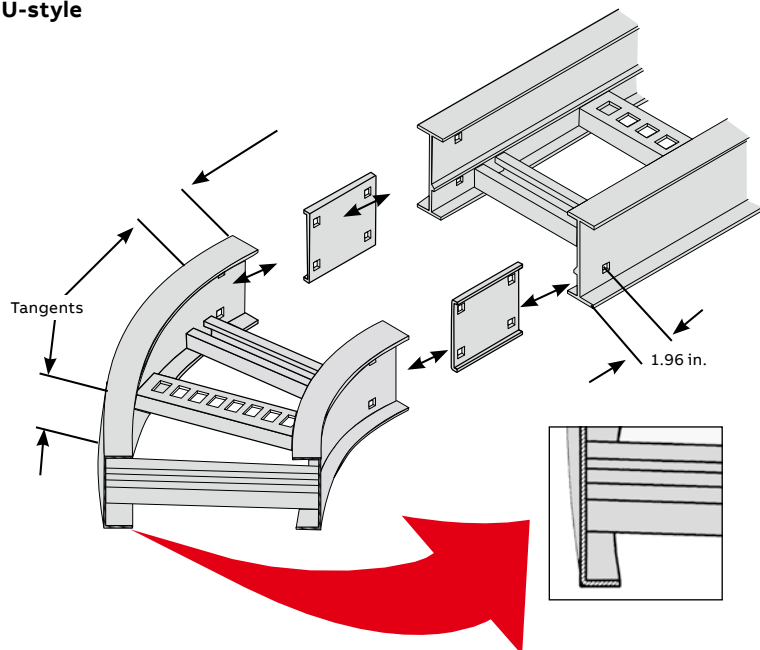


U-style

U-style fittings constructed with side rail flanges on the inside only (U-beam)*

Features and benefits

- U-style and H-style are interchangeable
- Lowest purchase price
- Easy to install
- Occupies less space in areas where space is restrained
- Easy-to-align straights
- Splice plate holds components together while hardware is inserted
- Lighter fittings are easy to handle
- Functional design
- Tangents on fittings
- 7 in. length snap-in splice plate

H-style

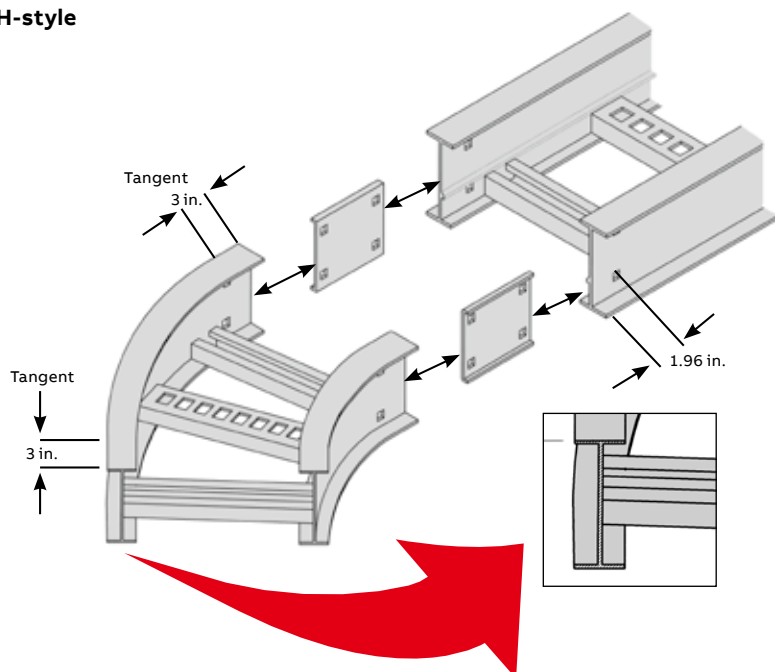

H-style

H-style fittings constructed with side rail having inner and outer flanges (H-beam).*

Features and benefits

- Improved system rigidity
- Improved aesthetics and customer appeal
- Easy to install
- Easy to align straights and fittings
- Splice plate holds components together while hardware is inserted
- Premium design
- 3 in. tangents on fittings
- 7 in. length snap-in splice plate

* T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Horizontal fittings selection

—
The U-style and H-style systems are interchangeable.


Fittings in a cable tray system are required to change cable routing direction and to join straight sections and other fittings. This step of the cable tray selection process requires that the specifier chooses between two distinct styles, U and H.

H-style fitting

- An H-shaped extrusion forms the fitting side rail.
- H-style fittings utilize a 7 in. splice plate and have 3 in. tangents at the extremities.
- This style offers enhanced aesthetics to the end-user and increased system rigidity.

U-style fitting

- A U-shaped extrusion forms the fitting side rail.
- U-style fittings utilize a 7 in. splice plate and have tangents at the extremities.
- This style offers maximum quality versus cost ratios of the installation.

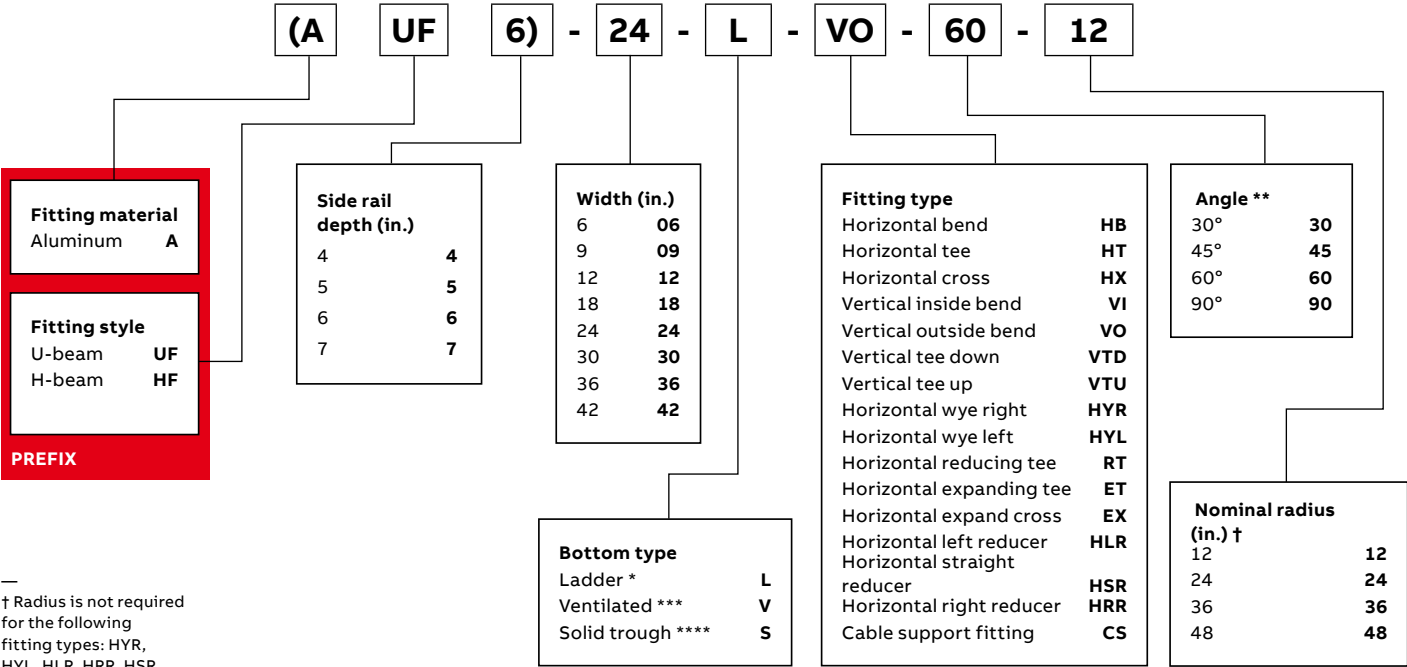

—
† Radius is not required for the following fitting types: HYR, HYL, HLR, HRR, HSR

—
* Manufactured with 9 in. rung spacing measured at the center line of fitting.

—
** Angle is required for HB, VI, VO only.

—
*** Manufactured with 4 in. edge-to-edge rung spacing measured at the center line of fitting.

—
**** Manufactured with flat sheet inserted under rungs with 9 in. rung spacing measured at the center line of fitting.

Aluminum horizontal fittings

U- and H-style horizontal fittings selection guide – Bends

- 01 U-style
90° Horizontal bend
Page A60
 - 02 U-style
60° Horizontal bend
Page A61
 - 03 U-style
45° Horizontal bend
Page A64
 - 04 U-style
30° Horizontal bend
Page A65
 - 05 H-style
90° Horizontal bend
Page A62
 - 06 H-style
60° Horizontal bend
Page A63
 - 07 H-style
45° Horizontal bend
Page A66
 - 08 H-style
30° Horizontal bend
Page A67
- T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.



01



05



02



06



03



07



04



08

H = H-style
U = U-style

Aluminum horizontal fittings

U- and H-style horizontal fittings selection guide – Tees and crosses

01 U-style

Tee
Page A68

02 U-style

Cross
Page A69

03 U-style

Horizontal reducing tee
Page A72

04 H-style

Tee
Page A70

05 H-style

Cross
Page A71

06 H-style

Horizontal reducing tee
Page A713


T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.




01




04

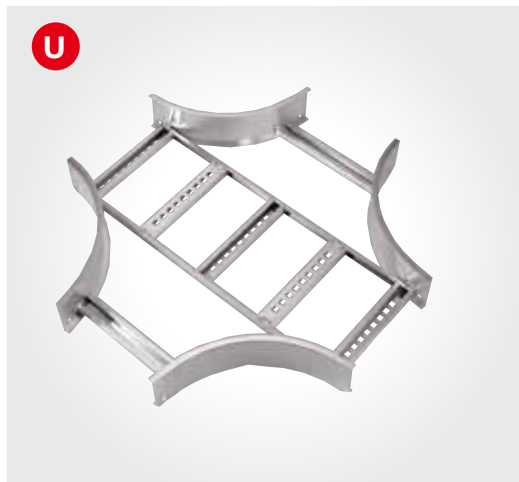

02

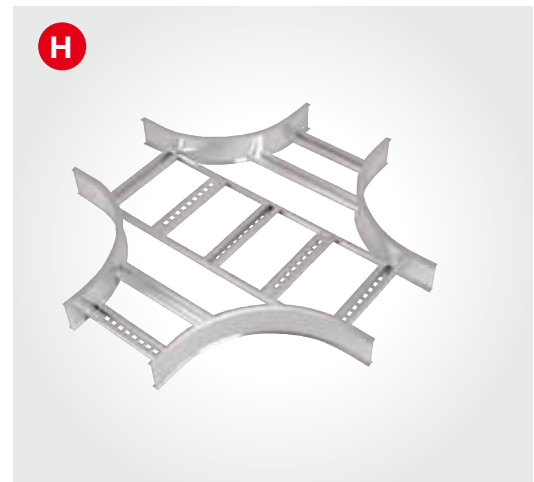

05

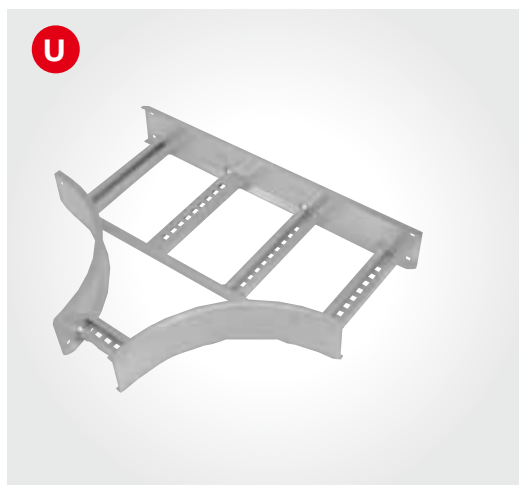

03



06

H = H-style

U = U-style

Aluminum horizontal fittings

U- and H-style horizontal fittings selection guide – Tees and crosses (continued)

01 **U-style**
Horizontal
expanding tee
Page A74

02 **U-style**
Horizontal
expanding cross
Page A76


03 **H-style**
Horizontal
expanding tee
Page A75

04 **H-style**
Horizontal
expanding cross
Page A77


T&B aluminum cable
tray is composed of
two distinct systems,
H-style and U-style.
These systems are
interchangeable.




01

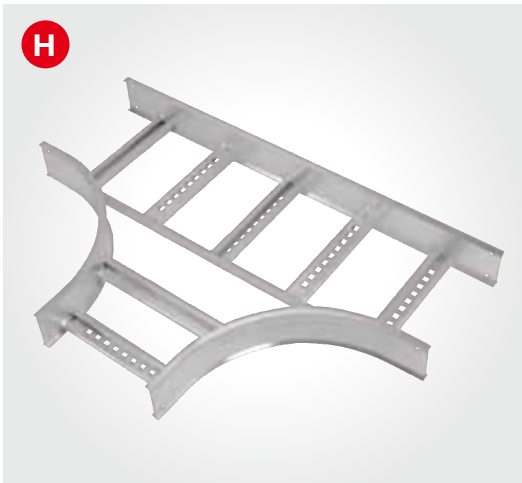

03

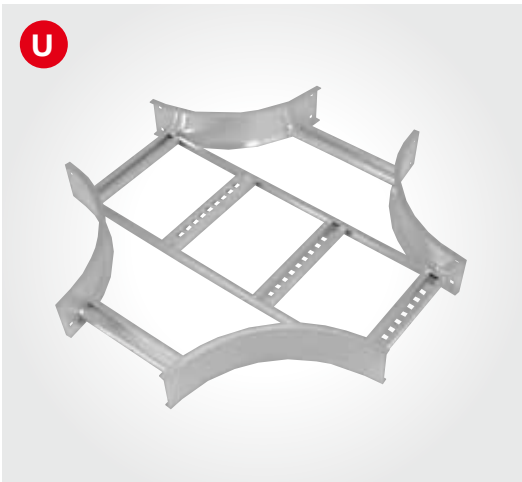

02

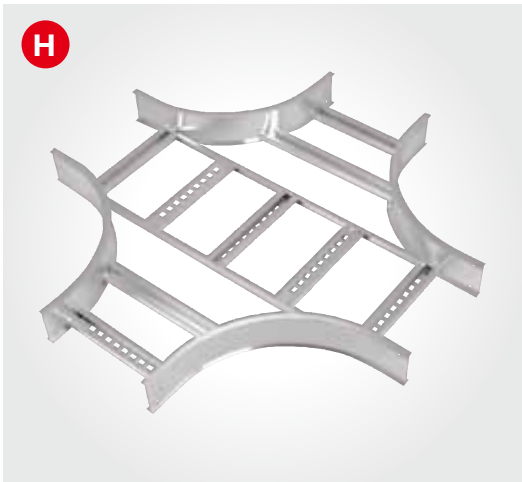

04

H = H-style

U = U-style

Aluminum vertical fittings

U- and H-style vertical fittings selection guide – Reducers and wyes

01 **U-style**
Offset reducer right
Page A78



01

02 **U-style**
Reducer straight
Page A78



02

03 **U-style**
Offset reducer left
Page A78



03

04 **H-style**
Offset reducer right
Page A80



04

05 **H-style**
Reducer straight
Page A80



05

06 **H-style**
Offset reducer left
Page A80



06

07 **U-style**
Left-hand wye
Page A82



07

08 **U-style**
Right-hand wye
Page A82



08

09 **H-style**
Left-hand wye
Page A83



09

10 **H-style**
Right-hand wye
Page A83



10

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

H = H-style

U = U-style

Aluminum vertical fittings

U- and H-style vertical fittings selection guide – Bends

- 01 U-style
90° Outside bend
Page A84
 - 02 U-style
90° Inside bend
Page A84
 - 03 U-style
60° Outside bend
Page A86
 - 04 U-style
60° Inside bend
Page A86
 - 05 H-style
90° Outside bend
Page A85
 - 06 H-style
90° Inside bend
Page A85
 - 07 H-style
60° Outside bend
Page A87
 - 08 H-style
60° Inside bend
Page A87
- T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.



01




05



02




06

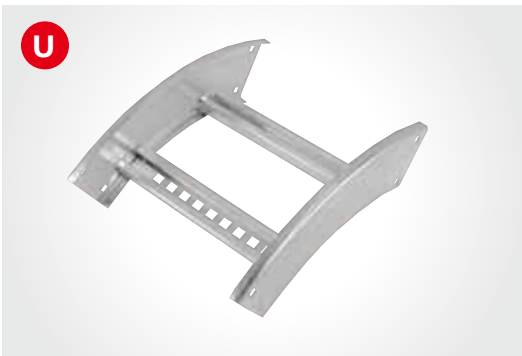

03



07

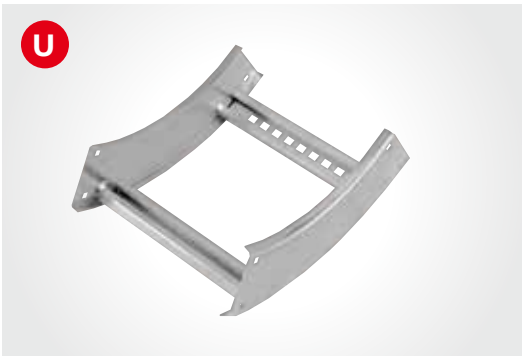

04



08

H = H-style
U = U-style

—
09 U-style
 45° Outside bend
 Page A88

—
10 U-style
 45° Inside bend
 Page A88

—
11 U-style
 30° Outside bend
 Page A90

—
12 U-style
 30° Inside bend
 Page A90

—
13 H-style
 45° Outside bend
 Page A89

—
14 H-style
 45° Inside bend
 Page A89

—
15 H-style
 30° Outside bend
 Page A91

—
16 H-style
 30° Inside bend
 Page A91

—
 T&B aluminum cable
 tray is composed
 of two distinct systems,
 H-style and U-style.
 These systems are
 interchangeable.



09



13



10



14



11



15



12



16

H = H-style

U = U-style


Aluminum vertical fittings

U- and H-style vertical fittings selection guide – Tees up/down

- 01 U-style
Vertical tee up
Page A92
 - 02 U-style
Vertical tee down
Page A92
 - 03 H-style
Vertical tee up
Page A93
 - 04 H-style
Vertical tee down
Page A93
- T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.



01

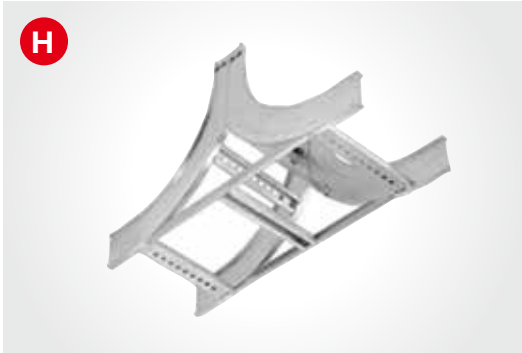

05



02



06

H = H-style
U = U-style

Aluminum vertical fittings

U- and H-style vertical fittings selection guide – Cable supports

01 U-style
Cable support
Page A94

02 H-style
Cable support
Page A95

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.



H = H-style

U = U-style

Aluminum fittings

Introducing our new flexible coupler


Exterior strap provides accurate radius to meet your cable tray design requirements.

The flexible coupler provides easy installation without measuring and cutting cable tray side rails. Once installed, the coupler allows for electrical continuity, therefore eliminating the requirement for a bonding jumper.

- Formed ribs provide better cable protection
- Fast and easy installation
- Meets the electrical continuity requirement of NEMA VE1 and CSA C22.2 No. 126.1

Features and benefits

- Reduces installation time
- No need for a bonding jumper
- Flexible and economical alternative to regular AU/AH fitting

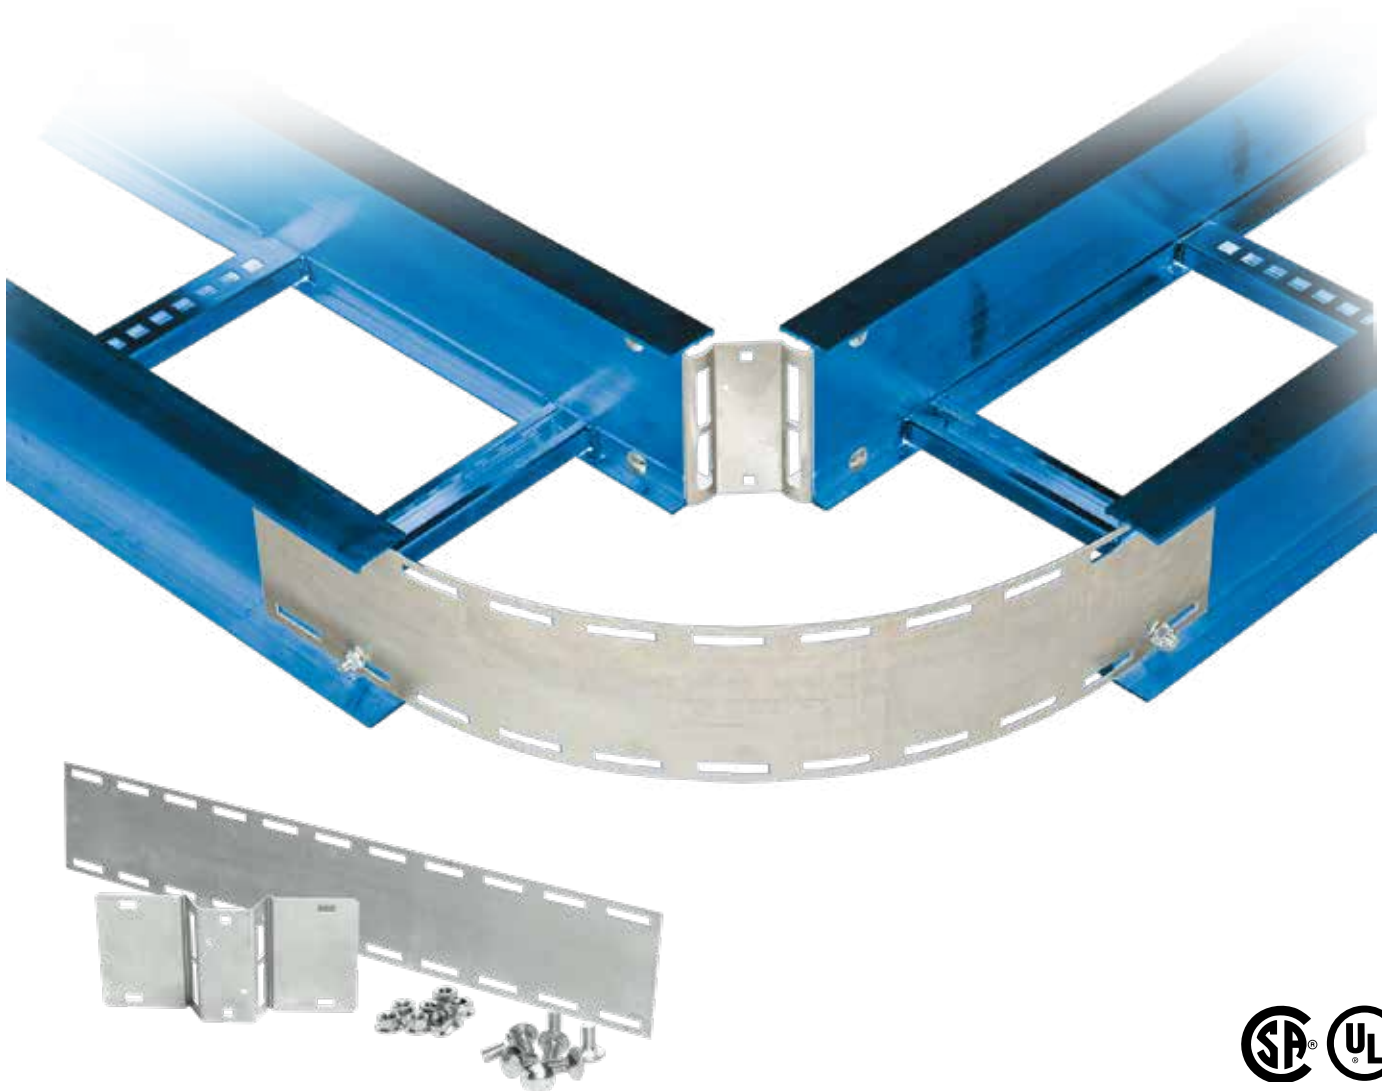

Aluminum fittings

Aluminum – Flexible coupler

Aluminum – Flexible coupler



Cat. no.	Material	Side rail height (in.)	Tray width (in.)
ABW-(*)06HBP	Aluminum	4 to 7	06
ABW-(*)09HBP	Aluminum	4 to 7	09
ABW-(*)12HBP	Aluminum	4 to 7	12
ABW-(*)18HBP	Aluminum	4 to 7	18
ABW-(*)24HBP	Aluminum	4 to 7	24
ABW-(*)30HBP	Aluminum	4 to 7	30
ABW-(*)36HBP	Aluminum	4 to 7	36

*Insert side rail height

Optional rung information (provides additional cable support)

Cat. no.	Material	Tray width (in.)
ABW-R(*)HBP	Aluminum	06
	Aluminum	09
	Aluminum	12
	Aluminum	18
	Aluminum	24
	Aluminum	30
	Aluminum	36

* Insert tray width

Load rating with optional rung

Tray width	Side rail height			
	3 in. (76 mm)	4 and 5 in. (102 and 127 mm)		6 and 7 in. (152 and 178 mm)
36 in. (914 mm)	50 lb/ft. (74 kg/m)	Al: 75 lb/ft. (112 kg/m)	Steel: 50 lb/ft. (74 kg/m)	100 lb/ft. (149 kg/m)
30 in. (762 mm)	75 lb/ft. (112 kg/m)		100 lb/ft. (149 kg/m)	100 lb/ft. (149 kg/m)
6 to 24 in. (152 to 610 mm)	100 lb/ft. (149 kg/m)		100 lb/ft. (149 kg/m)	100 lb/ft. (149 kg/m)

01 Fasten flexible coupler to tray.

02 Bend.

03 Fasten to the other length of cable tray.

04 Fasten the strap.




01



02



03

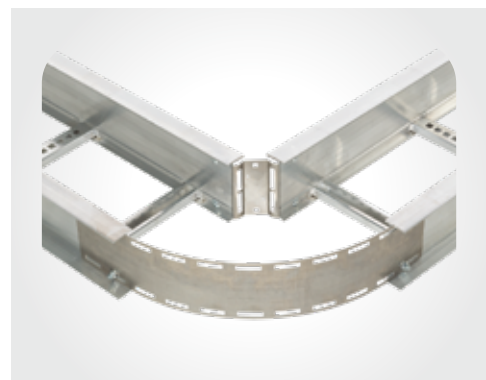

04

Aluminum fittings

90°/60° U-style horizontal bend fittings


90° Horizontal bend – U-style

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)	
				X	Y
	12	6	AUF(t)-06-(*)-HB90-12	15	15
	12	9	AUF(t)-09-(*)-HB90-12	16½	16½
	12	12	AUF(t)-12-(*)-HB90-12	18	18
	12	18	AUF(t)-18-(*)-HB90-12	21	21
	12	24	AUF(t)-24-(*)-HB90-12	24	24
	12	30	AUF(t)-30-(*)-HB90-12	27	27
	12	36	AUF(t)-36-(*)-HB90-12	30	30
	12	42	AUF(t)-42-(*)-HB90-12	33	33
	24	6	AUF(t)-06-(*)-HB90-24	27	27
	24	9	AUF(t)-09-(*)-HB90-24	28½	28½
	24	12	AUF(t)-12-(*)-HB90-24	30	30
	24	18	AUF(t)-18-(*)-HB90-24	33	33
	24	24	AUF(t)-24-(*)-HB90-24	36	36
	24	30	AUF(t)-30-(*)-HB90-24	39	39
	24	36	AUF(t)-36-(*)-HB90-24	42	42
	24	42	AUF(t)-42-(*)-HB90-24	45	45
	36	6	AUF(t)-06-(*)-HB90-36	39	39
	36	9	AUF(t)-09-(*)-HB90-36	40½	40½
	36	12	AUF(t)-12-(*)-HB90-36	42	42
	36	18	AUF(t)-18-(*)-HB90-36	45	45
	36	24	AUF(t)-24-(*)-HB90-36	48	48
	36	30	AUF(t)-30-(*)-HB90-36	51	51
	36	36	AUF(t)-36-(*)-HB90-36	54	54
	36	42	AUF(t)-42-(*)-HB90-36	57	57
	48	6	AUF(t)-06-(*)-HB90-48	51	51
	48	9	AUF(t)-09-(*)-HB90-48	52½	52½
	48	12	AUF(t)-12-(*)-HB90-48	54	54
	48	18	AUF(t)-18-(*)-HB90-48	57	57
	48	24	AUF(t)-24-(*)-HB90-48	60	60
	48	30	AUF(t)-30-(*)-HB90-48	63	63
	48	36	AUF(t)-36-(*)-HB90-48	66	66
	48	42	AUF(t)-42-(*)-HB90-48	69	69


(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

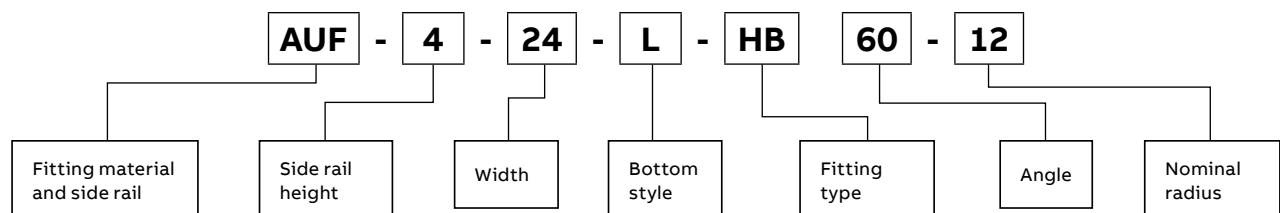

60° Horizontal bend – U-style

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	6	AUF(t)-06-(*)-HB60-12	14 ⁷ / ₁₆	8 ⁵ / ₁₆	9 ¹⁵ / ₁₆
	12	9	AUF(t)-09-(*)-HB60-12	16 ³ / ₁₆	9 ⁹ / ₁₆	10 ¹³ / ₁₆
	12	12	AUF(t)-12-(*)-HB60-12	17 ¹ / ₂	10 ¹ / ₁₆	11 ¹¹ / ₁₆
	12	18	AUF(t)-18-(*)-HB60-12	20 ¹ / ₁₆	11 ⁵ / ₁₆	13 ³ / ₁₆
	12	24	AUF(t)-24-(*)-HB60-12	22 ¹¹ / ₁₆	13 ³ / ₁₆	15 ¹ / ₁₆
	12	30	AUF(t)-30-(*)-HB60-12	25 ⁵ / ₁₆	14 ⁵ / ₁₆	16 ⁷ / ₁₆
	12	36	AUF(t)-36-(*)-HB60-12	27 ⁷ / ₁₆	16 ¹ / ₁₆	18 ⁹ / ₁₆
	12	42	AUF(t)-42-(*)-HB60-12	30 ¹ / ₂	17 ⁵ / ₁₆	20 ⁵ / ₁₆
	24	6	AUF(t)-06-(*)-HB60-24	25 ⁵ / ₁₆	14 ⁵ / ₁₆	16 ⁷ / ₁₆
	24	9	AUF(t)-09-(*)-HB60-24	26 ⁹ / ₁₆	15 ³ / ₁₆	17 ³ / ₄
	24	12	AUF(t)-12-(*)-HB60-24	27 ⁷ / ₁₆	16 ¹ / ₁₆	18 ⁹ / ₁₆
	24	18	AUF(t)-18-(*)-HB60-24	30 ¹ / ₂	17 ⁷ / ₁₆	20 ⁵ / ₁₆
	24	24	AUF(t)-24-(*)-HB60-24	33 ¹ / ₁₆	19 ¹ / ₁₆	22 ¹ / ₁₆
	24	30	AUF(t)-30-(*)-HB60-24	35 ¹¹ / ₁₆	20 ⁹ / ₁₆	23 ¹³ / ₁₆
	24	36	AUF(t)-36-(*)-HB60-24	38 ¹ / ₄	22 ¹ / ₁₆	25 ¹ / ₂
	24	42	AUF(t)-42-(*)-HB60-24	40 ⁷ / ₁₆	23 ³ / ₁₆	27 ¹ / ₄
	36	6	AUF(t)-06-(*)-HB60-36	35 ¹¹ / ₁₆	20 ⁵ / ₁₆	23 ¹³ / ₁₆
	36	9	AUF(t)-09-(*)-HB60-36	37	21 ³ / ₁₆	24 ⁵ / ₁₆
	36	12	AUF(t)-12-(*)-HB60-36	38 ³ / ₄	22 ¹ / ₁₆	25 ¹ / ₂
	36	18	AUF(t)-18-(*)-HB60-36	40 ⁷ / ₁₆	23 ³ / ₁₆	27 ⁷ / ₁₆
	36	24	AUF(t)-24-(*)-HB60-36	43 ¹ / ₂	25 ¹ / ₁₆	29
	36	30	AUF(t)-30-(*)-HB60-36	46 ¹ / ₁₆	26 ⁵ / ₁₆	30 ¹¹ / ₁₆
	36	36	AUF(t)-36-(*)-HB60-36	48 ¹ / ₁₆	28 ¹ / ₁₆	32 ⁷ / ₁₆
	36	42	AUF(t)-42-(*)-HB60-36	51 ¹ / ₄	29 ⁹ / ₁₆	34 ³ / ₁₆
	48	6	AUF(t)-06-(*)-HB60-48	46 ¹ / ₁₆	26 ⁵ / ₁₆	30 ¹¹ / ₁₆
	48	9	AUF(t)-09-(*)-HB60-48	47 ⁹ / ₁₆	27 ³ / ₁₆	31 ⁹ / ₁₆
	48	12	AUF(t)-12-(*)-HB60-48	48 ¹¹ / ₁₆	28 ¹ / ₁₆	32 ⁷ / ₁₆
	48	18	AUF(t)-18-(*)-HB60-48	51 ¹ / ₁₆	29 ⁹ / ₁₆	34 ³ / ₁₆
	48	24	AUF(t)-24-(*)-HB60-48	53 ⁷ / ₁₆	31 ¹ / ₁₆	35 ¹⁵ / ₁₆
	48	30	AUF(t)-30-(*)-HB60-48	56 ⁷ / ₁₆	32 ⁵ / ₁₆	37 ⁵ / ₁₆
	48	36	AUF(t)-36-(*)-HB60-48	59 ¹ / ₁₆	34 ¹ / ₁₆	39 ³ / ₁₆
	48	42	AUF(t)-42-(*)-HB60-48	61 ¹¹ / ₁₆	35 ⁵ / ₁₆	41 ¹ / ₁₆

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.


Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 90°, 60°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

Aluminum fittings


90°/60° H-style horizontal bend fittings

90° Horizontal bend – H-style


	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)	
				X	Y
	12	6	AHF(t)-06-(*)-HB90-12	18	18
	12	9	AHF(t)-09-(*)-HB90-12	19½	19½
	12	12	AHF(t)-12-(*)-HB90-12	21	21
	12	18	AHF(t)-18-(*)-HB90-12	24	24
	12	24	AHF(t)-24-(*)-HB90-12	27	27
	12	30	AHF(t)-30-(*)-HB90-12	30	30
	12	36	AHF(t)-36-(*)-HB90-12	33	33
	12	42	AHF(t)-42-(*)-HB90-12	36	36
	24	6	AHF(t)-06-(*)-HB90-24	30	30
	24	9	AHF(t)-09-(*)-HB90-24	31½	31½
	24	12	AHF(t)-12-(*)-HB90-24	33	33
	24	18	AHF(t)-18-(*)-HB90-24	36	36
	24	24	AHF(t)-24-(*)-HB90-24	39	39
	24	30	AHF(t)-30-(*)-HB90-24	42	42
	24	36	AHF(t)-36-(*)-HB90-24	45	45
	24	42	AHF(t)-42-(*)-HB90-24	48	48
	36	6	AHF(t)-06-(*)-HB90-36	42	42
	36	9	AHF(t)-09-(*)-HB90-36	43½	43½
	36	12	AHF(t)-12-(*)-HB90-36	45	45
	36	18	AHF(t)-18-(*)-HB90-36	48	48
	36	24	AHF(t)-24-(*)-HB90-36	51	51
	36	30	AHF(t)-30-(*)-HB90-36	54	54
	36	36	AHF(t)-36-(*)-HB90-36	57	57
	36	42	AHF(t)-42-(*)-HB90-36	60	60
	48	6	AHF(t)-06-(*)-HB90-48	54	54
	48	9	AHF(t)-09-(*)-HB90-48	55½	55½
	48	12	AHF(t)-12-(*)-HB90-48	57	57
	48	18	AHF(t)-18-(*)-HB90-48	60	60
	48	24	AHF(t)-24-(*)-HB90-48	63	63
	48	30	AHF(t)-30-(*)-HB90-48	66	66
	48	36	AHF(t)-36-(*)-HB90-48	69	69
	48	42	AHF(t)-42-(*)-HB90-48	72	72

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

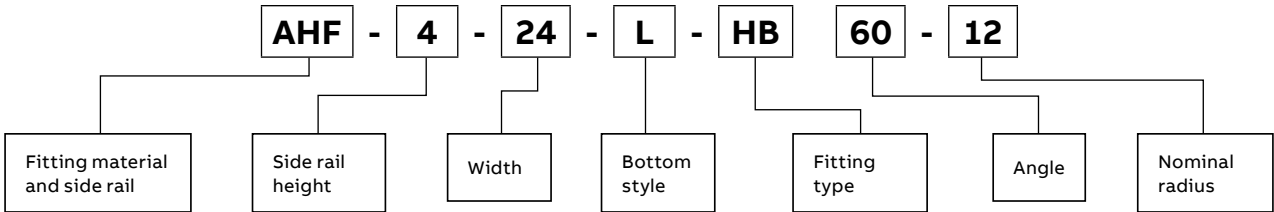

60° Horizontal bend – H-style



	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	6	AHF(t)-06-(*)-HB60-12	17½	10⅞	11¼⅞
	12	9	AHF(t)-09-(*)-HB60-12	18⅓⅞	10⅞	12½
	12	12	AHF(t)-12-(*)-HB60-12	20¼⅞	11⅞	13⅞
	12	18	AHF(t)-18-(*)-HB60-12	22¼⅞	13⅞	15⅞
	12	24	AHF(t)-24-(*)-HB60-12	25⅝⅞	14⅝	16⅞
	12	30	AHF(t)-30-(*)-HB60-12	27⅞	16⅞	18⅝⅞
	12	36	AHF(t)-36-(*)-HB60-12	30½	17⅞	20⅝⅞
	12	42	AHF(t)-42-(*)-HB60-12	33⅓⅞	19⅞	22¼⅞
	24	6	AHF(t)-06-(*)-HB60-24	27⅞	16⅞	18⅝⅞
	24	9	AHF(t)-09-(*)-HB60-24	29⅝⅞	16⅞	19⅞
	24	12	AHF(t)-12-(*)-HB60-24	30½	17⅞	20⅝⅞
	24	18	AHF(t)-18-(*)-HB60-24	33⅓⅞	19⅞	22¼⅞
	24	24	AHF(t)-24-(*)-HB60-24	35¼⅞	20⅞	23⅓⅞
	24	30	AHF(t)-30-(*)-HB60-24	38¼	22⅞	25½
	24	36	AHF(t)-36-(*)-HB60-24	40⅞	23⅞	27¼
	24	42	AHF(t)-42-(*)-HB60-24	43⅓⅞	25⅞	29⅝⅞
	36	6	AHF(t)-06-(*)-HB60-36	38¼	22⅞	25½
	36	9	AHF(t)-09-(*)-HB60-36	39⅝⅞	22⅞	26⅞
	36	12	AHF(t)-12-(*)-HB60-36	40⅞	23⅞	27¼
	36	18	AHF(t)-18-(*)-HB60-36	43½	25⅞	29
	36	24	AHF(t)-24-(*)-HB60-36	46¼⅞	26⅞	30¼⅞
	36	30	AHF(t)-30-(*)-HB60-36	48¼⅞	28⅞	32⅞
	36	36	AHF(t)-36-(*)-HB60-36	51¼	29⅞	34⅝⅞
	36	42	AHF(t)-42-(*)-HB60-36	53⅞	31⅞	35⅝⅞
	48	6	AHF(t)-06-(*)-HB60-48	48¼⅞	28⅞	32⅞
	48	9	AHF(t)-09-(*)-HB60-48	49⅝⅞	28⅞	33⅝⅞
	48	12	AHF(t)-12-(*)-HB60-48	51¼	29⅞	34⅝⅞
	48	18	AHF(t)-18-(*)-HB60-48	53⅞	31⅞	35⅝⅞
	48	24	AHF(t)-24-(*)-HB60-48	56⅞	32⅞	37⅞
	48	30	AHF(t)-30-(*)-HB60-48	59⅝⅞	34⅞	39⅞
	48	36	AHF(t)-36-(*)-HB60-48	61¼⅞	35⅞	41⅞
	48	42	AHF(t)-42-(*)-HB60-48	64¼	37⅞	42⅓⅞

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.


Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 90°, 60°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4 –7 in.

Aluminum fittings

45°/30° U-style horizontal bend fittings


45° Horizontal bend – U-style

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	6	AUF(t)-06-(*)-HB45-12	13 ⁵ / ₁₆	5 ⁵ / ₁₆	8
	12	9	AUF(t)-09-(*)-HB45-12	14 ¹¹ / ₁₆	6 ¹ / ₁₆	8 ⁹ / ₁₆
	12	12	AUF(t)-12-(*)-HB45-12	15 ³ / ₄	6 ¹ / ₂	9 ³ / ₁₆
	12	18	AUF(t)-18-(*)-HB45-12	17 ⁷ / ₈	7 ³ / ₈	10 ⁷ / ₁₆
	12	24	AUF(t)-24-(*)-HB45-12	20	8 ³ / ₄	11 ¹¹ / ₁₆
	12	30	AUF(t)-30-(*)-HB45-12	22 ³ / ₁₆	9 ³ / ₈	12 ¹⁵ / ₁₆
	12	36	AUF(t)-36-(*)-HB45-12	24 ³ / ₁₆	10	14 ³ / ₁₆
	12	42	AUF(t)-42-(*)-HB45-12	26 ⁵ / ₁₆	10 ¹⁵ / ₁₆	15 ⁷ / ₁₆
	24	6	AUF(t)-06-(*)-HB45-24	22 ³ / ₁₆	9 ³ / ₈	12 ¹⁵ / ₁₆
	24	9	AUF(t)-09-(*)-HB45-24	23 ³ / ₈	9 ⁹ / ₁₆	13 ³ / ₁₆
	24	12	AUF(t)-12-(*)-HB45-24	24 ³ / ₁₆	10	14 ³ / ₁₆
	24	18	AUF(t)-18-(*)-HB45-24	26 ⁵ / ₁₆	10 ¹⁵ / ₁₆	15 ⁷ / ₁₆
	24	24	AUF(t)-24-(*)-HB45-24	28 ⁷ / ₁₆	11 ¹³ / ₁₆	16 ¹¹ / ₁₆
	24	30	AUF(t)-30-(*)-HB45-24	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆
	24	36	AUF(t)-36-(*)-HB45-24	32 ¹¹ / ₁₆	13 ⁹ / ₁₆	19 ³ / ₈
	24	42	AUF(t)-42-(*)-HB45-24	34 ¹³ / ₁₆	14 ⁷ / ₈	20 ³ / ₈
	36	6	AUF(t)-06-(*)-HB45-36	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆
	36	9	AUF(t)-09-(*)-HB45-36	31 ⁵ / ₈	13 ³ / ₈	18 ⁹ / ₁₆
	36	12	AUF(t)-12-(*)-HB45-36	32 ¹¹ / ₁₆	13 ⁹ / ₁₆	19 ³ / ₈
	36	18	AUF(t)-18-(*)-HB45-36	34 ¹³ / ₁₆	14 ⁷ / ₁₆	20 ³ / ₈
	36	24	AUF(t)-24-(*)-HB45-36	36 ¹⁵ / ₁₆	15 ⁵ / ₁₆	21 ⁵ / ₈
	36	30	AUF(t)-30-(*)-HB45-36	39 ¹ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₈
	36	36	AUF(t)-36-(*)-HB45-36	41 ³ / ₁₆	17 ¹ / ₁₆	24 ¹ / ₈
	36	42	AUF(t)-42-(*)-HB45-36	43 ⁵ / ₁₆	17 ¹⁵ / ₁₆	25 ³ / ₈
	48	6	AUF(t)-06-(*)-HB45-48	39 ¹ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₈
	48	9	AUF(t)-09-(*)-HB45-48	40 ¹ / ₈	16 ³ / ₈	23 ¹ / ₂
	48	12	AUF(t)-12-(*)-HB45-48	41 ³ / ₁₆	17 ¹ / ₁₆	24 ¹ / ₈
	48	18	AUF(t)-18-(*)-HB45-48	43 ⁵ / ₁₆	17 ¹⁵ / ₁₆	25 ³ / ₈
	48	24	AUF(t)-24-(*)-HB45-48	45 ⁷ / ₁₆	18 ¹³ / ₁₆	26 ⁵ / ₈
	48	30	AUF(t)-30-(*)-HB45-48	47 ⁹ / ₁₆	19 ¹¹ / ₁₆	27 ⁷ / ₈
	48	36	AUF(t)-36-(*)-HB45-48	49 ¹¹ / ₁₆	20 ⁹ / ₁₆	29 ³ / ₈
	48	42	AUF(t)-42-(*)-HB45-48	51 ¹³ / ₁₆	21 ⁷ / ₁₆	30 ⁵ / ₁₆


(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

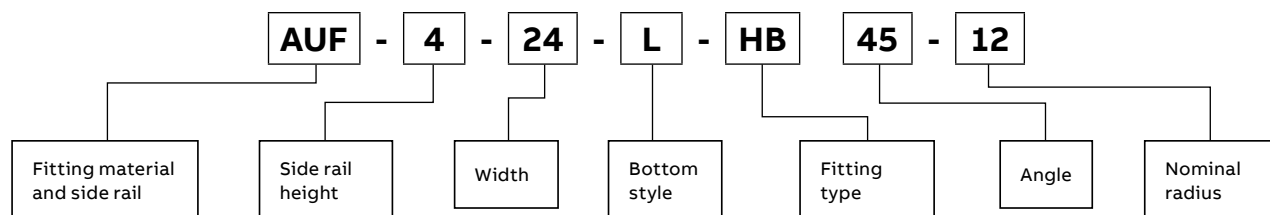

30° Horizontal bend – U-style



	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	6	AUF(t)-06-(*)-HB30-12	11 ⁵ / ₈	3 ¹ / ₈	6 ³ / ₁₆
	12	9	AUF(t)-09-(*)-HB30-12	12 ³ / ₈	3 ⁵ / ₁₆	6 ⁵ / ₈
	12	12	AUF(t)-12-(*)-HB30-12	13 ¹ / ₂	3 ¹ / ₂	7
	12	18	AUF(t)-18-(*)-HB30-12	14 ⁵ / ₈	3 ¹⁵ / ₁₆	7 ¹³ / ₁₆
	12	24	AUF(t)-24-(*)-HB30-12	16 ¹ / ₈	4 ⁵ / ₁₆	8 ⁵ / ₈
	12	30	AUF(t)-30-(*)-HB30-12	17 ⁵ / ₈	4 ¹¹ / ₁₆	9 ⁷ / ₁₆
	12	36	AUF(t)-36-(*)-HB30-12	19 ¹ / ₈	5 ¹ / ₈	10 ¹ / ₄
	12	42	AUF(t)-42-(*)-HB30-12	20 ⁵ / ₈	5 ¹ / ₂	11 ¹ / ₁₆
	24	6	AUF(t)-06-(*)-HB30-24	17 ⁵ / ₈	4 ¹¹ / ₁₆	9 ⁷ / ₁₆
	24	9	AUF(t)-09-(*)-HB30-24	18 ³ / ₈	4 ¹⁵ / ₁₆	9 ¹³ / ₁₆
	24	12	AUF(t)-12-(*)-HB30-24	19 ¹ / ₈	5 ⁵ / ₁₆	10 ⁴ / ₁₆
	24	18	AUF(t)-18-(*)-HB30-24	20 ⁵ / ₈	5 ⁵ / ₁₆	11 ¹ / ₁₆
	24	24	AUF(t)-24-(*)-HB30-24	22 ¹ / ₈	5 ¹⁵ / ₁₆	11 ¹³ / ₁₆
	24	30	AUF(t)-30-(*)-HB30-24	23 ³ / ₈	6 ¹ / ₁₆	12 ¹⁰ / ₁₆
	24	36	AUF(t)-36-(*)-HB30-24	25 ¹ / ₈	6 ¹³ / ₁₆	13 ⁷ / ₁₆
	24	42	AUF(t)-42-(*)-HB30-24	26 ⁵ / ₈	7 ¹ / ₈	14 ¹ / ₄
	36	6	AUF(t)-06-(*)-HB30-36	23 ³ / ₈	6 ¹ / ₁₆	12 ⁵ / ₈
	36	9	AUF(t)-09-(*)-HB30-36	24 ³ / ₈	6 ¹ / ₂	13 ³ / ₁₆
	36	12	AUF(t)-12-(*)-HB30-36	25 ¹ / ₈	6 ³ / ₄	13 ⁷ / ₁₆
	36	18	AUF(t)-18-(*)-HB30-36	26 ⁵ / ₈	7 ¹ / ₄	14 ¹ / ₄
	36	24	AUF(t)-24-(*)-HB30-36	28 ¹ / ₈	7 ¹ / ₂	15 ¹ / ₁₆
	36	30	AUF(t)-30-(*)-HB30-36	29 ⁵ / ₈	7 ¹⁵ / ₁₆	15 ⁷ / ₈
	36	36	AUF(t)-36-(*)-HB30-36	31 ¹ / ₈	8 ⁵ / ₁₆	16 ¹¹ / ₁₆
	36	42	AUF(t)-42-(*)-HB30-36	32 ⁵ / ₈	8 ³ / ₄	17 ¹ / ₂
	48	6	AUF(t)-06-(*)-HB30-48	29 ⁵ / ₈	7 ¹⁵ / ₁₆	15 ⁷ / ₈
	48	9	AUF(t)-09-(*)-HB30-48	30 ³ / ₈	8 ¹ / ₈	16 ¹ / ₄
	48	12	AUF(t)-12-(*)-HB30-48	31 ¹ / ₈	8 ⁵ / ₁₆	16 ¹¹ / ₁₆
	48	18	AUF(t)-18-(*)-HB30-48	32 ⁵ / ₈	8 ³ / ₄	17 ¹ / ₂
	48	24	AUF(t)-24-(*)-HB30-48	34 ¹ / ₈	9 ¹ / ₈	18 ¹ / ₄
	48	30	AUF(t)-30-(*)-HB30-48	35 ⁵ / ₈	9 ⁹ / ₁₆	19 ⁷ / ₁₆
	48	36	AUF(t)-36-(*)-HB30-48	37 ¹ / ₈	9 ¹⁵ / ₁₆	19 ⁷ / ₈
	48	42	AUF(t)-42-(*)-HB30-48	38 ⁵ / ₈	10 ⁵ / ₁₆	20 ¹¹ / ₁₆

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.


Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 45°, 30°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4– 7 in.

Aluminum fittings

45°/30° H-style horizontal bend fittings


45° Horizontal bend – H-style

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	6	AHF(t)-06-(*)-HB45-12	15 ³ / ₄	6 ¹ / ₂	9 ³ / ₁₆
	12	9	AHF(t)-09-(*)-HB45-12	16 ¹³ / ₁₆	6 ⁵ / ₁₆	9 ¹³ / ₁₆
	12	12	AHF(t)-12-(*)-HB45-12	17 ⁷ / ₈	7 ³ / ₈	10 ⁷ / ₁₆
	12	18	AHF(t)-18-(*)-HB45-12	20	8 ³ / ₄	11 ¹¹ / ₁₆
	12	24	AHF(t)-24-(*)-HB45-12	22 ³ / ₁₆	9 ³ / ₈	12 ¹⁵ / ₁₆
	12	30	AHF(t)-30-(*)-HB45-12	24 ³ / ₁₆	10	14 ³ / ₁₆
	12	36	AHF(t)-36-(*)-HB45-12	26 ⁵ / ₁₆	10 ¹⁵ / ₁₆	15 ⁷ / ₁₆
	12	42	AHF(t)-42-(*)-HB45-12	28 ⁷ / ₁₆	11 ⁷ / ₈	16 ¹¹ / ₁₆
	24	6	AHF(t)-06-(*)-HB45-24	24 ³ / ₁₆	10	14 ³ / ₁₆
	24	9	AHF(t)-09-(*)-HB45-24	25 ³ / ₄	10 ¹ / ₂	14 ¹³ / ₁₆
	24	12	AHF(t)-12-(*)-HB45-24	26 ⁵ / ₁₆	10 ¹⁵ / ₁₆	15 ⁷ / ₁₆
	24	18	AHF(t)-18-(*)-HB45-24	28 ⁷ / ₁₆	11 ¹³ / ₁₆	16 ¹¹ / ₁₆
	24	24	AHF(t)-24-(*)-HB45-24	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆
	24	30	AHF(t)-30-(*)-HB45-24	32 ¹¹ / ₁₆	13 ³ / ₁₆	19 ³ / ₈
	24	36	AHF(t)-36-(*)-HB45-24	34 ¹³ / ₁₆	14 ⁷ / ₈	20 ³ / ₈
	24	42	AHF(t)-42-(*)-HB45-24	36 ¹⁵ / ₁₆	15 ³ / ₄	21 ⁵ / ₈
	36	6	AHF(t)-06-(*)-HB45-36	32 ¹¹ / ₁₆	13 ³ / ₁₆	19 ³ / ₈
	36	9	AHF(t)-09-(*)-HB45-36	33 ³ / ₄	14	19 ³ / ₄
	36	12	AHF(t)-12-(*)-HB45-36	34 ¹³ / ₁₆	14 ⁷ / ₁₆	20 ³ / ₈
	36	18	AHF(t)-18-(*)-HB45-36	36 ¹⁵ / ₁₆	15 ⁵ / ₁₆	21 ⁵ / ₈
	36	24	AHF(t)-24-(*)-HB45-36	39 ¹ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₈
	36	30	AHF(t)-30-(*)-HB45-36	41 ³ / ₁₆	17 ¹ / ₁₆	24 ¹ / ₈
	36	36	AHF(t)-36-(*)-HB45-36	43 ⁵ / ₁₆	17 ¹⁵ / ₁₆	25 ³ / ₈
	36	42	AHF(t)-42-(*)-HB45-36	45 ⁷ / ₁₆	18 ¹³ / ₁₆	26 ⁵ / ₈
	48	6	AHF(t)-06-(*)-HB45-48	41 ³ / ₁₆	17 ¹ / ₁₆	24 ¹ / ₈
	48	9	AHF(t)-09-(*)-HB45-48	42 ¹ / ₄	17 ¹ / ₂	24 ³ / ₄
	48	12	AHF(t)-12-(*)-HB45-48	43 ⁵ / ₁₆	17 ⁷ / ₁₆	25 ³ / ₈
	48	18	AHF(t)-18-(*)-HB45-48	45 ⁷ / ₁₆	18 ³ / ₁₆	26 ⁵ / ₈
	48	24	AHF(t)-24-(*)-HB45-48	47 ⁹ / ₁₆	19 ¹¹ / ₁₆	27 ³ / ₄
	48	30	AHF(t)-30-(*)-HB45-48	49 ¹¹ / ₁₆	20 ³ / ₁₆	29 ³ / ₈
	48	36	AHF(t)-36-(*)-HB45-48	51 ¹³ / ₁₆	21 ⁷ / ₁₆	30 ⁵ / ₁₆
	48	42	AHF(t)-42-(*)-HB45-48	53 ¹⁵ / ₁₆	22 ⁵ / ₁₆	31 ⁷ / ₁₆


(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

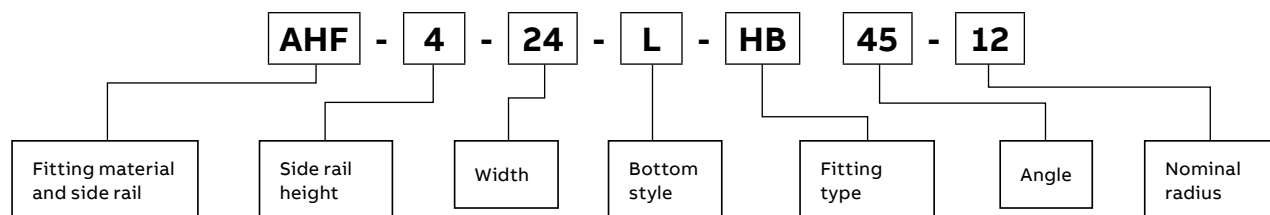

30° Horizontal bend – H-style

Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
			X	Y	Z
12	6	AHF(t)-06-(*)-HB30-12	13 $\frac{1}{8}$	3 $\frac{1}{2}$	7
12	9	AHF(t)-09-(*)-HB30-12	13 $\frac{7}{8}$	3 $\frac{11}{16}$	7 $\frac{7}{16}$
12	12	AHF(t)-12-(*)-HB30-12	14 $\frac{5}{8}$	3 $\frac{15}{16}$	7 $\frac{13}{16}$
12	18	AHF(t)-18-(*)-HB30-12	16 $\frac{1}{8}$	4 $\frac{1}{16}$	8 $\frac{5}{8}$
12	24	AHF(t)-24-(*)-HB30-12	17 $\frac{7}{8}$	4 $\frac{11}{16}$	9 $\frac{7}{8}$
12	30	AHF(t)-30-(*)-HB30-12	19 $\frac{1}{8}$	5 $\frac{1}{8}$	10 $\frac{1}{4}$
12	36	AHF(t)-36-(*)-HB30-12	20 $\frac{5}{8}$	5 $\frac{1}{2}$	11 $\frac{1}{16}$
12	42	AHF(t)-42-(*)-HB30-12	22 $\frac{1}{8}$	5 $\frac{7}{8}$	12 $\frac{3}{16}$
24	6	AHF(t)-06-(*)-HB30-24	19 $\frac{1}{8}$	5 $\frac{1}{8}$	10 $\frac{1}{4}$
24	9	AHF(t)-09-(*)-HB30-24	19 $\frac{7}{8}$	5 $\frac{1}{16}$	10 $\frac{5}{8}$
24	12	AHF(t)-12-(*)-HB30-24	20 $\frac{5}{8}$	5 $\frac{1}{2}$	11 $\frac{1}{16}$
24	18	AHF(t)-18-(*)-HB30-24	22 $\frac{1}{8}$	5 $\frac{5}{16}$	11 $\frac{13}{16}$
24	24	AHF(t)-24-(*)-HB30-24	23 $\frac{3}{8}$	6 $\frac{1}{16}$	12 $\frac{3}{8}$
24	30	AHF(t)-30-(*)-HB30-24	25 $\frac{1}{8}$	6 $\frac{3}{4}$	13 $\frac{3}{16}$
24	36	AHF(t)-36-(*)-HB30-24	26 $\frac{5}{8}$	7 $\frac{1}{8}$	14 $\frac{1}{4}$
24	42	AHF(t)-42-(*)-HB30-24	28 $\frac{1}{8}$	7 $\frac{1}{2}$	15 $\frac{1}{16}$
36	6	AHF(t)-06-(*)-HB30-36	25 $\frac{1}{8}$	6 $\frac{3}{4}$	13 $\frac{3}{16}$
36	9	AHF(t)-09-(*)-HB30-36	25 $\frac{7}{8}$	6 $\frac{15}{16}$	13 $\frac{3}{8}$
36	12	AHF(t)-12-(*)-HB30-36	26 $\frac{5}{8}$	7 $\frac{1}{8}$	14 $\frac{1}{4}$
36	18	AHF(t)-18-(*)-HB30-36	28 $\frac{1}{8}$	7 $\frac{1}{2}$	15 $\frac{1}{16}$
36	24	AHF(t)-24-(*)-HB30-36	29 $\frac{1}{8}$	7 $\frac{15}{16}$	15 $\frac{7}{8}$
36	30	AHF(t)-30-(*)-HB30-36	31 $\frac{1}{8}$	8 $\frac{5}{16}$	16 $\frac{11}{16}$
36	36	AHF(t)-36-(*)-HB30-36	32 $\frac{5}{8}$	8 $\frac{3}{4}$	17 $\frac{1}{2}$
36	42	AHF(t)-42-(*)-HB30-36	34 $\frac{1}{8}$	9 $\frac{1}{8}$	18 $\frac{5}{16}$
48	6	AHF(t)-06-(*)-HB30-48	31 $\frac{1}{8}$	8 $\frac{5}{16}$	16 $\frac{11}{16}$
48	9	AHF(t)-09-(*)-HB30-48	31 $\frac{7}{8}$	8 $\frac{1}{16}$	17 $\frac{1}{16}$
48	12	AHF(t)-12-(*)-HB30-48	32 $\frac{5}{8}$	8 $\frac{3}{4}$	17 $\frac{1}{2}$
48	18	AHF(t)-18-(*)-HB30-48	34 $\frac{1}{8}$	9 $\frac{1}{8}$	18 $\frac{1}{4}$
48	24	AHF(t)-24-(*)-HB30-48	35 $\frac{5}{8}$	9 $\frac{9}{16}$	19 $\frac{3}{16}$
48	30	AHF(t)-30-(*)-HB30-48	37 $\frac{1}{8}$	9 $\frac{15}{16}$	19 $\frac{7}{8}$
48	36	AHF(t)-36-(*)-HB30-48	38 $\frac{5}{8}$	10 $\frac{5}{16}$	20 $\frac{11}{16}$
48	42	AHF(t)-42-(*)-HB30-48	40 $\frac{1}{8}$	10 $\frac{11}{16}$	21 $\frac{1}{2}$

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.


Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 45°, 30°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

Aluminum fittings


U-style horizontal tee and cross fittings

Horizontal tee – U-style



	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)	
				X	Y
	12	6	AUF(t)-06-(*)-HT12	15	30
	12	9	AUF(t)-09-(*)-HT12	16½	33
	12	12	AUF(t)-12-(*)-HT12	18	36
	12	18	AUF(t)-18-(*)-HT12	21	42
	12	24	AUF(t)-24-(*)-HT12	24	48
	12	30	AUF(t)-30-(*)-HT12	27	54
	12	36	AUF(t)-36-(*)-HT12	30	60
	12	42	AUF(t)-42-(*)-HT12	33	66
	24	6	AUF(t)-06-(*)-HT24	27	54
	24	9	AUF(t)-09-(*)-HT24	28½	57
	24	12	AUF(t)-12-(*)-HT24	30	60
	24	18	AUF(t)-18-(*)-HT24	33	66
	24	24	AUF(t)-24-(*)-HT24	36	72
	24	30	AUF(t)-30-(*)-HT24	39	78
	24	36	AUF(t)-36-(*)-HT24	42	84
	24	42	AUF(t)-42-(*)-HT24	45	90
	36	6	AUF(t)-06-(*)-HT36	39	78
	36	9	AUF(t)-09-(*)-HT36	40½	81
	36	12	AUF(t)-12-(*)-HT36	42	84
	36	18	AUF(t)-18-(*)-HT36	45	90
	36	24	AUF(t)-24-(*)-HT36	48	96
	36	30	AUF(t)-30-(*)-HT36	51	102
	36	36	AUF(t)-36-(*)-HT36	54	108
	36	42	AUF(t)-42-(*)-HT36	57	114
	48	6	AUF(t)-06-(*)-HT48	51	102
	48	9	AUF(t)-09-(*)-HT48	52½	105
	48	12	AUF(t)-12-(*)-HT48	54	108
	48	18	AUF(t)-18-(*)-HT48	57	114
	48	24	AUF(t)-24-(*)-HT48	60	120
	48	30	AUF(t)-30-(*)-HT48	63	126
	48	36	AUF(t)-36-(*)-HT48	66	132
	48	42	AUF(t)-42-(*)-HT48	69	138

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Tees include 2 pairs/crosses include 3 pairs of splice plates with hardware. T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

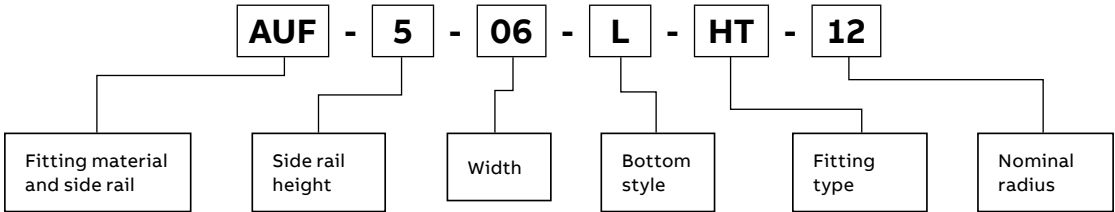

Horizontal cross – U-style

Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)	
			X	Y
12	6	AUF(t)-06-(*)-HX12	15	30
12	9	AUF(t)-09-(*)-HX12	16½	33
12	12	AUF(t)-12-(*)-HX12	18	36
12	18	AUF(t)-18-(*)-HX12	21	42
12	24	AUF(t)-24-(*)-HX12	24	48
12	30	AUF(t)-30-(*)-HX12	27	54
12	36	AUF(t)-36-(*)-HX12	30	60
12	42	AUF(t)-42-(*)-HX12	33	66
24	6	AUF(t)-06-(*)-HX24	27	54
24	9	AUF(t)-09-(*)-HX24	28½	57
24	12	AUF(t)-12-(*)-HX24	30	60
24	18	AUF(t)-18-(*)-HX24	33	66
24	24	AUF(t)-24-(*)-HX24	36	72
24	30	AUF(t)-30-(*)-HX24	39	78
24	36	AUF(t)-36-(*)-HX24	42	84
24	42	AUF(t)-42-(*)-HX24	45	90
36	6	AUF(t)-06-(*)-HX36	39	78
36	9	AUF(t)-09-(*)-HX36	40½	81
36	12	AUF(t)-12-(*)-HX36	42	84
36	18	AUF(t)-18-(*)-HX36	45	90
36	24	AUF(t)-24-(*)-HX36	48	96
36	30	AUF(t)-30-(*)-HX36	51	102
36	36	AUF(t)-36-(*)-HX36	54	108
36	42	AUF(t)-42-(*)-HX36	57	114
48	6	AUF(t)-06-(*)-HX48	51	102
48	9	AUF(t)-09-(*)-HX48	52½	105
48	12	AUF(t)-12-(*)-HX48	54	108
48	18	AUF(t)-18-(*)-HX48	57	114
48	24	AUF(t)-24-(*)-HX48	60	120
48	30	AUF(t)-30-(*)-HX48	63	126
48	36	AUF(t)-36-(*)-HX48	66	132
48	42	AUF(t)-42-(*)-HX48	69	138

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Tees include 2 pairs/crosses include 3 pairs of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.



Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

Aluminum fittings


H-style horizontal tee and cross fittings

Horizontal tee – H-style



	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)	
				X	Y
	12	6	AHF(t)-06-(*)-HT12	18	36
	12	9	AHF(t)-09-(*)-HT12	19½	39
	12	12	AHF(t)-12-(*)-HT12	21	42
	12	18	AHF(t)-18-(*)-HT12	24	48
	12	24	AHF(t)-24-(*)-HT12	27	54
	12	30	AHF(t)-30-(*)-HT12	30	60
	12	36	AHF(t)-36-(*)-HT12	33	66
	12	42	AHF(t)-42-(*)-HT12	36	72
	24	6	AHF(t)-06-(*)-HT24	30	60
	24	9	AHF(t)-09-(*)-HT24	31½	63
	24	12	AHF(t)-12-(*)-HT24	33	66
	24	18	AHF(t)-18-(*)-HT24	36	72
	24	24	AHF(t)-24-(*)-HT24	39	78
	24	30	AHF(t)-30-(*)-HT24	42	84
	24	36	AHF(t)-36-(*)-HT24	45	90
	24	42	AHF(t)-42-(*)-HT24	48	96
	36	6	AHF(t)-06-(*)-HT36	42	84
	36	9	AHF(t)-09-(*)-HT36	43½	87
	36	12	AHF(t)-12-(*)-HT36	45	90
	36	18	AHF(t)-18-(*)-HT36	48	96
	36	24	AHF(t)-24-(*)-HT36	51	102
	36	30	AHF(t)-30-(*)-HT36	54	108
	36	36	AHF(t)-36-(*)-HT36	57	114
	36	42	AHF(t)-42-(*)-HT36	60	120
	48	6	AHF(t)-06-(*)-HT48	54	108
	48	9	AHF(t)-09-(*)-HT48	55½	111
	48	12	AHF(t)-12-(*)-HT48	57	114
	48	18	AHF(t)-18-(*)-HT48	60	120
	48	24	AHF(t)-24-(*)-HT48	63	126
	48	30	AHF(t)-30-(*)-HT48	66	132
	48	36	AHF(t)-36-(*)-HT48	69	138
	48	42	AHF(t)-42-(*)-HT48	72	144

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Tees include 2 pairs/crosses include 3 pairs of splice plates with hardware. T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

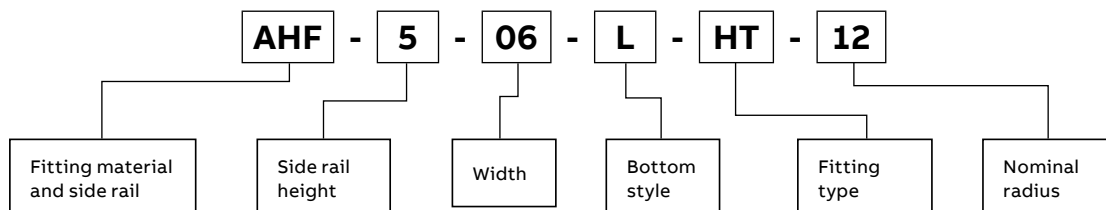

Horizontal cross – H-style

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)	
				X	Y
	12	6	AHF(t)-06-(*)-HX12	18	36
	12	9	AHF(t)-09-(*)-HX12	19½	39
	12	12	AHF(t)-12-(*)-HX12	21	42
	12	18	AHF(t)-18-(*)-HX12	24	48
	12	24	AHF(t)-24-(*)-HX12	27	54
	12	30	AHF(t)-30-(*)-HX12	30	60
	12	36	AHF(t)-36-(*)-HX12	33	66
	12	42	AHF(t)-42-(*)-HX12	36	72
	24	6	AHF(t)-06-(*)-HX24	30	60
	24	9	AHF(t)-09-(*)-HX24	31½	63
	24	12	AHF(t)-12-(*)-HX24	33	66
	24	18	AHF(t)-18-(*)-HX24	36	72
	24	24	AHF(t)-24-(*)-HX24	39	78
	24	30	AHF(t)-30-(*)-HX24	42	84
	24	36	AHF(t)-36-(*)-HX24	45	90
	24	42	AHF(t)-42-(*)-HX24	48	96
	36	6	AHF(t)-06-(*)-HX36	42	84
	36	9	AHF(t)-09-(*)-HX36	43½	87
	36	12	AHF(t)-12-(*)-HX36	45	90
	36	18	AHF(t)-18-(*)-HX36	48	96
	36	24	AHF(t)-24-(*)-HX36	51	102
	36	30	AHF(t)-30-(*)-HX36	54	108
	36	36	AHF(t)-36-(*)-HX36	57	114
	36	42	AHF(t)-42-(*)-HX36	60	120
	48	6	AHF(t)-06-(*)-HX48	54	108
	48	9	AHF(t)-09-(*)-HX48	55½	111
	48	12	AHF(t)-12-(*)-HX48	57	114
	48	18	AHF(t)-18-(*)-HX48	60	120
	48	24	AHF(t)-24-(*)-HX48	63	126
	48	30	AHF(t)-30-(*)-HX48	66	132
	48	36	AHF(t)-36-(*)-HX48	69	138
	48	42	AHF(t)-42-(*)-HX48	72	144

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Tees include 2 pairs/crosses include 3 pairs of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

Aluminum fittings

U-style horizontal reducing tee fittings

Selection guide


- Tray widths W1: 42, 36, 30, 24, 18, 12, 9 in.
- Tray widths W2: 36, 30, 24, 18, 12, 9, 6 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

Horizontal reducing tee – U-style

Widths (in.)			Dimensions (in.)							
			(+ 12 in. Nominal radius		(+ 24 in. Nominal radius		(+ 36 in. Nominal radius		(+ 48 in. Nominal radius	
W1	W2	Cat. no.	X	Y	X	Y	X	Y	X	Y
42	36	AUF(t)-4236-(*)-RT(+)	33	60	45	84	57	108	69	132
42	30	AUF(t)-4230-(*)-RT(+)	33	54	45	78	57	102	69	126
42	24	AUF(t)-4224-(*)-RT(+)	33	48	45	72	57	96	69	120
42	18	AUF(t)-4218-(*)-RT(+)	33	42	45	66	57	90	69	114
42	12	AUF(t)-4212-(*)-RT(+)	33	36	45	60	57	84	69	108
42	9	AUF(t)-4209-(*)-RT(+)	33	33	45	57	57	81	69	105
42	6	AUF(t)-4206-(*)-RT(+)	33	30	45	54	57	78	69	102
36	30	AUF(t)-3630-(*)-RT(+)	30	54	42	78	54	102	66	126
36	24	AUF(t)-3624-(*)-RT(+)	30	48	42	72	54	96	66	120
36	18	AUF(t)-3618-(*)-RT(+)	30	42	42	66	54	90	66	114
36	12	AUF(t)-3612-(*)-RT(+)	30	36	42	60	54	84	66	108
36	9	AUF(t)-3609-(*)-RT(+)	30	33	42	57	54	81	66	105
36	6	AUF(t)-3606-(*)-RT(+)	30	30	42	54	54	78	66	102
30	24	AUF(t)-3024-(*)-RT(+)	27	48	39	72	51	96	63	120
30	18	AUF(t)-3018-(*)-RT(+)	27	42	39	66	51	90	63	114
30	12	AUF(t)-3012-(*)-RT(+)	27	36	39	60	51	84	63	108
30	9	AUF(t)-3009-(*)-RT(+)	27	33	39	57	51	81	63	105
30	6	AUF(t)-3006-(*)-RT(+)	27	30	39	54	51	78	63	102
24	18	AUF(t)-2418-(*)-RT(+)	24	42	36	66	48	90	60	114
24	12	AUF(t)-2412-(*)-RT(+)	24	36	36	60	48	84	60	108
24	9	AUF(t)-2409-(*)-RT(+)	24	33	36	57	48	81	60	105
24	6	AUF(t)-2406-(*)-RT(+)	24	30	36	54	48	78	60	102
18	12	AUF(t)-1812-(*)-RT(+)	21	36	33	60	45	84	57	108
18	9	AUF(t)-1809-(*)-RT(+)	21	33	33	57	45	81	57	105
18	6	AUF(t)-1806-(*)-RT(+)	21	30	33	54	45	78	57	102
12	9	AUF(t)-1209-(*)-RT(+)	18	33	30	57	42	81	54	105
12	6	AUF(t)-1206-(*)-RT(+)	18	30	30	54	42	78	54	102
9	6	AUF(t)-0906-(*)-RT(+)	16½	30	28½	54	40½	78	52½	102

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. (+) Insert radius (12 in. – 48 in.). Includes 2 pairs of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

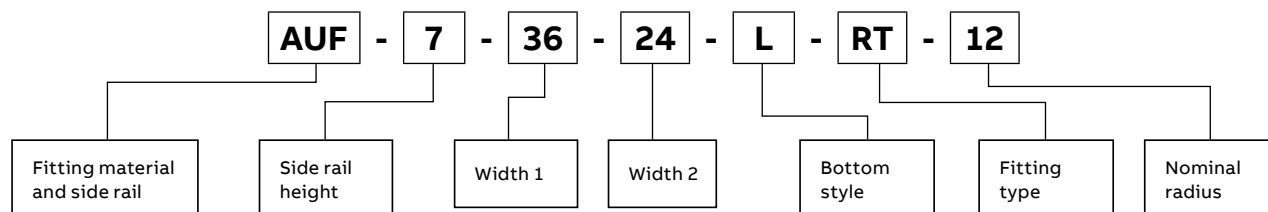



Aluminum fittings

H-style horizontal reducing tee fittings

Selection guide

- Tray widths W1: 42, 36, 30, 24, 18, 12, 9 in.
- Tray widths W2: 36, 30, 24, 18, 12, 9, 6 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.


Horizontal reducing tee – H-style

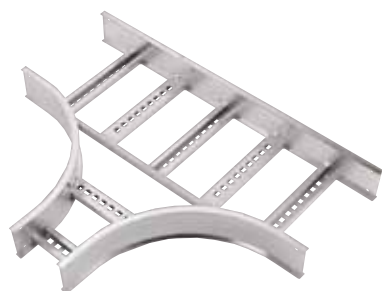

Widths (in.)			Dimensions (in.)							
			(+) 12 in.		(+) 24 in.		(+) 36 in.		(+) 48 in.	
			Nominal radius		Nominal radius		Nominal radius		Nominal radius	
W1	W2	Cat. no.	X	Y	X	Y	X	Y	X	Y
42	36	AHF(t)-4236-(*)-RT(+)	36	66	48	90	60	114	72	138
42	30	AHF(t)-4230-(*)-RT(+)	36	60	48	84	60	108	72	132
42	24	AHF(t)-4224-(*)-RT(+)	36	54	48	78	60	102	72	126
42	18	AHF(t)-4218-(*)-RT(+)	36	48	48	72	60	96	72	120
42	12	AHF(t)-4212-(*)-RT(+)	36	42	48	66	60	90	72	114
42	9	AHF(t)-4209-(*)-RT(+)	36	39	48	63	60	87	72	111
42	6	AHF(t)-4206-(*)-RT(+)	36	36	48	60	60	84	72	108
36	30	AHF(t)-3630-(*)-RT(+)	33	60	45	84	57	108	69	132
36	24	AHF(t)-3624-(*)-RT(+)	33	54	45	78	57	102	69	126
36	18	AHF(t)-3618-(*)-RT(+)	33	48	45	72	57	96	69	120
36	12	AHF(t)-3612-(*)-RT(+)	33	42	45	66	57	90	69	114
36	9	AHF(t)-3609-(*)-RT(+)	33	39	45	63	57	87	69	111
36	6	AHF(t)-3606-(*)-RT(+)	33	36	45	60	57	84	69	108
30	24	AHF(t)-3024-(*)-RT(+)	30	54	42	78	54	102	66	126
30	18	AHF(t)-3018-(*)-RT(+)	30	48	42	72	54	96	66	120
30	12	AHF(t)-3012-(*)-RT(+)	30	42	42	66	54	90	66	114
30	9	AHF(t)-3009-(*)-RT(+)	30	39	42	63	54	87	66	111
30	6	AHF(t)-3006-(*)-RT(+)	30	36	42	60	54	84	66	108
24	18	AHF(t)-2418-(*)-RT(+)	27	48	39	72	51	96	63	120
24	12	AHF(t)-2412-(*)-RT(+)	27	42	39	66	51	90	63	114
24	9	AHF(t)-2409-(*)-RT(+)	27	39	39	63	51	87	63	111
24	6	AHF(t)-2406-(*)-RT(+)	27	36	39	60	51	84	63	108
18	12	AHF(t)-1812-(*)-RT(+)	24	42	36	66	48	90	60	114
18	9	AHF(t)-1809-(*)-RT(+)	24	39	36	63	48	87	60	111
18	6	AHF(t)-1806-(*)-RT(+)	24	36	36	60	48	84	60	108
12	9	AHF(t)-1209-(*)-RT(+)	21	39	33	63	45	87	57	111
12	6	AHF(t)-1206-(*)-RT(+)	21	36	33	60	45	84	57	108
9	6	AHF(t)-0906-(*)-RT(+)	19½	36	31½	60	43½	84	55½	108

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. (+) Insert radius (12 in. – 48 in.). Includes 2 pairs of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

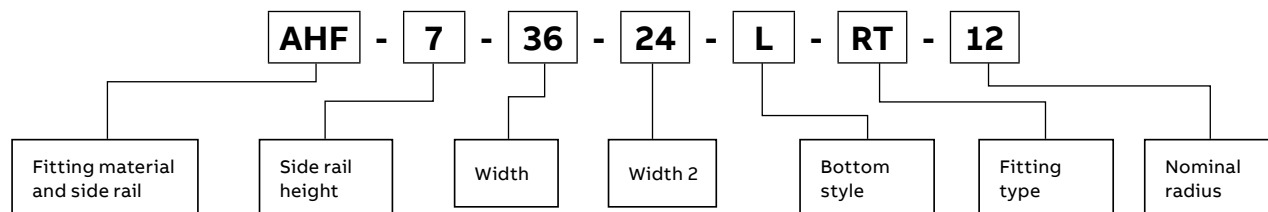

Aluminum fittings


U-style horizontal expanding tee fittings

Selection guide

- Tray widths W1: 30, 24, 18, 12, 9, 6 in.
- Tray widths W2: 42, 36, 30, 24, 18, 12, 9 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.


Horizontal expanding tee – U-style

Widths (in.)			Dimensions (in.)							
			(+) 12 in. Nominal radius		(+) 24 in. Nominal radius		(+) 36 in. Nominal radius		(+) 48 in. Nominal radius	
W1	W2	Cat. no.	X	Y	X	Y	X	Y	X	Y
36	42	AUF(t)-3642-(*)-ET(+)	30	66	42	90	54	114	66	138
30	36	AUF(t)-3036-(*)-ET(+)	27	60	39	84	51	108	63	132
30	42	AUF(t)-3042-(*)-ET(+)	27	66	39	90	51	114	63	138
24	30	AUF(t)-2430-(*)-ET(+)	24	54	36	78	48	102	60	126
24	36	AUF(t)-2436-(*)-ET(+)	24	60	36	84	48	108	60	132
24	42	AUF(t)-2442-(*)-ET(+)	24	66	36	90	48	114	60	138
18	24	AUF(t)-1824-(*)-ET(+)	21	48	33	72	45	96	57	120
18	30	AUF(t)-1830-(*)-ET(+)	21	54	33	78	45	102	57	126
18	36	AUF(t)-1836-(*)-ET(+)	21	60	33	84	45	108	57	132
18	42	AUF(t)-1842-(*)-ET(+)	21	66	33	90	45	114	57	138
12	18	AUF(t)-1218-(*)-ET(+)	18	42	30	66	42	90	54	114
12	24	AUF(t)-1224-(*)-ET(+)	18	48	30	72	42	96	54	120
12	30	AUF(t)-1230-(*)-ET(+)	18	54	30	78	42	102	54	126
12	36	AUF(t)-1236-(*)-ET(+)	18	60	30	84	42	108	54	132
12	42	AUF(t)-1242-(*)-ET(+)	18	66	30	90	42	114	54	138
9	12	AUF(t)-0912-(*)-ET(+)	16½	36	28½	60	40½	84	52½	108
9	18	AUF(t)-0918-(*)-ET(+)	16½	42	28½	66	40½	90	52½	114
9	24	AUF(t)-0924-(*)-ET(+)	16½	48	28½	72	40½	96	52½	120
9	30	AUF(t)-0930-(*)-ET(+)	16½	54	28½	78	40½	102	52½	126
9	36	AUF(t)-0936-(*)-ET(+)	16½	60	28½	84	40½	108	52½	132
9	42	AUF(t)-0942-(*)-ET(+)	16½	66	28½	90	40½	114	52½	138
6	9	AUF(t)-0609-(*)-ET(+)	15	33	27	57	39	81	51	105
6	12	AUF(t)-0612-(*)-ET(+)	15	36	27	60	39	84	51	108
6	18	AUF(t)-0618-(*)-ET(+)	15	42	27	66	39	90	51	114
6	24	AUF(t)-0624-(*)-ET(+)	15	48	27	72	39	96	51	120
6	30	AUF(t)-0630-(*)-ET(+)	15	54	27	78	39	102	51	126
6	36	AUF(t)-0636-(*)-ET(+)	15	60	27	84	39	108	51	132
6	42	AUF(t)-0642-(*)-ET(+)	15	66	27	90	39	114	51	138



(t) Insert side rail height. (*) Insert bottom style to complete cat. no. (+) Insert radius (12 in. – 48 in.). Includes 2 pairs of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

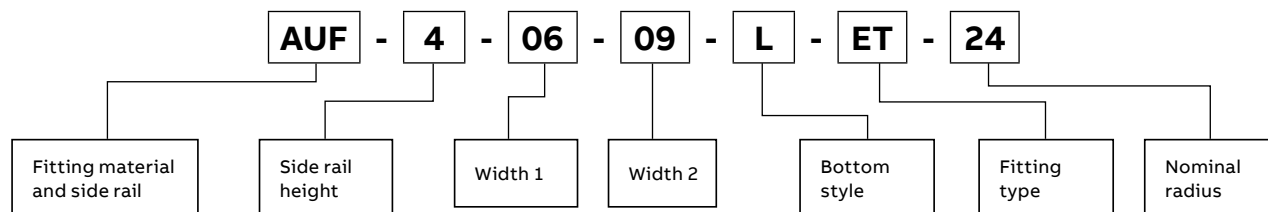

Aluminum fittings

H-style horizontal expanding tee fittings

Selection guide


- Tray widths W1: 30, 24, 18, 12, 9, 6 in.
- Tray widths W2: 42, 36, 30, 24, 18, 12, 9 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

Horizontal expanding tee – H-style

Widths (in.)			Dimensions (in.)							
			(+) 12 in. Nominal radius		(+) 24 in. Nominal radius		(+) 36 in. Nominal radius		(+) 48 in. Nominal radius	
W1	W2	Cat. no.	X	Y	X	Y	X	Y	X	Y
36	42	AHF(t)-3642-(*)-ET(+)	33	72	45	96	57	120	69	144
30	36	AHF(t)-3036-(*)-ET(+)	30	66	42	90	54	114	66	138
30	42	AHF(t)-3042-(*)-ET(+)	30	72	42	96	54	120	66	144
24	30	AHF(t)-2430-(*)-ET(+)	27	60	39	84	51	108	63	132
24	36	AHF(t)-2436-(*)-ET(+)	27	66	39	90	51	114	63	138
24	42	AHF(t)-2442-(*)-ET(+)	27	72	39	96	51	120	63	144
18	24	AHF(t)-1824-(*)-ET(+)	24	54	36	78	48	102	60	126
18	30	AHF(t)-1830-(*)-ET(+)	24	60	36	84	48	108	60	132
18	36	AHF(t)-1836-(*)-ET(+)	24	66	36	90	48	114	60	138
18	42	AHF(t)-1842-(*)-ET(+)	24	72	36	96	48	120	60	144
12	18	AHF(t)-1218-(*)-ET(+)	21	48	33	72	45	96	57	120
12	24	AHF(t)-1224-(*)-ET(+)	21	54	33	78	45	102	57	126
12	30	AHF(t)-1230-(*)-ET(+)	21	60	33	84	45	108	57	132
12	36	AHF(t)-1236-(*)-ET(+)	21	66	33	90	45	114	57	138
12	42	AHF(t)-1242-(*)-ET(+)	21	72	33	96	45	120	57	144
9	12	AHF(t)-0912-(*)-ET(+)	19½	42	31½	66	43½	90	55½	114
9	18	AHF(t)-0918-(*)-ET(+)	19½	48	31½	72	43½	96	55½	120
9	24	AHF(t)-0924-(*)-ET(+)	19½	54	31½	78	43½	102	55½	126
9	30	AHF(t)-0930-(*)-ET(+)	19½	60	31½	84	43½	108	55½	132
9	36	AHF(t)-0936-(*)-ET(+)	19½	66	31½	90	43½	114	55½	138
9	42	AHF(t)-0942-(*)-ET(+)	19½	72	31½	96	43½	120	55½	144
6	9	AHF(t)-0609-(*)-ET(+)	18	39	30	63	42	87	54	111
6	12	AHF(t)-0612-(*)-ET(+)	18	42	30	66	42	90	54	114
6	18	AHF(t)-0618-(*)-ET(+)	18	48	30	72	42	96	54	120
6	24	AHF(t)-0624-(*)-ET(+)	18	54	30	78	42	102	54	126
6	30	AHF(t)-0630-(*)-ET(+)	18	60	30	84	42	108	54	132
6	36	AHF(t)-0636-(*)-ET(+)	18	66	30	90	42	114	54	138
6	42	AHF(t)-0642-(*)-ET(+)	18	72	30	96	42	120	54	144

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. (+) Insert radius (12 in. – 48 in.). Includes 2 pairs of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

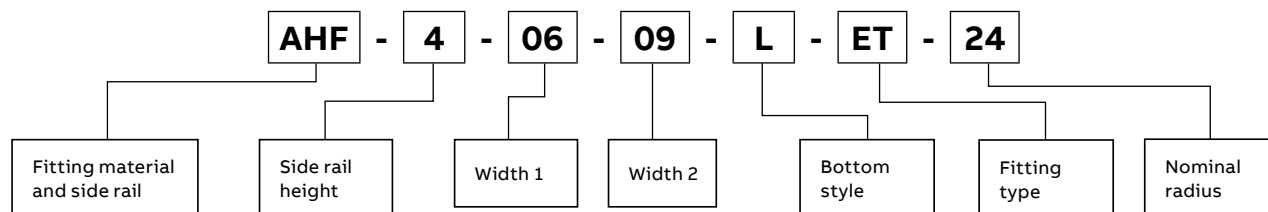

Aluminum fittings



U-style horizontal expanding cross fittings

Selection guide

- Tray widths W1: 30, 24, 18, 12, 9, 6 in.
- Tray widths W2: 42, 36, 30, 24, 18, 12, 9 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.


Horizontal expanding cross – U-style

Widths (in.)			Dimensions (in.)							
			(+ 12 in. Nominal radius		(+ 24 in. Nominal radius		(+ 36 in. Nominal radius		(+ 48 in. Nominal radius	
W1	W2	Cat. no.	X	Y	X	Y	X	Y	X	Y
36	42	AUF(t)-3642-(*)-EX(+)	60	66	84	90	108	114	132	138
30	36	AUF(t)-3036-(*)-EX(+)	54	60	78	84	102	108	126	132
30	42	AUF(t)-3042-(*)-EX(+)	54	66	78	90	102	114	126	138
24	30	AUF(t)-2430-(*)-EX(+)	48	54	72	78	96	102	120	126
24	36	AUF(t)-2436-(*)-EX(+)	48	60	72	84	96	108	120	132
24	42	AUF(t)-2442-(*)-EX(+)	48	66	72	90	96	114	120	138
18	24	AUF(t)-1824-(*)-EX(+)	42	48	66	72	90	96	114	120
18	30	AUF(t)-1830-(*)-EX(+)	42	54	66	78	90	102	114	126
18	36	AUF(t)-1836-(*)-EX(+)	42	60	66	84	90	108	114	132
18	42	AUF(t)-1842-(*)-EX(+)	42	66	66	90	90	114	114	138
12	18	AUF(t)-1218-(*)-EX(+)	36	42	60	66	84	90	108	114
12	24	AUF(t)-1224-(*)-EX(+)	36	48	60	72	84	96	108	120
12	30	AUF(t)-1230-(*)-EX(+)	36	54	60	78	84	102	108	126
12	36	AUF(t)-1236-(*)-EX(+)	36	60	60	84	84	108	108	132
12	42	AUF(t)-1242-(*)-EX(+)	36	66	60	90	84	114	108	138
9	12	AUF(t)-0912-(*)-EX(+)	33	36	57	60	81	84	105	108
9	18	AUF(t)-0918-(*)-EX(+)	33	42	57	66	81	90	105	114
9	24	AUF(t)-0924-(*)-EX(+)	33	48	57	72	81	96	105	120
9	30	AUF(t)-0930-(*)-EX(+)	33	54	57	78	81	102	105	126
9	36	AUF(t)-0936-(*)-EX(+)	33	60	57	84	81	108	105	132
9	42	AUF(t)-0942-(*)-EX(+)	33	66	57	90	81	114	105	138
6	9	AUF(t)-0609-(*)-EX(+)	30	33	54	57	78	81	102	105
6	12	AUF(t)-0612-(*)-EX(+)	30	36	54	60	78	84	102	108
6	18	AUF(t)-0618-(*)-EX(+)	30	42	54	66	78	90	102	114
6	24	AUF(t)-0624-(*)-EX(+)	30	48	54	72	78	96	102	120
6	30	AUF(t)-0630-(*)-EX(+)	30	54	54	78	78	102	102	126
6	36	AUF(t)-0636-(*)-EX(+)	30	60	54	84	78	108	102	132
6	42	AUF(t)-0642-(*)-EX(+)	30	66	54	90	78	114	102	138



(t) Insert side rail height. (*) Insert bottom style to complete cat. no. (+) Insert radius (12 in. – 48 in.). Includes 3 pairs of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems H-style and U-style. These systems are interchangeable.

Part numbering system

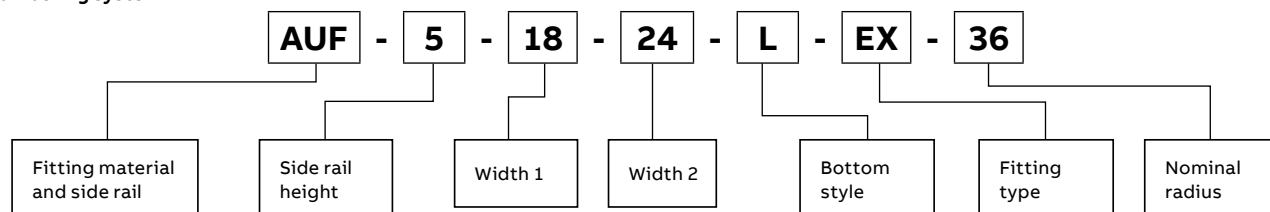

Aluminum fittings

H-style horizontal expanding cross fittings

Selection guide


- Tray widths W1: 30, 24, 18, 12, 9, 6 in.
- Tray widths W2: 42, 36, 30, 24, 18, 12, 9 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

Horizontal expanding cross – H-style

Widths (in.)			Dimensions (in.)							
			(+ 12 in. Nominal radius		(+ 24 in. Nominal radius		(+ 36 in. Nominal radius		(+ 48 in. Nominal radius	
W1	W2	Cat. no.	X	Y	X	Y	X	Y	X	Y
36	42	AHF(t)-3642-(*)-EX(+)	66	72	90	96	114	120	138	144
30	36	AHF(t)-3036-(*)-EX(+)	60	66	84	90	108	114	132	138
30	42	AHF(t)-3042-(*)-EX(+)	60	72	84	96	108	120	132	144
24	30	AHF(t)-2430-(*)-EX(+)	54	60	78	84	102	108	126	132
24	36	AHF(t)-2436-(*)-EX(+)	54	66	78	90	102	114	126	138
24	42	AHF(t)-2442-(*)-EX(+)	54	75	78	96	102	120	126	144
18	24	AHF(t)-1824-(*)-EX(+)	48	54	72	78	96	102	120	126
18	30	AHF(t)-1830-(*)-EX(+)	48	60	72	84	96	108	120	132
18	36	AHF(t)-1836-(*)-EX(+)	48	66	72	90	96	114	120	138
18	42	AHF(t)-1842-(*)-EX(+)	48	72	72	96	96	120	120	144
12	18	AHF(t)-1218-(*)-EX(+)	42	48	66	72	90	96	114	120
12	24	AHF(t)-1224-(*)-EX(+)	42	54	66	78	90	102	114	126
12	30	AHF(t)-1230-(*)-EX(+)	42	60	66	84	90	108	114	132
12	36	AHF(t)-1236-(*)-EX(+)	42	66	66	90	90	114	114	138
12	42	AHF(t)-1242-(*)-EX(+)	42	72	66	96	90	120	114	144
9	12	AHF(t)-0912-(*)-EX(+)	39	42	63	66	87	90	111	114
9	18	AHF(t)-0918-(*)-EX(+)	39	48	63	72	87	96	111	120
9	24	AHF(t)-0924-(*)-EX(+)	39	54	63	78	87	102	111	126
9	30	AHF(t)-0930-(*)-EX(+)	39	60	63	84	87	108	111	132
9	36	AHF(t)-0936-(*)-EX(+)	39	66	63	90	87	114	111	138
9	42	AHF(t)-0942-(*)-EX(+)	39	72	63	96	87	120	111	144
6	9	AHF(t)-0609-(*)-EX(+)	36	39	60	63	84	87	108	111
6	12	AHF(t)-0612-(*)-EX(+)	36	42	60	66	84	90	108	114
6	18	AHF(t)-0618-(*)-EX(+)	36	48	60	72	84	96	108	120
6	24	AHF(t)-0624-(*)-EX(+)	36	54	60	78	84	102	108	126
6	30	AHF(t)-0630-(*)-EX(+)	36	60	60	84	84	108	108	132
6	36	AHF(t)-0636-(*)-EX(+)	36	66	60	90	84	114	108	138
6	42	AHF(t)-0642-(*)-EX(+)	36	72	60	96	84	120	108	144

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. (+) Insert radius (12 in. – 48 in.). Includes 3 pairs of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

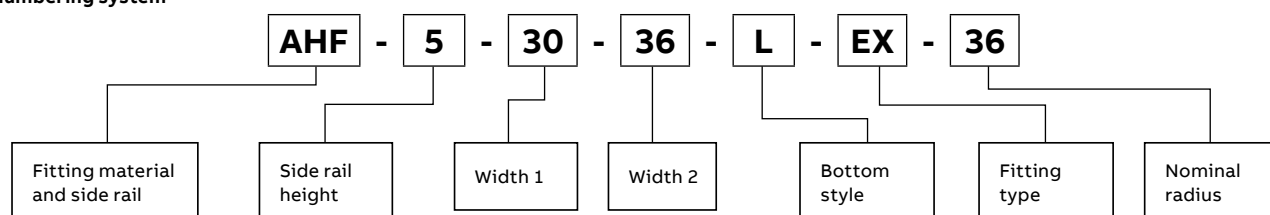


Aluminum fittings
U-style reducer fittings




Horizontal reducers - U-style

Widths (in.)				Straight reducer (concentric)			
W1	W2	Left reducer Cat. no.	Dim. X (in.)	Cat. no.	Dim. X (in.)	Right reducer Cat. no.	Dim. X (in.)
42	36	AUF(†)-42-36-(*)-HLR	15 7/16	AUF(†)-42-36-(*)-HSR	13 3/4	AUF(†)-42-36-(*)-HRR	15 7/16
42	30	AUF(†)-42-30-(*)-HLR	18 15/16	AUF(†)-42-30-(*)-HSR	15 7/16	AUF(†)-42-30-(*)-HRR	18 15/16
42	24	AUF(†)-42-24-(*)-HLR	22 3/8	AUF(†)-42-24-(*)-HSR	17 3/16	AUF(†)-42-24-(*)-HRR	22 3/8
42	18	AUF(†)-42-18-(*)-HLR	25 7/8	AUF(†)-42-18-(*)-HSR	18 5/16	AUF(†)-42-18-(*)-HRR	25 7/8
42	12	AUF(†)-42-12-(*)-HLR	29 9/16	AUF(†)-42-12-(*)-HSR	20 5/8	AUF(†)-42-12-(*)-HRR	29 9/16
42	9	AUF(†)-42-09-(*)-HLR	31 1/16	AUF(†)-42-09-(*)-HSR	21 1/2	AUF(†)-42-09-(*)-HRR	31 1/16
42	6	AUF(†)-42-06-(*)-HLR	32 3/4	AUF(†)-42-06-(*)-HSR	22 3/8	AUF(†)-42-06-(*)-HRR	32 3/4
36	30	AUF(†)-36-30-(*)-HLR	15 7/16	AUF(†)-36-30-(*)-HSR	13 3/4	AUF(†)-36-30-(*)-HRR	15 7/16
36	24	AUF(†)-36-24-(*)-HLR	18 15/16	AUF(†)-36-24-(*)-HSR	15 7/16	AUF(†)-36-24-(*)-HRR	18 15/16
36	18	AUF(†)-36-18-(*)-HLR	22 3/8	AUF(†)-36-18-(*)-HSR	17 3/8	AUF(†)-36-18-(*)-HRR	22 3/8
36	12	AUF(†)-36-12-(*)-HLR	25 7/8	AUF(†)-36-12-(*)-HSR	18 5/16	AUF(†)-36-12-(*)-HRR	25 7/8
36	9	AUF(†)-36-09-(*)-HLR	27 7/16	AUF(†)-36-09-(*)-HSR	19 13/16	AUF(†)-36-09-(*)-HRR	27 7/16
36	6	AUF(†)-36-06-(*)-HLR	29 9/16	AUF(†)-36-06-(*)-HSR	20 11/16	AUF(†)-36-06-(*)-HRR	29 9/16

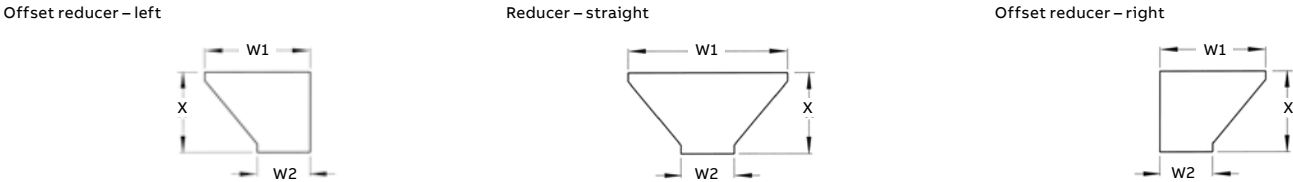

(†) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

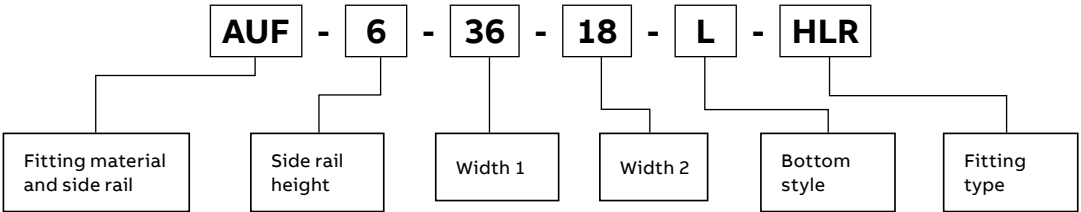

Offset reducer – left



Reducer – straight



Offset reducer – right

**Horizontal reducers – U-style****Widths (in.)**

Left reducer		Cat. no.	Dim. X (in.)
W1	W2		
30	24	AUF(t)-30-24-(*)-HLR	15 ⁷ / ₁₆
30	18	AUF(t)-30-18-(*)-HLR	18 ¹⁵ / ₁₆
30	12	AUF(t)-30-12-(*)-HLR	22 ³ / ₈
30	9	AUF(t)-30-09-(*)-HLR	24 ¹ / ₈
30	6	AUF(t)-30-06-(*)-HLR	25 ⁷ / ₈
24	18	AUF(t)-24-18-(*)-HLR	15 ⁷ / ₁₆
24	12	AUF(t)-24-12-(*)-HLR	18 ¹⁵ / ₁₆
24	9	AUF(t)-24-09-(*)-HLR	20 ¹¹ / ₁₆
24	6	AUF(t)-24-06-(*)-HLR	22 ³ / ₈
18	12	AUF(t)-18-12-(*)-HLR	15 ⁷ / ₁₆
18	9	AUF(t)-18-09-(*)-HLR	17 ³ / ₁₆
18	6	AUF(t)-18-06-(*)-HLR	18 ¹⁵ / ₁₆
12	9	AUF(t)-12-09-(*)-HLR	13 ³ / ₄
12	6	AUF(t)-12-06-(*)-HLR	15 ⁷ / ₁₆
9	6	AUF(t)-09-06-(*)-HLR	13 ³ / ₄


**Straight reducer
(concentric)**

Straight reducer (concentric)		Cat. no.	Dim. X (in.)
W1	W2		
30	24	AUF(t)-30-24-(*)-HSR	13 ³ / ₄
30	18	AUF(t)-30-18-(*)-HSR	15 ⁷ / ₁₆
30	12	AUF(t)-30-12-(*)-HSR	17 ³ / ₁₆
30	9	AUF(t)-30-09-(*)-HSR	18 ¹ / ₁₆
30	6	AUF(t)-30-06-(*)-HSR	18 ¹⁵ / ₁₆
24	18	AUF(t)-24-18-(*)-HSR	13 ³ / ₄
24	12	AUF(t)-24-12-(*)-HSR	15 ⁷ / ₁₆
24	9	AUF(t)-24-09-(*)-HSR	16 ⁵ / ₁₆
24	6	AUF(t)-24-06-(*)-HSR	17 ³ / ₁₆
18	12	AUF(t)-18-12-(*)-HSR	13 ³ / ₄
18	9	AUF(t)-18-09-(*)-HSR	14 ⁵ / ₁₆
18	6	AUF(t)-18-06-(*)-HSR	15 ⁷ / ₁₆
12	9	AUF(t)-12-09-(*)-HSR	12 ⁷ / ₁₆
12	6	AUF(t)-12-06-(*)-HSR	13 ³ / ₄
9	6	AUF(t)-09-06-(*)-HSR	12 ⁷ / ₁₆


Right reducer

Right reducer		Cat. no.	Dim. X (in.)
W1	W2		
30	24	AUF(t)-30-24-(*)-HRR	15 ⁷ / ₁₆
30	18	AUF(t)-30-18-(*)-HRR	18 ¹⁵ / ₁₆
30	12	AUF(t)-30-12-(*)-HRR	22 ³ / ₈
30	9	AUF(t)-30-09-(*)-HRR	24 ¹ / ₈
30	6	AUF(t)-30-06-(*)-HRR	25 ⁷ / ₈
24	18	AUF(t)-24-18-(*)-HRR	15 ⁷ / ₁₆
24	12	AUF(t)-24-12-(*)-HRR	18 ¹⁵ / ₁₆
24	9	AUF(t)-24-09-(*)-HRR	20 ¹¹ / ₁₆
24	6	AUF(t)-24-06-(*)-HRR	22 ³ / ₈
18	12	AUF(t)-18-12-(*)-HRR	15 ⁷ / ₁₆
18	9	AUF(t)-18-09-(*)-HRR	17 ³ / ₁₆
18	6	AUF(t)-18-06-(*)-HRR	18 ¹⁵ / ₁₆
12	9	AUF(t)-12-09-(*)-HRR	13 ³ / ₄
12	6	AUF(t)-12-06-(*)-HRR	15 ⁷ / ₁₆
9	6	AUF(t)-09-06-(*)-HRR	13 ³ / ₄


Offset reducer – left



Reducer – straight



Offset reducer – right



(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Selection guide

- Tray widths W1: 42, 36, 30, 24, 18, 12, 9 in.
- Tray widths W2: 36, 30, 24, 18, 12, 9, 6 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

Aluminum fittings

H-style reducer fittings

Offset reducer – left



Reducer – straight



Offset reducer – right



Horizontal reducers – H-style

Widths (in.)

Left reducer		Cat. no.	Dim. X (in.)
W1	W2		
42	36	AHF(†)-42-36-(*)-HLR	15 ⁷ / ₁₆
	30	AHF(†)-42-30-(*)-HLR	18 ¹⁵ / ₁₆
	24	AHF(†)-42-24-(*)-HLR	22 ³ / ₈
	18	AHF(†)-42-18-(*)-HLR	25 ⁵ / ₈
	12	AHF(†)-42-12-(*)-HLR	29 ⁵ / ₁₆
	9	AHF(†)-42-09-(*)-HLR	31 ¹ / ₁₆
	6	AHF(†)-42-06-(*)-HLR	32 ³ / ₄
36	30	AHF(†)-36-30-(*)-HLR	15 ⁷ / ₁₆
	24	AHF(†)-36-24-(*)-HLR	18 ¹⁵ / ₁₆
	18	AHF(†)-36-18-(*)-HLR	22 ³ / ₈
	12	AHF(†)-36-12-(*)-HLR	25 ⁵ / ₈
	9	AHF(†)-36-09-(*)-HLR	27 ⁹ / ₁₆
	6	AHF(†)-36-06-(*)-HLR	29 ⁵ / ₁₆
30	24	AHF(†)-30-24-(*)-HLR	15 ⁷ / ₁₆
	18	AHF(†)-30-18-(*)-HLR	18 ¹⁵ / ₁₆
	12	AHF(†)-30-12-(*)-HLR	22 ³ / ₈
	9	AHF(†)-30-09-(*)-HLR	24 ¹ / ₈
	6	AHF(†)-30-06-(*)-HLR	25 ⁵ / ₈


Straight reducer (concentric)

Cat. no.	Dim. X (in.)
AHF(†)-42-36-(*)-HSR	13 ³ / ₄
AHF(†)-42-30-(*)-HSR	15 ⁷ / ₁₆
AHF(†)-42-24-(*)-HSR	17 ³ / ₁₆
AHF(†)-42-18-(*)-HSR	18 ⁵ / ₁₆
AHF(†)-42-12-(*)-HSR	20 ⁵ / ₈
AHF(†)-42-09-(*)-HSR	21 ¹ / ₂
AHF(†)-42-06-(*)-HSR	22 ³ / ₈
AHF(†)-36-30-(*)-HSR	13 ³ / ₄
AHF(†)-36-24-(*)-HSR	15 ⁷ / ₁₆
AHF(†)-36-18-(*)-HSR	17 ³ / ₈
AHF(†)-36-12-(*)-HSR	18 ⁵ / ₁₆
AHF(†)-36-09-(*)-HSR	19 ¹³ / ₁₆
AHF(†)-36-06-(*)-HSR	20 ¹¹ / ₁₆
AHF(†)-30-24-(*)-HSR	13 ³ / ₄
AHF(†)-30-18-(*)-HSR	15 ⁷ / ₁₆
AHF(†)-30-12-(*)-HSR	17 ³ / ₁₆
AHF(†)-30-09-(*)-HSR	18 ¹ / ₁₆
AHF(†)-30-06-(*)-HSR	18 ¹⁵ / ₁₆


Right reducer

Cat. no.	Dim. X (in.)
AHF(†)-42-36-(*)-HRR	15 ⁷ / ₁₆
AHF(†)-42-30-(*)-HRR	18 ¹⁵ / ₁₆
AHF(†)-42-24-(*)-HRR	22 ³ / ₈
AHF(†)-42-18-(*)-HRR	25 ⁵ / ₈
AHF(†)-42-12-(*)-HRR	29 ⁵ / ₁₆
AHF(†)-42-09-(*)-HRR	31 ¹ / ₁₆
AHF(†)-42-06-(*)-HRR	32 ³ / ₄
AHF(†)-36-30-(*)-HRR	15 ⁷ / ₁₆
AHF(†)-36-24-(*)-HRR	18 ¹⁵ / ₁₆
AHF(†)-36-18-(*)-HRR	22 ³ / ₈
AHF(†)-36-12-(*)-HRR	25 ⁵ / ₈
AHF(†)-36-09-(*)-HRR	27 ⁹ / ₁₆
AHF(†)-36-06-(*)-HRR	29 ⁵ / ₁₆
AHF(†)-30-24-(*)-HRR	15 ⁷ / ₁₆
AHF(†)-30-18-(*)-HRR	18 ¹⁵ / ₁₆
AHF(†)-30-12-(*)-HRR	22 ³ / ₈
AHF(†)-30-09-(*)-HRR	24 ¹ / ₈
AHF(†)-30-06-(*)-HRR	25 ⁵ / ₈


Offset reducer – left



Reducer – straight




Offset reducer – right



(†) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

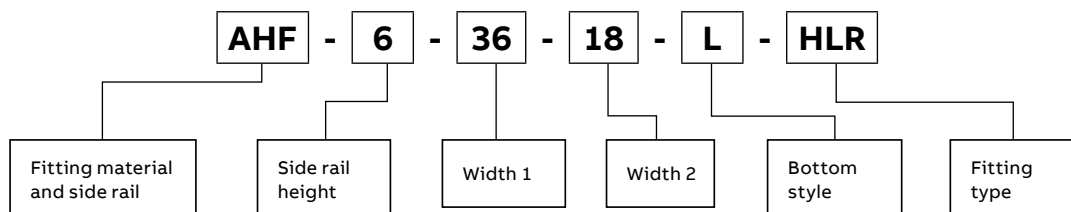

Offset reducer – left



Reducer – straight



Offset reducer – right

**Horizontal reducers – H-style****Widths (in.)**

		Left reducer	
W1	W2	Cat. no.	Dim. X (in.)
24	18	AHF(†)-24-18-(*)-HLR	15 ⁷ / ₁₆
	12	AHF(†)-24-12-(*)-HLR	18 ¹⁵ / ₁₆
	9	AHF(†)-24-09-(*)-HLR	20 ¹¹ / ₁₆
	6	AHF(†)-24-06-(*)-HLR	22 ³ / ₈
18	12	AHF(†)-18-12-(*)-HLR	15 ⁷ / ₁₆
	9	AHF(†)-18-09-(*)-HLR	17 ³ / ₁₆
	6	AHF(†)-18-06-(*)-HLR	18 ¹⁵ / ₁₆
12	9	AHF(†)-12-09-(*)-HLR	13 ³ / ₄
	6	AHF(†)-12-06-(*)-HLR	15 ⁷ / ₁₆
9	6	AHF(†)-09-06-(*)-HLR	13 ³ / ₄


Straight reducer (concentric)

Cat. no.	Dim. X (in.)
AHF(†)-24-18-(*)-HSR	13 ³ / ₄
AHF(†)-24-12-(*)-HSR	15 ⁷ / ₁₆
AHF(†)-24-09-(*)-HSR	16 ⁵ / ₁₆
AHF(†)-24-06-(*)-HSR	17 ³ / ₁₆
AHF(†)-18-12-(*)-HSR	13 ³ / ₄
AHF(†)-18-09-(*)-HSR	14 ³ / ₈
AHF(†)-18-06-(*)-HSR	15 ⁷ / ₁₆
AHF(†)-12-09-(*)-HSR	12 ⁷ / ₈
AHF(†)-12-06-(*)-HSR	13 ³ / ₄
AHF(†)-09-06-(*)-HSR	12 ⁷ / ₈


Right reducer

Cat. no.	Dim. X (in.)
AHF(†)-24-18-(*)-HRR	15 ⁷ / ₁₆
AHF(†)-24-12-(*)-HRR	18 ¹⁵ / ₁₆
AHF(†)-24-09-(*)-HRR	20 ¹¹ / ₁₆
AHF(†)-24-06-(*)-HRR	22 ³ / ₈
AHF(†)-18-12-(*)-HRR	15 ⁷ / ₁₆
AHF(†)-18-09-(*)-HRR	17 ³ / ₁₆
AHF(†)-18-06-(*)-HRR	18 ¹⁵ / ₁₆
AHF(†)-12-09-(*)-HRR	13 ³ / ₄
AHF(†)-12-06-(*)-HRR	15 ⁷ / ₁₆
AHF(†)-09-06-(*)-HRR	13 ³ / ₄


Offset reducer – left



Reducer – straight



Offset reducer – right



(†) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.
 T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.


Selection guide

- Tray widths W1: 42, 36, 30, 24, 18, 12, 9 in.
- Tray widths W2: 36, 30, 24, 18, 12, 9, 6 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

Aluminum fittings

45° U-style horizontal wye fittings

Left-hand wye



Right-hand wye




Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.


45° Horizontal wye – U-style

Width (in.)	Left-hand wye Cat. no.	Right-hand wye Cat. no.	Dimensions (in.)		
			X	Y	Z
6	AUF(†)-06-(*)-HYL	AUF(†)-06-(*)-HYR	18 ⁵ / ₁₆	14 ¹³ / ₁₆	12 ⁷ / ₁₆
9	AUF(†)-09-(*)-HYL	AUF(†)-09-(*)-HYR	22 ¹ / ₂	19 ¹⁵ / ₁₆	15 ⁵ / ₁₆
12	AUF(†)-12-(*)-HYL	AUF(†)-12-(*)-HYR	26 ³ / ₄	25	18 ⁷ / ₁₆
18	AUF(†)-18-(*)-HYL	AUF(†)-18-(*)-HYR	35 ¹ / ₄	35 ¹ / ₄	24 ⁷ / ₁₆
24	AUF(†)-24-(*)-HYL	AUF(†)-24-(*)-HYR	43 ¹ / ₂	45 ¹ / ₂	30 ⁷ / ₁₆
30	AUF(†)-30-(*)-HYL	AUF(†)-30-(*)-HYR	52 ¹ / ₄	55 ³ / ₄	36 ⁷ / ₁₆
36	AUF(†)-36-(*)-HYL	AUF(†)-36-(*)-HYR	60 ¹¹ / ₁₆	66	42 ⁷ / ₁₆
42	AUF(†)-42-(*)-HYL	AUF(†)-42-(*)-HYR	69 ³ / ₁₆	76 ¹ / ₄	45 ⁷ / ₁₆

Left-hand wye




Right-hand wye



(†) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 2 pairs of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

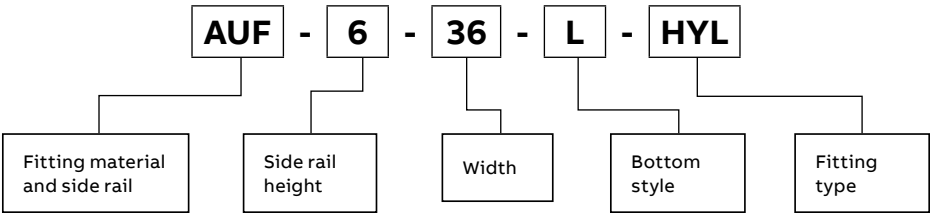

Aluminum fittings

45° H-style horizontal wye fittings

Left-hand wye



Right-hand wye




Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.


45° Horizontal wye – H-style

Width (in.)	Left-hand wye Cat. no.	Right-hand wye Cat. no.	Dimensions (in.)		
			X	Y	Z
6	AHF(t)-06-(*)-HYL	AHF(t)-06-(*)-HYR	18 $\frac{5}{16}$	14 $\frac{13}{16}$	12 $\frac{7}{16}$
9	AHF(t)-09-(*)-HYL	AHF(t)-09-(*)-HYR	22 $\frac{1}{2}$	19 $\frac{15}{16}$	15 $\frac{1}{16}$
12	AHF(t)-12-(*)-HYL	AHF(t)-12-(*)-HYR	26 $\frac{3}{4}$	25	18 $\frac{7}{16}$
18	AHF(t)-18-(*)-HYL	AHF(t)-18-(*)-HYR	35 $\frac{1}{4}$	35 $\frac{1}{4}$	24 $\frac{7}{16}$
24	AHF(t)-24-(*)-HYL	AHF(t)-24-(*)-HYR	43 $\frac{1}{2}$	45 $\frac{1}{2}$	30 $\frac{7}{16}$
30	AHF(t)-30-(*)-HYL	AHF(t)-30-(*)-HYR	52 $\frac{1}{4}$	55 $\frac{3}{4}$	36 $\frac{7}{16}$
36	AHF(t)-36-(*)-HYL	AHF(t)-36-(*)-HYR	60 $\frac{11}{16}$	66	42 $\frac{7}{16}$
42	AHF(t)-42-(*)-HYL	AHF(t)-42-(*)-HYR	69 $\frac{3}{16}$	76 $\frac{1}{4}$	45 $\frac{1}{16}$

Left hand wye




Right hand wye



(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 2 pairs of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

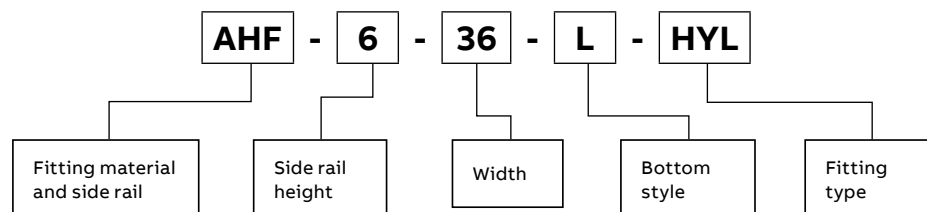



Aluminum fittings

90° U-style vertical bend fittings

Selection guide


- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 90°
- Radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

90° Vertical bend – U-style

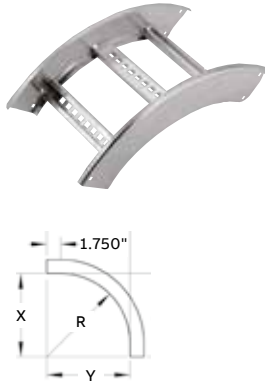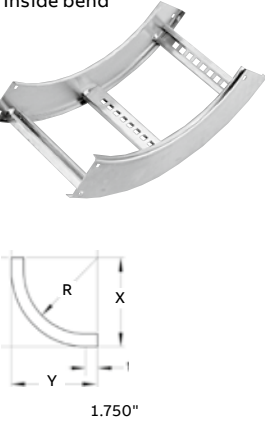	Nominal		Cat. no.	(+) VO side rail		Dimensions (in.)							
				4 in. – 7 in.		4 in.		5 in.		6 in.		7 in.	
	Radius (in.)	Width (in.)		X	Y	X	Y	X	Y	X	Y	X	Y
Outside bend 	12	6	AUF(+)-06-(*)-(+)90-12	12	12	17 ¹⁵ / ₁₆	17 ¹⁵ / ₁₆	18 ¹³ / ₁₆	18 ¹³ / ₁₆	20	20	21	21
	12	9	AUF(+)-09-(*)-(+)90-12	12	12	17 ¹⁵ / ₁₆	17 ¹⁵ / ₁₆	18 ¹³ / ₁₆	18 ¹³ / ₁₆	20	20	21	21
	12	12	AUF(+)-12-(*)-(+)90-12	12	12	17 ¹⁵ / ₁₆	17 ¹⁵ / ₁₆	18 ¹³ / ₁₆	18 ¹³ / ₁₆	20	20	21	21
	12	18	AUF(+)-18-(*)-(+)90-12	12	12	17 ¹⁵ / ₁₆	17 ¹⁵ / ₁₆	18 ¹³ / ₁₆	18 ¹³ / ₁₆	20	20	21	21
	12	24	AUF(+)-24-(*)-(+)90-12	12	12	17 ¹⁵ / ₁₆	17 ¹⁵ / ₁₆	18 ¹³ / ₁₆	18 ¹³ / ₁₆	20	20	21	21
	12	30	AUF(+)-30-(*)-(+)90-12	12	12	17 ¹⁵ / ₁₆	17 ¹⁵ / ₁₆	18 ¹³ / ₁₆	18 ¹³ / ₁₆	20	20	21	21
	12	36	AUF(+)-36-(*)-(+)90-12	12	12	17 ¹⁵ / ₁₆	17 ¹⁵ / ₁₆	18 ¹³ / ₁₆	18 ¹³ / ₁₆	20	20	21	21
	12	42	AUF(+)-42-(*)-(+)90-12	12	12	17 ¹⁵ / ₁₆	17 ¹⁵ / ₁₆	18 ¹³ / ₁₆	18 ¹³ / ₁₆	20	20	21	21
	24	6	AUF(+)-06-(*)-(+)90-24	24	24	29 ¹⁵ / ₁₆	29 ¹⁵ / ₁₆	30 ¹³ / ₁₆	30 ¹³ / ₁₆	32	32	33	33
	24	9	AUF(+)-09-(*)-(+)90-24	24	24	29 ¹⁵ / ₁₆	29 ¹⁵ / ₁₆	30 ¹³ / ₁₆	30 ¹³ / ₁₆	32	32	33	33
	24	12	AUF(+)-12-(*)-(+)90-24	24	24	29 ¹⁵ / ₁₆	29 ¹⁵ / ₁₆	30 ¹³ / ₁₆	30 ¹³ / ₁₆	32	32	33	33
	24	18	AUF(+)-18-(*)-(+)90-24	24	24	29 ¹⁵ / ₁₆	29 ¹⁵ / ₁₆	30 ¹³ / ₁₆	30 ¹³ / ₁₆	32	32	33	33
	24	24	AUF(+)-24-(*)-(+)90-24	24	24	29 ¹⁵ / ₁₆	29 ¹⁵ / ₁₆	30 ¹³ / ₁₆	30 ¹³ / ₁₆	32	32	33	33
	24	30	AUF(+)-30-(*)-(+)90-24	24	24	29 ¹⁵ / ₁₆	29 ¹⁵ / ₁₆	30 ¹³ / ₁₆	30 ¹³ / ₁₆	32	32	33	33
	24	36	AUF(+)-36-(*)-(+)90-24	24	24	29 ¹⁵ / ₁₆	29 ¹⁵ / ₁₆	30 ¹³ / ₁₆	30 ¹³ / ₁₆	32	32	33	33
	24	42	AUF(+)-42-(*)-(+)90-24	24	24	29 ¹⁵ / ₁₆	29 ¹⁵ / ₁₆	30 ¹³ / ₁₆	30 ¹³ / ₁₆	32	32	33	33
Inside bend 	36	6	AUF(+)-06-(*)-(+)90-36	36	36	41 ¹⁵ / ₁₆	41 ¹⁵ / ₁₆	42 ¹³ / ₁₆	42 ¹³ / ₁₆	44	44	33	33
	36	9	AUF(+)-09-(*)-(+)90-36	36	36	41 ¹⁵ / ₁₆	41 ¹⁵ / ₁₆	42 ¹³ / ₁₆	42 ¹³ / ₁₆	44	44	33	33
	36	12	AUF(+)-12-(*)-(+)90-36	36	36	41 ¹⁵ / ₁₆	41 ¹⁵ / ₁₆	42 ¹³ / ₁₆	42 ¹³ / ₁₆	44	44	33	33
	36	18	AUF(+)-18-(*)-(+)90-36	36	36	41 ¹⁵ / ₁₆	41 ¹⁵ / ₁₆	42 ¹³ / ₁₆	42 ¹³ / ₁₆	44	44	33	33
	36	24	AUF(+)-24-(*)-(+)90-36	36	36	41 ¹⁵ / ₁₆	41 ¹⁵ / ₁₆	42 ¹³ / ₁₆	42 ¹³ / ₁₆	44	44	33	33
	36	30	AUF(+)-30-(*)-(+)90-36	36	36	41 ¹⁵ / ₁₆	41 ¹⁵ / ₁₆	42 ¹³ / ₁₆	42 ¹³ / ₁₆	44	44	33	33
	36	36	AUF(+)-36-(*)-(+)90-36	36	36	41 ¹⁵ / ₁₆	41 ¹⁵ / ₁₆	42 ¹³ / ₁₆	42 ¹³ / ₁₆	44	44	33	33
	36	42	AUF(+)-42-(*)-(+)90-36	36	36	41 ¹⁵ / ₁₆	41 ¹⁵ / ₁₆	42 ¹³ / ₁₆	42 ¹³ / ₁₆	44	44	33	33
	48	6	AUF(+)-06-(*)-(+)90-48	48	48	53 ¹⁵ / ₁₆	53 ¹⁵ / ₁₆	54 ¹³ / ₁₆	54 ¹³ / ₁₆	56	56	57	57
	48	9	AUF(+)-09-(*)-(+)90-48	48	48	53 ¹⁵ / ₁₆	53 ¹⁵ / ₁₆	54 ¹³ / ₁₆	54 ¹³ / ₁₆	56	56	57	57
	48	12	AUF(+)-12-(*)-(+)90-48	48	48	53 ¹⁵ / ₁₆	53 ¹⁵ / ₁₆	54 ¹³ / ₁₆	54 ¹³ / ₁₆	56	56	57	57
	48	18	AUF(+)-18-(*)-(+)90-48	48	48	53 ¹⁵ / ₁₆	53 ¹⁵ / ₁₆	54 ¹³ / ₁₆	54 ¹³ / ₁₆	56	56	57	57
	48	24	AUF(+)-24-(*)-(+)90-48	48	48	53 ¹⁵ / ₁₆	53 ¹⁵ / ₁₆	54 ¹³ / ₁₆	54 ¹³ / ₁₆	56	56	57	57
	48	30	AUF(+)-30-(*)-(+)90-48	48	48	53 ¹⁵ / ₁₆	53 ¹⁵ / ₁₆	54 ¹³ / ₁₆	54 ¹³ / ₁₆	56	56	57	57
	48	36	AUF(+)-36-(*)-(+)90-48	48	48	53 ¹⁵ / ₁₆	53 ¹⁵ / ₁₆	54 ¹³ / ₁₆	54 ¹³ / ₁₆	56	56	57	57
	48	42	AUF(+)-42-(*)-(+)90-48	48	48	53 ¹⁵ / ₁₆	53 ¹⁵ / ₁₆	54 ¹³ / ₁₆	54 ¹³ / ₁₆	56	56	57	57

(†) Insert side rail height. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no. Includes 1 pair of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

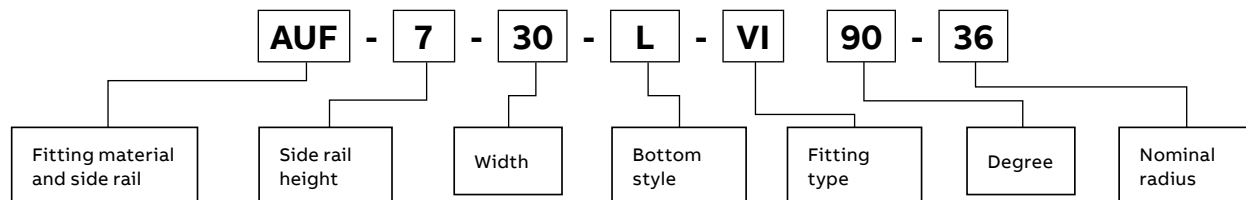



Aluminum fittings

90° H-style vertical bend fittings

Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 90°
- Radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.


90° Vertical bend – H-style

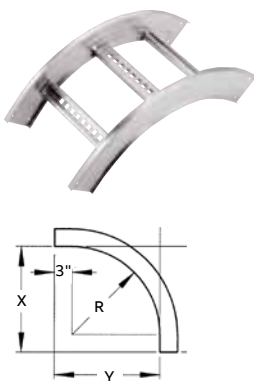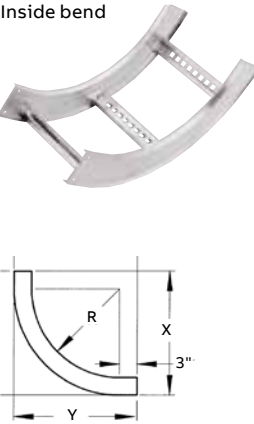				Dimensions (in.)									
	Nominal Radius (in.)	Width (in.)	Cat. no.	(+) VO side rail		(+) VI side rail							
				4 in. – 7 in.		4 in.		5 in.		6 in.		7 in.	
				X	Y	X	Y	X	Y	X	Y	X	Y
Outside bend 	12	6	AHF(+)-06-(*)-(+)90-12	15	15	19 ³ / ₁₆	19 ³ / ₁₆	20 ³ / ₁₆	20 ³ / ₁₆	21 ¹ / ₄	21 ¹ / ₄	22 ³ / ₄	22 ³ / ₄
	12	9	AHF(+)-09-(*)-(+)90-12	15	15	19 ³ / ₁₆	19 ³ / ₁₆	20 ³ / ₁₆	20 ³ / ₁₆	21 ¹ / ₄	21 ¹ / ₄	22 ³ / ₄	22 ³ / ₄
	12	12	AHF(+)-12-(*)-(+)90-12	15	15	19 ³ / ₁₆	19 ³ / ₁₆	20 ³ / ₁₆	20 ³ / ₁₆	21 ¹ / ₄	21 ¹ / ₄	22 ³ / ₄	22 ³ / ₄
	12	18	AHF(+)-18-(*)-(+)90-12	15	15	19 ³ / ₁₆	19 ³ / ₁₆	20 ³ / ₁₆	20 ³ / ₁₆	21 ¹ / ₄	21 ¹ / ₄	22 ³ / ₄	22 ³ / ₄
	12	24	AHF(+)-24-(*)-(+)90-12	15	15	19 ³ / ₁₆	19 ³ / ₁₆	20 ³ / ₁₆	20 ³ / ₁₆	21 ¹ / ₄	21 ¹ / ₄	22 ³ / ₄	22 ³ / ₄
	12	30	AHF(+)-30-(*)-(+)90-12	15	15	19 ³ / ₁₆	19 ³ / ₁₆	20 ³ / ₁₆	20 ³ / ₁₆	21 ¹ / ₄	21 ¹ / ₄	22 ³ / ₄	22 ³ / ₄
	12	36	AHF(+)-36-(*)-(+)90-12	15	15	19 ³ / ₁₆	19 ³ / ₁₆	20 ³ / ₁₆	20 ³ / ₁₆	21 ¹ / ₄	21 ¹ / ₄	22 ³ / ₄	22 ³ / ₄
	12	42	AHF(+)-42-(*)-(+)90-12	15	15	19 ³ / ₁₆	19 ³ / ₁₆	20 ³ / ₁₆	20 ³ / ₁₆	21 ¹ / ₄	21 ¹ / ₄	22 ³ / ₄	22 ³ / ₄
	24	6	AHF(+)-06-(*)-(+)90-24	27	27	31 ³ / ₁₆	31 ³ / ₁₆	32 ³ / ₁₆	32 ³ / ₁₆	33 ³ / ₄	33 ³ / ₄	34 ³ / ₄	34 ³ / ₄
	24	9	AHF(+)-09-(*)-(+)90-24	27	27	31 ³ / ₁₆	31 ³ / ₁₆	32 ³ / ₁₆	32 ³ / ₁₆	33 ³ / ₄	33 ³ / ₄	34 ³ / ₄	34 ³ / ₄
	24	12	AHF(+)-12-(*)-(+)90-24	27	27	31 ³ / ₁₆	31 ³ / ₁₆	32 ³ / ₁₆	32 ³ / ₁₆	33 ³ / ₄	33 ³ / ₄	34 ³ / ₄	34 ³ / ₄
	24	18	AHF(+)-18-(*)-(+)90-24	27	27	31 ³ / ₁₆	31 ³ / ₁₆	32 ³ / ₁₆	32 ³ / ₁₆	33 ³ / ₄	33 ³ / ₄	34 ³ / ₄	34 ³ / ₄
Inside bend 	24	24	AHF(+)-24-(*)-(+)90-24	27	27	31 ³ / ₁₆	31 ³ / ₁₆	32 ³ / ₁₆	32 ³ / ₁₆	33 ³ / ₄	33 ³ / ₄	34 ³ / ₄	34 ³ / ₄
	24	30	AHF(+)-30-(*)-(+)90-24	27	27	31 ³ / ₁₆	31 ³ / ₁₆	32 ³ / ₁₆	32 ³ / ₁₆	33 ³ / ₄	33 ³ / ₄	34 ³ / ₄	34 ³ / ₄
	24	36	AHF(+)-36-(*)-(+)90-24	27	27	31 ³ / ₁₆	31 ³ / ₁₆	32 ³ / ₁₆	32 ³ / ₁₆	33 ³ / ₄	33 ³ / ₄	34 ³ / ₄	34 ³ / ₄
	24	42	AHF(+)-42-(*)-(+)90-24	27	27	31 ³ / ₁₆	31 ³ / ₁₆	32 ³ / ₁₆	32 ³ / ₁₆	33 ³ / ₄	33 ³ / ₄	34 ³ / ₄	34 ³ / ₄
	36	6	AHF(+)-06-(*)-(+)90-36	39	39	43 ³ / ₁₆	43 ³ / ₁₆	44 ³ / ₁₆	44 ³ / ₁₆	45 ³ / ₄	45 ³ / ₄	46 ³ / ₄	46 ³ / ₄
	36	9	AHF(+)-09-(*)-(+)90-36	39	39	43 ³ / ₁₆	43 ³ / ₁₆	44 ³ / ₁₆	44 ³ / ₁₆	45 ³ / ₄	45 ³ / ₄	46 ³ / ₄	46 ³ / ₄
	36	12	AHF(+)-12-(*)-(+)90-36	39	39	43 ³ / ₁₆	43 ³ / ₁₆	44 ³ / ₁₆	44 ³ / ₁₆	45 ³ / ₄	45 ³ / ₄	46 ³ / ₄	46 ³ / ₄
	36	18	AHF(+)-18-(*)-(+)90-36	39	39	43 ³ / ₁₆	43 ³ / ₁₆	44 ³ / ₁₆	44 ³ / ₁₆	45 ³ / ₄	45 ³ / ₄	46 ³ / ₄	46 ³ / ₄
	36	24	AHF(+)-24-(*)-(+)90-36	39	39	43 ³ / ₁₆	43 ³ / ₁₆	44 ³ / ₁₆	44 ³ / ₁₆	45 ³ / ₄	45 ³ / ₄	46 ³ / ₄	46 ³ / ₄
	36	30	AHF(+)-30-(*)-(+)90-36	39	39	43 ³ / ₁₆	43 ³ / ₁₆	44 ³ / ₁₆	44 ³ / ₁₆	45 ³ / ₄	45 ³ / ₄	46 ³ / ₄	46 ³ / ₄
	36	36	AHF(+)-36-(*)-(+)90-36	39	39	43 ³ / ₁₆	43 ³ / ₁₆	44 ³ / ₁₆	44 ³ / ₁₆	45 ³ / ₄	45 ³ / ₄	46 ³ / ₄	46 ³ / ₄
	36	42	AHF(+)-42-(*)-(+)90-36	39	39	43 ³ / ₁₆	43 ³ / ₁₆	44 ³ / ₁₆	44 ³ / ₁₆	45 ³ / ₄	45 ³ / ₄	46 ³ / ₄	46 ³ / ₄
	48	6	AHF(+)-06-(*)-(+)90-48	51	51	55 ³ / ₁₆	55 ³ / ₁₆	56 ³ / ₁₆	56 ³ / ₁₆	57 ³ / ₄	57 ³ / ₄	58 ³ / ₄	58 ³ / ₄
	48	9	AHF(+)-09-(*)-(+)90-48	51	51	55 ³ / ₁₆	55 ³ / ₁₆	56 ³ / ₁₆	56 ³ / ₁₆	57 ³ / ₄	57 ³ / ₄	58 ³ / ₄	58 ³ / ₄
	48	12	AHF(+)-12-(*)-(+)90-48	51	51	55 ³ / ₁₆	55 ³ / ₁₆	56 ³ / ₁₆	56 ³ / ₁₆	57 ³ / ₄	57 ³ / ₄	58 ³ / ₄	58 ³ / ₄
	48	18	AHF(+)-18-(*)-(+)90-48	51	51	55 ³ / ₁₆	55 ³ / ₁₆	56 ³ / ₁₆	56 ³ / ₁₆	57 ³ / ₄	57 ³ / ₄	58 ³ / ₄	58 ³ / ₄
	48	24	AHF(+)-24-(*)-(+)90-48	51	51	55 ³ / ₁₆	55 ³ / ₁₆	56 ³ / ₁₆	56 ³ / ₁₆	57 ³ / ₄	57 ³ / ₄	58 ³ / ₄	58 ³ / ₄
	48	30	AHF(+)-30-(*)-(+)90-48	51	51	55 ³ / ₁₆	55 ³ / ₁₆	56 ³ / ₁₆	56 ³ / ₁₆	57 ³ / ₄	57 ³ / ₄	58 ³ / ₄	58 ³ / ₄
	48	36	AHF(+)-36-(*)-(+)90-48	51	51	55 ³ / ₁₆	55 ³ / ₁₆	56 ³ / ₁₆	56 ³ / ₁₆	57 ³ / ₄	57 ³ / ₄	58 ³ / ₄	58 ³ / ₄
	48	42	AHF(+)-42-(*)-(+)90-48	51	51	55 ³ / ₁₆	55 ³ / ₁₆	56 ³ / ₁₆	56 ³ / ₁₆	57 ³ / ₄	57 ³ / ₄	58 ³ / ₄	58 ³ / ₄

(+) Insert side rail height. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no. Includes 1 pair of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

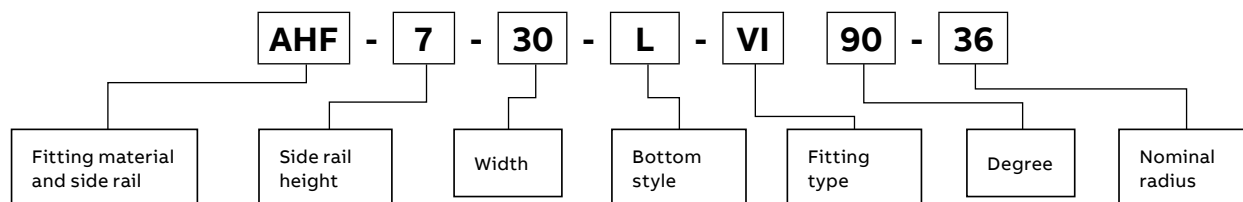



Aluminum fittings

60° U-style vertical bend fittings

60° Vertical bend – U-style


Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 60°
- Radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

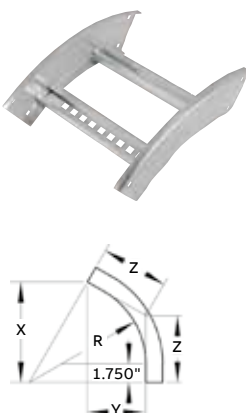				Dimensions (in.)														
				(+ VO side rail						(+ VI side rail								
				4 in. – 7 in.			4 in.			5 in.			6 in.			7 in.		
	Nominal Radius (in.)	Width (in.)	Cat. no.	X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z
Outside bend 	12	6	AUF(+)-06-(*)-(+)60-12	13	7½	8⅛	16⅞	11⅛	11⅛	17⅞	12⅞	11⅞	18⅞	13⅛	12¼	19⅞	14¾	12⅞
	12	9	AUF(+)-09-(*)-(+)60-12	13	7½	8⅛	16⅞	11⅛	11⅛	17⅞	12⅞	11⅞	18⅞	13⅛	12¼	19⅞	14¾	12⅞
	12	12	AUF(+)-12-(*)-(+)60-12	13	7½	8⅛	16⅞	11⅛	11⅛	17⅞	12⅞	11⅞	18⅞	13⅛	12¼	19⅞	14¾	12⅞
	12	18	AUF(+)-18-(*)-(+)60-12	13	7½	8⅛	16⅞	11⅛	11⅛	17⅞	12⅞	11⅞	18⅞	13⅛	12¼	19⅞	14¾	12⅞
	12	24	AUF(+)-24-(*)-(+)60-12	13	7½	8⅛	16⅞	11⅛	11⅛	17⅞	12⅞	11⅞	18⅞	13⅛	12¼	19⅞	14¾	12⅞
	12	30	AUF(+)-30-(*)-(+)60-12	13	7½	8⅛	16⅞	11⅛	11⅛	17⅞	12⅞	11⅞	18⅞	13⅛	12¼	19⅞	14¾	12⅞
	12	36	AUF(+)-36-(*)-(+)60-12	13	7½	8⅛	16⅞	11⅛	11⅛	17⅞	12⅞	11⅞	18⅞	13⅛	12¼	19⅞	14¾	12⅞
	12	42	AUF(+)-42-(*)-(+)60-12	13	7½	8⅛	16⅞	11⅛	11⅛	17⅞	12⅞	11⅞	18⅞	13⅛	12¼	19⅞	14¾	12⅞
	24	6	AUF(+)-06-(*)-(+)60-24	23⅞	13½	15⅞	27	17⅛	18	27⅛	18⅞	16⅞	28⅞	19⅛	19⅞	29⅛	20¾	19⅛
	24	9	AUF(+)-09-(*)-(+)60-24	23⅞	13½	15⅞	27	17⅛	18	27⅛	18⅞	16⅞	28⅞	19⅛	19⅞	29⅛	20¾	19⅛
	24	12	AUF(+)-12-(*)-(+)60-24	23⅞	13½	15⅞	27	17⅛	18	27⅛	18⅞	16⅞	28⅞	19⅛	19⅞	29⅛	20¾	19⅛
	24	18	AUF(+)-18-(*)-(+)60-24	23⅞	13½	15⅞	27	17⅛	18	27⅛	18⅞	16⅞	28⅞	19⅛	19⅞	29⅛	20¾	19⅛
Inside bend 	24	24	AUF(+)-24-(*)-(+)60-24	23⅞	13½	15⅞	27	17⅛	18	27⅛	18⅞	16⅞	28⅞	19⅛	19⅞	29⅛	20¾	19⅛
	24	30	AUF(+)-30-(*)-(+)60-24	23⅞	13½	15⅞	27	17⅛	18	27⅛	18⅞	16⅞	28⅞	19⅛	19⅞	29⅛	20¾	19⅛
	24	36	AUF(+)-36-(*)-(+)60-24	23⅞	13½	15⅞	27	17⅛	18	27⅛	18⅞	16⅞	28⅞	19⅛	19⅞	29⅛	20¾	19⅛
	24	42	AUF(+)-42-(*)-(+)60-24	23⅞	13½	15⅞	27	17⅛	18	27⅛	18⅞	16⅞	28⅞	19⅛	19⅞	29⅛	20¾	19⅛
	36	6	AUF(+)-06-(*)-(+)60-36	33⅞	19½	22⅞	37⅞	23⅛	24⅞	38⅞	24⅞	25⅞	39⅞	25⅞	26⅞	40⅞	26¾	26⅞
	36	9	AUF(+)-09-(*)-(+)60-36	33⅞	19½	22⅞	37⅞	23⅛	24⅞	38⅞	24⅞	25⅞	39⅞	25⅞	26⅞	40⅞	26¾	26⅞
	36	12	AUF(+)-12-(*)-(+)60-36	33⅞	19½	22⅞	37⅞	23⅛	24⅞	38⅞	24⅞	25⅞	39⅞	25⅞	26⅞	40⅞	26¾	26⅞
	36	18	AUF(+)-18-(*)-(+)60-36	33⅞	19½	22⅞	37⅞	23⅛	24⅞	38⅞	24⅞	25⅞	39⅞	25⅞	26⅞	40⅞	26¾	26⅞
	36	24	AUF(+)-24-(*)-(+)60-36	33⅞	19½	22⅞	37⅞	23⅛	24⅞	38⅞	24⅞	25⅞	39⅞	25⅞	26⅞	40⅞	26¾	26⅞
	36	30	AUF(+)-30-(*)-(+)60-36	33⅞	19½	22⅞	37⅞	23⅛	24⅞	38⅞	24⅞	25⅞	39⅞	25⅞	26⅞	40⅞	26¾	26⅞
	36	36	AUF(+)-36-(*)-(+)60-36	33⅞	19½	22⅞	37⅞	23⅛	24⅞	38⅞	24⅞	25⅞	39⅞	25⅞	26⅞	40⅞	26¾	26⅞
	36	42	AUF(+)-42-(*)-(+)60-36	33⅞	19½	22⅞	37⅞	23⅛	24⅞	38⅞	24⅞	25⅞	39⅞	25⅞	26⅞	40⅞	26¾	26⅞
	48	6	AUF(+)-06-(*)-(+)60-48	44⅞	25½	29⅞	47⅞	29⅞	31⅞	48⅞	30⅞	32⅞	49⅞	31⅞	33⅞	50⅞	32¾	33⅞
	48	9	AUF(+)-09-(*)-(+)60-48	44⅞	25½	29⅞	47⅞	29⅞	31⅞	48⅞	30⅞	32⅞	49⅞	31⅞	33⅞	50⅞	32¾	33⅞
	48	12	AUF(+)-12-(*)-(+)60-48	44⅞	25½	29⅞	47⅞	29⅞	31⅞	48⅞	30⅞	32⅞	49⅞	31⅞	33⅞	50⅞	32¾	33⅞
	48	18	AUF(+)-18-(*)-(+)60-48	44⅞	25½	29⅞	47⅞	29⅞	31⅞	48⅞	30⅞	32⅞	49⅞	31⅞	33⅞	50⅞	32¾	33⅞
	48	24	AUF(+)-24-(*)-(+)60-48	44⅞	25½	29⅞	47⅞	29⅞	31⅞	48⅞	30⅞	32⅞	49⅞	31⅞	33⅞	50⅞	32¾	33⅞
	48	30	AUF(+)-30-(*)-(+)60-48	44⅞	25½	29⅞	47⅞	29⅞	31⅞	48⅞	30⅞	32⅞	49⅞	31⅞	33⅞	50⅞	32¾	33⅞
	48	36	AUF(+)-36-(*)-(+)60-48	44⅞	25½	29⅞	47⅞	29⅞	31⅞	48⅞	30⅞	32⅞	49⅞	31⅞	33⅞	50⅞	32¾	33⅞
	48	42	AUF(+)-42-(*)-(+)60-48	44⅞	25½	29⅞	47⅞	29⅞	31⅞	48⅞	30⅞	32⅞	49⅞	31⅞	33⅞	50⅞	32¾	33⅞

(†) Insert side rail height. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no. Includes 1 pair of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

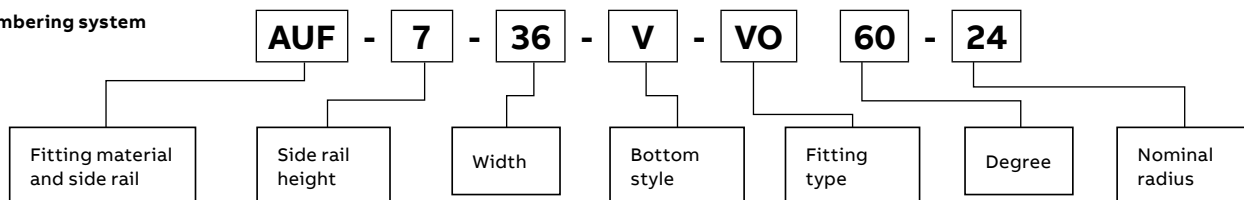



Aluminum fittings

60° H-style vertical bend fittings

Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 60°
- Radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

60° Vertical bend – H-style

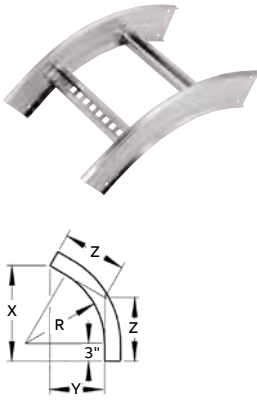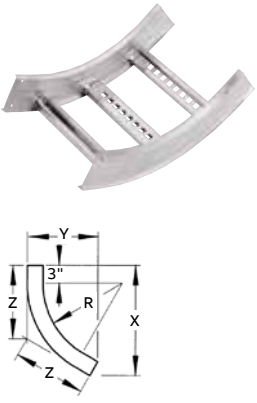				Dimensions (in.)														
				(+ VO side rail					(+ VI side rail									
	Nominal	Radius	Width	4 in. – 7 in.					4 in.					5 in.				
	(in.)	(in.)	Cat. no.	X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z
Outside bend 	12	6	AHF(†)-06-(*)-(+)60-12	14 ⁷ / ₁₆	8 ⁵ / ₁₆	9 ¹⁵ / ₁₆	18 ¹ / ₂	12 ³ / ₄	12 ⁵ / ₁₆	19 ⁵ / ₁₆	13 ¹¹ / ₁₆	12 ⁷ / ₁₆	20 ⁵ / ₁₆	14 ¹³ / ₁₆	13 ¹ / ₂	21 ¹ / ₈	15 ¹³ / ₁₆	14 ³ / ₈
	12	9	AHF(†)-09-(*)-(+)60-12	14 ⁷ / ₁₆	8 ⁵ / ₁₆	9 ¹⁵ / ₁₆	18 ¹ / ₂	12 ³ / ₄	12 ⁵ / ₁₆	19 ⁵ / ₁₆	13 ¹¹ / ₁₆	12 ⁷ / ₁₆	20 ⁵ / ₁₆	14 ¹³ / ₁₆	13 ¹ / ₂	21 ¹ / ₈	15 ¹³ / ₁₆	14 ³ / ₈
	12	12	AHF(†)-12-(*)-(+)60-12	14 ⁷ / ₁₆	8 ⁵ / ₁₆	9 ¹⁵ / ₁₆	18 ¹ / ₂	12 ³ / ₄	12 ⁵ / ₁₆	19 ⁵ / ₁₆	13 ¹¹ / ₁₆	12 ⁷ / ₁₆	20 ⁵ / ₁₆	14 ¹³ / ₁₆	13 ¹ / ₂	21 ¹ / ₈	15 ¹³ / ₁₆	14 ³ / ₈
	12	18	AHF(†)-18-(*)-(+)60-12	14 ⁷ / ₁₆	8 ⁵ / ₁₆	9 ¹⁵ / ₁₆	18 ¹ / ₂	12 ³ / ₄	12 ⁵ / ₁₆	19 ⁵ / ₁₆	13 ¹¹ / ₁₆	12 ⁷ / ₁₆	20 ⁵ / ₁₆	14 ¹³ / ₁₆	13 ¹ / ₂	21 ¹ / ₈	15 ¹³ / ₁₆	14 ³ / ₈
	12	24	AHF(†)-24-(*)-(+)60-12	14 ⁷ / ₁₆	8 ⁵ / ₁₆	9 ¹⁵ / ₁₆	18 ¹ / ₂	12 ³ / ₄	12 ⁵ / ₁₆	19 ⁵ / ₁₆	13 ¹¹ / ₁₆	12 ⁷ / ₁₆	20 ⁵ / ₁₆	14 ¹³ / ₁₆	13 ¹ / ₂	21 ¹ / ₈	15 ¹³ / ₁₆	14 ³ / ₈
	12	30	AHF(†)-30-(*)-(+)60-12	14 ⁷ / ₁₆	8 ⁵ / ₁₆	9 ¹⁵ / ₁₆	18 ¹ / ₂	12 ³ / ₄	12 ⁵ / ₁₆	19 ⁵ / ₁₆	13 ¹¹ / ₁₆	12 ⁷ / ₁₆	20 ⁵ / ₁₆	14 ¹³ / ₁₆	13 ¹ / ₂	21 ¹ / ₈	15 ¹³ / ₁₆	14 ³ / ₈
	12	36	AHF(†)-36-(*)-(+)60-12	14 ⁷ / ₁₆	8 ⁵ / ₁₆	9 ¹⁵ / ₁₆	18 ¹ / ₂	12 ³ / ₄	12 ⁵ / ₁₆	19 ⁵ / ₁₆	13 ¹¹ / ₁₆	12 ⁷ / ₁₆	20 ⁵ / ₁₆	14 ¹³ / ₁₆	13 ¹ / ₂	21 ¹ / ₈	15 ¹³ / ₁₆	14 ³ / ₈
	12	42	AHF(†)-42-(*)-(+)60-12	14 ⁷ / ₁₆	8 ⁵ / ₁₆	9 ¹⁵ / ₁₆	18 ¹ / ₂	12 ³ / ₄	12 ⁵ / ₁₆	19 ⁵ / ₁₆	13 ¹¹ / ₁₆	12 ⁷ / ₁₆	20 ⁵ / ₁₆	14 ¹³ / ₁₆	13 ¹ / ₂	21 ¹ / ₈	15 ¹³ / ₁₆	14 ³ / ₈
	24	6	AHF(†)-06-(*)-(+)60-24	25 ⁵ / ₁₆	14 ⁵ / ₁₆	16 ⁷ / ₁₆	28 ⁷ / ₁₆	18 ³ / ₄	19 ¹ / ₄	29 ¹¹ / ₁₆	19 ¹¹ / ₁₆	19 ¹³ / ₁₆	30 ¹¹ / ₁₆	20 ¹³ / ₁₆	20 ⁷ / ₁₆	31 ⁹ / ₁₆	21 ¹³ / ₁₆	21
	24	9	AHF(†)-09-(*)-(+)60-24	25 ⁵ / ₁₆	14 ⁵ / ₁₆	16 ⁷ / ₁₆	28 ⁷ / ₁₆	18 ³ / ₄	19 ¹ / ₄	29 ¹¹ / ₁₆	19 ¹¹ / ₁₆	19 ¹³ / ₁₆	30 ¹¹ / ₁₆	20 ¹³ / ₁₆	20 ⁷ / ₁₆	31 ⁹ / ₁₆	21 ¹³ / ₁₆	21
	24	12	AHF(†)-12-(*)-(+)60-24	25 ⁵ / ₁₆	14 ⁵ / ₁₆	16 ⁷ / ₁₆	28 ⁷ / ₁₆	18 ³ / ₄	19 ¹ / ₄	29 ¹¹ / ₁₆	19 ¹¹ / ₁₆	19 ¹³ / ₁₆	30 ¹¹ / ₁₆	20 ¹³ / ₁₆	20 ⁷ / ₁₆	31 ⁹ / ₁₆	21 ¹³ / ₁₆	21
	24	18	AHF(†)-18-(*)-(+)60-24	25 ⁵ / ₁₆	14 ⁵ / ₁₆	16 ⁷ / ₁₆	28 ⁷ / ₁₆	18 ³ / ₄	19 ¹ / ₄	29 ¹¹ / ₁₆	19 ¹¹ / ₁₆	19 ¹³ / ₁₆	30 ¹¹ / ₁₆	20 ¹³ / ₁₆	20 ⁷ / ₁₆	31 ⁹ / ₁₆	21 ¹³ / ₁₆	21
	24	24	AHF(†)-24-(*)-(+)60-24	25 ⁵ / ₁₆	14 ⁵ / ₁₆	16 ⁷ / ₁₆	28 ⁷ / ₁₆	18 ³ / ₄	19 ¹ / ₄	29 ¹¹ / ₁₆	19 ¹¹ / ₁₆	19 ¹³ / ₁₆	30 ¹¹ / ₁₆	20 ¹³ / ₁₆	20 ⁷ / ₁₆	31 ⁹ / ₁₆	21 ¹³ / ₁₆	21
	24	30	AHF(†)-30-(*)-(+)60-24	25 ⁵ / ₁₆	14 ⁵ / ₁₆	16 ⁷ / ₁₆	28 ⁷ / ₁₆	18 ³ / ₄	19 ¹ / ₄	29 ¹¹ / ₁₆	19 ¹¹ / ₁₆	19 ¹³ / ₁₆	30 ¹¹ / ₁₆	20 ¹³ / ₁₆	20 ⁷ / ₁₆	31 ⁹ / ₁₆	21 ¹³ / ₁₆	21
	24	36	AHF(†)-36-(*)-(+)60-24	25 ⁵ / ₁₆	14 ⁵ / ₁₆	16 ⁷ / ₁₆	28 ⁷ / ₁₆	18 ³ / ₄	19 ¹ / ₄	29 ¹¹ / ₁₆	19 ¹¹ / ₁₆	19 ¹³ / ₁₆	30 ¹¹ / ₁₆	20 ¹³ / ₁₆	20 ⁷ / ₁₆	31 ⁹ / ₁₆	21 ¹³ / ₁₆	21
	24	42	AHF(†)-42-(*)-(+)60-24	25 ⁵ / ₁₆	14 ⁵ / ₁₆	16 ⁷ / ₁₆	28 ⁷ / ₁₆	18 ³ / ₄	19 ¹ / ₄	29 ¹¹ / ₁₆	19 ¹¹ / ₁₆	19 ¹³ / ₁₆	30 ¹¹ / ₁₆	20 ¹³ / ₁₆	20 ⁷ / ₁₆	31 ⁹ / ₁₆	21 ¹³ / ₁₆	21
Inside bend 	36	6	AHF(†)-06-(*)-(+)60-36	35 ¹¹ / ₁₆	20 ⁵ / ₁₆	23 ¹³ / ₁₆	39 ⁹ / ₁₆	24 ³ / ₄	26 ³ / ₁₆	40 ¹ / ₁₆	25 ¹¹ / ₁₆	26 ¹¹ / ₁₆	41 ¹ / ₁₆	26 ¹³ / ₁₆	27 ³ / ₈	41 ¹⁵ / ₁₆	27 ¹³ / ₁₆	27 ¹⁵ / ₁₆
	36	9	AHF(†)-09-(*)-(+)60-36	35 ¹¹ / ₁₆	20 ⁵ / ₁₆	23 ¹³ / ₁₆	39 ⁹ / ₁₆	24 ³ / ₄	26 ³ / ₁₆	40 ¹ / ₁₆	25 ¹¹ / ₁₆	26 ¹¹ / ₁₆	41 ¹ / ₁₆	26 ¹³ / ₁₆	27 ³ / ₈	41 ¹⁵ / ₁₆	27 ¹³ / ₁₆	27 ¹⁵ / ₁₆
	36	12	AHF(†)-12-(*)-(+)60-36	35 ¹¹ / ₁₆	20 ⁵ / ₁₆	23 ¹³ / ₁₆	39 ⁹ / ₁₆	24 ³ / ₄	26 ³ / ₁₆	40 ¹ / ₁₆	25 ¹¹ / ₁₆	26 ¹¹ / ₁₆	41 ¹ / ₁₆	26 ¹³ / ₁₆	27 ³ / ₈	41 ¹⁵ / ₁₆	27 ¹³ / ₁₆	27 ¹⁵ / ₁₆
	36	18	AHF(†)-18-(*)-(+)60-36	35 ¹¹ / ₁₆	20 ⁵ / ₁₆	23 ¹³ / ₁₆	39 ⁹ / ₁₆	24 ³ / ₄	26 ³ / ₁₆	40 ¹ / ₁₆	25 ¹¹ / ₁₆	26 ¹¹ / ₁₆	41 ¹ / ₁₆	26 ¹³ / ₁₆	27 ³ / ₈	41 ¹⁵ / ₁₆	27 ¹³ / ₁₆	27 ¹⁵ / ₁₆
	36	24	AHF(†)-24-(*)-(+)60-36	35 ¹¹ / ₁₆	20 ⁵ / ₁₆	23 ¹³ / ₁₆	39 ⁹ / ₁₆	24 ³ / ₄	26 ³ / ₁₆	40 ¹ / ₁₆	25 ¹¹ / ₁₆	26 ¹¹ / ₁₆	41 ¹ / ₁₆	26 ¹³ / ₁₆	27 ³ / ₈	41 ¹⁵ / ₁₆	27 ¹³ / ₁₆	27 ¹⁵ / ₁₆
	36	30	AHF(†)-30-(*)-(+)60-36	35 ¹¹ / ₁₆	20 ⁵ / ₁₆	23 ¹³ / ₁₆	39 ⁹ / ₁₆	24 ³ / ₄	26 ³ / ₁₆	40 ¹ / ₁₆	25 ¹¹ / ₁₆	26 ¹¹ / ₁₆	41 ¹ / ₁₆	26 ¹³ / ₁₆	27 ³ / ₈	41 ¹⁵ / ₁₆	27 ¹³ / ₁₆	27 ¹⁵ / ₁₆
	36	36	AHF(†)-36-(*)-(+)60-36	35 ¹¹ / ₁₆	20 ⁵ / ₁₆	23 ¹³ / ₁₆	39 ⁹ / ₁₆	24 ³ / ₄	26 ³ / ₁₆	40 ¹ / ₁₆	25 ¹¹ / ₁₆	26 ¹¹ / ₁₆	41 ¹ / ₁₆	26 ¹³ / ₁₆	27 ³ / ₈	41 ¹⁵ / ₁₆	27 ¹³ / ₁₆	27 ¹⁵ / ₁₆
	36	42	AHF(†)-42-(*)-(+)60-36	35 ¹¹ / ₁₆	20 ⁵ / ₁₆	23 ¹³ / ₁₆	39 ⁹ / ₁₆	24 ³ / ₄	26 ³ / ₁₆	40 ¹ / ₁₆	25 ¹¹ / ₁₆	26 ¹¹ / ₁₆	41 ¹ / ₁₆	26 ¹³ / ₁₆	27 ³ / ₈	41 ¹⁵ / ₁₆	27 ¹³ / ₁₆	27 ¹⁵ / ₁₆
	48	6	AHF(†)-06-(*)-(+)60-48	46 ¹ / ₁₆	26 ³ / ₁₆	30 ¹¹ / ₁₆	49 ¹¹ / ₁₆	30 ³ / ₄	33 ³ / ₈	50 ⁷ / ₁₆	31 ¹¹ / ₁₆	33 ⁵ / ₈	51 ¹ / ₂	32 ¹³ / ₁₆	34 ⁵ / ₁₆	52 ⁵ / ₁₆	33 ¹³ / ₁₆	34 ⁷ / ₈
	48	9	AHF(†)-09-(*)-(+)60-48	46 ¹ / ₁₆	26 ³ / ₁₆	30 ¹¹ / ₁₆	49 ¹¹ / ₁₆	30 ³ / ₄	33 ³ / ₈	50 ⁷ / ₁₆	31 ¹¹ / ₁₆	33 ⁵ / ₈	51 ¹ / ₂	32 ¹³ / ₁₆	34 ⁵ / ₁₆	52 ⁵ / ₁₆	33 ¹³ / ₁₆	34 ⁷ / ₈
	48	12	AHF(†)-12-(*)-(+)60-48	46 ¹ / ₁₆	26 ³ / ₁₆	30 ¹¹ / ₁₆	49 ¹¹ / ₁₆	30 ³ / ₄	33 ³ / ₈	50 ⁷ / ₁₆	31 ¹¹ / ₁₆	33 ⁵ / ₈	51 ¹ / ₂	32 ¹³ / ₁₆	34 ⁵ / ₁₆	52 ⁵ / ₁₆	33 ¹³ / ₁₆	34 ⁷ / ₈
	48	18	AHF(†)-18-(*)-(+)60-48	46 ¹ / ₁₆	26 ³ / ₁₆	30 ¹¹ / ₁₆	49 ¹¹ / ₁₆	30 ³ / ₄	33 ³ / ₈	50 ⁷ / ₁₆	31 ¹¹ / ₁₆	33 ⁵ / ₈	51 ¹ / ₂	32 ¹³ / ₁₆	34 ⁵ / ₁₆	52 ⁵ / ₁₆	33 ¹³ / ₁₆	34 ⁷ / ₈
	48	24	AHF(†)-24-(*)-(+)60-48	46 ¹ / ₁₆	26 ³ / ₁₆	30 ¹¹ / ₁₆	49 ¹¹ / ₁₆	30 ³ / ₄	33 ³ / ₈	50 ⁷ / ₁₆	31 ¹¹ / ₁₆	33 ⁵ / ₈	51 ¹ / ₂	32 ¹³ / ₁₆	34 ⁵ / ₁₆	52 ⁵ / ₁₆	33 ¹³ / ₁₆	34 ⁷ / ₈
	48	30	AHF(†)-30-(*)-(+)60-48	46 ¹ / ₁₆	26 ³ / ₁₆	30 ¹¹ / ₁₆	49 ¹¹ / ₁₆	30 ³ / ₄	33 ³ / ₈	50 ⁷ / ₁₆	31 ¹¹ / ₁₆	33 ⁵ / ₈	51 ¹ / ₂	32 ¹³ / ₁₆	34 ⁵ / ₁₆	52 ⁵ / ₁₆	33 ¹³ / ₁₆	34 ⁷ / ₈
	48	36	AHF(†)-36-(*)-(+)60-48	46 ¹ / ₁₆	26 ³ / ₁₆	30 ¹¹ / ₁₆	49 ¹¹ / ₁₆	30 ³ / ₄	33 ³ / ₈	50 ⁷ / ₁₆	31 ¹¹ / ₁₆	33 ⁵ / ₈	51 ¹ / ₂	32 ¹³ / ₁₆	34 ⁵ / ₁₆	52 ⁵ / ₁₆	33 ¹³ / ₁₆	34 ⁷ / ₈
	48	42	AHF(†)-42-(*)-(+)60-48	46 ¹ / ₁₆	26 ³ / ₁₆	30 ¹¹ / ₁₆	49 ¹¹ / ₁₆	30 ³ / ₄	33 ³ / ₈	50 ⁷ / ₁₆	31 ¹¹ / ₁₆	33 ⁵ / ₈	51 ¹ / ₂	32 ¹³ / ₁₆	34 ⁵ / ₁₆	52 ⁵ / ₁₆	33 ¹³ / ₁₆	34 ⁷ / ₈

(†) Insert side rail height. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no. Includes 1 pair of splice plates with hardware.




Aluminum fittings

45° U-style vertical bend fittings

Selection guide


- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 45°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

45° Vertical bend – U-style

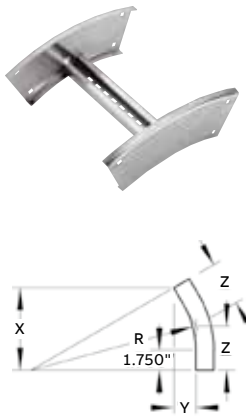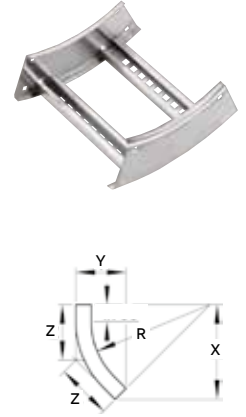				Dimensions (in.)														
				(+ VO side rail)						(+ VI side rail)								
	Nominal	Radius	Width	4 in. – 7 in.			4 in.			5 in.			6 in.			7 in.		
	(in.)	(in.)	Cat. no.	X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z
	12	6	AUF(+)-06-(*)-(+)45-12	11½	4¾	6¾	147/16	815/16	87/16	15½	913/16	813/16	157/8	1015/16	95/16	169/16	12	9¾
	12	9	AUF(+)-09-(*)-(+)45-12	11½	4¾	6¾	147/16	815/16	87/16	15½	913/16	813/16	157/8	1015/16	95/16	169/16	12	9¾
	12	12	AUF(+)-12-(*)-(+)45-12	11½	4¾	6¾	147/16	815/16	87/16	15½	913/16	813/16	157/8	1015/16	95/16	169/16	12	9¾
	12	18	AUF(+)-18-(*)-(+)45-12	11½	4¾	6¾	147/16	815/16	87/16	15½	913/16	813/16	157/8	1015/16	95/16	169/16	12	9¾
	12	24	AUF(+)-24-(*)-(+)45-12	11½	4¾	6¾	147/16	815/16	87/16	15½	913/16	813/16	157/8	1015/16	95/16	169/16	12	9¾
	12	30	AUF(+)-30-(*)-(+)45-12	11½	4¾	6¾	147/16	815/16	87/16	15½	913/16	813/16	157/8	1015/16	95/16	169/16	12	9¾
	12	36	AUF(+)-36-(*)-(+)45-12	11½	4¾	6¾	147/16	815/16	87/16	15½	913/16	813/16	157/8	1015/16	95/16	169/16	12	9¾
	12	42	AUF(+)-42-(*)-(+)45-12	11½	4¾	6¾	147/16	815/16	87/16	15½	913/16	813/16	157/8	1015/16	95/16	169/16	12	9¾
	24	6	AUF(+)-06-(*)-(+)45-24	1915/16	8¾	1113/16	2215/16	127/16	137/16	233/16	133/8	1313/16	245/16	147/16	14¼	25½	15½	1411/16
	24	9	AUF(+)-09-(*)-(+)45-24	1915/16	8¾	1113/16	2215/16	127/16	137/16	233/16	133/8	1313/16	245/16	147/16	14¼	25½	15½	1411/16
	24	12	AUF(+)-12-(*)-(+)45-24	1915/16	8¾	1113/16	2215/16	127/16	137/16	233/16	133/8	1313/16	245/16	147/16	14¼	25½	15½	1411/16
	24	18	AUF(+)-18-(*)-(+)45-24	1915/16	8¾	1113/16	2215/16	127/16	137/16	233/16	133/8	1313/16	245/16	147/16	14¼	25½	15½	1411/16
	24	24	AUF(+)-24-(*)-(+)45-24	1915/16	8¾	1113/16	2215/16	127/16	137/16	233/16	133/8	1313/16	245/16	147/16	14¼	25½	15½	1411/16
	24	30	AUF(+)-30-(*)-(+)45-24	1915/16	8¾	1113/16	2215/16	127/16	137/16	233/16	133/8	1313/16	245/16	147/16	14¼	25½	15½	1411/16
	24	36	AUF(+)-36-(*)-(+)45-24	1915/16	8¾	1113/16	2215/16	127/16	137/16	233/16	133/8	1313/16	245/16	147/16	14¼	25½	15½	1411/16
	24	42	AUF(+)-42-(*)-(+)45-24	1915/16	8¾	1113/16	2215/16	127/16	137/16	233/16	133/8	1313/16	245/16	147/16	14¼	25½	15½	1411/16
	36	6	AUF(+)-06-(*)-(+)45-36	287/16	1113/16	1611/16	313/8	1515/16	183/8	32½	167/8	18¾	3213/16	18	19¼	333/16	19	1911/16
	36	9	AUF(+)-09-(*)-(+)45-36	287/16	1113/16	1611/16	313/8	1515/16	183/8	32½	167/8	18¾	3213/16	18	19¼	333/16	19	1911/16
	36	12	AUF(+)-12-(*)-(+)45-36	287/16	1113/16	1611/16	313/8	1515/16	183/8	32½	167/8	18¾	3213/16	18	19¼	333/16	19	1911/16
	36	18	AUF(+)-18-(*)-(+)45-36	287/16	1113/16	1611/16	313/8	1515/16	183/8	32½	167/8	18¾	3213/16	18	19¼	333/16	19	1911/16
	36	24	AUF(+)-24-(*)-(+)45-36	287/16	1113/16	1611/16	313/8	1515/16	183/8	32½	167/8	18¾	3213/16	18	19¼	333/16	19	1911/16
	36	30	AUF(+)-30-(*)-(+)45-36	287/16	1113/16	1611/16	313/8	1515/16	183/8	32½	167/8	18¾	3213/16	18	19¼	333/16	19	1911/16
	36	36	AUF(+)-36-(*)-(+)45-36	287/16	1113/16	1611/16	313/8	1515/16	183/8	32½	167/8	18¾	3213/16	18	19¼	333/16	19	1911/16
	36	42	AUF(+)-42-(*)-(+)45-36	287/16	1113/16	1611/16	313/8	1515/16	183/8	32½	167/8	18¾	3213/16	18	19¼	333/16	19	1911/16
	48	6	AUF(+)-06-(*)-(+)45-48	3615/16	15½	21½	397/8	19½	23¾	40½	20¾	23¾	41½	21½	24¾	42½	22½	24½
	48	9	AUF(+)-09-(*)-(+)45-48	3615/16	15½	21½	397/8	19½	23¾	40½	20¾	23¾	41½	21½	24¾	42½	22½	24½
	48	12	AUF(+)-12-(*)-(+)45-48	3615/16	15½	21½	397/8	19½	23¾	40½	20¾	23¾	41½	21½	24¾	42½	22½	24½
	48	18	AUF(+)-18-(*)-(+)45-48	3615/16	15½	21½	397/8	19½	23¾	40½	20¾	23¾	41½	21½	24¾	42½	22½	24½
	48	24	AUF(+)-24-(*)-(+)45-48	3615/16	15½	21½	397/8	19½	23¾	40½	20¾	23¾	41½	21½	24¾	42½	22½	24½
	48	30	AUF(+)-30-(*)-(+)45-48	3615/16	15½	21½	397/8	19½	23¾	40½	20¾	23¾	41½	21½	24¾	42½	22½	24½
	48	36	AUF(+)-36-(*)-(+)45-48	3615/16	15½	21½	397/8	19½	23¾	40½	20¾	23¾	41½	21½	24¾	42½	22½	24½
	48	42	AUF(+)-42-(*)-(+)45-48	3615/16	15½	21½	397/8	19½	23¾	40½	20¾	23¾	41½	21½	24¾	42½	22½	24½

(†) Insert side rail height. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no. Includes 1 pair of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

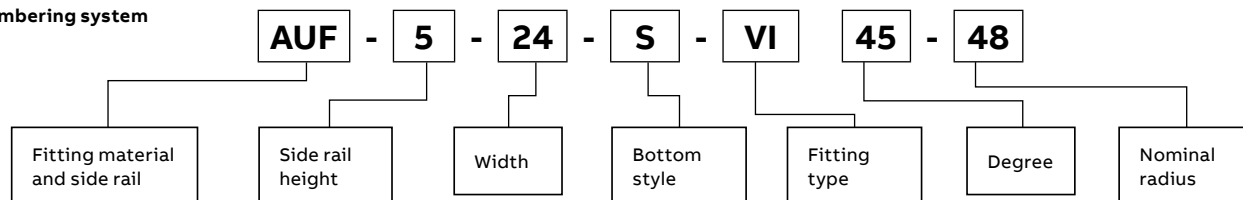


Aluminum fittings

45° H-style vertical bend fittings

45° Vertical bend – H-style


Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 45°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

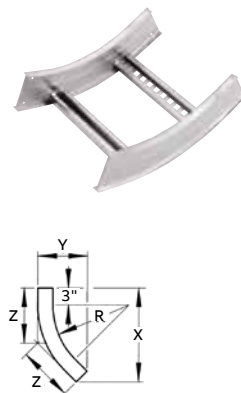																	Dimensions (in.)					
				(+) VO side rail						(+) VI side rail												
				4 in. – 7 in.			4 in.			5 in.			6 in.			7 in.						
Nominal																						
Radius Width																						
(in.) (in.) Cat. no.				X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z				
Outside bend 	12	6	AHF(+)-06-(*)-(+)45-12	13 ⁵ / ₁₆	5 ⁵ / ₁₆	8	16 ⁵ / ₁₆	9 ¹³ / ₁₆	9 ¹¹ / ₁₆	17 ³ / ₁₆	10 ¹¹ / ₁₆	10 ³ / ₁₆	18	11 ⁷ / ₁₆	10 ⁹ / ₁₆	18 ¹¹ / ₁₆	12 ⁷ / ₁₆	10 ¹⁵ / ₁₆				
	12	9	AHF(+)-09-(*)-(+)45-12	13 ⁵ / ₁₆	5 ⁵ / ₁₆	8	16 ⁵ / ₁₆	9 ¹³ / ₁₆	9 ¹¹ / ₁₆	17 ³ / ₁₆	10 ¹¹ / ₁₆	10 ³ / ₁₆	18	11 ⁷ / ₁₆	10 ⁹ / ₁₆	18 ¹¹ / ₁₆	12 ⁷ / ₁₆	10 ¹⁵ / ₁₆				
	12	12	AHF(+)-12-(*)-(+)45-12	13 ⁵ / ₁₆	5 ⁵ / ₁₆	8	16 ⁵ / ₁₆	9 ¹³ / ₁₆	9 ¹¹ / ₁₆	17 ³ / ₁₆	10 ¹¹ / ₁₆	10 ³ / ₁₆	18	11 ⁷ / ₁₆	10 ⁹ / ₁₆	18 ¹¹ / ₁₆	12 ⁷ / ₁₆	10 ¹⁵ / ₁₆				
	12	18	AHF(+)-18-(*)-(+)45-12	13 ⁵ / ₁₆	5 ⁵ / ₁₆	8	16 ⁵ / ₁₆	9 ¹³ / ₁₆	9 ¹¹ / ₁₆	17 ³ / ₁₆	10 ¹¹ / ₁₆	10 ³ / ₁₆	18	11 ⁷ / ₁₆	10 ⁹ / ₁₆	18 ¹¹ / ₁₆	12 ⁷ / ₁₆	10 ¹⁵ / ₁₆				
	12	24	AHF(+)-24-(*)-(+)45-12	13 ⁵ / ₁₆	5 ⁵ / ₁₆	8	16 ⁵ / ₁₆	9 ¹³ / ₁₆	9 ¹¹ / ₁₆	17 ³ / ₁₆	10 ¹¹ / ₁₆	10 ³ / ₁₆	18	11 ⁷ / ₁₆	10 ⁹ / ₁₆	18 ¹¹ / ₁₆	12 ⁷ / ₁₆	10 ¹⁵ / ₁₆				
	12	30	AHF(+)-30-(*)-(+)45-12	13 ⁵ / ₁₆	5 ⁵ / ₁₆	8	16 ⁵ / ₁₆	9 ¹³ / ₁₆	9 ¹¹ / ₁₆	17 ³ / ₁₆	10 ¹¹ / ₁₆	10 ³ / ₁₆	18	11 ⁷ / ₁₆	10 ⁹ / ₁₆	18 ¹¹ / ₁₆	12 ⁷ / ₁₆	10 ¹⁵ / ₁₆				
	12	36	AHF(+)-36-(*)-(+)45-12	13 ⁵ / ₁₆	5 ⁵ / ₁₆	8	16 ⁵ / ₁₆	9 ¹³ / ₁₆	9 ¹¹ / ₁₆	17 ³ / ₁₆	10 ¹¹ / ₁₆	10 ³ / ₁₆	18	11 ⁷ / ₁₆	10 ⁹ / ₁₆	18 ¹¹ / ₁₆	12 ⁷ / ₁₆	10 ¹⁵ / ₁₆				
	12	42	AHF(+)-42-(*)-(+)45-12	13 ⁵ / ₁₆	5 ⁵ / ₁₆	8	16 ⁵ / ₁₆	9 ¹³ / ₁₆	9 ¹¹ / ₁₆	17 ³ / ₁₆	10 ¹¹ / ₁₆	10 ³ / ₁₆	18	11 ⁷ / ₁₆	10 ⁹ / ₁₆	18 ¹¹ / ₁₆	12 ⁷ / ₁₆	10 ¹⁵ / ₁₆				
	24	6	AHF(+)-06-(*)-(+)45-24	22 ⁵ / ₁₆	9 ³ / ₁₆	12 ¹⁵ / ₁₆	25 ⁵ / ₁₆	13 ⁵ / ₁₆	14 ¹³ / ₁₆	25 ¹¹ / ₁₆	14 ³ / ₄	15 ⁵ / ₁₆	26 ¹ / ₂	15 ³ / ₁₆	15 ¹ / ₂	27 ³ / ₁₆	16 ³ / ₁₆	15 ¹⁵ / ₁₆				
	24	9	AHF(+)-09-(*)-(+)45-24	22 ⁵ / ₁₆	9 ³ / ₁₆	12 ¹⁵ / ₁₆	25 ⁵ / ₁₆	13 ⁵ / ₁₆	14 ¹³ / ₁₆	25 ¹¹ / ₁₆	14 ³ / ₄	15 ⁵ / ₁₆	26 ¹ / ₂	15 ³ / ₁₆	15 ¹ / ₂	27 ³ / ₁₆	16 ³ / ₁₆	15 ¹⁵ / ₁₆				
	24	12	AHF(+)-12-(*)-(+)45-24	22 ⁵ / ₁₆	9 ³ / ₁₆	12 ¹⁵ / ₁₆	25 ⁵ / ₁₆	13 ⁵ / ₁₆	14 ¹³ / ₁₆	25 ¹¹ / ₁₆	14 ³ / ₄	15 ⁵ / ₁₆	26 ¹ / ₂	15 ³ / ₁₆	15 ¹ / ₂	27 ³ / ₁₆	16 ³ / ₁₆	15 ¹⁵ / ₁₆				
	24	18	AHF(+)-18-(*)-(+)45-24	22 ⁵ / ₁₆	9 ³ / ₁₆	12 ¹⁵ / ₁₆	25 ⁵ / ₁₆	13 ⁵ / ₁₆	14 ¹³ / ₁₆	25 ¹¹ / ₁₆	14 ³ / ₄	15 ⁵ / ₁₆	26 ¹ / ₂	15 ³ / ₁₆	15 ¹ / ₂	27 ³ / ₁₆	16 ³ / ₁₆	15 ¹⁵ / ₁₆				
	24	24	AHF(+)-24-(*)-(+)45-24	22 ⁵ / ₁₆	9 ³ / ₁₆	12 ¹⁵ / ₁₆	25 ⁵ / ₁₆	13 ⁵ / ₁₆	14 ¹³ / ₁₆	25 ¹¹ / ₁₆	14 ³ / ₄	15 ⁵ / ₁₆	26 ¹ / ₂	15 ³ / ₁₆	15 ¹ / ₂	27 ³ / ₁₆	16 ³ / ₁₆	15 ¹⁵ / ₁₆				
	24	30	AHF(+)-30-(*)-(+)45-24	22 ⁵ / ₁₆	9 ³ / ₁₆	12 ¹⁵ / ₁₆	25 ⁵ / ₁₆	13 ⁵ / ₁₆	14 ¹³ / ₁₆	25 ¹¹ / ₁₆	14 ³ / ₄	15 ⁵ / ₁₆	26 ¹ / ₂	15 ³ / ₁₆	15 ¹ / ₂	27 ³ / ₁₆	16 ³ / ₁₆	15 ¹⁵ / ₁₆				
	24	36	AHF(+)-36-(*)-(+)45-24	22 ⁵ / ₁₆	9 ³ / ₁₆	12 ¹⁵ / ₁₆	25 ⁵ / ₁₆	13 ⁵ / ₁₆	14 ¹³ / ₁₆	25 ¹¹ / ₁₆	14 ³ / ₄	15 ⁵ / ₁₆	26 ¹ / ₂	15 ³ / ₁₆	15 ¹ / ₂	27 ³ / ₁₆	16 ³ / ₁₆	15 ¹⁵ / ₁₆				
	24	42	AHF(+)-42-(*)-(+)45-24	22 ⁵ / ₁₆	9 ³ / ₁₆	12 ¹⁵ / ₁₆	25 ⁵ / ₁₆	13 ⁵ / ₁₆	14 ¹³ / ₁₆	25 ¹¹ / ₁₆	14 ³ / ₄	15 ⁵ / ₁₆	26 ¹ / ₂	15 ³ / ₁₆	15 ¹ / ₂	27 ³ / ₁₆	16 ³ / ₁₆	15 ¹⁵ / ₁₆				
Inside bend 	36	6	AHF(+)-06-(*)-(+)45-36	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆	33 ¹ / ₂	16 ¹³ / ₁₆	19 ⁵ / ₁₆	34 ³ / ₁₆	17 ³ / ₄	20	35	18 ⁷ / ₁₆	20 ¹ / ₂	35 ¹¹ / ₁₆	19 ⁷ / ₁₆	20 ⁷ / ₁₆				
	36	9	AHF(+)-09-(*)-(+)45-36	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆	33 ¹ / ₂	16 ¹³ / ₁₆	19 ⁵ / ₁₆	34 ³ / ₁₆	17 ³ / ₄	20	35	18 ⁷ / ₁₆	20 ¹ / ₂	35 ¹¹ / ₁₆	19 ⁷ / ₁₆	20 ⁷ / ₁₆				
	36	12	AHF(+)-12-(*)-(+)45-36	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆	33 ¹ / ₂	16 ¹³ / ₁₆	19 ⁵ / ₁₆	34 ³ / ₁₆	17 ³ / ₄	20	35	18 ⁷ / ₁₆	20 ¹ / ₂	35 ¹¹ / ₁₆	19 ⁷ / ₁₆	20 ⁷ / ₁₆				
	36	18	AHF(+)-18-(*)-(+)45-36	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆	33 ¹ / ₂	16 ¹³ / ₁₆	19 ⁵ / ₁₆	34 ³ / ₁₆	17 ³ / ₄	20	35	18 ⁷ / ₁₆	20 ¹ / ₂	35 ¹¹ / ₁₆	19 ⁷ / ₁₆	20 ⁷ / ₁₆				
	36	24	AHF(+)-24-(*)-(+)45-36	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆	33 ¹ / ₂	16 ¹³ / ₁₆	19 ⁵ / ₁₆	34 ³ / ₁₆	17 ³ / ₄	20	35	18 ⁷ / ₁₆	20 ¹ / ₂	35 ¹¹ / ₁₆	19 ⁷ / ₁₆	20 ⁷ / ₁₆				
	36	30	AHF(+)-30-(*)-(+)45-36	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆	33 ¹ / ₂	16 ¹³ / ₁₆	19 ⁵ / ₁₆	34 ³ / ₁₆	17 ³ / ₄	20	35	18 ⁷ / ₁₆	20 ¹ / ₂	35 ¹¹ / ₁₆	19 ⁷ / ₁₆	20 ⁷ / ₁₆				
	36	36	AHF(+)-36-(*)-(+)45-36	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆	33 ¹ / ₂	16 ¹³ / ₁₆	19 ⁵ / ₁₆	34 ³ / ₁₆	17 ³ / ₄	20	35	18 ⁷ / ₁₆	20 ¹ / ₂	35 ¹¹ / ₁₆	19 ⁷ / ₁₆	20 ⁷ / ₁₆				
	36	42	AHF(+)-42-(*)-(+)45-36	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆	33 ¹ / ₂	16 ¹³ / ₁₆	19 ⁵ / ₁₆	34 ³ / ₁₆	17 ³ / ₄	20	35	18 ⁷ / ₁₆	20 ¹ / ₂	35 ¹¹ / ₁₆	19 ⁷ / ₁₆	20 ⁷ / ₁₆				
	48	6	AHF(+)-06-(*)-(+)45-48	39 ³ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₁₆	42	20 ³ / ₁₆	24 ⁵ / ₁₆	42 ⁵ / ₁₆	21 ¹ / ₄	25	43 ¹ / ₂	22 ⁷ / ₁₆	25 ¹ / ₁₆	44 ³ / ₁₆	23 ³ / ₁₆	25 ⁷ / ₁₆				
	48	9	AHF(+)-09-(*)-(+)45-48	39 ³ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₁₆	42	20 ³ / ₁₆	24 ⁵ / ₁₆	42 ⁵ / ₁₆	21 ¹ / ₄	25	43 ¹ / ₂	22 ⁷ / ₁₆	25 ¹ / ₁₆	44 ³ / ₁₆	23 ³ / ₁₆	25 ⁷ / ₁₆				
	48	12	AHF(+)-12-(*)-(+)45-48	39 ³ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₁₆	42	20 ³ / ₁₆	24 ⁵ / ₁₆	42 ⁵ / ₁₆	21 ¹ / ₄	25	43 ¹ / ₂	22 ⁷ / ₁₆	25 ¹ / ₁₆	44 ³ / ₁₆	23 ³ / ₁₆	25 ⁷ / ₁₆				
	48	18	AHF(+)-18-(*)-(+)45-48	39 ³ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₁₆	42	20 ³ / ₁₆	24 ⁵ / ₁₆	42 ⁵ / ₁₆	21 ¹ / ₄	25	43 ¹ / ₂	22 ⁷ / ₁₆	25 ¹ / ₁₆	44 ³ / ₁₆	23 ³ / ₁₆	25 ⁷ / ₁₆				
	48	24	AHF(+)-24-(*)-(+)45-48	39 ³ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₁₆	42	20 ³ / ₁₆	24 ⁵ / ₁₆	42 ⁵ / ₁₆	21 ¹ / ₄	25	43 ¹ / ₂	22 ⁷ / ₁₆	25 ¹ / ₁₆	44 ³ / ₁₆	23 ³ / ₁₆	25 ⁷ / ₁₆				
	48	30	AHF(+)-30-(*)-(+)45-48	39 ³ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₁₆	42	20 ³ / ₁₆	24 ⁵ / ₁₆	42 ⁵ / ₁₆	21 ¹ / ₄	25	43 ¹ / ₂	22 ⁷ / ₁₆	25 ¹ / ₁₆	44 ³ / ₁₆	23 ³ / ₁₆	25 ⁷ / ₁₆				
	48	36	AHF(+)-36-(*)-(+)45-48	39 ³ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₁₆	42	20 ³ / ₁₆	24 ⁵ / ₁₆	42 ⁵ / ₁₆	21 ¹ / ₄	25	43 ¹ / ₂	22 ⁷ / ₁₆	25 ¹ / ₁₆	44 ³ / ₁₆	23 ³ / ₁₆	25 ⁷ / ₁₆				
	48	42	AHF(+)-42-(*)-(+)45-48	39 ³ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₁₆	42	20 ³ / ₁₆	24 ⁵ / ₁₆	42 ⁵ / ₁₆	21 ¹ / ₄	25	43 ¹ / ₂	22 ⁷ / ₁₆	25 ¹ / ₁₆	44 ³ / ₁₆	23 ³ / ₁₆	25 ⁷ / ₁₆				

(+) Insert side rail height. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no. Includes 1 pair of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

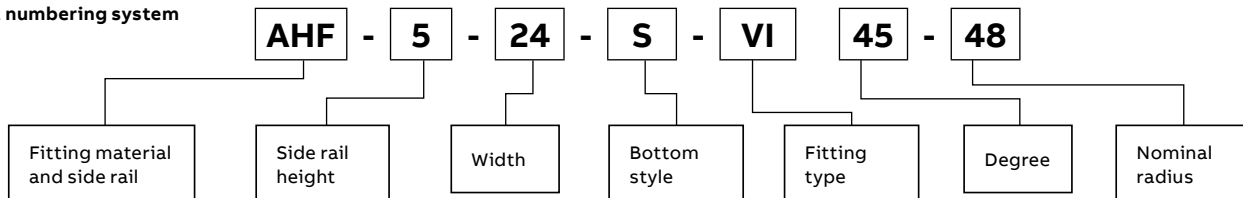

Aluminum fittings

30° U-style vertical bend fittings

Selection guide


- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 30°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

30° Vertical bend – U-style

	Nominal Radius Width (in.) (in.)		Cat. no.	Dimensions (in.)														
				(+) VO side rail									(+) VI side rail					
				4 in. – 7 in.			4 in.			5 in.			6 in.			7 in.		
				X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z
Outside bend	12	6	AUF(t)-06-(*)-(+)30-12	9¼	2½	4 ¹⁵ / ₁₆	11¾	6 ¹¹ / ₁₆	6½	11 ¹³ / ₁₆	7¾	6½	12¾	8 ¹¹ / ₁₆	6½	12¾	9¾	6¾
	12	9	AUF(t)-09-(*)-(+)30-12	9¼	2½	4 ¹⁵ / ₁₆	11¾	6 ¹¹ / ₁₆	6½	11 ¹³ / ₁₆	7¾	6½	12¾	8 ¹¹ / ₁₆	6½	12¾	9¾	6¾
	12	12	AUF(t)-12-(*)-(+)30-12	9¼	2½	4 ¹⁵ / ₁₆	11¾	6 ¹¹ / ₁₆	6½	11 ¹³ / ₁₆	7¾	6½	12¾	8 ¹¹ / ₁₆	6½	12¾	9¾	6¾
	12	18	AUF(t)-18-(*)-(+)30-12	9¼	2½	4 ¹⁵ / ₁₆	11¾	6 ¹¹ / ₁₆	6½	11 ¹³ / ₁₆	7¾	6½	12¾	8 ¹¹ / ₁₆	6½	12¾	9¾	6¾
	12	24	AUF(t)-24-(*)-(+)30-12	9¼	2½	4 ¹⁵ / ₁₆	11¾	6 ¹¹ / ₁₆	6½	11 ¹³ / ₁₆	7¾	6½	12¾	8 ¹¹ / ₁₆	6½	12¾	9¾	6¾
	12	30	AUF(t)-30-(*)-(+)30-12	9¼	2½	4 ¹⁵ / ₁₆	11¾	6 ¹¹ / ₁₆	6½	11 ¹³ / ₁₆	7¾	6½	12¾	8 ¹¹ / ₁₆	6½	12¾	9¾	6¾
	12	36	AUF(t)-36-(*)-(+)30-12	9¼	2½	4 ¹⁵ / ₁₆	11¾	6 ¹¹ / ₁₆	6½	11 ¹³ / ₁₆	7¾	6½	12¾	8 ¹¹ / ₁₆	6½	12¾	9¾	6¾
	12	42	AUF(t)-42-(*)-(+)30-12	9¼	2½	4 ¹⁵ / ₁₆	11¾	6 ¹¹ / ₁₆	6½	11 ¹³ / ₁₆	7¾	6½	12¾	8 ¹¹ / ₁₆	6½	12¾	9¾	6¾
	24	6	AUF(t)-06-(*)-(+)30-24	15¼	4½	8¾	17¾	8¾	9½	17 ¹³ / ₁₆	9¾	9½	18¾	10¾	9 ¹³ / ₁₆	18¾	11½	10¾
	24	9	AUF(t)-09-(*)-(+)30-24	15¼	4½	8¾	17¾	8¾	9½	17 ¹³ / ₁₆	9¾	9½	18¾	10¾	9 ¹³ / ₁₆	18¾	11½	10¾
	24	12	AUF(t)-12-(*)-(+)30-24	15¼	4½	8¾	17¾	8¾	9½	17 ¹³ / ₁₆	9¾	9½	18¾	10¾	9 ¹³ / ₁₆	18¾	11½	10¾
	24	18	AUF(t)-18-(*)-(+)30-24	15¼	4½	8¾	17¾	8¾	9½	17 ¹³ / ₁₆	9¾	9½	18¾	10¾	9 ¹³ / ₁₆	18¾	11½	10¾
Inside bend	24	24	AUF(t)-24-(*)-(+)30-24	15¼	4½	8¾	17¾	8¾	9½	17 ¹³ / ₁₆	9¾	9½	18¾	10¾	9 ¹³ / ₁₆	18¾	11½	10¾
	24	30	AUF(t)-30-(*)-(+)30-24	15¼	4½	8¾	17¾	8¾	9½	17 ¹³ / ₁₆	9¾	9½	18¾	10¾	9 ¹³ / ₁₆	18¾	11½	10¾
	24	36	AUF(t)-36-(*)-(+)30-24	15¼	4½	8¾	17¾	8¾	9½	17 ¹³ / ₁₆	9¾	9½	18¾	10¾	9 ¹³ / ₁₆	18¾	11½	10¾
	24	42	AUF(t)-42-(*)-(+)30-24	15¼	4½	8¾	17¾	8¾	9½	17 ¹³ / ₁₆	9¾	9½	18¾	10¾	9 ¹³ / ₁₆	18¾	11½	10¾
	36	6	AUF(t)-06-(*)-(+)30-36	21¼	5½	11¾	23¾	9¾	12½	23 ¹³ / ₁₆	10¾	12¾	24¾	11¾	13½	24¾	12½	13¾
	36	9	AUF(t)-09-(*)-(+)30-36	21¼	5½	11¾	23¾	9¾	12½	23 ¹³ / ₁₆	10¾	12¾	24¾	11¾	13½	24¾	12½	13¾
	36	12	AUF(t)-12-(*)-(+)30-36	21¼	5½	11¾	23¾	9¾	12½	23 ¹³ / ₁₆	10¾	12¾	24¾	11¾	13½	24¾	12½	13¾
	36	18	AUF(t)-18-(*)-(+)30-36	21¼	5½	11¾	23¾	9¾	12½	23 ¹³ / ₁₆	10¾	12¾	24¾	11¾	13½	24¾	12½	13¾
	36	24	AUF(t)-24-(*)-(+)30-36	21¼	5½	11¾	23¾	9¾	12½	23 ¹³ / ₁₆	10¾	12¾	24¾	11¾	13½	24¾	12½	13¾
	36	30	AUF(t)-30-(*)-(+)30-36	21¼	5½	11¾	23¾	9¾	12½	23 ¹³ / ₁₆	10¾	12¾	24¾	11¾	13½	24¾	12½	13¾
	36	36	AUF(t)-36-(*)-(+)30-36	21¼	5½	11¾	23¾	9¾	12½	23 ¹³ / ₁₆	10¾	12¾	24¾	11¾	13½	24¾	12½	13¾
	36	42	AUF(t)-42-(*)-(+)30-36	21¼	5½	11¾	23¾	9¾	12½	23 ¹³ / ₁₆	10¾	12¾	24¾	11¾	13½	24¾	12½	13¾
	48	6	AUF(t)-06-(*)-(+)30-48	21¼	7½	14½	29¾	11½	15¾	29 ¹³ / ₁₆	12¾	16	30¾	13½	16¾	30¾	14½	16¾
	48	9	AUF(t)-09-(*)-(+)30-48	21¼	7½	14½	29¾	11½	15¾	29 ¹³ / ₁₆	12¾	16	30¾	13½	16¾	30¾	14½	16¾
	48	12	AUF(t)-12-(*)-(+)30-48	21¼	7½	14½	29¾	11½	15¾	29 ¹³ / ₁₆	12¾	16	30¾	13½	16¾	30¾	14½	16¾
	48	18	AUF(t)-18-(*)-(+)30-48	21¼	7½	14½	29¾	11½	15¾	29 ¹³ / ₁₆	12¾	16	30¾	13½	16¾	30¾	14½	16¾
	48	24	AUF(t)-24-(*)-(+)30-48	21¼	7½	14½	29¾	11½	15¾	29 ¹³ / ₁₆	12¾	16	30¾	13½	16¾	30¾	14½	16¾
	48	30	AUF(t)-30-(*)-(+)30-48	21¼	7½	14½	29¾	11½	15¾	29 ¹³ / ₁₆	12¾	16	30¾	13½	16¾	30¾	14½	16¾
	48	36	AUF(t)-36-(*)-(+)30-48	21¼	7½	14½	29¾	11½	15¾	29 ¹³ / ₁₆	12¾	16	30¾	13½	16¾	30¾	14½	16¾
	48	42	AUF(t)-42-(*)-(+)30-48	21¼	7½	14½	29¾	11½	15¾	29 ¹³ / ₁₆	12¾	16	30¾	13½	16¾	30¾	14½	16¾

(t) Insert side rail height. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no. Includes 1 pair of splice plates with hardware.
T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

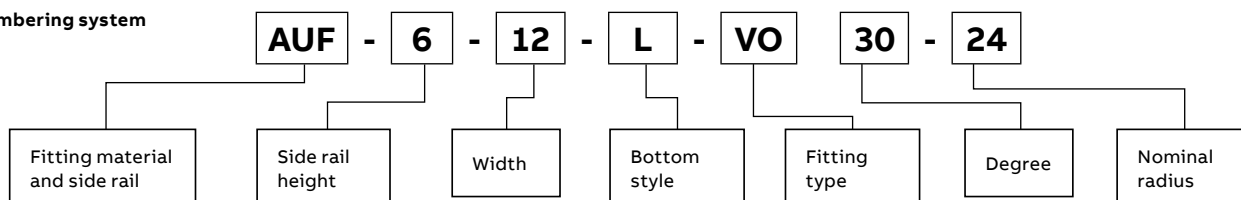



Aluminum fittings

30° H-style vertical bend fittings

30° Vertical bend – H-style


Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 30°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.

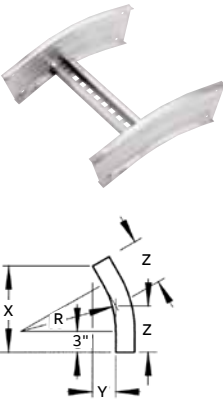				Dimensions (in.)														
				(+) VO side rail							(+) VI side rail							
Nominal				4 in. – 7 in.			4 in.			5 in.			6 in.			7 in.		
Radius Width																		
(in.) (in.) Cat. no.				X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z
Outside bend 	12	6	AHF(+)-06-(*)-(+)30-12	11 ⁵ / ₁₆	3 ¹ / ₂	6 ³ / ₁₆	13 ¹¹ / ₁₆	7 ⁵ / ₁₆	7 ⁵ / ₁₆	14 ¹ / ₂	8 ³ / ₁₆	7 ⁵ / ₁₆	14 ¹¹ / ₁₆	9 ³ / ₁₆	7 ⁷ / ₁₆	13 ¹¹ / ₁₆	10 ⁹ / ₁₆	8 ³ / ₁₆
	12	9	AHF(+)-09-(*)-(+)30-12	11 ⁵ / ₁₆	3 ¹ / ₂	6 ³ / ₁₆	13 ¹¹ / ₁₆	7 ⁵ / ₁₆	7 ⁵ / ₁₆	14 ¹ / ₂	8 ³ / ₁₆	7 ⁵ / ₁₆	14 ¹¹ / ₁₆	9 ³ / ₁₆	7 ⁷ / ₁₆	13 ¹¹ / ₁₆	10 ⁹ / ₁₆	8 ³ / ₁₆
	12	12	AHF(+)-12-(*)-(+)30-12	11 ⁵ / ₁₆	3 ¹ / ₂	6 ³ / ₁₆	13 ¹¹ / ₁₆	7 ⁵ / ₁₆	7 ⁵ / ₁₆	14 ¹ / ₂	8 ³ / ₁₆	7 ⁵ / ₁₆	14 ¹¹ / ₁₆	9 ³ / ₁₆	7 ⁷ / ₁₆	13 ¹¹ / ₁₆	10 ⁹ / ₁₆	8 ³ / ₁₆
	12	18	AHF(+)-18-(*)-(+)30-12	11 ⁵ / ₁₆	3 ¹ / ₂	6 ³ / ₁₆	13 ¹¹ / ₁₆	7 ⁵ / ₁₆	7 ⁵ / ₁₆	14 ¹ / ₂	8 ³ / ₁₆	7 ⁵ / ₁₆	14 ¹¹ / ₁₆	9 ³ / ₁₆	7 ⁷ / ₁₆	13 ¹¹ / ₁₆	10 ⁹ / ₁₆	8 ³ / ₁₆
	12	24	AHF(+)-24-(*)-(+)30-12	11 ⁵ / ₁₆	3 ¹ / ₂	6 ³ / ₁₆	13 ¹¹ / ₁₆	7 ⁵ / ₁₆	7 ⁵ / ₁₆	14 ¹ / ₂	8 ³ / ₁₆	7 ⁵ / ₁₆	14 ¹¹ / ₁₆	9 ³ / ₁₆	7 ⁷ / ₁₆	13 ¹¹ / ₁₆	10 ⁹ / ₁₆	8 ³ / ₁₆
	12	30	AHF(+)-30-(*)-(+)30-12	11 ⁵ / ₁₆	3 ¹ / ₂	6 ³ / ₁₆	13 ¹¹ / ₁₆	7 ⁵ / ₁₆	7 ⁵ / ₁₆	14 ¹ / ₂	8 ³ / ₁₆	7 ⁵ / ₁₆	14 ¹¹ / ₁₆	9 ³ / ₁₆	7 ⁷ / ₁₆	13 ¹¹ / ₁₆	10 ⁹ / ₁₆	8 ³ / ₁₆
	12	36	AHF(+)-36-(*)-(+)30-12	11 ⁵ / ₁₆	3 ¹ / ₂	6 ³ / ₁₆	13 ¹¹ / ₁₆	7 ⁵ / ₁₆	7 ⁵ / ₁₆	14 ¹ / ₂	8 ³ / ₁₆	7 ⁵ / ₁₆	14 ¹¹ / ₁₆	9 ³ / ₁₆	7 ⁷ / ₁₆	13 ¹¹ / ₁₆	10 ⁹ / ₁₆	8 ³ / ₁₆
	12	42	AHF(+)-42-(*)-(+)30-12	11 ⁵ / ₁₆	3 ¹ / ₂	6 ³ / ₁₆	13 ¹¹ / ₁₆	7 ⁵ / ₁₆	7 ⁵ / ₁₆	14 ¹ / ₂	8 ³ / ₁₆	7 ⁵ / ₁₆	14 ¹¹ / ₁₆	9 ³ / ₁₆	7 ⁷ / ₁₆	13 ¹¹ / ₁₆	10 ⁹ / ₁₆	8 ³ / ₁₆
	24	6	AHF(+)-06-(*)-(+)30-24	17 ⁵ / ₁₆	4 ¹¹ / ₁₆	9 ⁷ / ₁₆	19 ¹¹ / ₁₆	8 ⁷ / ₁₆	10 ⁹ / ₁₆	20 ¹ / ₂	9 ¹³ / ₁₆	10 ¹³ / ₁₆	20 ¹¹ / ₁₆	10 ¹⁵ / ₁₆	11 ¹ / ₂	19 ¹¹ / ₁₆	11 ¹⁵ / ₁₆	11 ³ / ₁₆
	24	9	AHF(+)-09-(*)-(+)30-24	17 ⁵ / ₁₆	4 ¹¹ / ₁₆	9 ⁷ / ₁₆	19 ¹¹ / ₁₆	8 ⁷ / ₁₆	10 ⁹ / ₁₆	20 ¹ / ₂	9 ¹³ / ₁₆	10 ¹³ / ₁₆	20 ¹¹ / ₁₆	10 ¹⁵ / ₁₆	11 ¹ / ₂	19 ¹¹ / ₁₆	11 ¹⁵ / ₁₆	11 ³ / ₁₆
	24	12	AHF(+)-12-(*)-(+)30-24	17 ⁵ / ₁₆	4 ¹¹ / ₁₆	9 ⁷ / ₁₆	19 ¹¹ / ₁₆	8 ⁷ / ₁₆	10 ⁹ / ₁₆	20 ¹ / ₂	9 ¹³ / ₁₆	10 ¹³ / ₁₆	20 ¹¹ / ₁₆	10 ¹⁵ / ₁₆	11 ¹ / ₂	19 ¹¹ / ₁₆	11 ¹⁵ / ₁₆	11 ³ / ₁₆
	24	18	AHF(+)-18-(*)-(+)30-24	17 ⁵ / ₁₆	4 ¹¹ / ₁₆	9 ⁷ / ₁₆	19 ¹¹ / ₁₆	8 ⁷ / ₁₆	10 ⁹ / ₁₆	20 ¹ / ₂	9 ¹³ / ₁₆	10 ¹³ / ₁₆	20 ¹¹ / ₁₆	10 ¹⁵ / ₁₆	11 ¹ / ₂	19 ¹¹ / ₁₆	11 ¹⁵ / ₁₆	11 ³ / ₁₆
	24	24	AHF(+)-24-(*)-(+)30-24	17 ⁵ / ₁₆	4 ¹¹ / ₁₆	9 ⁷ / ₁₆	19 ¹¹ / ₁₆	8 ⁷ / ₁₆	10 ⁹ / ₁₆	20 ¹ / ₂	9 ¹³ / ₁₆	10 ¹³ / ₁₆	20 ¹¹ / ₁₆	10 ¹⁵ / ₁₆	11 ¹ / ₂	19 ¹¹ / ₁₆	11 ¹⁵ / ₁₆	11 ³ / ₁₆
	24	30	AHF(+)-30-(*)-(+)30-24	17 ⁵ / ₁₆	4 ¹¹ / ₁₆	9 ⁷ / ₁₆	19 ¹¹ / ₁₆	8 ⁷ / ₁₆	10 ⁹ / ₁₆	20 ¹ / ₂	9 ¹³ / ₁₆	10 ¹³ / ₁₆	20 ¹¹ / ₁₆	10 ¹⁵ / ₁₆	11 ¹ / ₂	19 ¹¹ / ₁₆	11 ¹⁵ / ₁₆	11 ³ / ₁₆
	24	36	AHF(+)-36-(*)-(+)30-24	17 ⁵ / ₁₆	4 ¹¹ / ₁₆	9 ⁷ / ₁₆	19 ¹¹ / ₁₆	8 ⁷ / ₁₆	10 ⁹ / ₁₆	20 ¹ / ₂	9 ¹³ / ₁₆	10 ¹³ / ₁₆	20 ¹¹ / ₁₆	10 ¹⁵ / ₁₆	11 ¹ / ₂	19 ¹¹ / ₁₆	11 ¹⁵ / ₁₆	11 ³ / ₁₆
	24	42	AHF(+)-42-(*)-(+)30-24	17 ⁵ / ₁₆	4 ¹¹ / ₁₆	9 ⁷ / ₁₆	19 ¹¹ / ₁₆	8 ⁷ / ₁₆	10 ⁹ / ₁₆	20 ¹ / ₂	9 ¹³ / ₁₆	10 ¹³ / ₁₆	20 ¹¹ / ₁₆	10 ¹⁵ / ₁₆	11 ¹ / ₂	19 ¹¹ / ₁₆	11 ¹⁵ / ₁₆	11 ³ / ₁₆
Inside bend 	36	6	AHF(+)-06-(*)-(+)30-36	23 ³ / ₁₆	6 ³ / ₁₆	12 ⁵ / ₁₆	25 ¹¹ / ₁₆	10 ¹ / ₂	13 ³ / ₁₆	26 ¹ / ₂	11 ³ / ₁₆	14 ² / ₁₆	26 ¹¹ / ₁₆	12 ⁹ / ₁₆	14 ⁵ / ₁₆	25 ¹¹ / ₁₆	13 ⁹ / ₁₆	14 ⁹ / ₁₆
	36	9	AHF(+)-09-(*)-(+)30-36	23 ³ / ₁₆	6 ³ / ₁₆	12 ⁵ / ₁₆	25 ¹¹ / ₁₆	10 ¹ / ₂	13 ³ / ₁₆	26 ¹ / ₂	11 ³ / ₁₆	14 ² / ₁₆	26 ¹¹ / ₁₆	12 ⁹ / ₁₆	14 ⁵ / ₁₆	25 ¹¹ / ₁₆	13 ⁹ / ₁₆	14 ⁹ / ₁₆
	36	12	AHF(+)-12-(*)-(+)30-36	23 ³ / ₁₆	6 ³ / ₁₆	12 ⁵ / ₁₆	25 ¹¹ / ₁₆	10 ¹ / ₂	13 ³ / ₁₆	26 ¹ / ₂	11 ³ / ₁₆	14 ² / ₁₆	26 ¹¹ / ₁₆	12 ⁹ / ₁₆	14 ⁵ / ₁₆	25 ¹¹ / ₁₆	13 ⁹ / ₁₆	14 ⁹ / ₁₆
	36	18	AHF(+)-18-(*)-(+)30-36	23 ³ / ₁₆	6 ³ / ₁₆	12 ⁵ / ₁₆	25 ¹¹ / ₁₆	10 ¹ / ₂	13 ³ / ₁₆	26 ¹ / ₂	11 ³ / ₁₆	14 ² / ₁₆	26 ¹¹ / ₁₆	12 ⁹ / ₁₆	14 ⁵ / ₁₆	25 ¹¹ / ₁₆	13 ⁹ / ₁₆	14 ⁹ / ₁₆
	36	24	AHF(+)-24-(*)-(+)30-36	23 ³ / ₁₆	6 ³ / ₁₆	12 ⁵ / ₁₆	25 ¹¹ / ₁₆	10 ¹ / ₂	13 ³ / ₁₆	26 ¹ / ₂	11 ³ / ₁₆	14 ² / ₁₆	26 ¹¹ / ₁₆	12 ⁹ / ₁₆	14 ⁵ / ₁₆	25 ¹¹ / ₁₆	13 ⁹ / ₁₆	14 ⁹ / ₁₆
	36	30	AHF(+)-30-(*)-(+)30-36	23 ³ / ₁₆	6 ³ / ₁₆	12 ⁵ / ₁₆	25 ¹¹ / ₁₆	10 ¹ / ₂	13 ³ / ₁₆	26 ¹ / ₂	11 ³ / ₁₆	14 ² / ₁₆	26 ¹¹ / ₁₆	12 ⁹ / ₁₆	14 ⁵ / ₁₆	25 ¹¹ / ₁₆	13 ⁹ / ₁₆	14 ⁹ / ₁₆
	36	36	AHF(+)-36-(*)-(+)30-36	23 ³ / ₁₆	6 ³ / ₁₆	12 ⁵ / ₁₆	25 ¹¹ / ₁₆	10 ¹ / ₂	13 ³ / ₁₆	26 ¹ / ₂	11 ³ / ₁₆	14 ² / ₁₆	26 ¹¹ / ₁₆	12 ⁹ / ₁₆	14 ⁵ / ₁₆	25 ¹¹ / ₁₆	13 ⁹ / ₁₆	14 ⁹ / ₁₆
	36	42	AHF(+)-42-(*)-(+)30-36	23 ³ / ₁₆	6 ³ / ₁₆	12 ⁵ / ₁₆	25 ¹¹ / ₁₆	10 ¹ / ₂	13 ³ / ₁₆	26 ¹ / ₂	11 ³ / ₁₆	14 ² / ₁₆	26 ¹¹ / ₁₆	12 ⁹ / ₁₆	14 ⁵ / ₁₆	25 ¹¹ / ₁₆	13 ⁹ / ₁₆	14 ⁹ / ₁₆
	48	6	AHF(+)-06-(*)-(+)30-48	29 ⁵ / ₁₆	7 ¹⁵ / ₁₆	15 ⁷ / ₁₆	31 ¹¹ / ₁₆	12 ³ / ₁₆	17	32 ¹ / ₂	13	17 ¹ / ₄	32 ¹¹ / ₁₆	14 ³ / ₁₆	17 ⁹ / ₁₆	31 ¹¹ / ₁₆	15 ⁷ / ₁₆	17 ¹³ / ₁₆
	48	9	AHF(+)-09-(*)-(+)30-48	29 ⁵ / ₁₆	7 ¹⁵ / ₁₆	15 ⁷ / ₁₆	31 ¹¹ / ₁₆	12 ³ / ₁₆	17	32 ¹ / ₂	13	17 ¹ / ₄	32 ¹¹ / ₁₆	14 ³ / ₁₆	17 ⁹ / ₁₆	31 ¹¹ / ₁₆	15 ⁷ / ₁₆	17 ¹³ / ₁₆
	48	12	AHF(+)-12-(*)-(+)30-48	29 ⁵ / ₁₆	7 ¹⁵ / ₁₆	15 ⁷ / ₁₆	31 ¹¹ / ₁₆	12 ³ / ₁₆	17	32 ¹ / ₂	13	17 ¹ / ₄	32 ¹¹ / ₁₆	14 ³ / ₁₆	17 ⁹ / ₁₆	31 ¹¹ / ₁₆	15 ⁷ / ₁₆	17 ¹³ / ₁₆
	48	18	AHF(+)-18-(*)-(+)30-48	29 ⁵ / ₁₆	7 ¹⁵ / ₁₆	15 ⁷ / ₁₆	31 ¹¹ / ₁₆	12 ³ / ₁₆	17	32 ¹ / ₂	13	17 ¹ / ₄	32 ¹¹ / ₁₆	14 ³ / ₁₆	17 ⁹ / ₁₆	31 ¹¹ / ₁₆	15 ⁷ / ₁₆	17 ¹³ / ₁₆
	48	24	AHF(+)-24-(*)-(+)30-48	29 ⁵ / ₁₆	7 ¹⁵ / ₁₆	15 ⁷ / ₁₆	31 ¹¹ / ₁₆	12 ³ / ₁₆	17	32 ¹ / ₂	13	17 ¹ / ₄	32 ¹¹ / ₁₆	14 ³ / ₁₆	17 ⁹ / ₁₆	31 ¹¹ / ₁₆	15 ⁷ / ₁₆	17 ¹³ / ₁₆
	48	30	AHF(+)-30-(*)-(+)30-48	29 ⁵ / ₁₆	7 ¹⁵ / ₁₆	15 ⁷ / ₁₆	31 ¹¹ / ₁₆	12 ³ / ₁₆	17	32 ¹ / ₂	13	17 ¹ / ₄	32 ¹¹ / ₁₆	14 ³ / ₁₆	17 ⁹ / ₁₆	31 ¹¹ / ₁₆	15 ⁷ / ₁₆	17 ¹³ / ₁₆
	48	36	AHF(+)-36-(*)-(+)30-48	29 ⁵ / ₁₆	7 ¹⁵ / ₁₆	15 ⁷ / ₁₆	31 ¹¹ / ₁₆	12 ³ / ₁₆	17	32 ¹ / ₂	13	17 ¹ / ₄	32 ¹¹ / ₁₆	14 ³ / ₁₆	17 ⁹ / ₁₆	31 ¹¹ / ₁₆	15 ⁷ / ₁₆	17 ¹³ / ₁₆
	48	42	AHF(+)-42-(*)-(+)30-48	29 ⁵ / ₁₆	7 ¹⁵ / ₁₆	15 ⁷ / ₁₆	31 ¹¹ / ₁₆	12 ³ / ₁₆	17	32 ¹ / ₂	13	17 ¹ / ₄	32 ¹¹ / ₁₆	14 ³ / ₁₆	17 ⁹ / ₁₆	31 ¹¹ / ₁₆	15 ⁷ / ₁₆	17 ¹³ / ₁₆

(t) Insert side rail height. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no. Includes 1 pair of splice plates with hardware. T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

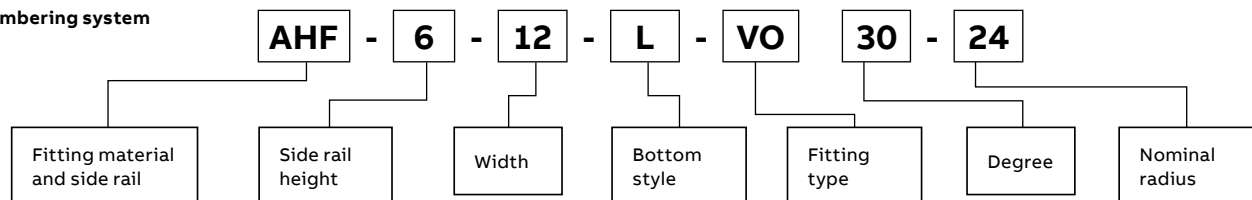

Aluminum fittings

U-style vertical tee up/down fittings

Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.


Vertical tee up/down – U-style

						Dimensions (in.)							
						Side rail height "H"							
						4 in.		5 in.		6 in.		7 in.	
Nominal		Vertical tee up Cat. no.	Vertical tee down Cat. no.	X		Y		X		Y		X	
Radius	Width												
(in.)	(in.)												
Up													
12	6	AUF(†)-06-(*)-VTU12	AUF(†)-06-(*)-VTD12	15 ¹³ / ₁₆	31 ¹¹ / ₁₆	16 ⁵ / ₁₆	32 ⁹ / ₁₆	16 ⁷ / ₈	33 ³ / ₄	17 ⁷ / ₈	34 ³ / ₄		
12	9	AUF(†)-09-(*)-VTU12	AUF(†)-09-(*)-VTD12	15 ¹³ / ₁₆	31 ¹¹ / ₁₆	16 ⁵ / ₁₆	32 ⁹ / ₁₆	16 ⁷ / ₈	33 ³ / ₄	17 ⁷ / ₈	34 ³ / ₄		
12	12	AUF(†)-12-(*)-VTU12	AUF(†)-12-(*)-VTD12	15 ¹³ / ₁₆	31 ¹¹ / ₁₆	16 ⁵ / ₁₆	32 ⁹ / ₁₆	16 ⁷ / ₈	33 ³ / ₄	17 ⁷ / ₈	34 ³ / ₄		
12	18	AUF(†)-18-(*)-VTU12	AUF(†)-18-(*)-VTD12	15 ¹³ / ₁₆	31 ¹¹ / ₁₆	16 ⁵ / ₁₆	32 ⁹ / ₁₆	16 ⁷ / ₈	33 ³ / ₄	17 ⁷ / ₈	34 ³ / ₄		
12	24	AUF(†)-24-(*)-VTU12	AUF(†)-24-(*)-VTD12	15 ¹³ / ₁₆	31 ¹¹ / ₁₆	16 ⁵ / ₁₆	32 ⁹ / ₁₆	16 ⁷ / ₈	33 ³ / ₄	17 ⁷ / ₈	34 ³ / ₄		
12	30	AUF(†)-30-(*)-VTU12	AUF(†)-30-(*)-VTD12	15 ¹³ / ₁₆	31 ¹¹ / ₁₆	16 ⁵ / ₁₆	32 ⁹ / ₁₆	16 ⁷ / ₈	33 ³ / ₄	17 ⁷ / ₈	34 ³ / ₄		
12	36	AUF(†)-36-(*)-VTU12	AUF(†)-36-(*)-VTD12	15 ¹³ / ₁₆	31 ¹¹ / ₁₆	16 ⁵ / ₁₆	32 ⁹ / ₁₆	16 ⁷ / ₈	33 ³ / ₄	17 ⁷ / ₈	34 ³ / ₄		
12	42	AUF(†)-42-(*)-VTU12	AUF(†)-42-(*)-VTD12	15 ¹³ / ₁₆	31 ¹¹ / ₁₆	16 ⁵ / ₁₆	32 ⁹ / ₁₆	16 ⁷ / ₈	33 ³ / ₄	17 ⁷ / ₈	34 ³ / ₄		
24	6	AUF(†)-06-(*)-VTU24	AUF(†)-06-(*)-VTD24	27 ¹³ / ₁₆	55 ¹¹ / ₁₆	28 ⁵ / ₁₆	56 ⁹ / ₁₆	28 ⁷ / ₈	57 ³ / ₄	29 ³ / ₈	58 ³ / ₄		
24	9	AUF(†)-09-(*)-VTU24	AUF(†)-09-(*)-VTD24	27 ¹³ / ₁₆	55 ¹¹ / ₁₆	28 ⁵ / ₁₆	56 ⁹ / ₁₆	28 ⁷ / ₈	57 ³ / ₄	29 ³ / ₈	58 ³ / ₄		
24	12	AUF(†)-12-(*)-VTU24	AUF(†)-12-(*)-VTD24	27 ¹³ / ₁₆	55 ¹¹ / ₁₆	28 ⁵ / ₁₆	56 ⁹ / ₁₆	28 ⁷ / ₈	57 ³ / ₄	29 ³ / ₈	58 ³ / ₄		
24	18	AUF(†)-18-(*)-VTU24	AUF(†)-18-(*)-VTD24	27 ¹³ / ₁₆	55 ¹¹ / ₁₆	28 ⁵ / ₁₆	56 ⁹ / ₁₆	28 ⁷ / ₈	57 ³ / ₄	29 ³ / ₈	58 ³ / ₄		
24	24	AUF(†)-24-(*)-VTU24	AUF(†)-24-(*)-VTD24	27 ¹³ / ₁₆	55 ¹¹ / ₁₆	28 ⁵ / ₁₆	56 ⁹ / ₁₆	28 ⁷ / ₈	57 ³ / ₄	29 ³ / ₈	58 ³ / ₄		
24	30	AUF(†)-30-(*)-VTU24	AUF(†)-30-(*)-VTD24	27 ¹³ / ₁₆	55 ¹¹ / ₁₆	28 ⁵ / ₁₆	56 ⁹ / ₁₆	28 ⁷ / ₈	57 ³ / ₄	29 ³ / ₈	58 ³ / ₄		
24	36	AUF(†)-36-(*)-VTU24	AUF(†)-36-(*)-VTD24	27 ¹³ / ₁₆	55 ¹¹ / ₁₆	28 ⁵ / ₁₆	56 ⁹ / ₁₆	28 ⁷ / ₈	57 ³ / ₄	29 ³ / ₈	58 ³ / ₄		
24	42	AUF(†)-42-(*)-VTU24	AUF(†)-42-(*)-VTD24	27 ¹³ / ₁₆	55 ¹¹ / ₁₆	28 ⁵ / ₁₆	56 ⁹ / ₁₆	28 ⁷ / ₈	57 ³ / ₄	29 ³ / ₈	58 ³ / ₄		
Down													
36	6	AUF(†)-06-(*)-VTU36	AUF(†)-06-(*)-VTD36	39 ¹³ / ₁₆	79 ¹¹ / ₁₆	40 ⁵ / ₁₆	80 ⁹ / ₁₆	40 ⁷ / ₈	81 ³ / ₄	41 ³ / ₈	82 ³ / ₄		
36	9	AUF(†)-09-(*)-VTU36	AUF(†)-09-(*)-VTD36	39 ¹³ / ₁₆	79 ¹¹ / ₁₆	40 ⁵ / ₁₆	80 ⁹ / ₁₆	40 ⁷ / ₈	81 ³ / ₄	41 ³ / ₈	82 ³ / ₄		
36	12	AUF(†)-12-(*)-VTU36	AUF(†)-12-(*)-VTD36	39 ¹³ / ₁₆	79 ¹¹ / ₁₆	40 ⁵ / ₁₆	80 ⁹ / ₁₆	40 ⁷ / ₈	81 ³ / ₄	41 ³ / ₈	82 ³ / ₄		
36	18	AUF(†)-18-(*)-VTU36	AUF(†)-18-(*)-VTD36	39 ¹³ / ₁₆	79 ¹¹ / ₁₆	40 ⁵ / ₁₆	80 ⁹ / ₁₆	40 ⁷ / ₈	81 ³ / ₄	41 ³ / ₈	82 ³ / ₄		
36	24	AUF(†)-24-(*)-VTU36	AUF(†)-24-(*)-VTD36	39 ¹³ / ₁₆	79 ¹¹ / ₁₆	40 ⁵ / ₁₆	80 ⁹ / ₁₆	40 ⁷ / ₈	81 ³ / ₄	41 ³ / ₈	82 ³ / ₄		
36	30	AUF(†)-30-(*)-VTU36	AUF(†)-30-(*)-VTD36	39 ¹³ / ₁₆	79 ¹¹ / ₁₆	40 ⁵ / ₁₆	80 ⁹ / ₁₆	40 ⁷ / ₈	81 ³ / ₄	41 ³ / ₈	82 ³ / ₄		
36	36	AUF(†)-36-(*)-VTU36	AUF(†)-36-(*)-VTD36	39 ¹³ / ₁₆	79 ¹¹ / ₁₆	40 ⁵ / ₁₆	80 ⁹ / ₁₆	40 ⁷ / ₈	81 ³ / ₄	41 ³ / ₈	82 ³ / ₄		
36	42	AUF(†)-42-(*)-VTU36	AUF(†)-42-(*)-VTD36	39 ¹³ / ₁₆	79 ¹¹ / ₁₆	40 ⁵ / ₁₆	80 ⁹ / ₁₆	40 ⁷ / ₈	81 ³ / ₄	41 ³ / ₈	82 ³ / ₄		
48	6	AUF(†)-06-(*)-VTU48	AUF(†)-06-(*)-VTD48	51 ¹³ / ₁₆	103 ¹¹ / ₁₆	52 ⁵ / ₁₆	104 ⁹ / ₁₆	52 ⁷ / ₈	105 ³ / ₄	53 ³ / ₈	106 ³ / ₄		
48	9	AUF(†)-09-(*)-VTU48	AUF(†)-09-(*)-VTD48	51 ¹³ / ₁₆	103 ¹¹ / ₁₆	52 ⁵ / ₁₆	104 ⁹ / ₁₆	52 ⁷ / ₈	105 ³ / ₄	53 ³ / ₈	106 ³ / ₄		
48	12	AUF(†)-12-(*)-VTU48	AUF(†)-12-(*)-VTD48	51 ¹³ / ₁₆	103 ¹¹ / ₁₆	52 ⁵ / ₁₆	104 ⁹ / ₁₆	52 ⁷ / ₈	105 ³ / ₄	53 ³ / ₈	106 ³ / ₄		
48	18	AUF(†)-18-(*)-VTU48	AUF(†)-18-(*)-VTD48	51 ¹³ / ₁₆	103 ¹¹ / ₁₆	52 ⁵ / ₁₆	104 ⁹ / ₁₆	52 ⁷ / ₈	105 ³ / ₄	53 ³ / ₈	106 ³ / ₄		
48	24	AUF(†)-24-(*)-VTU48	AUF(†)-24-(*)-VTD48	51 ¹³ / ₁₆	103 ¹¹ / ₁₆	52 ⁵ / ₁₆	104 ⁹ / ₁₆	52 ⁷ / ₈	105 ³ / ₄	53 ³ / ₈	106 ³ / ₄		
48	30	AUF(†)-30-(*)-VTU48	AUF(†)-30-(*)-VTD48	51 ¹³ / ₁₆	103 ¹¹ / ₁₆	52 ⁵ / ₁₆	104 ⁹ / ₁₆	52 ⁷ / ₈	105 ³ / ₄	53 ³ / ₈	106 ³ / ₄		
48	36	AUF(†)-36-(*)-VTU48	AUF(†)-36-(*)-VTD48	51 ¹³ / ₁₆	103 ¹¹ / ₁₆	52 ⁵ / ₁₆	104 ⁹ / ₁₆	52 ⁷ / ₈	105 ³ / ₄	53 ³ / ₈	106 ³ / ₄		
48	42	AUF(†)-42-(*)-VTU48	AUF(†)-42-(*)-VTD48	51 ¹³ / ₁₆	103 ¹¹ / ₁₆	52 ⁵ / ₁₆	104 ⁹ / ₁₆	52 ⁷ / ₈	105 ³ / ₄	53 ³ / ₈	106 ³ / ₄		

(†) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 2 pairs of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

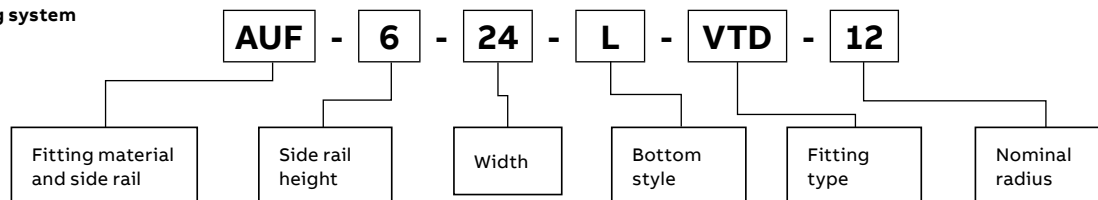

Aluminum fittings

H-style vertical tee up/down fittings

Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.


Vertical tee up/down – H-style

	Nominal Radius Width		Vertical tee up Cat. no.	Vertical tee down Cat. no.	Side rail height "H"							
					4 in.		5 in.		6 in.		7 in.	
					X	Y	X	Y	X	Y	X	Y
Up	12	6	AHF(t)-06-(*)-VTU12	AHF(t)-06-(*)-VTD12	17 $\frac{1}{16}$	34 $\frac{3}{16}$	17 $\frac{1}{16}$	35 $\frac{1}{16}$	18 $\frac{3}{8}$	36 $\frac{1}{4}$	18 $\frac{3}{8}$	37 $\frac{1}{4}$
	12	9	AHF(t)-09-(*)-VTU12	AHF(t)-09-(*)-VTD12	17 $\frac{1}{16}$	34 $\frac{3}{16}$	17 $\frac{1}{16}$	35 $\frac{1}{16}$	18 $\frac{3}{8}$	36 $\frac{1}{4}$	18 $\frac{3}{8}$	37 $\frac{1}{4}$
	12	12	AHF(t)-12-(*)-VTU12	AHF(t)-12-(*)-VTD12	17 $\frac{1}{16}$	34 $\frac{3}{16}$	17 $\frac{1}{16}$	35 $\frac{1}{16}$	18 $\frac{3}{8}$	36 $\frac{1}{4}$	18 $\frac{3}{8}$	37 $\frac{1}{4}$
	12	18	AHF(t)-18-(*)-VTU12	AHF(t)-18-(*)-VTD12	17 $\frac{1}{16}$	34 $\frac{3}{16}$	17 $\frac{1}{16}$	35 $\frac{1}{16}$	18 $\frac{3}{8}$	36 $\frac{1}{4}$	18 $\frac{3}{8}$	37 $\frac{1}{4}$
	12	24	AHF(t)-24-(*)-VTU12	AHF(t)-24-(*)-VTD12	17 $\frac{1}{16}$	34 $\frac{3}{16}$	17 $\frac{1}{16}$	35 $\frac{1}{16}$	18 $\frac{3}{8}$	36 $\frac{1}{4}$	18 $\frac{3}{8}$	37 $\frac{1}{4}$
	12	30	AHF(t)-30-(*)-VTU12	AHF(t)-30-(*)-VTD12	17 $\frac{1}{16}$	34 $\frac{3}{16}$	17 $\frac{1}{16}$	35 $\frac{1}{16}$	18 $\frac{3}{8}$	36 $\frac{1}{4}$	18 $\frac{3}{8}$	37 $\frac{1}{4}$
	12	36	AHF(t)-36-(*)-VTU12	AHF(t)-36-(*)-VTD12	17 $\frac{1}{16}$	34 $\frac{3}{16}$	17 $\frac{1}{16}$	35 $\frac{1}{16}$	18 $\frac{3}{8}$	36 $\frac{1}{4}$	18 $\frac{3}{8}$	37 $\frac{1}{4}$
	12	42	AHF(t)-42-(*)-VTU12	AHF(t)-42-(*)-VTD12	17 $\frac{1}{16}$	34 $\frac{3}{16}$	17 $\frac{1}{16}$	35 $\frac{1}{16}$	18 $\frac{3}{8}$	36 $\frac{1}{4}$	18 $\frac{3}{8}$	37 $\frac{1}{4}$
	24	6	AHF(t)-06-(*)-VTU24	AHF(t)-06-(*)-VTD24	29 $\frac{1}{16}$	58 $\frac{3}{16}$	29 $\frac{1}{16}$	59 $\frac{1}{16}$	30 $\frac{3}{8}$	60 $\frac{1}{4}$	30 $\frac{3}{8}$	61 $\frac{1}{4}$
	24	9	AHF(t)-09-(*)-VTU24	AHF(t)-09-(*)-VTD24	29 $\frac{1}{16}$	58 $\frac{3}{16}$	29 $\frac{1}{16}$	59 $\frac{1}{16}$	30 $\frac{3}{8}$	60 $\frac{1}{4}$	30 $\frac{3}{8}$	61 $\frac{1}{4}$
	24	12	AHF(t)-12-(*)-VTU24	AHF(t)-12-(*)-VTD24	29 $\frac{1}{16}$	58 $\frac{3}{16}$	29 $\frac{1}{16}$	59 $\frac{1}{16}$	30 $\frac{3}{8}$	60 $\frac{1}{4}$	30 $\frac{3}{8}$	61 $\frac{1}{4}$
	24	18	AHF(t)-18-(*)-VTU24	AHF(t)-18-(*)-VTD24	29 $\frac{1}{16}$	58 $\frac{3}{16}$	29 $\frac{1}{16}$	59 $\frac{1}{16}$	30 $\frac{3}{8}$	60 $\frac{1}{4}$	30 $\frac{3}{8}$	61 $\frac{1}{4}$
	24	24	AHF(t)-24-(*)-VTU24	AHF(t)-24-(*)-VTD24	29 $\frac{1}{16}$	58 $\frac{3}{16}$	29 $\frac{1}{16}$	59 $\frac{1}{16}$	30 $\frac{3}{8}$	60 $\frac{1}{4}$	30 $\frac{3}{8}$	61 $\frac{1}{4}$
	24	30	AHF(t)-30-(*)-VTU24	AHF(t)-30-(*)-VTD24	29 $\frac{1}{16}$	58 $\frac{3}{16}$	29 $\frac{1}{16}$	59 $\frac{1}{16}$	30 $\frac{3}{8}$	60 $\frac{1}{4}$	30 $\frac{3}{8}$	61 $\frac{1}{4}$
	24	36	AHF(t)-36-(*)-VTU24	AHF(t)-36-(*)-VTD24	29 $\frac{1}{16}$	58 $\frac{3}{16}$	29 $\frac{1}{16}$	59 $\frac{1}{16}$	30 $\frac{3}{8}$	60 $\frac{1}{4}$	30 $\frac{3}{8}$	61 $\frac{1}{4}$
	24	42	AHF(t)-42-(*)-VTU24	AHF(t)-42-(*)-VTD24	29 $\frac{1}{16}$	58 $\frac{3}{16}$	29 $\frac{1}{16}$	59 $\frac{1}{16}$	30 $\frac{3}{8}$	60 $\frac{1}{4}$	30 $\frac{3}{8}$	61 $\frac{1}{4}$
Down	36	6	AHF(t)-06-(*)-VTU36	AHF(t)-06-(*)-VTD36	41 $\frac{1}{16}$	82 $\frac{3}{16}$	41 $\frac{1}{16}$	83 $\frac{1}{16}$	42 $\frac{3}{8}$	84 $\frac{1}{4}$	42 $\frac{3}{8}$	85 $\frac{1}{4}$
	36	9	AHF(t)-09-(*)-VTU36	AHF(t)-09-(*)-VTD36	41 $\frac{1}{16}$	82 $\frac{3}{16}$	41 $\frac{1}{16}$	83 $\frac{1}{16}$	42 $\frac{3}{8}$	84 $\frac{1}{4}$	42 $\frac{3}{8}$	85 $\frac{1}{4}$
	36	12	AHF(t)-12-(*)-VTU36	AHF(t)-12-(*)-VTD36	41 $\frac{1}{16}$	82 $\frac{3}{16}$	41 $\frac{1}{16}$	83 $\frac{1}{16}$	42 $\frac{3}{8}$	84 $\frac{1}{4}$	42 $\frac{3}{8}$	85 $\frac{1}{4}$
	36	18	AHF(t)-18-(*)-VTU36	AHF(t)-18-(*)-VTD36	41 $\frac{1}{16}$	82 $\frac{3}{16}$	41 $\frac{1}{16}$	83 $\frac{1}{16}$	42 $\frac{3}{8}$	84 $\frac{1}{4}$	42 $\frac{3}{8}$	85 $\frac{1}{4}$
	36	24	AHF(t)-24-(*)-VTU36	AHF(t)-24-(*)-VTD36	41 $\frac{1}{16}$	82 $\frac{3}{16}$	41 $\frac{1}{16}$	83 $\frac{1}{16}$	42 $\frac{3}{8}$	84 $\frac{1}{4}$	42 $\frac{3}{8}$	85 $\frac{1}{4}$
	36	30	AHF(t)-30-(*)-VTU36	AHF(t)-30-(*)-VTD36	41 $\frac{1}{16}$	82 $\frac{3}{16}$	41 $\frac{1}{16}$	83 $\frac{1}{16}$	42 $\frac{3}{8}$	84 $\frac{1}{4}$	42 $\frac{3}{8}$	85 $\frac{1}{4}$
	36	36	AHF(t)-36-(*)-VTU36	AHF(t)-36-(*)-VTD36	41 $\frac{1}{16}$	82 $\frac{3}{16}$	41 $\frac{1}{16}$	83 $\frac{1}{16}$	42 $\frac{3}{8}$	84 $\frac{1}{4}$	42 $\frac{3}{8}$	85 $\frac{1}{4}$
	36	42	AHF(t)-42-(*)-VTU36	AHF(t)-42-(*)-VTD36	41 $\frac{1}{16}$	82 $\frac{3}{16}$	41 $\frac{1}{16}$	83 $\frac{1}{16}$	42 $\frac{3}{8}$	84 $\frac{1}{4}$	42 $\frac{3}{8}$	85 $\frac{1}{4}$
	48	6	AHF(t)-06-(*)-VTU48	AHF(t)-06-(*)-VTD48	53 $\frac{1}{16}$	106 $\frac{3}{16}$	53 $\frac{1}{16}$	107 $\frac{1}{16}$	54 $\frac{3}{8}$	108 $\frac{1}{4}$	54 $\frac{3}{8}$	109 $\frac{1}{4}$
	48	9	AHF(t)-09-(*)-VTU48	AHF(t)-09-(*)-VTD48	53 $\frac{1}{16}$	106 $\frac{3}{16}$	53 $\frac{1}{16}$	107 $\frac{1}{16}$	54 $\frac{3}{8}$	108 $\frac{1}{4}$	54 $\frac{3}{8}$	109 $\frac{1}{4}$
	48	12	AHF(t)-12-(*)-VTU48	AHF(t)-12-(*)-VTD48	53 $\frac{1}{16}$	106 $\frac{3}{16}$	53 $\frac{1}{16}$	107 $\frac{1}{16}$	54 $\frac{3}{8}$	108 $\frac{1}{4}$	54 $\frac{3}{8}$	109 $\frac{1}{4}$
	48	18	AHF(t)-18-(*)-VTU48	AHF(t)-18-(*)-VTD48	53 $\frac{1}{16}$	106 $\frac{3}{16}$	53 $\frac{1}{16}$	107 $\frac{1}{16}$	54 $\frac{3}{8}$	108 $\frac{1}{4}$	54 $\frac{3}{8}$	109 $\frac{1}{4}$
	48	24	AHF(t)-24-(*)-VTU48	AHF(t)-24-(*)-VTD48	53 $\frac{1}{16}$	106 $\frac{3}{16}$	53 $\frac{1}{16}$	107 $\frac{1}{16}$	54 $\frac{3}{8}$	108 $\frac{1}{4}$	54 $\frac{3}{8}$	109 $\frac{1}{4}$
	48	30	AHF(t)-30-(*)-VTU48	AHF(t)-30-(*)-VTD48	53 $\frac{1}{16}$	106 $\frac{3}{16}$	53 $\frac{1}{16}$	107 $\frac{1}{16}$	54 $\frac{3}{8}$	108 $\frac{1}{4}$	54 $\frac{3}{8}$	109 $\frac{1}{4}$
	48	36	AHF(t)-36-(*)-VTU48	AHF(t)-36-(*)-VTD48	53 $\frac{1}{16}$	106 $\frac{3}{16}$	53 $\frac{1}{16}$	107 $\frac{1}{16}$	54 $\frac{3}{8}$	108 $\frac{1}{4}$	54 $\frac{3}{8}$	109 $\frac{1}{4}$
	48	42	AHF(t)-42-(*)-VTU48	AHF(t)-42-(*)-VTD48	53 $\frac{1}{16}$	106 $\frac{3}{16}$	53 $\frac{1}{16}$	107 $\frac{1}{16}$	54 $\frac{3}{8}$	108 $\frac{1}{4}$	54 $\frac{3}{8}$	109 $\frac{1}{4}$

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 2 pairs of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

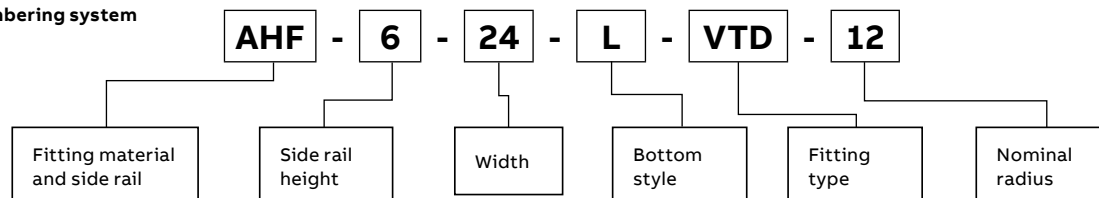


Aluminum fittings

U-style cable support fittings

Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.


Cable support fitting – U-style

			Dimensions (in.)								
			Side rail height “H”								
			4 in.		5 in.		6 in.		7 in.		
Nominal											
Radius (in.)	Width (in.)	Cat. no.	X	Y	X	Y	X	Y	X	Y	
	12	6	AUF(†)-06-(*)-CS12	17 ¹⁵ / ₁₆	13 ³ / ₄	18 ¹³ / ₁₆	13 ³ / ₄	20	13 ³ / ₄	21	13 ³ / ₄
	12	9	AUF(†)-09-(*)-CS12	17 ¹⁵ / ₁₆	13 ³ / ₄	18 ¹³ / ₁₆	13 ³ / ₄	20	13 ³ / ₄	21	13 ³ / ₄
	12	12	AUF(†)-12-(*)-CS12	17 ¹⁵ / ₁₆	13 ³ / ₄	18 ¹³ / ₁₆	13 ³ / ₄	20	13 ³ / ₄	21	13 ³ / ₄
	12	18	AUF(†)-18-(*)-CS12	17 ¹⁵ / ₁₆	13 ³ / ₄	18 ¹³ / ₁₆	13 ³ / ₄	20	13 ³ / ₄	21	13 ³ / ₄
	12	24	AUF(†)-24-(*)-CS12	17 ¹⁵ / ₁₆	13 ³ / ₄	18 ¹³ / ₁₆	13 ³ / ₄	20	13 ³ / ₄	21	13 ³ / ₄
	12	30	AUF(†)-30-(*)-CS12	17 ¹⁵ / ₁₆	13 ³ / ₄	18 ¹³ / ₁₆	13 ³ / ₄	20	13 ³ / ₄	21	13 ³ / ₄
	12	36	AUF(†)-36-(*)-CS12	17 ¹⁵ / ₁₆	13 ³ / ₄	18 ¹³ / ₁₆	13 ³ / ₄	20	13 ³ / ₄	21	13 ³ / ₄
	12	42	AUF(†)-42-(*)-CS12	17 ¹⁵ / ₁₆	13 ³ / ₄	18 ¹³ / ₁₆	13 ³ / ₄	20	13 ³ / ₄	21	13 ³ / ₄
	24	6	AUF(†)-06-(*)-CS24	29 ¹⁵ / ₁₆	25 ³ / ₄	30 ¹³ / ₁₆	25 ³ / ₄	32	25 ³ / ₄	33	25 ³ / ₄
	24	9	AUF(†)-09-(*)-CS24	29 ¹⁵ / ₁₆	25 ³ / ₄	30 ¹³ / ₁₆	25 ³ / ₄	32	25 ³ / ₄	33	25 ³ / ₄
	24	12	AUF(†)-12-(*)-CS24	29 ¹⁵ / ₁₆	25 ³ / ₄	30 ¹³ / ₁₆	25 ³ / ₄	32	25 ³ / ₄	33	25 ³ / ₄
	24	18	AUF(†)-18-(*)-CS24	29 ¹⁵ / ₁₆	25 ³ / ₄	30 ¹³ / ₁₆	25 ³ / ₄	32	25 ³ / ₄	33	25 ³ / ₄
	24	24	AUF(†)-24-(*)-CS24	29 ¹⁵ / ₁₆	25 ³ / ₄	30 ¹³ / ₁₆	25 ³ / ₄	32	25 ³ / ₄	33	25 ³ / ₄
	24	30	AUF(†)-30-(*)-CS24	29 ¹⁵ / ₁₆	25 ³ / ₄	30 ¹³ / ₁₆	25 ³ / ₄	32	25 ³ / ₄	33	25 ³ / ₄
	24	36	AUF(†)-36-(*)-CS24	29 ¹⁵ / ₁₆	25 ³ / ₄	30 ¹³ / ₁₆	25 ³ / ₄	32	25 ³ / ₄	33	25 ³ / ₄
	24	42	AUF(†)-42-(*)-CS24	29 ¹⁵ / ₁₆	25 ³ / ₄	30 ¹³ / ₁₆	25 ³ / ₄	32	25 ³ / ₄	33	25 ³ / ₄
	36	6	AUF(†)-06-(*)-CS36	41 ¹⁵ / ₁₆	37 ³ / ₄	42 ¹³ / ₁₆	37 ³ / ₄	44	37 ³ / ₄	45	37 ³ / ₄
	36	9	AUF(†)-09-(*)-CS36	41 ¹⁵ / ₁₆	37 ³ / ₄	42 ¹³ / ₁₆	37 ³ / ₄	44	37 ³ / ₄	45	37 ³ / ₄
	36	12	AUF(†)-12-(*)-CS36	41 ¹⁵ / ₁₆	37 ³ / ₄	42 ¹³ / ₁₆	37 ³ / ₄	44	37 ³ / ₄	45	37 ³ / ₄
	36	18	AUF(†)-18-(*)-CS36	41 ¹⁵ / ₁₆	37 ³ / ₄	42 ¹³ / ₁₆	37 ³ / ₄	44	37 ³ / ₄	45	37 ³ / ₄
	36	24	AUF(†)-24-(*)-CS36	41 ¹⁵ / ₁₆	37 ³ / ₄	42 ¹³ / ₁₆	37 ³ / ₄	44	37 ³ / ₄	45	37 ³ / ₄
	36	30	AUF(†)-30-(*)-CS36	41 ¹⁵ / ₁₆	37 ³ / ₄	42 ¹³ / ₁₆	37 ³ / ₄	44	37 ³ / ₄	45	37 ³ / ₄
	36	36	AUF(†)-36-(*)-CS36	41 ¹⁵ / ₁₆	37 ³ / ₄	42 ¹³ / ₁₆	37 ³ / ₄	44	37 ³ / ₄	45	37 ³ / ₄
	36	42	AUF(†)-42-(*)-CS36	41 ¹⁵ / ₁₆	37 ³ / ₄	42 ¹³ / ₁₆	37 ³ / ₄	44	37 ³ / ₄	45	37 ³ / ₄
	48	6	AUF(†)-06-(*)-CS48	53 ¹⁵ / ₁₆	49 ³ / ₄	54 ¹³ / ₁₆	49 ³ / ₄	56	49 ³ / ₄	57	49 ³ / ₄
	48	9	AUF(†)-09-(*)-CS48	53 ¹⁵ / ₁₆	49 ³ / ₄	54 ¹³ / ₁₆	49 ³ / ₄	56	49 ³ / ₄	57	49 ³ / ₄
	48	12	AUF(†)-12-(*)-CS48	53 ¹⁵ / ₁₆	49 ³ / ₄	54 ¹³ / ₁₆	49 ³ / ₄	56	49 ³ / ₄	57	49 ³ / ₄
	48	18	AUF(†)-18-(*)-CS48	53 ¹⁵ / ₁₆	49 ³ / ₄	54 ¹³ / ₁₆	49 ³ / ₄	56	49 ³ / ₄	57	49 ³ / ₄
	48	24	AUF(†)-24-(*)-CS48	53 ¹⁵ / ₁₆	49 ³ / ₄	54 ¹³ / ₁₆	49 ³ / ₄	56	49 ³ / ₄	57	49 ³ / ₄
	48	30	AUF(†)-30-(*)-CS48	53 ¹⁵ / ₁₆	49 ³ / ₄	54 ¹³ / ₁₆	49 ³ / ₄	56	49 ³ / ₄	57	49 ³ / ₄
	48	36	AUF(†)-36-(*)-CS48	53 ¹⁵ / ₁₆	49 ³ / ₄	54 ¹³ / ₁₆	49 ³ / ₄	56	49 ³ / ₄	57	49 ³ / ₄
	48	42	AUF(†)-42-(*)-CS48	53 ¹⁵ / ₁₆	49 ³ / ₄	54 ¹³ / ₁₆	49 ³ / ₄	56	49 ³ / ₄	57	49 ³ / ₄

(†) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

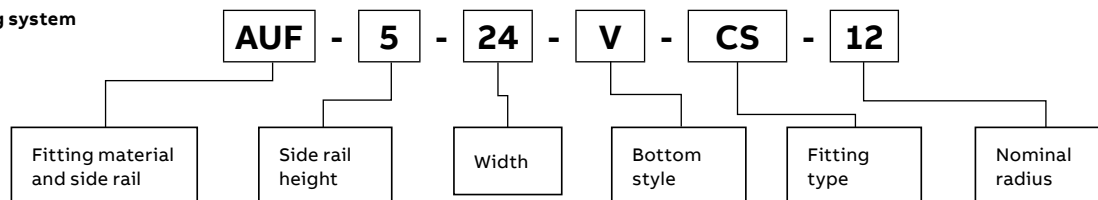

Aluminum fittings

H-style cable support fittings

Selection guide

- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 4–7 in.


Cable support fitting – H-style

			Dimensions (in.)							
			Side rail height "H"							
			4 in.		5 in.		6 in.		7 in.	
Nominal Radius (in.)	Width (in.)	Cat. no.	X	Y	X	Y	X	Y	X	Y
12	6	AHF(t)-06-(*)-CS12	19 ³ / ₁₆	15	20 ³ / ₁₆	15	21 ¹ / ₄	15	22 ³ / ₄	15
12	9	AHF(t)-09-(*)-CS12	19 ³ / ₁₆	15	20 ³ / ₁₆	15	21 ¹ / ₄	15	22 ³ / ₄	15
12	12	AHF(t)-12-(*)-CS12	19 ³ / ₁₆	15	20 ³ / ₁₆	15	21 ¹ / ₄	15	22 ³ / ₄	15
12	18	AHF(t)-18-(*)-CS12	19 ³ / ₁₆	15	20 ³ / ₁₆	15	21 ¹ / ₄	15	22 ³ / ₄	15
12	24	AHF(t)-24-(*)-CS12	19 ³ / ₁₆	15	20 ³ / ₁₆	15	21 ¹ / ₄	15	22 ³ / ₄	15
12	30	AHF(t)-30-(*)-CS12	19 ³ / ₁₆	15	20 ³ / ₁₆	15	21 ¹ / ₄	15	22 ³ / ₄	15
12	36	AHF(t)-36-(*)-CS12	19 ³ / ₁₆	15	20 ³ / ₁₆	15	21 ¹ / ₄	15	22 ³ / ₄	15
12	42	AHF(t)-42-(*)-CS12	19 ³ / ₁₆	15	20 ³ / ₁₆	15	21 ¹ / ₄	15	22 ³ / ₄	15
24	6	AHF(t)-06-(*)-CS24	31 ³ / ₁₆	27	32 ³ / ₁₆	27	33 ³ / ₄	27	34 ³ / ₄	27
24	9	AHF(t)-09-(*)-CS24	31 ³ / ₁₆	27	32 ³ / ₁₆	27	33 ³ / ₄	27	34 ³ / ₄	27
24	12	AHF(t)-12-(*)-CS24	31 ³ / ₁₆	27	32 ³ / ₁₆	27	33 ³ / ₄	27	34 ³ / ₄	27
24	18	AHF(t)-18-(*)-CS24	31 ³ / ₁₆	27	32 ³ / ₁₆	27	33 ³ / ₄	27	34 ³ / ₄	27
24	24	AHF(t)-24-(*)-CS24	31 ³ / ₁₆	27	32 ³ / ₁₆	27	33 ³ / ₄	27	34 ³ / ₄	27
24	30	AHF(t)-30-(*)-CS24	31 ³ / ₁₆	27	32 ³ / ₁₆	27	33 ³ / ₄	27	34 ³ / ₄	27
24	36	AHF(t)-36-(*)-CS24	31 ³ / ₁₆	27	32 ³ / ₁₆	27	33 ³ / ₄	27	34 ³ / ₄	27
24	42	AHF(t)-42-(*)-CS24	31 ³ / ₁₆	27	32 ³ / ₁₆	27	33 ³ / ₄	27	34 ³ / ₄	27
36	6	AHF(t)-06-(*)-CS36	43 ³ / ₁₆	39	44 ³ / ₁₆	39	45 ³ / ₄	39	46 ³ / ₄	39
36	9	AHF(t)-09-(*)-CS36	43 ³ / ₁₆	39	44 ³ / ₁₆	39	45 ³ / ₄	39	46 ³ / ₄	39
36	12	AHF(t)-12-(*)-CS36	43 ³ / ₁₆	39	44 ³ / ₁₆	39	45 ³ / ₄	39	46 ³ / ₄	39
36	18	AHF(t)-18-(*)-CS36	43 ³ / ₁₆	39	44 ³ / ₁₆	39	45 ³ / ₄	39	46 ³ / ₄	39
36	24	AHF(t)-24-(*)-CS36	43 ³ / ₁₆	39	44 ³ / ₁₆	39	45 ³ / ₄	39	46 ³ / ₄	39
36	30	AHF(t)-30-(*)-CS36	43 ³ / ₁₆	39	44 ³ / ₁₆	39	45 ³ / ₄	39	46 ³ / ₄	39
36	36	AHF(t)-36-(*)-CS36	43 ³ / ₁₆	39	44 ³ / ₁₆	39	45 ³ / ₄	39	46 ³ / ₄	39
36	42	AHF(t)-42-(*)-CS36	43 ³ / ₁₆	39	44 ³ / ₁₆	39	45 ³ / ₄	39	46 ³ / ₄	39
48	6	AHF(t)-06-(*)-CS48	55 ³ / ₁₆	51	56 ³ / ₁₆	51	57 ³ / ₄	51	58 ³ / ₄	51
48	9	AHF(t)-09-(*)-CS48	55 ³ / ₁₆	51	56 ³ / ₁₆	51	57 ³ / ₄	51	58 ³ / ₄	51
48	12	AHF(t)-12-(*)-CS48	55 ³ / ₁₆	51	56 ³ / ₁₆	51	57 ³ / ₄	51	58 ³ / ₄	51
48	18	AHF(t)-18-(*)-CS48	55 ³ / ₁₆	51	56 ³ / ₁₆	51	57 ³ / ₄	51	58 ³ / ₄	51
48	24	AHF(t)-24-(*)-CS48	55 ³ / ₁₆	51	56 ³ / ₁₆	51	57 ³ / ₄	51	58 ³ / ₄	51
48	30	AHF(t)-30-(*)-CS48	55 ³ / ₁₆	51	56 ³ / ₁₆	51	57 ³ / ₄	51	58 ³ / ₄	51
48	36	AHF(t)-36-(*)-CS48	55 ³ / ₁₆	51	56 ³ / ₁₆	51	57 ³ / ₄	51	58 ³ / ₄	51
48	42	AHF(t)-42-(*)-CS48	55 ³ / ₁₆	51	56 ³ / ₁₆	51	57 ³ / ₄	51	58 ³ / ₄	51

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

T&B aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Part numbering system

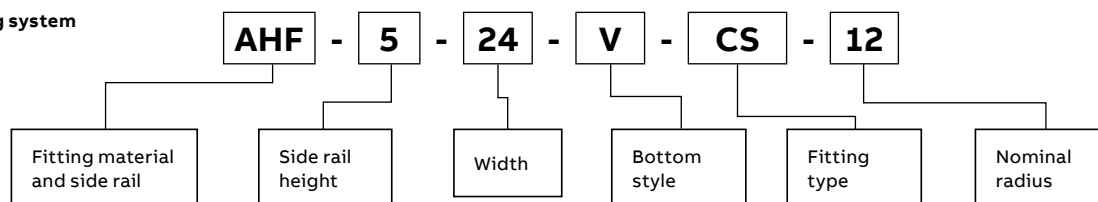

Aluminum fittings

Helix[®] cable tray fitting

01 Right-turn assembly
02 Left-turn assembly

The Helix cable tray fitting.
Efficiency is in its DNA.

Go from horizontal to vertical, maximum cable protection, minimum space.


Making transitions from horizontal to vertical cable tray runs has never been easier or more efficient. The latest evolution in cable tray fittings, the Helix fitting assembly was developed specifically for use in confined areas. It allows installers to transition from horizontal to vertical surfaces in less time, using significantly less space.


- Enables installation close to walls and other surfaces, eliminating need for distance
- Provides enhanced cable protection in confined spaces
- Secures cables within fitting for clean, organized cable runs

Helix cable tray fitting

Cat. no.	Material	Side rail (in.)	Width (in.)	Direction
AUF612LHVR	Aluminum	6	12	Right turn
AUF612LHVL	Aluminum	6	12	Left turn
AUF624LHVR	Aluminum	6	24	Right turn
AUF624LHVL	Aluminum	6	24	Left turn

Supports should be positioned within 24" (610 mm) of each Helix fitting extremity.


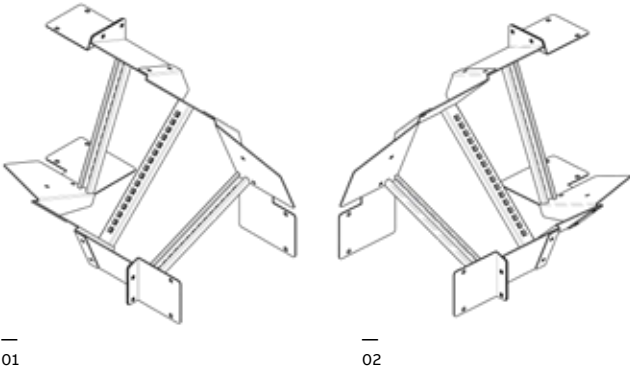


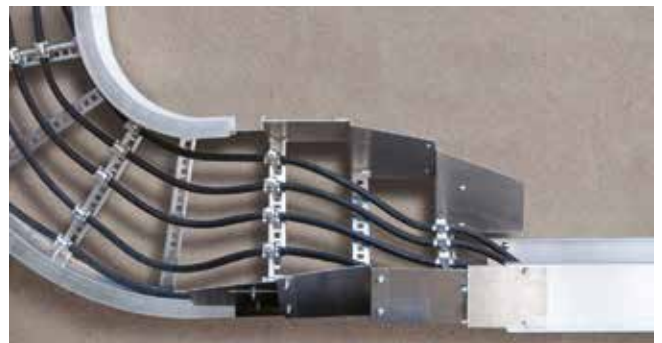

Aluminum

Large radius aluminum cable tray

Large radius aluminum cable tray

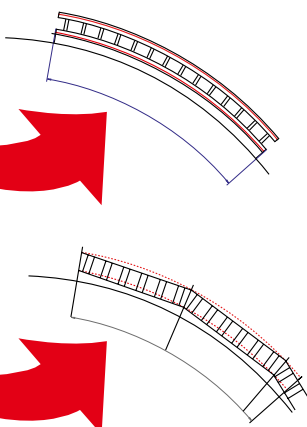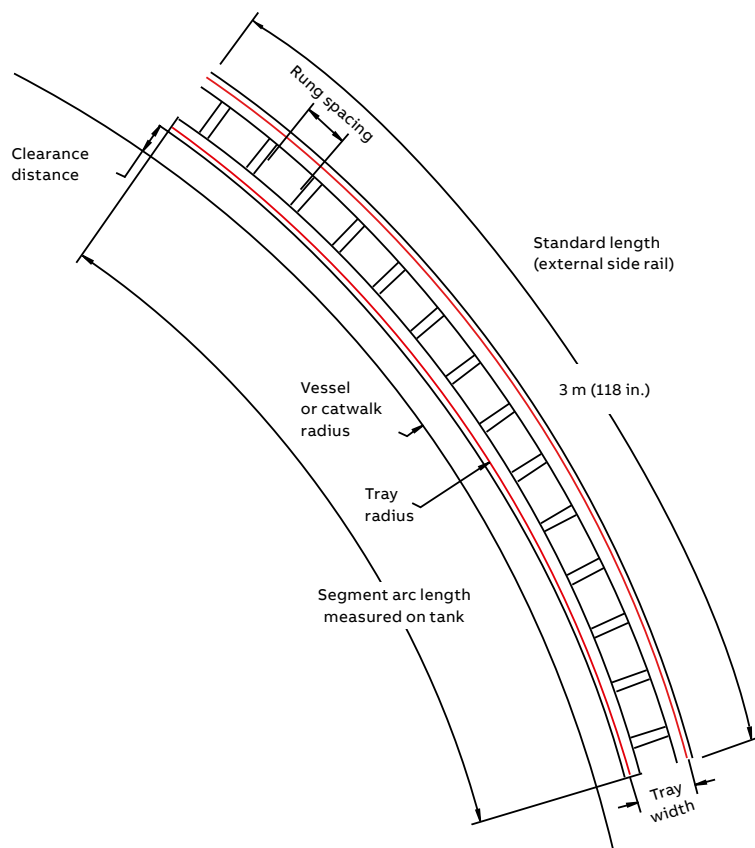

Old method

This cable tray design offers a custom-built cable support system for each petrochemical project tank or tower. This cable tray system is usually installed around the outer perimeter of the catwalks and stairs that are mounted on the tank or vessel.

ABB takes pride in manufacturing a complete system to meet your most rigorous requirements. Our cable support systems reduce the costly and labor-intensive modifications required to assemble straight sections, splice plates and accessories to fit your tank or vessel.

T&B large radius aluminum cable tray systems mount flawlessly with no extra cutting, set-up or surplus material. With the option of pre-assembly of this cable tray system prior to erection of the tank or vessel, you can drastically reduce installing time.

ABB aluminum cable tray is composed of two distinct systems, H-style and U-style. These systems are interchangeable.

Features and benefits

- No mitered joints
- No bent splice plates
- Less costly
- Easier to install
- Faster to install
- Fewer skills required to install
- Cleaner lines
- Improved functionality and aesthetics

Data required for quotation

Height of the cable tray: in.
 Width of the cable tray: in.
 Rung spacing: in.
 Load rating and support span: lb/ft. (kg/m)
 Radius of tank or vessel: in.
 Clearance distance: in.
 Quantity required: (number of segments)
 or total arc length: (measured on structure)

Aluminum

Tray covers

- 01 Solid cover, flanged
- 02 Solid cover, unflanged
- 03 Ventilated flanged covers
- 04 Peaked flanged cover

Number selection

Tray covers

Tray covers are available for all classes of tray. They should be installed where falling objects may damage cables or where vertical tray run is accessible by pedestrian or vehicular traffic.

Solid covers

These covers provide maximum mechanical protection for cables with limited heat build-up. Solid covers are available with or without flange. Flanged covers have ½ in. flange.


Ventilated flanged covers

This design offers excellent mechanical protection while allowing heat produced by cables to dissipate.


For extreme applications: Peaked flanged covers, peaked ventilated covers

Peaked covers offer mechanical protection and reduce pooling of liquids on the cover.

Cover mounting hardware must be ordered separately.


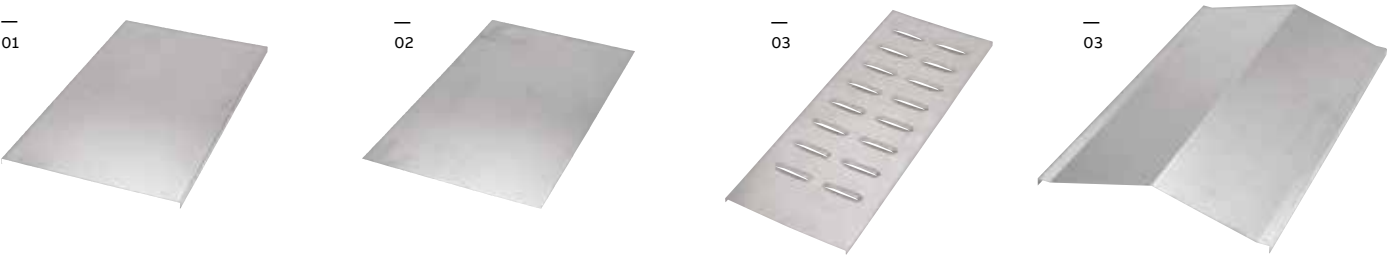


Straight cover number selection

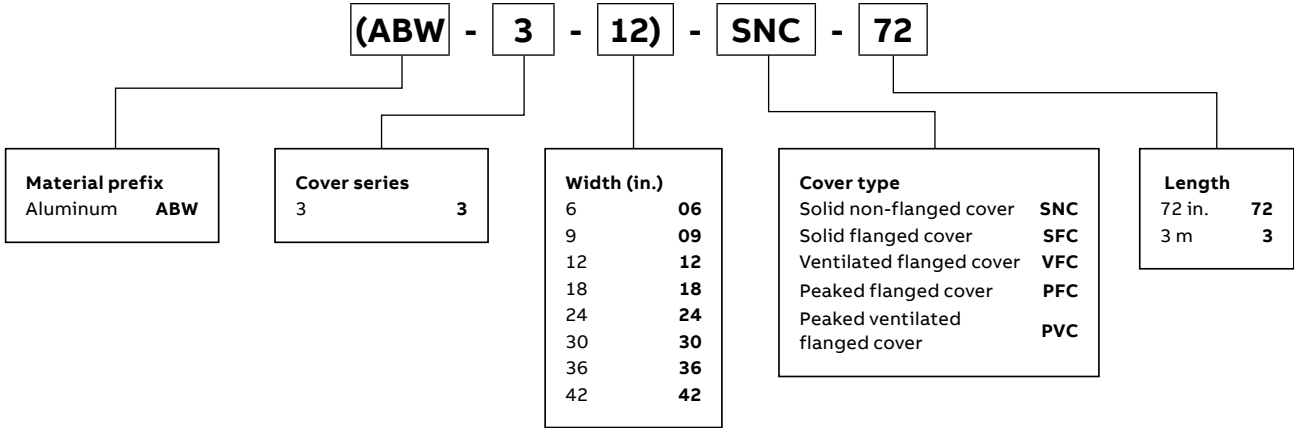


Aluminum
Fittings covers

Fitting covers number selection

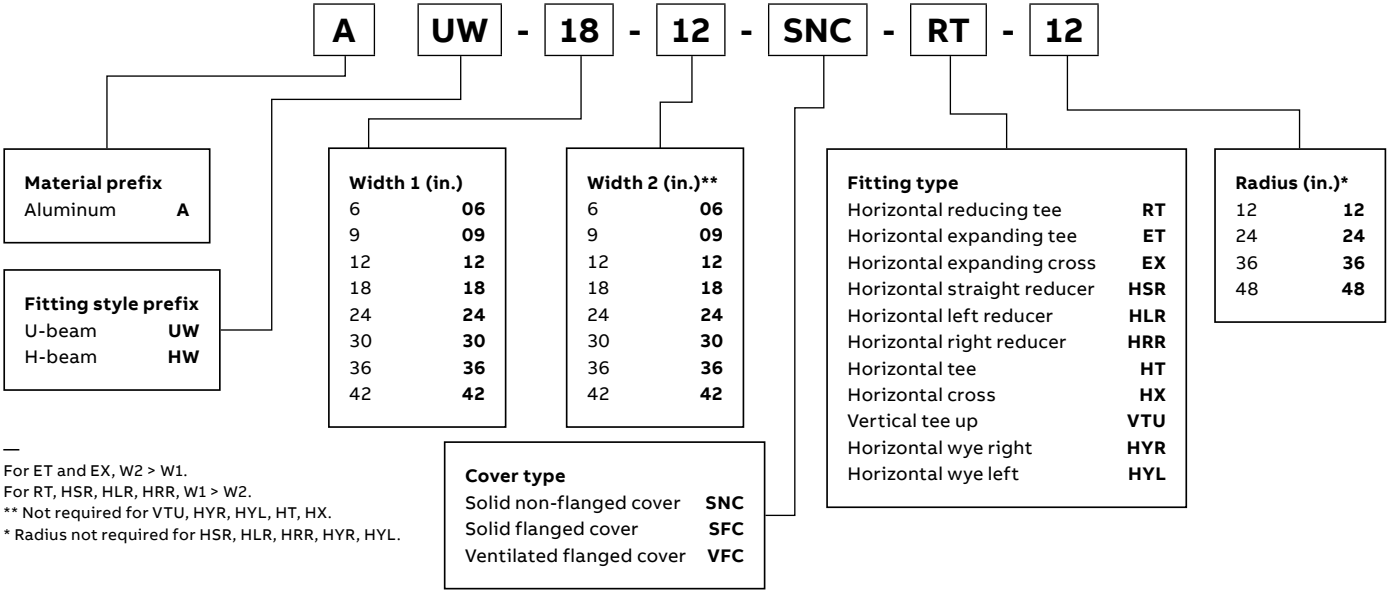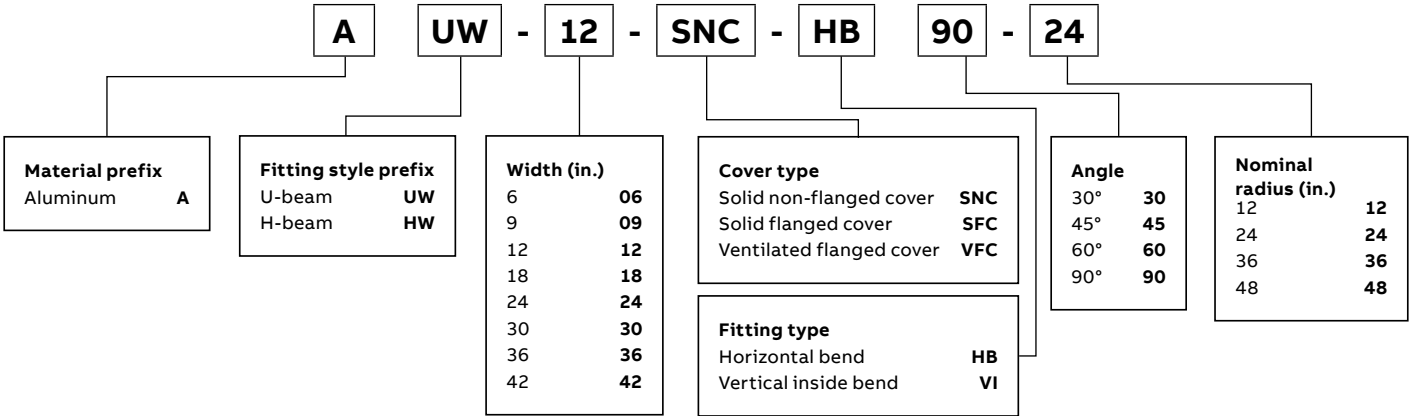

—
For ET and EX, W2 > W1.
For RT, HSR, HLR, HRR, W1 > W2.
** Not required for VTU, HYR, HYL, HT, HX.
* Radius not required for HSR, HLR, HRR, HYR, HYL.

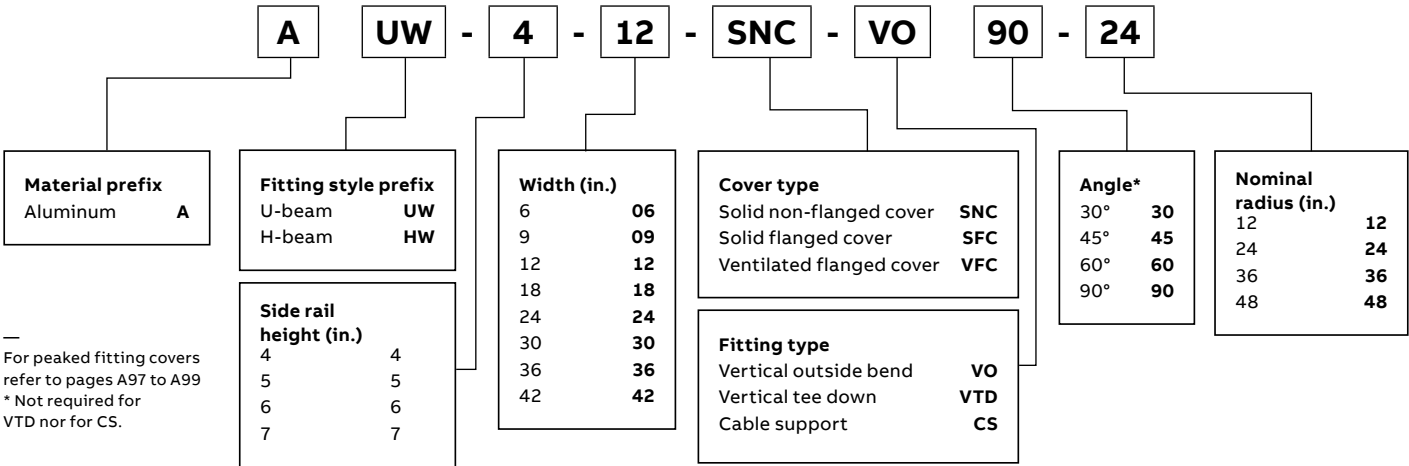

—
For peaked fitting covers refer to pages A97 to A99
* Not required for VTD nor for CS.


Aluminum

Peaked covers

Horizontal bend/vertical inside bend (peaked covers) number selection




—
Pregalvanized
not available

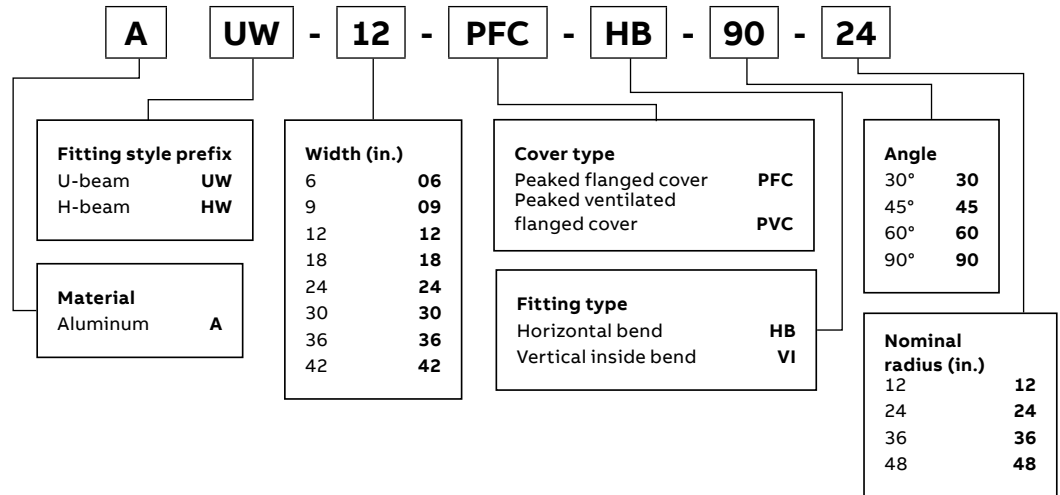

Vertical outside bend (peaked covers) number selection




—
Pregalvanized
not available

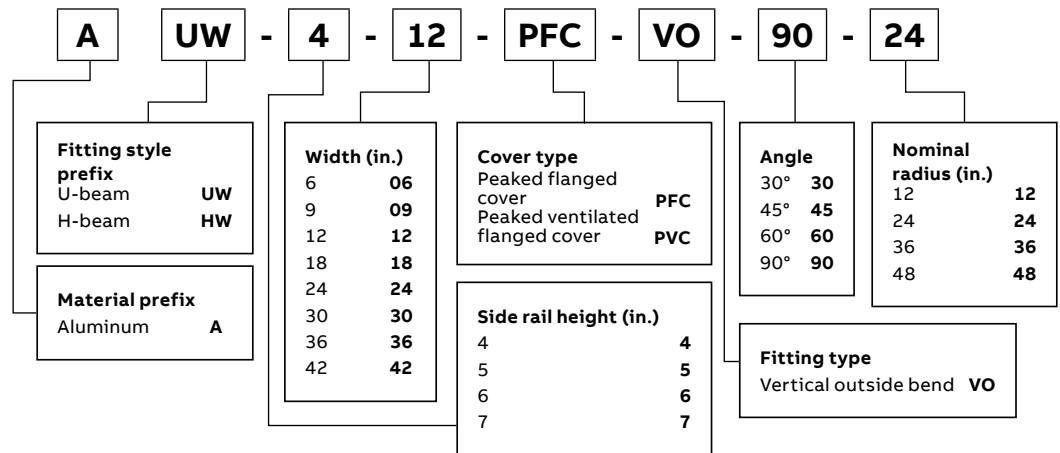

Horizontal tee (peaked covers) number selection



—
Pregalvanized
not available

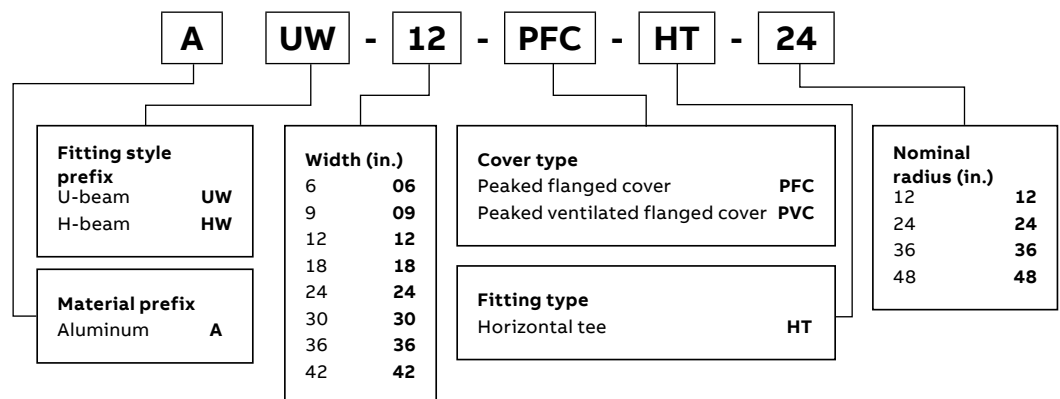


Aluminum covers

Accessories

Quantity of standard cover clamps required			
Straight sections 1.8 m (6 ft.)	4 pcs.	Tees	6 pcs.
Straight sections 3 m (10 ft.) and 3.7 m (12 ft.)	6 pcs.	Crosses	8 pcs.
Horizontal and vertical bends	4 pcs.		


Important note: "B" in cat. no. indicates this accessory can be used for both styles.
When using heavy-duty cover clamp, only half the quantity of pieces are required.

Economical cover clamp

		Cat. no.	Material	Side rail height (in.)
		ABW-SCC	Aluminum	All sizes

Rigid indoor cover clamp for flat and flanged covers.
Cannot be used with U-style fittings.

Universal fitting cover clamp

		Cat. no.	Material	Side rail height (in.)
		ABW(*)FCC	Aluminum	4
			Aluminum	5
			Aluminum	6
			Aluminum	7

Rigid indoor cover clamp for flat and flanged covers.
(*) Insert side rail height

Heavy-duty cover clamp

		Cat. no.	Material	Side rail height	Tray width (in.)
		ABW4(*)HCC	Aluminum	4	06
		ABW5(*)HCC	Aluminum	5	09
		ABW6(*)HCC	Aluminum	6	12
		ABW7(*)HCC	Aluminum	7	18
		ABW7(*)HCC	Aluminum	7	24
			Aluminum	7	30
			Aluminum	7	36
			Aluminum	7	42

Wraparound design offers added protection for rugged applications and outdoor conditions. Hardware included.
(*) Insert tray width

Extreme heavy-duty cover clamp

	Cat. no.	Material	Side rail height	Tray width (in.)
	ABW4(*)ECC	Aluminum	4	06
	ABW5(*)ECC	Aluminum	5	09
	ABW6(*)ECC	Aluminum	6	12
	ABW7(*)ECC	Aluminum	7	18
		Aluminum	7	24
		Aluminum	7	30
		Aluminum	7	36
		Aluminum	7	42

Wraparound design offers added protection for rugged applications and outdoor conditions. Hardware included.

(*) Insert tray width


Heavy-duty peaked cover clamp

	Cat. no.	Material	Side rail height	Tray width (in.)
	ABW4(*)HPC	Aluminum	4	06
	ABW5(*)HPC	Aluminum	5	09
	ABW6(*)HPC	Aluminum	6	12
	ABW7(*)HPC	Aluminum	7	18
		Aluminum	7	24
		Aluminum	7	30
		Aluminum	7	36
		Aluminum	7	42

Wraparound design formed to fit peaked cover for outdoor applications. Hardware included.

(*) Insert tray width

Hold-down clamp

	Cat. no.	Material	Side rail height (in.)
	ABW(*)HDC	Aluminum	4
		Aluminum	5
		Aluminum	6
		Aluminum	7


Designed to secure cable tray to support system.

Hardware included, (*) Insert side rail height

Aluminum covers

Accessories

Raised cover clamp

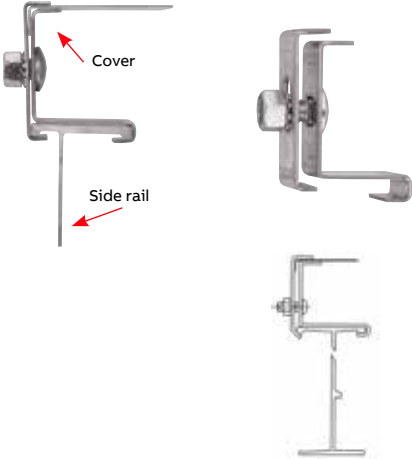		Cat. no.	Material	Cover series	Cover offset (in.)*
		ABW3(*)RCC†	Aluminum	3	1
			Aluminum	3	2
			Aluminum	3	3
			Aluminum	3	4

(*) Cover offset. For straight section and PFC and SFC covers only.
Designed to raise cover above tray for added ventilation.
† For indoor applications only.

Peaked end cap

		Cat. no.	Material	Tray width (in.)
		ABW(*)PEC	Aluminum	06
			Aluminum	09
			Aluminum	12
			Aluminum	18
			Aluminum	24
			Aluminum	30
			Aluminum	36
			Aluminum	42

(*) Insert tray width. Used for transition between peaked covers to straight covers.

Cover joint strip

		Cat. no.	Material	Tray width (in.)
		ABW(*)PCS	Plastic	06
			Plastic	09
			Plastic	12
			Plastic	18
			Plastic	24
			Plastic	30
			Plastic	36
			Plastic	42

(*) Insert tray width.
Strip used for joining flat covers end to end.

Aluminum splice plates

Snap-in and transition plates



- Designed to lock into place for easy alignment and installation
- Packaged in pairs with zinc-plated hardware
- Kit contents: 8 bolts, 8 nuts
- Provided as standard with each straight and fitting

Snap-in splice plate


Cat. no.	Material	Side rail height (in.)
ABW-4-SSP	Aluminum	4
ABW-5-SSP	Aluminum	5
ABW-6-SSP	Aluminum	6
ABW-7-SSP	Aluminum	7



- Allows for a 1 in. expansion or contraction of tray system
- Packaged in pairs with zinc-plated hardware
- Kit contents: 8 bolts, 4 nuts, 4 stop nuts $\frac{3}{8}$ in. diameter

Snap-in expansion splice plate

Cat. no.	Material	Side rail height (in.)
ABW-4-ESP	Aluminum	4
ABW-5-ESP	Aluminum	5
ABW-6-ESP	Aluminum	6
ABW-7-ESP	Aluminum	7



- Designed to make the transition from aluminum to steel cable tray
- Works for all 6 in. side rails


Transition splice plate

Cat. no.	Material	Side rail height (in.)
XNM-XP400-(*)-SS6	Polyester/fiberglass	6

Each pair of plates:
 8 x carriage bolt ($\frac{3}{8}$ x 1 in.) SS316
 8 x $\frac{3}{8}$ in. serrated flange nut SS316

Aluminum splice plates


Horizontal and vertical adjustable plates

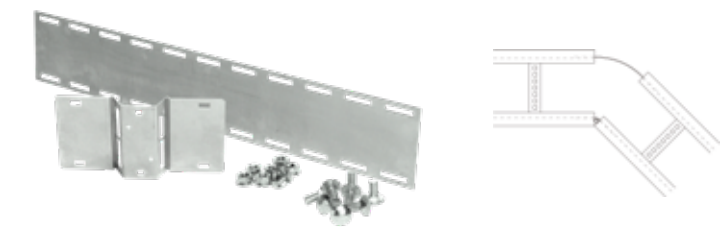

Horizontal adjustable plate

Cat. no.	Material	Side rail height (in)	Tray width (in)*
ABW-(*)06HBP	Aluminum	4 to 7	06
ABW-(*)09HBP	Aluminum	4 to 7	09
ABW-(*)12HBP	Aluminum	4 to 7	12
ABW-(*)18HBP	Aluminum	4 to 7	18
ABW-(*)24HBP	Aluminum	4 to 7	24
ABW-(*)30HBP	Aluminum	4 to 7	30
ABW-(*)36HBP	Aluminum	4 to 7	36
ABW-(*)42HBP	Aluminum	4 to 7	42

Furnished in pairs with hardware.
(*) Insert side rail height.



- Hinged vertical plates provide maximum flexibility for changes in elevation
- Furnished in pairs with hardware
- Kit contents: 10 carriage bolts, 2 cap screws, 12 serrated flange nuts, 3/8 in. diameter

Vertical adjustable plate

Cat. no.	Material	Side rail height (in.)
ABW-4-VSP	Aluminum	4
ABW-5-VSP	Aluminum	5
ABW-6-VSP	Aluminum	6
ABW-7-VSP	Aluminum	7

Aluminum splice plates

Branch pivot connectors, box-to-tray plates and closure end plate

Branch pivot connectors

	Cat. no.	Material	Side rail height (in.)
	ABW-4-BPC	Aluminum	4
	ABW-5-BPC	Aluminum	5
	ABW-6-BPC	Aluminum	6
	ABW-7-BPC	Aluminum	7

Allows cables to run from one tray level to another.



- Designed to secure tray to electrical panels or boxes, walls or end supports
- Furnished in pairs with hardware
- Kit contents: 8 bolts, 8 nuts, 8 lock washers, $\frac{3}{8}$ in. diameter


Box-to-tray plates

	Cat. no.	Material	Side rail height (in.)
	ABW-4-BSP	Aluminum	4
	ABW-5-BSP	Aluminum	5
	ABW-6-BSP	Aluminum	6
	ABW-7-BSP	Aluminum	7



- Provides closure for any tray end
- Packaged with hardware
- Kit contents: 4 bolts, 4 nuts, 4 washers, $\frac{3}{8}$ in. diameter

Closure end plate

	Cat. no.	Material	Side rail height (in.)	Tray width (in.)
	ABW-4(*)-CEP	Aluminum	4	6
	ABW-4(*)-CEP	Aluminum	4	9
	ABW-5(*)-CEP	Aluminum	5	12
	ABW-5(*)-CEP	Aluminum	5	18
	ABW-6(*)-CEP	Aluminum	6	24
	ABW-6(*)-CEP	Aluminum	6	30
	ABW-7(*)-CEP	Aluminum	7	36
	ABW-7(*)-CEP	Aluminum	7	42

(*) Insert tray width

Aluminum splice plates

Reducing splice plate, step-down splice plate, Super-Duty Splice Plate™




- Used in pairs to provide a straight reduction or used with a standard splice plate for an offset reduction
- Packaged with hardware
- Kit contents: 4 bolts, 4 nuts

Reducing splice plate

	Cat. no.	Material	Side rail height (in.)
	ABW-4(*)-RSP	Aluminum	4
	ABW-5(*)-RSP	Aluminum	5
	ABW-6(*)-RSP	Aluminum	6
	ABW-7(*)-RSP	Aluminum	7

(*) For offset reduction: insert width to be reduced. For straight reduction: insert ½ width to be reduced (2 required).
Example: ABW-43-RSP = 3 in. offset reducer.



- Connects side rails of different heights
- Kit contents: 4 bolts, 4 nuts

Step-down splice plate

	Cat. no.	Material	Side rail height (in.)
	ABW(*)(**)SDS	Aluminum	4
		Aluminum	5
		Aluminum	6
		Aluminum	7

(*) Side rail height 1. (**) Side rail height 2.
Side rail height 1 is greater then side rail height 2.

Super-Duty Splice Plate

	Cat. no.	Kit includes
	ABW6SDP	2 Super-Duty Splice Plates
		12 ribbed-neck carriage bolts
		8 nylon insert locknuts
		8 serrated flanged locknuts
		12 nylon washers (spacers)

Comes complete with all hardware required, for either expansion or mid-span splicing.

Splice plates

Over-support splice adaptor

01 Expansion plate
gap chart

Every expansion joint
requires the use
of a bonding jumper
such as FBD16-1
(16 in., 600 amps)



ABW46-OSS-B


Over-support splice adaptor – Beam installation

- Expansion over support beam 29 in.
- SHW-CTC, heavy-duty hold-down clamp (complete with mounting hardware)
- ABWCHGC, standard hold-down clamp
- E142-3/8x100EG, 3/8 in.-16 x 1 in. hex cap screws
- AC100-3/8EGC, 3/8 in. strut nut

ABW46-OSS-S

Over-support splice adaptor – Strut installation

- Expansion over support beam 29 in.
- ABWCHGC, standard hold-down clamp
- E142-3/8x100EG, 3/8 in.-16 x 1 in. hex cap screws
- AC100-3/8EGC, 3/8 in. strut nut

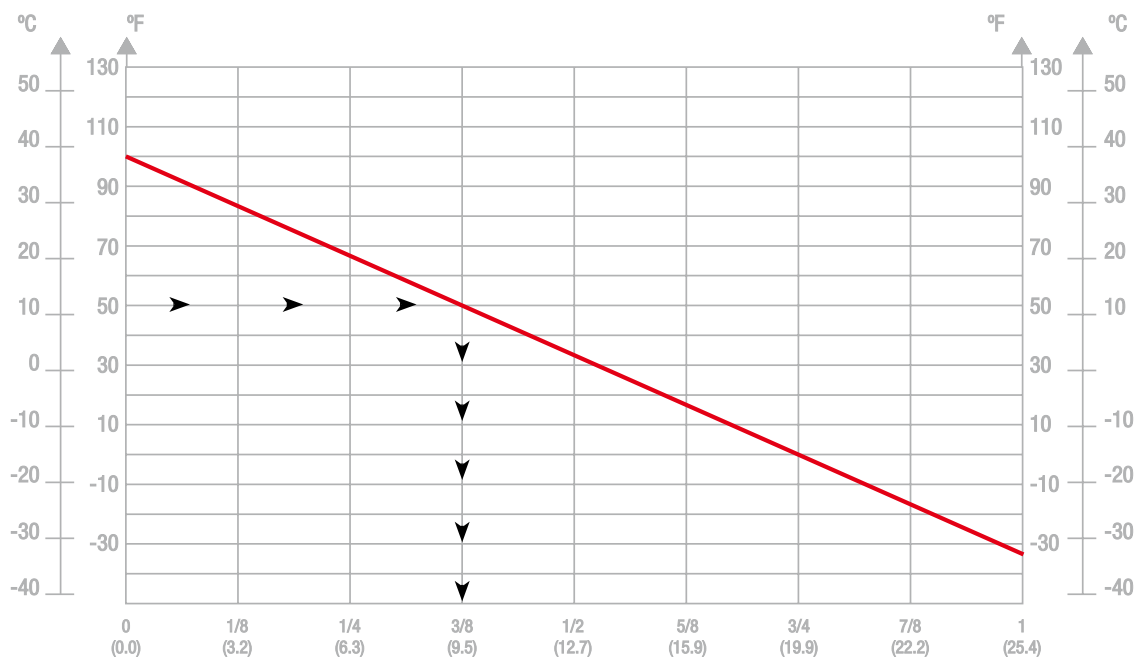



Aluminum cable protection

Drop out and wall penetration sleeve



- Designed to provide a smooth radius surface at any position on the tray or trough bottom
- Drop outs are easily attached using hardware provided
- Standard radius 4 in.

Drop out

	Cat. no.	Description	Tray width (in.)
	ABW(*)DO	For ladder and ventilated tray, aluminum	06
		For ladder and ventilated tray, aluminum	09
		For ladder and ventilated tray, aluminum	12
		For ladder and ventilated tray, aluminum	18
		For ladder and ventilated tray, aluminum	24
		For ladder and ventilated tray, aluminum	30
		For ladder and ventilated tray, aluminum	36
		For ladder and ventilated tray, aluminum	42

(*) Insert tray width



- Designed to pass through walls and fire walls.
- Hardware included
- Important: Not fire rated
- Fire stop not included
- Sold with cover


Wall penetration sleeve

Cat. no.	Material	Side rail height (in.)	Tray width (in.)
ABW(*)(**)WPS	Aluminum	4	06
	Aluminum	4	09
	Aluminum	5	12
	Aluminum	5	18
	Aluminum	6	24
	Aluminum	6	30
	Aluminum	7	36
	Aluminum	7	42

(*) Insert side rail height. (**) Insert tray width

Aluminum cable protection

Frame-type tray-to-box plate and expansion pad



- Designed to secure tray to electrical enclosures and panels
- Hardware included

Frame-type tray-to-box plate

Cat. no.	Material	Side rail height (in.)	Tray width (in.)
ABW(*)(**)FBP	Aluminum	4	06
	Aluminum	4	09
	Aluminum	5	12
	Aluminum	5	18
	Aluminum	6	24
	Aluminum	6	30
	Aluminum	7	36
	Aluminum	7	42

(*) Insert side rail height. (**) Insert tray width

Nylon expansion pad

Cat. no.		Material
	ABW-NSP	Natural nylon

Allows for thermal expansion and contraction of cable trays over supports.

Aluminum barrier strips

Barrier strips, vertical bend barriers

SBH



SB



- Aluminum barrier strips provide a method of separating cables in tray and trough systems
- Easily installed using supplied hardware
- 72 in. barriers are flexible for use with horizontal fittings

Barrier strips

Cat. no.	Designed for side rail height (in.)	Length
ABW-4-SBH-72	4	72 in.
ABW-5-SBH-72	5	72 in.
ABW-6-SBH-72	6	72 in.
ABW-7-SBH-72	7	72 in.
ABW-4-SB-(*)	4	144 in. 3 m
ABW-5-SB-(*)	5	144 in. 3 m
ABW-6-SB-(*)	6	144 in. 3 m
ABW-7-SB-(*)	7	144 in. 3 m

72 in. barriers provided with 3 SPW10SCR. 144 in., 3 m barriers provided with 6 SPW10SCR.

(*) Insert length.

Inside/outside vertical bend barriers

	Inside bend cat. no.	Outside bend cat. no.	Designed for side rail height (in.)
	AUW(*)VIB-(**)-(+)	AUW(*)VOB-(**)-(+)	4
	AUW(*)VIB-(**)-(+)	AUW(*)VOB-(**)-(+)	5
	AUW(*)VIB-(**)-(+)	AUW(*)VOB-(**)-(+)	6
	AUW(*)VIB-(**)-(+)	AUW(*)VOB-(**)-(+)	7
	AHW(*)VIB-(**)-(+)	AHW(*)VOB-(**)-(+)	4
	AHW(*)VIB-(**)-(+)	AHW(*)VOB-(**)-(+)	5
	AHW(*)VIB-(**)-(+)	AHW(*)VOB-(**)-(+)	6
	AHW(*)VIB-(**)-(+)	AHW(*)VOB-(**)-(+)	7
	AHW(*)VIB-(**)-(+)	AHW(*)VOB-(**)-(+)	7
	AHW(*)VIB-(**)-(+)	AHW(*)VOB-(**)-(+)	7

(*) Insert side rail height (**) Insert bend angle (+) Insert bend radius.

Barrier strip splice


	Cat. no.	Material
	ABWBSS	Plastic

Alignment splice for joining connecting barrier strips.

Aluminum clamps and hardware

Hold-down clamps, combo clamps, conduit clamps and tray hardware

Hold-down clamp

	Cat. no.	Type	Material	Design load
	ABW-HDCS	Single	Aluminum	600 lb/pair
	ABW-HDCD	Double	Aluminum	1000 lb/pair

For vertical applications

Cable tray combo clamp

	Cat. no.	Material	Hardware size (in.)
	ABWCHGC	Aluminum	$\frac{3}{8}$
	ABWCHGC-HDW*	Aluminum	$\frac{3}{8}$

*Hardware supplied: 1 bolt and 1 springless strut nut $\frac{3}{8}$ in. diameter.

Conduit clamp

	Cat. no.	Material	Conduit size (in.)
	ABW-100-CDO	Aluminum	1
	ABW-125-CDO	Aluminum	1 $\frac{1}{4}$
	ABW-150-CDO	Aluminum	1 $\frac{1}{2}$
	ABW-200-CDO	Aluminum	2
	ABW-250-CDO	Aluminum	2 $\frac{1}{2}$
	ABW-300-CDO	Aluminum	3
	ABW-400-CDO	Aluminum	4

Aluminum tray hardware

	Cat. no.	Material	Description
	SPW-1/4-CB	Zinc-plated steel	$\frac{1}{4}$ in. carriage bolt
	SPW-3/8-CB	Zinc-plated steel	$\frac{3}{8}$ in. carriage bolt
	SPW-1/4-HN	Zinc-plated steel	$\frac{1}{4}$ in. hex. nut
	SPW-3/8-HN	Zinc-plated steel	$\frac{3}{8}$ in. hex. nut
	SPW3/8HWK*	Zinc-plated steel	Zinc-plated steel hardware kit
	SPW-3/8HXHWK**	Zinc-plated steel	Hardware kit $\frac{3}{8}$ in. for large radius crosses
	SSW-3/8-CB	316 stainless	$\frac{3}{8}$ in. carriage bolt
	SSW-3/8-HN	316 stainless	$\frac{3}{8}$ in. hex. nut
	SSW38HWK*	316 stainless	316 stainless steel hardware kit
	SSW-3/8HXHWK**	316 stainless	Hardware kit $\frac{3}{8}$ in. for large radius crosses

*Contains 8 bolts and 8 nuts.

**Contains 6 bolts, 6 nuts and 6 washers.

Aluminum clamps and hardware

Self-drilling tapping screws, cable tray guide, cable tray clamp and vertical tray hanger


Self-drilling tapping screw

	Cat. no.	Material	Description
	SPW-10-SCR	Zinc-plated steel	Self-drilling tapping screw
		Stainless steel	Self-drilling tapping screw



- Expansion guide for single or double runs of cable tray
- No need to field drill the channel or I-beam


Cable tray guide

	Cat. no.	Material
	SPW-CTG	Zinc-plated steel
		Hot-dipped galvanized steel



- Clamp for single run of cable tray
- No need to field drill the channel or I-beam

Cable tray clamp

	Cat. no.	Material
	SPW-CTC	Zinc-plated steel
		Hot-dipped galvanized steel

Vertical tray hanger

	Cat. no.	Material	Side rail height (in.)
	ABW(*)VTH	Aluminum	4
		Aluminum	5
		Aluminum	6
		Aluminum	7

(*) Insert side rail height

Steel cable tray

Straight lengths – Tray bottom

- 01 Ladder
- 02 Ventilated
- 03 Solid trough



Ladder, ventilated and solid trough

Ladder

Formed side rails are welded to 1½ in. wide rungs to provide maximum rigidity and strength. Rung design includes exclusive Ty-Rap cable tie slots on 1 in. centers.

Ventilated

A fabricated structure consisting of integral or separate longitudinal rails and a bottom having openings sufficient for the passage of air and utilizing 75% or less of the plane area of the surface to support cables.

The maximum open spacings between cable support surfaces of transverse elements do not exceed 102 mm (4 in.) in the direction parallel to the tray side rails (rung to rung).

Solid trough

Solid sheet welded to steel side rails below rungs. This design offers added cable protection.


Straight section number selection

How to create part numbers

ABB has created a numbering system based on the order of selection criteria. For example, the first selection issue is the environment to which the cable tray will be subjected. This selection will lead to the best material for your application. For complete details on the cable tray selection process, see page A9 in the technical section.

Methods

1. Select the material best suited to your environment. Refer to technical section page A9.
2. Determine the tray series using the NEMA/CSA load/span designations page A16, and sizing cable tray page A23.
3. Select nominal depth and width of tray based on cable loading. See sizing cable tray page A23.
4. Select the bottom type based on cables and spacing requirements.
5. The last number is the length of the cable tray in meters or inches.

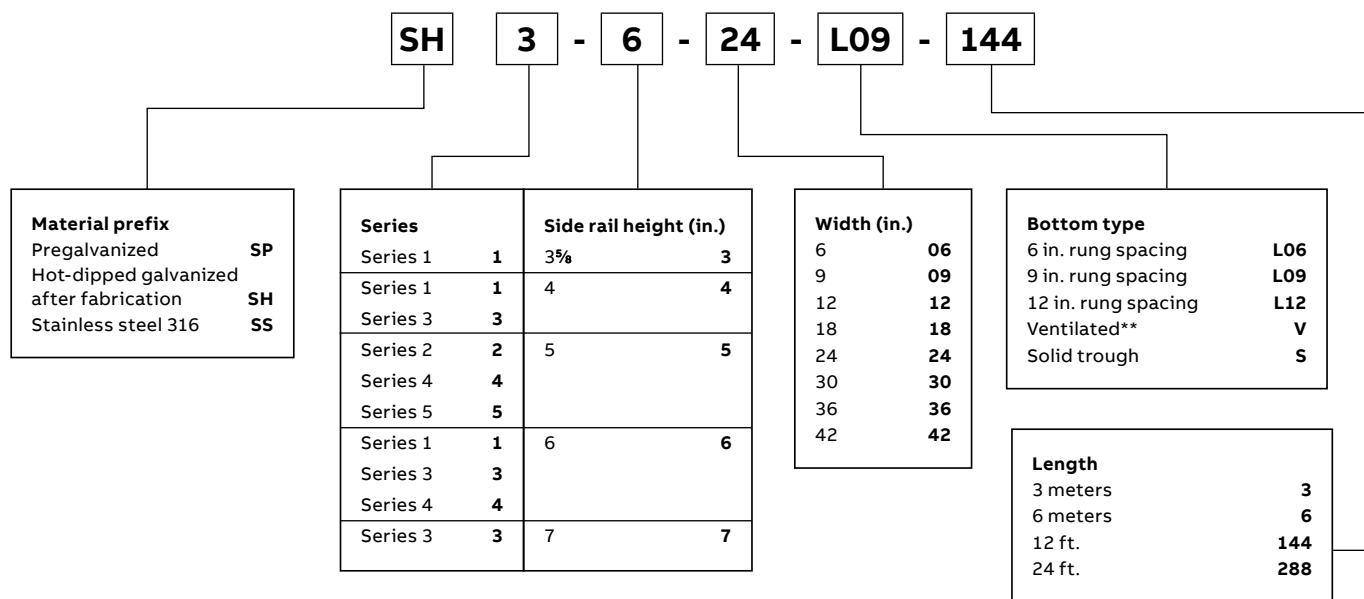

* Series 1-3 and 1-4 are not available in 6 meter or 288 in. lengths.

** For load ratings of CSA Class C/NEMA 8C or less, please see an alternative ventilated series of cable tray called One-Piece found on pages A174 to A207 of this catalogue.

Steel straight lengths

3⁵/₈ in. straight sections/series 1-3 – Ladder, ventilated and solid trough



Technical specifications


All calculations and data are based on 42 in. wide cable trays with rungs spaced 12 inches center to center with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.


3⁵/₈ in. straight sections/series 1-3 – Ladder, ventilated and solid trough

		Support span (feet)			
Series		6	8	10	12
SP1-3	Load (lb)/ft.)	200	113	72	50
SH1-3	Deflection (in.)	0.242	0.430	0.672	0.967
SS1-3	Deflection factor	0.0012	0.0038	0.0093	0.0193

Straight section number selection

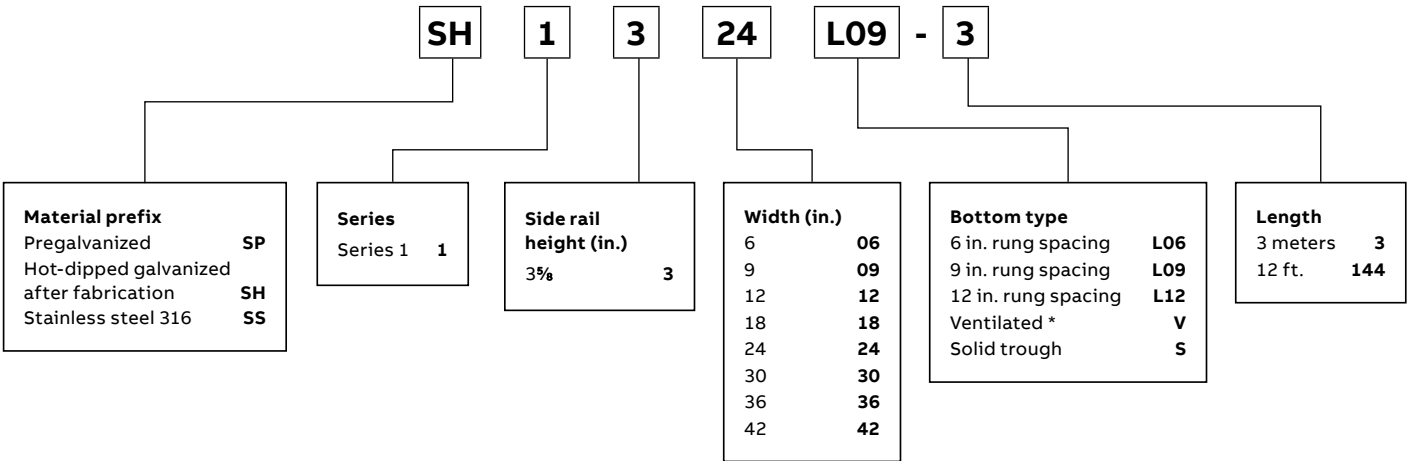

Dimensions

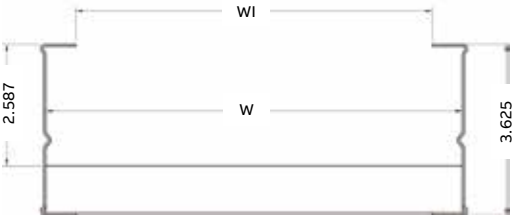SP1-3, SH1-3, SS1-3		
	W (in.)	Wi (in.)
	6	4.5
	9	7.5
	12	10.5
	18	16.5
	24	22.5
	30	28.5
	36	34.5
	42	40.5

Technical specifications
Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray (side rail, rung, etc.) above and beyond published load class.

Load ratings: 1.5 safety factor

	Series	Side rail design factors 1 pair	Classifications			
			NEMA	CSA	UL	ABS
	SP1-3	Ix = 0.80 in. ⁴ Sx = 0.44 in. ³ Area = 0.49 in. ²	12A	C/3m	UL cross sectional area : 0.40 in. ²	Stainless steel only
	SH1-3					
	SS1-3					

Steel straight lengths

4 in. straight sections/series 1-4, 3-4 – Ladder, ventilated and solid trough



Technical specifications


All calculations and data are based on 42 in. wide cable trays with rungs spaced on 12 in. centers with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

4 in. straight sections/series 1-4, 3-4 – Ladder, ventilated and solid trough

		Support span (feet)							
Series		6	8	10	12	14	16	18	20
SP1-4	Load (lb)/ft.)	420	236	151	105	–	–	–	–
SH1-4	Deflection (in.)	0.207	0.368	0.574	0.827	–	–	–	–
SS1-4	Deflection factor	0.0005	0.0016	0.0038	0.0079	–	–	–	–
SP3-4	Load (lb)/ft.)	556	313	200	139	102	78	62	50
SH3-4	Deflection (in.)	0.243	0.432	0.674	0.971	1.322	1.727	2.185	2.698
SS3-4	Deflection factor	0.0004	0.0014	0.0034	0.0070	0.0130	0.0221	0.0354	0.0540

Straight section number selection

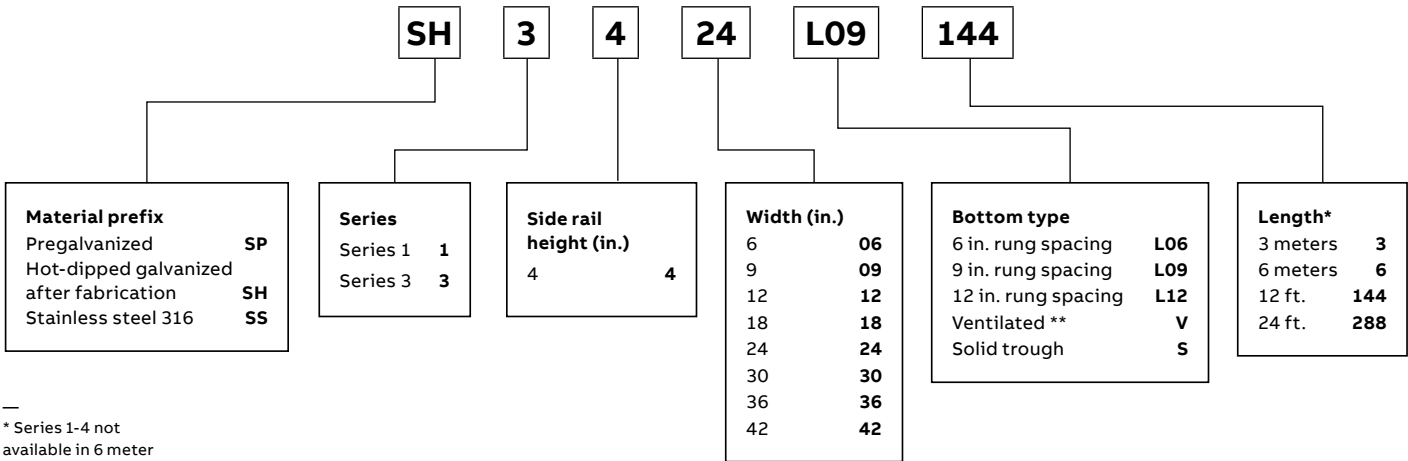


Dimensions

	SP1-4, SH1-4, SS1-4, SP3-4, SH3-4, SS3-4	
	W (in.)	Wi (in.)
	6	3.34
	9	6.34
	12	9.34
	18	15.34
	24	21.34
	30	27.34
	36	33.34
	42	39.34

Technical specifications

Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray (side rail, rung, etc.) above and beyond published load class.

Load ratings: 1.5 safety factor

	Series	Side rail design factors 1 pair	Classifications			
			NEMA	CSA	UL	ABS
	SP1-4 SH1-4 SS1-4	$I_x = 1.97 \text{ in.}^4$ $S_x = 0.79 \text{ in.}^3$ Area = 0.68 in.^2	12C	D/3m	UL cross sectional area: 0.70 in.^2	Stainless steel only
	SP3-4 SH3-4 SS3-4	$I_x = 2.22 \text{ in.}^4$ $S_x = 1.02 \text{ in.}^3$ Area = 1.08 in.^2	20A	D/6m	UL cross sectional area: 0.70 in.^2	Stainless steel only

Steel straight lengths

5 in. straight sections/series 2-5, 4-5, 5-5 – Ladder, ventilated and solid trough



Technical specifications


All calculations and data are based on 42 in. wide cable trays with rungs spaced on 12 in. centers with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

5 in. straight sections/series 2-5, 4-5, 5-5 – Ladder, ventilated and solid trough

		Support span (feet)							
Series		6	8	10	12	14	16	18	20
SP2-5	Load (lb)/ft.)	556	313	200	139	102	78	62	50
SH2-5	Deflection (in.)	0.187	0.332	0.519	0.747	1.017	1.329	1.682	2.076
SS2-5	Deflection factor	0.0001	0.0011	0.0026	0.0054	0.0100	0.0170	0.0272	0.0415
SP4-5	Load (lb)/ft.)	833	469	300	208	153	117	93	75
SH4-5	Deflection (in.)	0.216	0.384	0.600	0.864	1.176	1.536	1.944	2.400
SS4-5	Deflection factor	0.0003	0.0008	0.0020	0.0041	0.0077	0.0131	0.0211	0.0320
SP5-5	Load (lb)/ft.)	–	625	400	278	204	156	123	100
SH5-5	Deflection (in.)	–	0.414	0.647	0.932	1.269	1.657	2.097	2.589
SS5-5	Deflection factor	–	0.0007	0.0016	0.0034	0.0062	0.0106	0.0170	0.0259

Straight section number selection

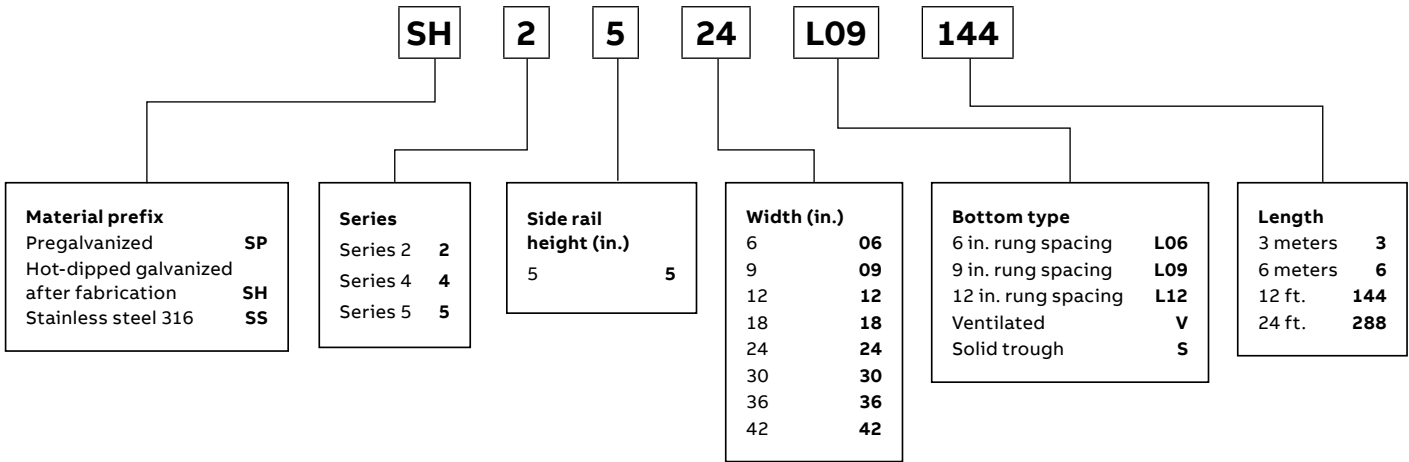

For fittings, consult pages A48 to A98.

Dimensions




SP2-5, SH2-5, SS2-5, SP4-5, SH4-5, SS4-5, SP5-5, SH5-5, SS5-5

W (in.)	Wi (in.)
6	3.34
9	6.34
12	9.34
18	15.34
24	21.34
30	27.34
36	33.34
42	39.34

Technical specifications

Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray (side rail, rung, etc.) above and beyond published load class.

Load ratings: 1.5 safety factor



Series	Side rail design factors 1 pair	Classifications			
		NEMA	CSA	UL	ABS
SP2-5 SH2-5 SS2-5	$I_x = 2.89 \text{ in.}^4$ $S_x = 1.09 \text{ in.}^3$ Area = 0.78 in.^2	20A	D/6m	UL cross sectional area: 0.70 in.^2	Stainless steel only
SP4-5 SH4-5 SS4-5	$I_x = 3.75 \text{ in.}^4$ $S_x = 1.40 \text{ in.}^3$ Area = 1.02 in.^2	20B	E/6m	UL cross sectional area: 1.00 in.^2	Stainless steel only
SP5-5 SH5-5 SS5-5	$I_x = 4.64 \text{ in.}^4$ $S_x = 1.73 \text{ in.}^3$ Area = 1.24 in.^2	20C	Exceeds E/6m	UL cross sectional area: 1.00 in.^2	Stainless steel only

Steel straight lengths

6 in. straight sections/series 1-6, 3-6, 4-6 – Ladder, ventilated and solid trough



Technical specifications


All calculations and data are based on 42 in. wide cable trays with rungs spaced on 12 in. centers with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

6 in. straight sections/series 1-6, 3-6, 4-6 – Ladder, ventilated and solid trough

		Support span (feet)							
Series		6	8	10	12	14	16	18	20
SP1-6	Load (lb)/ft.)	556	313	200	139	102	78	62	50
SH1-6	Deflection (in.)	0.122	0.216	0.338	0.486	0.662	0.865	1.095	1.351
SS1-6	Deflection factor	0.0002	0.0007	0.0017	0.0035	0.0065	0.0111	0.0177	0.0270
SP3-6	Load (lb)/ft.)	833	469	300	208	153	117	93	75
SH3-6	Deflection (in.)	0.151	0.268	0.419	0.603	0.821	1.072	1.357	1.675
SS3-6	Deflection factor	0.0002	0.0006	0.0014	0.0029	0.0054	0.0091	0.0147	0.0223
SP4-6	Load (lb)/ft.)	–	728	466	324	238	182	144	117
SH4-6	Deflection (in.)	–	0.312	0.487	0.702	0.955	1.247	1.579	1.949
SS4-6	Deflection factor	–	0.0004	0.0010	0.0022	0.0040	0.0069	0.0110	0.0167

Straight section number selection

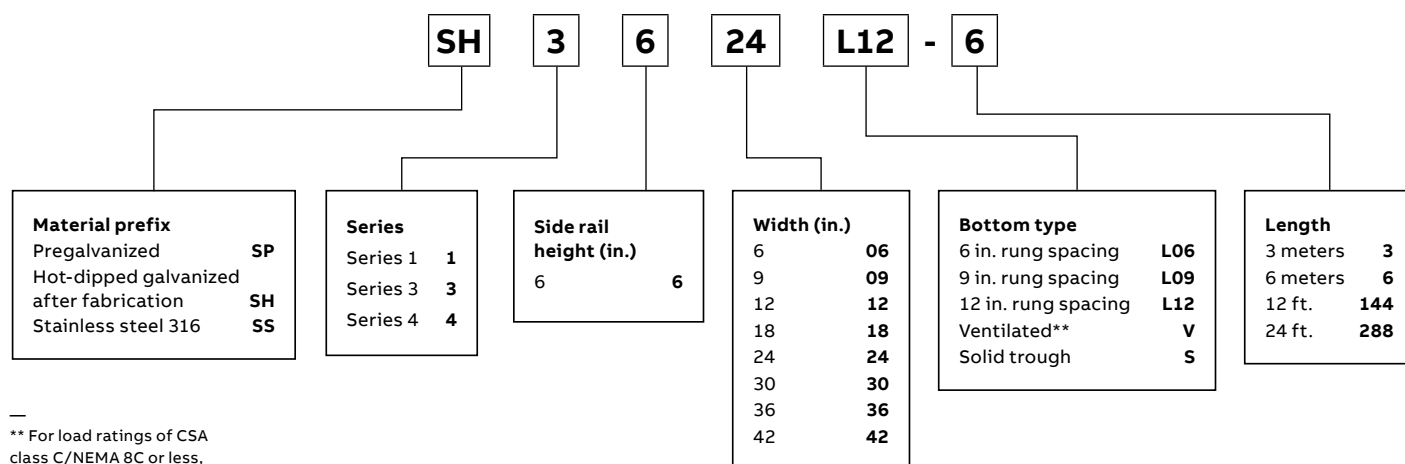

** For load ratings of CSA class C/NEMA 8C or less, please see an alternative ventilated series of cable tray called One-Piece found on pages A174 to A207 of this catalogue.

For fittings, consult pages A48 to A98.


Dimensions

SP1-6, SH1-6, SS1-6, SP3-6, SH3-6, SS3-6, SP4-6, SH4-6, SS4-6		
	W (in.)	Wi (in.)
	6	3.34
	9	6.34
	12	9.34
	18	15.34
	24	21.34
	30	27.34
	36	33.34
	42	39.34

Technical specifications

Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray (side rail, rung, etc.) above and beyond published load class.

Load ratings: 1.5 safety factor

	Series	Side rail design factors 1 pair	Classifications			
			NEMA	CSA	UL	ABS
	SP1-6	$I_x = 4.44 \text{ in.}^4$ $S_x = 1.39 \text{ in.}^3$ $\text{Area} = 0.87 \text{ in.}^2$	20A	D/6m	UL cross sectional area: 0.70 in. ²	Stainless steel only
	SH1-6					
	SS1-6					
	SP3-6	$I_x = 5.37 \text{ in.}^4$ $S_x = 1.7 \text{ in.}^3$ $\text{Area} = 1.23 \text{ in.}^2$	20B	E/6m	UL cross sectional area: 1.00 in. ²	Stainless steel only
	SH3-6					
	SS3-6					
	SP4-6	$I_x = 7.17 \text{ in.}^4$ $S_x = 2.25 \text{ in.}^3$ $\text{Area} = 1.47 \text{ in.}^2$	20C	Exceeds E/6m	UL cross sectional area: 1.00 in. ²	Stainless steel only
	SH4-6					
	SS4-6					

Steel straight lengths

7 in. straight sections/series 3-7 – Ladder, ventilated and solid trough



Technical specifications


All calculations and data are based on 42 in. wide cable trays with rungs spaced on 12 in. centers with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

6 in. straight sections/series 1-6, 3-6, 4-6 – Ladder, ventilated and solid trough

		Support span (feet)							
Series		6	8	10	12	14	16	18	20
SP3-7	Load (lb)/ft.)	–	750	480	333	245	188	148	120
SH3-7	Deflection (in.)	–	0.221	0.346	0.498	0.678	0.885	1.120	1.383
SS3-7	Deflection Factor	–	0.0003	0.0007	0.0015	0.0028	0.0047	0.0076	0.0115


Straight section number selection

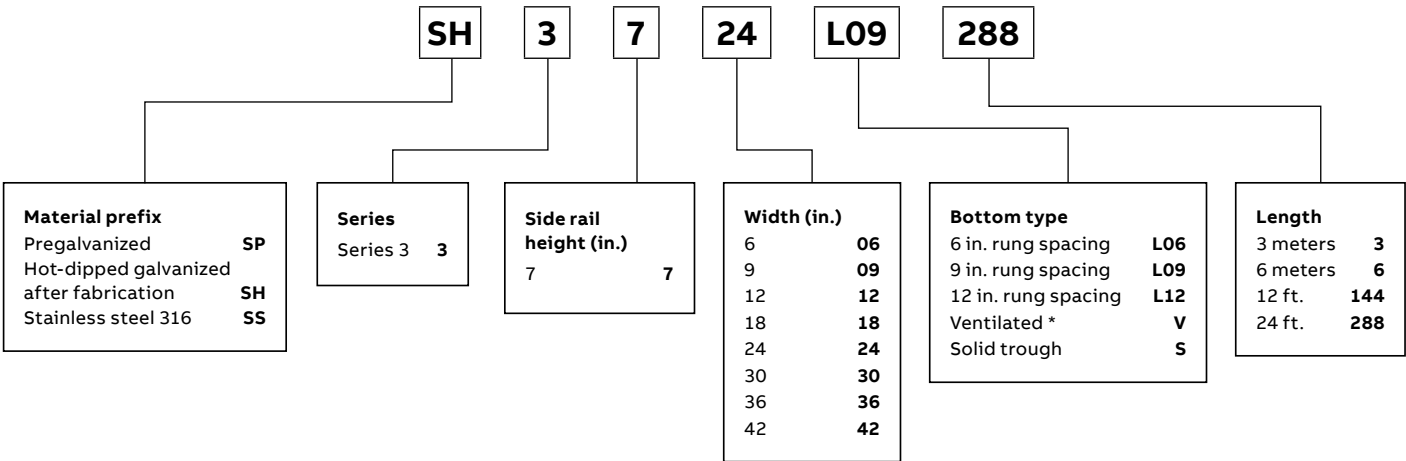

* For load ratings of CSA class C/NEMA 12C or less, please see an alternative ventilated series of cable tray called One-Piece found on pages A174 to A207 of this catalogue.

For fittings consult, pages A48 to A98.


—
Dimensions

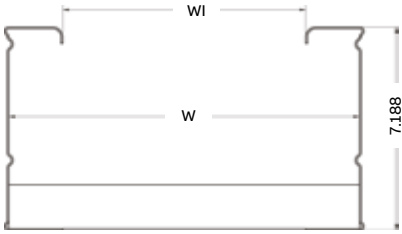SP3-7, SH3-7, SS3-7		
	W (in.)	Wi (in.)
	6	3.34
	9	6.34
	12	9.34
	18	15.34
	24	21.34
	30	27.34
	36	33.34
	42	39.34

Technical specifications

Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray (side rail, rung, etc.) above and beyond published load class.

—
Load ratings: 1.5 safety factor

	Series	Side rail design factors 1 pair	Classifications			
			NEMA	CSA	UL	ABS
	SP3-7	Ix = 10.41 in. ⁴ Sx = 2.82 in. ³ Area = 1.54 in. ²	Exceeds 20C	Exceeds E/6m	UL cross sectional area: 1.50 in. ²	Stainless steel only
	SH3-7					
	SS3-7					

Steel fittings

Introducing our new flexible coupler


Exterior strap provides accurate radius to meet your cable tray design requirements.

The flexible coupler provides easy installation without measuring and cutting cable tray side rails. Once installed, the coupler allows for electrical continuity, therefore eliminating the requirement for a bonding jumper.

- Formed ribs provide better cable protection
- Fast and easy installation
- Meets the electrical continuity requirement of NEMA VE1 and CSA C22.2 No. 126.1

Features and benefits

- Reduces installation time
- No need for a bonding jumper
- Flexible and economical alternative to regular AU/AH fitting

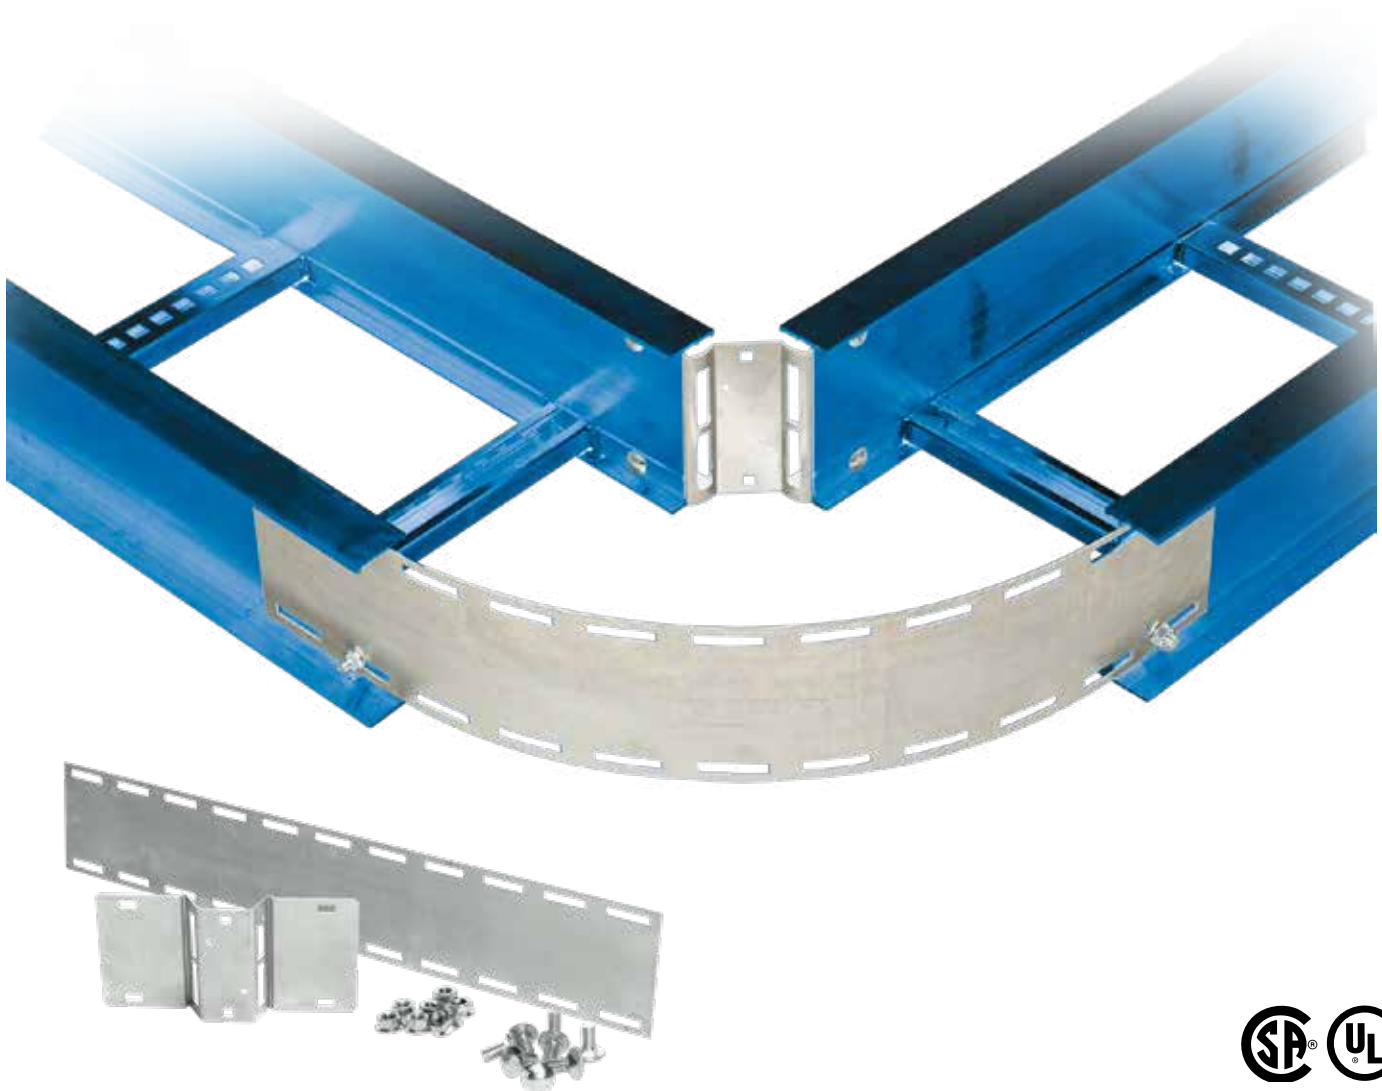

Steel fittings

Horizontal adjustable plate

Steel – Flexible coupler



Cat. no.	Material	Side rail height (in.)	Tray width (in.)
(Prefix)-(*)06HBP	SPW, SHW, SSW	3 to 7	06
(Prefix)-(*)09HBP	SPW, SHW, SSW	3 to 7	09
(Prefix)-(*)12HBP	SPW, SHW, SSW	3 to 7	12
(Prefix)-(*)18HBP	SPW, SHW, SSW	3 to 7	18
(Prefix)-(*)24HBP	SPW, SHW, SSW	3 to 7	24
(Prefix)-(*)30HBP	SPW, SHW, SSW	3 to 7	30
(Prefix)-(*)36HBP	SPW, SHW, SSW	3 to 7	36
(Prefix)-(*)42HBP	SPW, SHW, SSW	3 to 7	42

*Insert side rail height

Optional rung information (provides additional cable support)

Cat. no.	Material	Tray width (in.)
(Prefix)-R06HBP	SPW, SHW, SSW	06
(Prefix)-R09HBP	SPW, SHW, SSW	09
(Prefix)-R12HBP	SPW, SHW, SSW	12
(Prefix)-R18HBP	SPW, SHW, SSW	18
(Prefix)-R24HBP	SPW, SHW, SSW	24
(Prefix)-R30HBP	SPW, SHW, SSW	30
(Prefix)-R36HBP	SPW, SHW, SSW	36
(Prefix)-R42HBP	SPW, SHW, SSW	42

Load rating with optional rung

Tray width	Side rail height		
	3 in. (76 mm)	4 and 5 in. (102 and 127 mm)	6 and 7 in. (152 and 178 mm)
36 in. (914 mm)	50 lb/ft. (74 kg/m)	Al: 75 lb/ft. (112 kg/m)	Steel: 50 lb/ft. (74 kg/m)
30 in. (762 mm)	75 lb/ft. (112 kg/m)		100 lb/ft. (149 kg/m)
6 to 24 in. (152 to 610 mm)	100 lb/ft. (149 kg/m)	100 lb/ft. (149 kg/m)	100 lb/ft. (149 kg/m)

01 Fasten flexible coupler to tray.

02 Bend.

03 Fasten to the other length of cable tray.

04 Fasten the strap.




01



02



03

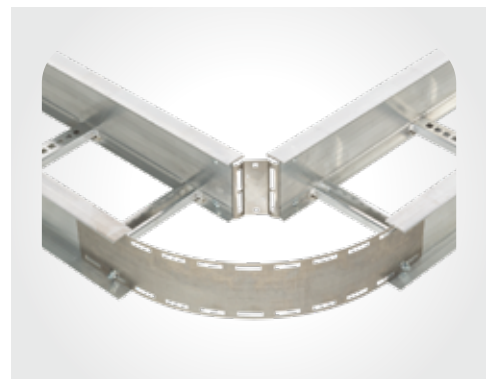


04



Steel fittings

Fittings number selection

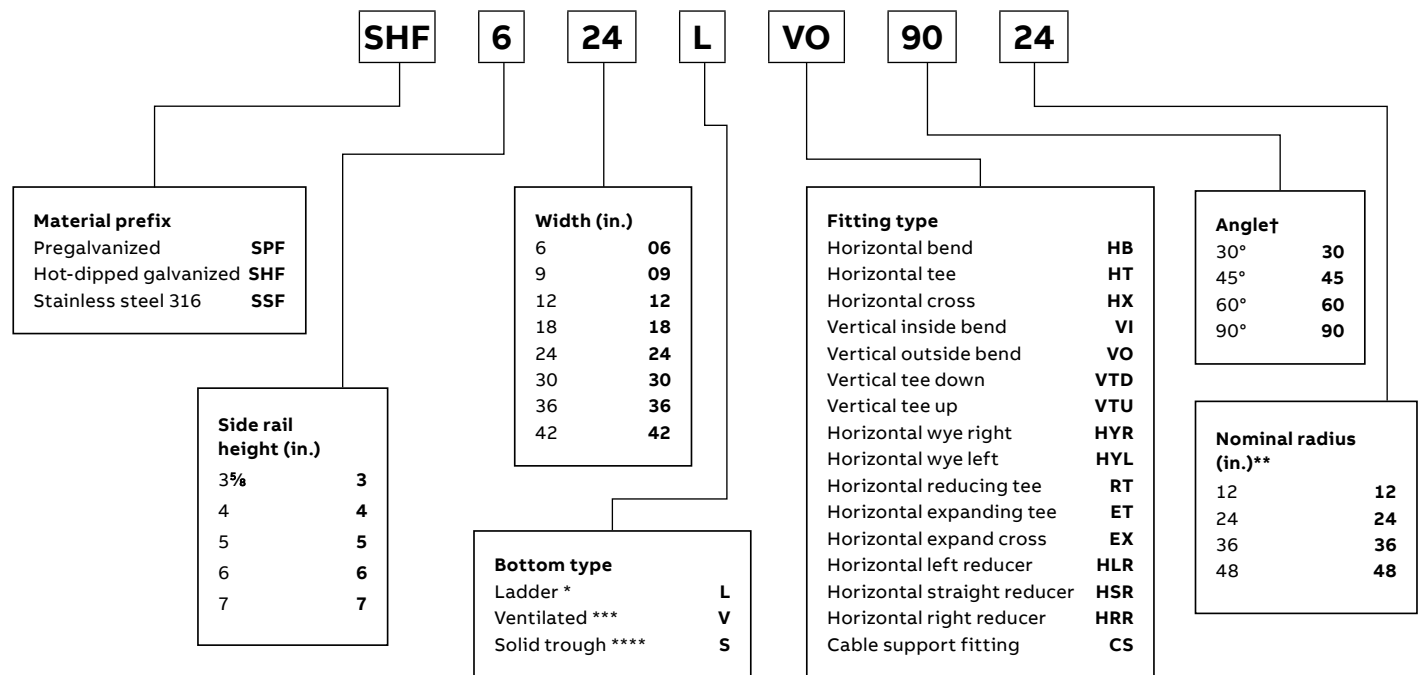

—
† For HB, VI, VO
fitting types only.

—
* Manufactured with
9 in. rung spacing
measured at the
center line of fitting.

—
** Radius is not required
for the following
fitting types: HYR,
HYL, HLR, HRR, HSR.


—
*** Manufactured with
4 in. edge-to-edge rung
spacing measured at the
center line of fitting.

—
**** Manufactured with
flat sheet inserted under
rungs with 9 in. rung
spacing measured at the
center line of fitting.

Steel fittings


90°/60° Horizontal bend fittings

90° Horizontal bend


	Nominal		Cat. no.	Dimensions (in.)	
	Radius (in.)	Width (in.)		X	Y
	12	6	Prefix(t)-06-(*)-HB90-12	15	15
	12	9	Prefix(t)-09-(*)-HB90-12	16½	16½
	12	12	Prefix(t)-12-(*)-HB90-12	18	18
	12	18	Prefix(t)-18-(*)-HB90-12	21	21
	12	24	Prefix(t)-24-(*)-HB90-12	24	24
	12	30	Prefix(t)-30-(*)-HB90-12	27	27
	12	36	Prefix(t)-36-(*)-HB90-12	30	30
	12	42	Prefix(t)-42-(*)-HB90-12	33	33
	24	6	Prefix(t)-06-(*)-HB90-24	27	27
	24	9	Prefix(t)-09-(*)-HB90-24	28½	28½
	24	12	Prefix(t)-12-(*)-HB90-24	30	30
	24	18	Prefix(t)-18-(*)-HB90-24	33	33
	24	24	Prefix(t)-24-(*)-HB90-24	36	36
	24	30	Prefix(t)-30-(*)-HB90-24	39	39
	24	36	Prefix(t)-36-(*)-HB90-24	42	42
	24	42	Prefix(t)-42-(*)-HB90-24	45	45
	36	6	Prefix(t)-06-(*)-HB90-36	39	39
	36	9	Prefix(t)-09-(*)-HB90-36	40½	40½
	36	12	Prefix(t)-12-(*)-HB90-36	42	42
	36	18	Prefix(t)-18-(*)-HB90-36	45	45
	36	24	Prefix(t)-24-(*)-HB90-36	48	48
	36	30	Prefix(t)-30-(*)-HB90-36	51	51
	36	36	Prefix(t)-36-(*)-HB90-36	54	54
	36	42	Prefix(t)-42-(*)-HB90-36	57	57
	48	6	Prefix(t)-06-(*)-HB90-48	51	51
	48	9	Prefix(t)-09-(*)-HB90-48	52½	52½
	48	12	Prefix(t)-12-(*)-HB90-48	54	54
	48	18	Prefix(t)-18-(*)-HB90-48	57	57
	48	24	Prefix(t)-24-(*)-HB90-48	60	60
	48	30	Prefix(t)-30-(*)-HB90-48	63	63
	48	36	Prefix(t)-36-(*)-HB90-48	66	66
	48	42	Prefix(t)-42-(*)-HB90-48	69	69

(t) Insert side rail height (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

Part numbering system

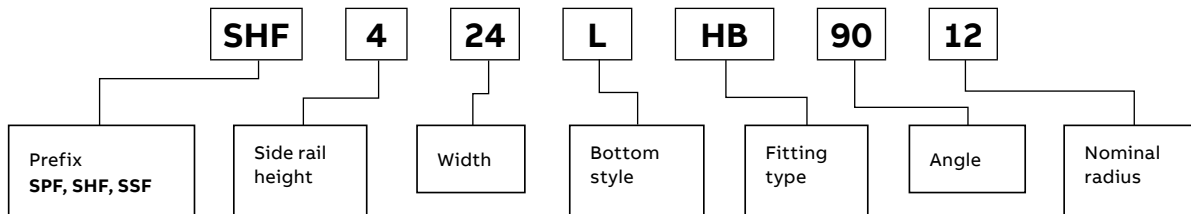

60° Horizontal bend

	Nominal		Cat. no.	Dimensions (in.)		
	Radius (in.)	Width (in.)		X	Y	Z
	12	6	Prefix(t)-06-(*)-HB60-12	14 $\frac{7}{8}$	8 $\frac{5}{8}$	9 $\frac{15}{16}$
	12	9	Prefix(t)-09-(*)-HB60-12	16 $\frac{3}{16}$	9 $\frac{3}{8}$	10 $\frac{13}{16}$
	12	12	Prefix(t)-12-(*)-HB60-12	17 $\frac{1}{2}$	10 $\frac{1}{8}$	11 $\frac{11}{16}$
	12	18	Prefix(t)-18-(*)-HB60-12	20 $\frac{1}{16}$	11 $\frac{5}{8}$	13 $\frac{3}{8}$
	12	24	Prefix(t)-24-(*)-HB60-12	22 $\frac{11}{16}$	13 $\frac{3}{8}$	15 $\frac{1}{8}$
	12	30	Prefix(t)-30-(*)-HB60-12	25 $\frac{5}{16}$	14 $\frac{5}{8}$	16 $\frac{7}{8}$
	12	36	Prefix(t)-36-(*)-HB60-12	27 $\frac{7}{8}$	16 $\frac{3}{8}$	18 $\frac{9}{16}$
	12	42	Prefix(t)-42-(*)-HB60-12	30 $\frac{1}{2}$	17 $\frac{7}{8}$	20 $\frac{5}{16}$
	24	6	Prefix(t)-06-(*)-HB60-24	25 $\frac{5}{16}$	14 $\frac{3}{8}$	16 $\frac{7}{8}$
	24	9	Prefix(t)-09-(*)-HB60-24	26 $\frac{9}{16}$	15 $\frac{3}{8}$	17 $\frac{3}{4}$
	24	12	Prefix(t)-12-(*)-HB60-24	27 $\frac{7}{8}$	16 $\frac{1}{8}$	18 $\frac{9}{16}$
	24	18	Prefix(t)-18-(*)-HB60-24	30 $\frac{1}{2}$	17 $\frac{3}{8}$	20 $\frac{5}{16}$
	24	24	Prefix(t)-24-(*)-HB60-24	33 $\frac{3}{16}$	19 $\frac{1}{8}$	22 $\frac{1}{16}$
	24	30	Prefix(t)-30-(*)-HB60-24	35 $\frac{11}{16}$	20 $\frac{5}{8}$	23 $\frac{13}{16}$
	24	36	Prefix(t)-36-(*)-HB60-24	38 $\frac{1}{4}$	22 $\frac{1}{8}$	25 $\frac{1}{2}$
	24	42	Prefix(t)-42-(*)-HB60-24	40 $\frac{7}{8}$	23 $\frac{3}{8}$	27 $\frac{1}{4}$
	36	6	Prefix(t)-06-(*)-HB60-36	35 $\frac{11}{16}$	20 $\frac{5}{8}$	23 $\frac{13}{16}$
	36	9	Prefix(t)-09-(*)-HB60-36	37	21 $\frac{3}{8}$	24 $\frac{5}{8}$
	36	12	Prefix(t)-12-(*)-HB60-36	38 $\frac{3}{4}$	22 $\frac{1}{8}$	25 $\frac{1}{2}$
	36	18	Prefix(t)-18-(*)-HB60-36	40 $\frac{7}{8}$	23 $\frac{3}{8}$	27 $\frac{7}{8}$
	36	24	Prefix(t)-24-(*)-HB60-36	43 $\frac{1}{2}$	25 $\frac{5}{8}$	29
	36	30	Prefix(t)-30-(*)-HB60-36	46 $\frac{1}{16}$	26 $\frac{5}{8}$	30 $\frac{11}{16}$
	36	36	Prefix(t)-36-(*)-HB60-36	48 $\frac{11}{16}$	28 $\frac{1}{8}$	32 $\frac{7}{16}$
	36	42	Prefix(t)-42-(*)-HB60-36	51 $\frac{1}{4}$	29 $\frac{3}{8}$	34 $\frac{3}{16}$
	48	6	Prefix(t)-06-(*)-HB60-48	46 $\frac{1}{16}$	26 $\frac{5}{8}$	30 $\frac{11}{16}$
	48	9	Prefix(t)-09-(*)-HB60-48	47 $\frac{3}{8}$	27 $\frac{3}{8}$	31 $\frac{1}{16}$
	48	12	Prefix(t)-12-(*)-HB60-48	48 $\frac{11}{16}$	28 $\frac{1}{8}$	32 $\frac{7}{16}$
	48	18	Prefix(t)-18-(*)-HB60-48	51 $\frac{1}{16}$	29 $\frac{3}{8}$	34 $\frac{3}{16}$
	48	24	Prefix(t)-24-(*)-HB60-48	53 $\frac{3}{8}$	31 $\frac{1}{8}$	35 $\frac{15}{16}$
	48	30	Prefix(t)-30-(*)-HB60-48	56 $\frac{7}{16}$	32 $\frac{5}{8}$	37 $\frac{3}{8}$
	48	36	Prefix(t)-36-(*)-HB60-48	59 $\frac{1}{16}$	34 $\frac{1}{8}$	39 $\frac{3}{8}$
	48	42	Prefix(t)-42-(*)-HB60-48	61 $\frac{11}{16}$	35 $\frac{5}{8}$	41 $\frac{1}{8}$

(t) Insert side rail height (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.


Selection guide

- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 90°, 60°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.

Steel fittings

45°/30° Horizontal bend fittings


45° Horizontal bend




Nominal			Dimensions (in.)		
Radius (in.)	Width (in.)	Cat. no.	X	Y	Z
12	6	Prefix(t)-06-(*)-HB45-12	13 ⁵ / ₁₆	5 ⁵ / ₁₆	8
12	9	Prefix(t)-09-(*)-HB45-12	14 ¹¹ / ₁₆	6 ¹ / ₁₆	8 ⁹ / ₁₆
12	12	Prefix(t)-12-(*)-HB45-12	15 ³ / ₄	6 ¹ / ₂	9 ³ / ₁₆
12	18	Prefix(t)-18-(*)-HB45-12	17 ⁷ / ₈	7 ³ / ₈	10 ⁷ / ₁₆
12	24	Prefix(t)-24-(*)-HB45-12	20	8 ³ / ₄	11 ¹¹ / ₁₆
12	30	Prefix(t)-30-(*)-HB45-12	22 ¹ / ₁₆	9 ³ / ₈	12 ¹⁵ / ₁₆
12	36	Prefix(t)-36-(*)-HB45-12	24 ³ / ₁₆	10	14 ³ / ₁₆
12	42	Prefix(t)-42-(*)-HB45-12	26 ⁵ / ₁₆	10 ¹⁵ / ₁₆	15 ⁷ / ₁₆
24	6	Prefix(t)-06-(*)-HB45-24	22 ¹ / ₁₆	9 ³ / ₈	12 ¹⁵ / ₁₆
24	9	Prefix(t)-09-(*)-HB45-24	23 ³ / ₈	9 ⁹ / ₁₆	13 ³ / ₁₆
24	12	Prefix(t)-12-(*)-HB45-24	24 ³ / ₁₆	10	14 ³ / ₁₆
24	18	Prefix(t)-18-(*)-HB45-24	26 ⁵ / ₁₆	10 ¹⁵ / ₁₆	15 ⁷ / ₁₆
24	24	Prefix(t)-24-(*)-HB45-24	28 ⁷ / ₁₆	11 ¹³ / ₁₆	16 ¹¹ / ₁₆
24	30	Prefix(t)-30-(*)-HB45-24	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆
24	36	Prefix(t)-36-(*)-HB45-24	32 ¹¹ / ₁₆	13 ⁹ / ₁₆	19 ¹ / ₈
24	42	Prefix(t)-42-(*)-HB45-24	34 ¹³ / ₁₆	14 ⁷ / ₈	20 ³ / ₈
36	6	Prefix(t)-06-(*)-HB45-36	30 ⁹ / ₁₆	12 ¹¹ / ₁₆	17 ¹⁵ / ₁₆
36	9	Prefix(t)-09-(*)-HB45-36	31 ⁵ / ₈	13 ³ / ₈	18 ⁹ / ₁₆
36	12	Prefix(t)-12-(*)-HB45-36	32 ¹¹ / ₁₆	13 ⁹ / ₁₆	19 ¹ / ₈
36	18	Prefix(t)-18-(*)-HB45-36	34 ¹³ / ₁₆	14 ⁷ / ₁₆	20 ³ / ₈
36	24	Prefix(t)-24-(*)-HB45-36	36 ¹⁵ / ₁₆	15 ⁵ / ₁₆	21 ⁵ / ₈
36	30	Prefix(t)-30-(*)-HB45-36	39 ¹ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₈
36	36	Prefix(t)-36-(*)-HB45-36	41 ³ / ₁₆	17 ¹ / ₁₆	24 ¹ / ₈
36	42	Prefix(t)-42-(*)-HB45-36	43 ⁵ / ₁₆	17 ¹⁵ / ₁₆	25 ³ / ₈
48	6	Prefix(t)-06-(*)-HB45-48	39 ¹ / ₁₆	16 ³ / ₁₆	22 ⁷ / ₈
48	9	Prefix(t)-09-(*)-HB45-48	40 ⁵ / ₈	16 ³ / ₈	23 ¹ / ₂
48	12	Prefix(t)-12-(*)-HB45-48	41 ³ / ₁₆	17 ¹ / ₁₆	24 ¹ / ₈
48	18	Prefix(t)-18-(*)-HB45-48	43 ⁵ / ₁₆	17 ¹⁵ / ₁₆	25 ³ / ₈
48	24	Prefix(t)-24-(*)-HB45-48	45 ⁷ / ₁₆	18 ¹³ / ₁₆	26 ⁵ / ₈
48	30	Prefix(t)-30-(*)-HB45-48	47 ⁹ / ₁₆	19 ¹¹ / ₁₆	27 ⁷ / ₈
48	36	Prefix(t)-36-(*)-HB45-48	49 ¹¹ / ₁₆	20 ⁹ / ₁₆	29 ¹ / ₈
48	42	Prefix(t)-42-(*)-HB45-48	51 ¹³ / ₁₆	21 ⁷ / ₁₆	30 ³ / ₁₆

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

Part numbering system

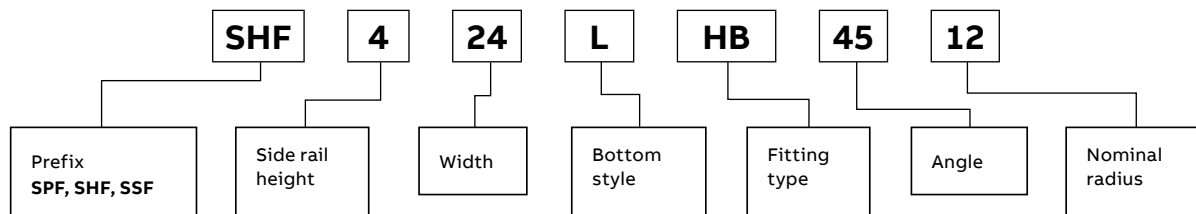

30° Horizontal bend



Nominal			Dimensions (in.)		
Radius (in.)	Width (in.)	Cat. no.	X	Y	Z
12	6	Prefix(t)-06-(*)-HB30-12	11 ⁵ / ₈	3 ⁵ / ₈	6 ³ / ₁₆
12	9	Prefix(t)-09-(*)-HB30-12	12 ³ / ₈	3 ⁵ / ₁₆	6 ⁵ / ₈
12	12	Prefix(t)-12-(*)-HB30-12	13 ¹ / ₂	3 ¹ / ₂	7
12	18	Prefix(t)-18-(*)-HB30-12	14 ⁵ / ₈	3 ¹⁵ / ₁₆	7 ¹³ / ₁₆
12	24	Prefix(t)-24-(*)-HB30-12	16 ¹ / ₈	4 ⁵ / ₁₆	8 ⁵ / ₈
12	30	Prefix(t)-30-(*)-HB30-12	17 ⁷ / ₈	4 ¹¹ / ₁₆	9 ⁷ / ₁₆
12	36	Prefix(t)-36-(*)-HB30-12	19 ¹ / ₈	5 ⁵ / ₈	10 ³ / ₄
12	42	Prefix(t)-42-(*)-HB30-12	20 ⁵ / ₈	5 ¹ / ₂	11 ¹ / ₁₆
24	6	Prefix(t)-06-(*)-HB30-24	17 ⁷ / ₈	4 ¹¹ / ₁₆	9 ⁷ / ₁₆
24	9	Prefix(t)-09-(*)-HB30-24	18 ³ / ₈	4 ¹⁵ / ₁₆	9 ¹³ / ₁₆
24	12	Prefix(t)-12-(*)-HB30-24	19 ¹ / ₈	5 ⁵ / ₁₆	10 ⁴ / ₁₆
24	18	Prefix(t)-18-(*)-HB30-24	20 ⁵ / ₈	5 ⁵ / ₁₆	11 ¹ / ₁₆
24	24	Prefix(t)-24-(*)-HB30-24	22 ¹ / ₈	5 ¹⁵ / ₁₆	11 ¹³ / ₁₆
24	30	Prefix(t)-30-(*)-HB30-24	23 ³ / ₈	6 ⁵ / ₁₆	12 ¹⁰ / ₁₆
24	36	Prefix(t)-36-(*)-HB30-24	25 ¹ / ₈	6 ¹⁵ / ₁₆	13 ⁷ / ₁₆
24	42	Prefix(t)-42-(*)-HB30-24	26 ⁵ / ₈	7 ¹ / ₈	14 ¹ / ₄
36	6	Prefix(t)-06-(*)-HB30-36	23 ³ / ₈	6 ⁵ / ₁₆	12 ⁵ / ₈
36	9	Prefix(t)-09-(*)-HB30-36	24 ³ / ₈	6 ¹ / ₂	13 ³ / ₁₆
36	12	Prefix(t)-12-(*)-HB30-36	25 ¹ / ₈	6 ³ / ₄	13 ⁷ / ₁₆
36	18	Prefix(t)-18-(*)-HB30-36	26 ⁵ / ₈	7 ¹ / ₄	14 ¹ / ₄
36	24	Prefix(t)-24-(*)-HB30-36	28 ¹ / ₈	7 ¹ / ₂	15 ¹ / ₁₆
36	30	Prefix(t)-30-(*)-HB30-36	29 ⁵ / ₈	7 ¹⁵ / ₁₆	15 ⁷ / ₈
36	36	Prefix(t)-36-(*)-HB30-36	31 ¹ / ₈	8 ⁵ / ₁₆	16 ¹¹ / ₁₆
36	42	Prefix(t)-42-(*)-HB30-36	32 ⁵ / ₈	8 ³ / ₄	17 ¹ / ₂
48	6	Prefix(t)-06-(*)-HB30-48	29 ⁵ / ₈	7 ¹⁵ / ₁₆	15 ⁷ / ₈
48	9	Prefix(t)-09-(*)-HB30-48	30 ³ / ₈	8 ⁵ / ₈	16 ¹ / ₄
48	12	Prefix(t)-12-(*)-HB30-48	31 ¹ / ₈	8 ⁵ / ₁₆	16 ¹¹ / ₁₆
48	18	Prefix(t)-18-(*)-HB30-48	32 ⁵ / ₈	8 ³ / ₄	17 ¹ / ₂
48	24	Prefix(t)-24-(*)-HB30-48	34 ¹ / ₈	9 ¹ / ₈	18 ¹ / ₄
48	30	Prefix(t)-30-(*)-HB30-48	35 ⁵ / ₈	9 ¹⁵ / ₁₆	19 ³ / ₁₆
48	36	Prefix(t)-36-(*)-HB30-48	37 ¹ / ₈	9 ¹⁵ / ₁₆	19 ⁷ / ₈
48	42	Prefix(t)-42-(*)-HB30-48	38 ⁵ / ₈	10 ⁵ / ₁₆	20 ¹¹ / ₁₆

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.



Selection guide

- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 45°, 30°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.

Steel fittings

Horizontal tee and cross fittings


Horizontal tee

	Nominal		Cat. no.	Dimensions (in.)	
	Radius (in.)	Width (in.)		X	Y
	12	6	Prefix(t)-06-(*)-HT12	15	30
	12	9	Prefix(t)-09-(*)-HT12	16½	33
	12	12	Prefix(t)-12-(*)-HT12	18	36
	12	18	Prefix(t)-18-(*)-HT12	21	42
	12	24	Prefix(t)-24-(*)-HT12	24	48
	12	30	Prefix(t)-30-(*)-HT12	27	54
	12	36	Prefix(t)-36-(*)-HT12	30	60
	12	42	Prefix(t)-42-(*)-HT12	33	66
	24	6	Prefix(t)-06-(*)-HT24	27	54
	24	9	Prefix(t)-09-(*)-HT24	28½	57
	24	12	Prefix(t)-12-(*)-HT24	30	60
	24	18	Prefix(t)-18-(*)-HT24	33	66
	24	24	Prefix(t)-24-(*)-HT24	36	72
	24	30	Prefix(t)-30-(*)-HT24	39	78
	24	36	Prefix(t)-36-(*)-HT24	42	84
	24	42	Prefix(t)-42-(*)-HT24	45	90
	36	6	Prefix(t)-06-(*)-HT36	39	78
	36	9	Prefix(t)-09-(*)-HT36	40½	81
	36	12	Prefix(t)-12-(*)-HT36	42	84
	36	18	Prefix(t)-18-(*)-HT36	45	90
	36	24	Prefix(t)-24-(*)-HT36	48	96
	36	30	Prefix(t)-30-(*)-HT36	51	102
	36	36	Prefix(t)-36-(*)-HT36	54	108
	36	42	Prefix(t)-42-(*)-HT36	57	114
	48	6	Prefix(t)-06-(*)-HT48	51	102
	48	9	Prefix(t)-09-(*)-HT48	52½	105
	48	12	Prefix(t)-12-(*)-HT48	54	108
	48	18	Prefix(t)-18-(*)-HT48	57	114
	48	24	Prefix(t)-24-(*)-HT48	60	120
	48	30	Prefix(t)-30-(*)-HT48	63	126
	48	36	Prefix(t)-36-(*)-HT48	66	132
	48	42	Prefix(t)-42-(*)-HT48	69	138



(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Tees include 2 pairs / crosses include 3 pairs of splice plates with hardware.

¥ Shipped with SPW-3/8HXHWK hardware kit.

Part numbering system

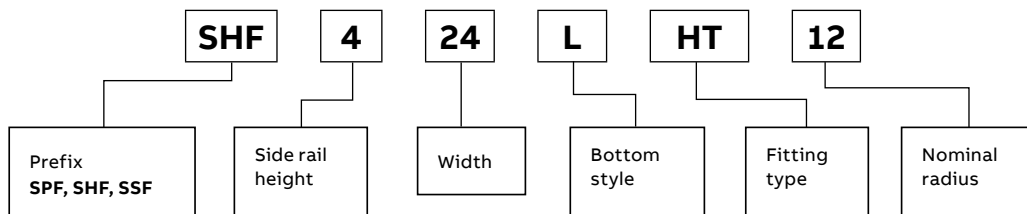

Horizontal cross

	Nominal		Cat. no.	Dimensions (in.)	
	Radius (in.)	Width (in.)		X	Y
	12	6	Prefix(t)-06-(*)-HX12	15	30
	12	9	Prefix(t)-09-(*)-HX12	16½	33
	12	12	Prefix(t)-12-(*)-HX12	18	36
	12	18	Prefix(t)-18-(*)-HX12	21	42
	12	24	Prefix(t)-24-(*)-HX12	24	48
	12	30	Prefix(t)-30-(*)-HX12	27	54
	12	36	Prefix(t)-36-(*)-HX12	30	60
	12	42	Prefix(t)-42-(*)-HX12	33	66
	24	6	Prefix(t)-06-(*)-HX24	27	54
	24	9	Prefix(t)-09-(*)-HX24	28½	57
	24	12	Prefix(t)-12-(*)-HX24	30	60
	24	18	Prefix(t)-18-(*)-HX24	33	66
	24	24	Prefix(t)-24-(*)-HX24	36	72
	24	30	Prefix(t)-30-(*)-HX24	39	78
	24	36	Prefix(t)-36-(*)-HX24	42	84
	24	42	Prefix(t)-42-(*)-HX24	45	90
	36	6	Prefix(t)-06-(*)-HX36	39	78
	36	9	Prefix(t)-09-(*)-HX36	40½	81
	36	12	Prefix(t)-12-(*)-HX36	42	84
	36	18	Prefix(t)-18-(*)-HX36	45	90
	36	24	Prefix(t)-24-(*)-HX36	48	96
	36	30 [¥]	Prefix(t)-30-(*)-HX36	51	102
	36	36 [¥]	Prefix(t)-36-(*)-HX36	54	108
	36	42 [¥]	Prefix(t)-42-(*)-HX36	57	114
	48	6	Prefix(t)-06-(*)-HX48	51	102
	48	9	Prefix(t)-09-(*)-HX48	52½	105
	48	12	Prefix(t)-12-(*)-HX48	54	108
	48	18	Prefix(t)-18-(*)-HX48	57	114
	48	24	Prefix(t)-24-(*)-HX48	60	120
	48	30	Prefix(t)-30-(*)-HX48	63	126
	48	36	Prefix(t)-36-(*)-HX48	66	132
	48	42	Prefix(t)-42-(*)-HX48	69	138

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Tees include 2 pairs / crosses include 3 pairs of splice plates with hardware.

¥ Shipped with SPW-3/8HXHWK hardware kit.

Selection guide

- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.

Steel fittings

Horizontal reducing tee fittings

Selection guide


- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Tray widths W1: 42, 36, 30, 24, 18, 12, 9 in.
- Tray widths W2: 36, 30, 24, 18, 12, 9, 6 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.

Horizontal reducing tee

Widths (in.)			Dimensions (in.)							
			(+ 12 in. Nominal radius		(+ 24 in. Nominal radius		(+ 36 in. Nominal radius		(+ 48 in. Nominal radius	
W1	W2	Cat. no.	X	Y	X	Y	X	Y	X	Y
42	36	Prefix(t)-4236-(*)-RT(+)	33	60	45	84	57	108	69	132
42	30	Prefix(t)-4230-(*)-RT(+)	33	54	45	78	57	102	69	126
42	24	Prefix(t)-4224-(*)-RT(+)	33	48	45	72	57	96	69	120
42	18	Prefix(t)-4218-(*)-RT(+)	33	42	45	66	57	90	69	114
42	12	Prefix(t)-4212-(*)-RT(+)	33	36	45	60	57	84	69	108
42	9	Prefix(t)-4209-(*)-RT(+)	33	33	45	57	57	81	69	105
42	6	Prefix(t)-4206-(*)-RT(+)	33	30	45	54	57	78	69	102
36	30	Prefix(t)-3630-(*)-RT(+)	30	54	42	78	54	102	66	126
36	24	Prefix(t)-3624-(*)-RT(+)	30	48	42	72	54	96	66	120
36	18	Prefix(t)-3618-(*)-RT(+)	30	42	42	66	54	90	66	114
36	12	Prefix(t)-3612-(*)-RT(+)	30	36	42	60	54	84	66	108
36	9	Prefix(t)-3609-(*)-RT(+)	30	33	42	57	54	81	66	105
36	6	Prefix(t)-3606-(*)-RT(+)	30	30	42	54	54	78	66	102
30	24	Prefix(t)-3024-(*)-RT(+)	27	48	39	72	51	96	63	120
30	18	Prefix(t)-3018-(*)-RT(+)	27	42	39	66	51	90	63	114
30	12	Prefix(t)-3012-(*)-RT(+)	27	36	39	60	51	84	63	108
30	9	Prefix(t)-3009-(*)-RT(+)	27	33	39	57	51	81	63	105
30	6	Prefix(t)-3006-(*)-RT(+)	27	30	39	54	51	78	63	102
24	18	Prefix(t)-2418-(*)-RT(+)	24	42	36	66	48	90	60	114
24	12	Prefix(t)-2412-(*)-RT(+)	24	36	36	60	48	84	60	108
24	9	Prefix(t)-2409-(*)-RT(+)	24	33	36	57	48	81	60	105
24	6	Prefix(t)-2406-(*)-RT(+)	24	30	36	54	48	78	60	102
18	12	Prefix(t)-1812-(*)-RT(+)	21	36	33	60	45	84	57	108
18	9	Prefix(t)-1809-(*)-RT(+)	21	33	33	57	45	81	57	105
18	6	Prefix(t)-1806-(*)-RT(+)	21	30	33	54	45	78	57	102
12	9	Prefix(t)-1209-(*)-RT(+)	18	33	30	57	42	81	54	105
12	6	Prefix(t)-1206-(*)-RT(+)	18	30	30	54	42	78	54	102
9	6	Prefix(t)-0906-(*)-RT(+)	16½	30	28½	54	40½	78	52½	102

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. (+) Insert radius (12 in.–48 in.). Includes 2 pairs of splice plates with hardware.

Part numbering system

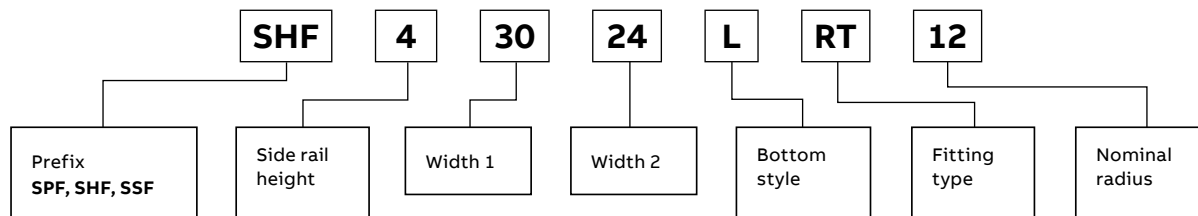

Steel fittings

Horizontal expanding tee fittings

Selection guide


- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
Tray widths W1: 36, 30, 24, 18, 12, 9, 6 in.
- Tray widths W2: 42, 36, 30, 24, 18, 12, 9 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L- ladder, V- ventilated, S- solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.

Horizontal expanding tee

Widths (in.)			Dimensions (in.)							
			(+ 12 in. Nominal radius		(+ 24 in. Nominal radius		(+ 36 in. Nominal radius		(+ 48 in. Nominal radius	
W1	W2	Cat. no.	X	Y	X	Y	X	Y	X	Y
36	42	Prefix(t)-3642-(*)-ET(+)	30	66	42	90	54	114	66	138
30	36	Prefix(t)-3036-(*)-ET(+)	27	60	39	84	51	108	63	132
30	42	Prefix(t)-3042-(*)-ET(+)	27	66	39	90	51	114	63	138
24	30	Prefix(t)-2430-(*)-ET(+)	24	54	36	78	48	102	60	126
24	36	Prefix(t)-2436-(*)-ET(+)	24	60	36	84	48	108	60	132
24	42	Prefix(t)-2442-(*)-ET(+)	24	66	36	90	48	114	60	138
18	24	Prefix(t)-1824-(*)-ET(+)	21	48	33	72	45	96	57	120
18	30	Prefix(t)-1830-(*)-ET(+)	21	54	33	78	45	102	57	126
18	36	Prefix(t)-1836-(*)-ET(+)	21	60	33	84	45	108	57	132
18	42	Prefix(t)-1842-(*)-ET(+)	21	66	33	90	45	114	57	138
12	18	Prefix(t)-1218-(*)-ET(+)	18	42	30	66	42	90	54	114
12	24	Prefix(t)-1224-(*)-ET(+)	18	48	30	72	42	96	54	120
12	30	Prefix(t)-1230-(*)-ET(+)	18	54	30	78	42	102	54	126
12	36	Prefix(t)-1236-(*)-ET(+)	18	60	30	84	42	108	54	132
12	42	Prefix(t)-1242-(*)-ET(+)	18	66	30	90	42	114	54	138
9	12	Prefix(t)-0912-(*)-ET(+)	16½	36	28½	60	40½	84	52½	108
9	18	Prefix(t)-0918-(*)-ET(+)	16½	42	28½	66	40½	90	52½	114
9	24	Prefix(t)-0924-(*)-ET(+)	16½	48	28½	72	40½	96	52½	120
9	30	Prefix(t)-0930-(*)-ET(+)	16½	54	28½	78	40½	102	52½	126
9	36	Prefix(t)-0936-(*)-ET(+)	16½	60	28½	84	40½	108	52½	132
9	42	Prefix(t)-0942-(*)-ET(+)	16½	66	28½	90	40½	114	52½	138
6	9	Prefix(t)-0609-(*)-ET(+)	15	33	27	57	39	81	51	105
6	12	Prefix(t)-0612-(*)-ET(+)	15	36	27	60	39	84	51	108
6	18	Prefix(t)-0618-(*)-ET(+)	15	42	27	66	39	90	51	114
6	24	Prefix(t)-0624-(*)-ET(+)	15	48	27	72	39	96	51	120
6	30	Prefix(t)-0630-(*)-ET(+)	15	54	27	78	39	102	51	126
6	36	Prefix(t)-0636-(*)-ET(+)	15	60	27	84	39	108	51	132
6	42	Prefix(t)-0636-(*)-ET(+)	15	66	27	90	39	114	51	138

(t) Insert side rail height. (*) Insert bottom style (+) Insert radius (12 in.–48 in.) to complete cat. no. Includes 2 pairs of splice plates with hardware.

Part numbering system

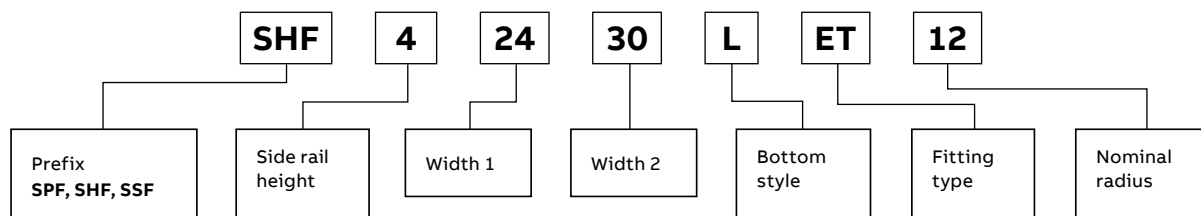


Steel fittings


Horizontal expanding cross fittings


Selection guide

- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Tray widths W1: 30, 24, 18, 12, 9, 6 in.
- Tray widths W2: 42, 36, 30, 24, 18, 12, 9 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.

Horizontal expanding cross


Widths (in.)			Dimensions (in.)								
			(+12 in. Nominal radius		(+24 in. Nominal radius		(+36 in. Nominal radius		(+48 in. Nominal radius		
			X	Y	X	Y	X	Y	X	Y	
	36	42	Prefix(t)-3642-(*)-EX(+)	60	66	84	90	108	114	132	138
	30	36	Prefix(t)-3036-(*)-EX(+)	54	60	78	84	102	108	126	132
	30	42	Prefix(t)-3042-(*)-EX(+)	54	66	78	90	102	114	126	138
	24	30	Prefix(t)-2430-(*)-EX(+)	48	54	72	78	96	102	120	126
	24	36	Prefix(t)-2436-(*)-EX(+)	48	60	72	84	96	108	120	132
	24	42	Prefix(t)-2442-(*)-EX(+)	48	66	72	90	96	114	120	138
	18	24	Prefix(t)-1824-(*)-EX(+)	42	48	66	72	90	96	114	120
	18	30	Prefix(t)-1830-(*)-EX(+)	42	54	66	78	90	102	114	126
	18	36	Prefix(t)-1836-(*)-EX(+)	42	60	66	84	90	108	114	132
	18	42	Prefix(t)-1842-(*)-EX(+)	42	66	66	90	90	114	114	138
	12	18	Prefix(t)-1218-(*)-EX(+)	36	42	60	66	84	90	108	114
	12	24	Prefix(t)-1224-(*)-EX(+)	36	48	60	72	84	96	108	120
	12	30	Prefix(t)-1230-(*)-EX(+)	36	54	60	78	84	102	108	126
	12	36	Prefix(t)-1236-(*)-EX(+)	36	60	60	84	84	108	108	132
	12	42	Prefix(t)-1242-(*)-EX(+)	36	66	60	90	84	114	108	138
	9	12	Prefix(t)-0912-(*)-EX(+)	33	36	57	60	81	84	105	108
	9	18	Prefix(t)-0918-(*)-EX(+)	33	42	57	66	81	90	105	114
	9	24	Prefix(t)-0924-(*)-EX(+)	33	48	57	72	81	96	105	120
	9	30	Prefix(t)-0930-(*)-EX(+)	33	54	57	78	81	102	105	126
	9	36	Prefix(t)-0936-(*)-EX(+)	33	60	57	84	81	108	105	132
	9	42	Prefix(t)-0942-(*)-EX(+)	33	66	57	90	81	114	105	138
	6	9	Prefix(t)-0609-(*)-EX(+)	30	33	54	57	78	81	102	105
	6	12	Prefix(t)-0612-(*)-EX(+)	30	36	54	60	78	84	102	108
	6	18	Prefix(t)-0618-(*)-EX(+)	30	42	54	66	78	90	102	114
	6	24	Prefix(t)-0624-(*)-EX(+)	30	48	54	72	78	96	102	120
	6	30	Prefix(t)-0630-(*)-EX(+)	30	54	54	78	78	102	102	126
	6	36	Prefix(t)-0636-(*)-EX(+)	30	60	54	84	78	108	102	132
	6	42	Prefix(t)-0642-(*)-EX(+)	30	66	54	90	78	114	102	138





(t) Insert side rail height. (*) Insert bottom (+) Insert radius (12 in.–48 in.) style to complete cat. no. Includes 3 pairs of splice plates with hardware.

Part numbering system

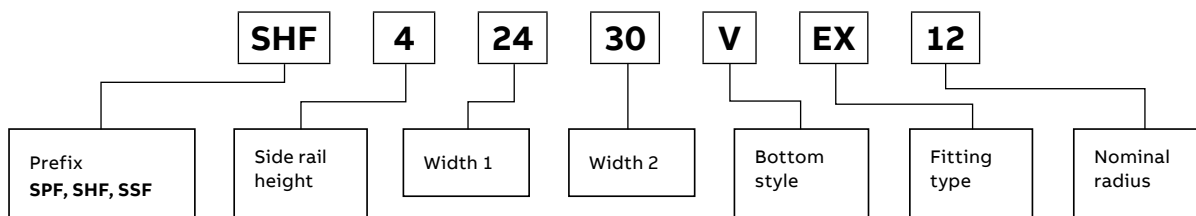



Steel fittings

90° Vertical bend fittings

Selection guide


- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 90°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.

90° Vertical bends

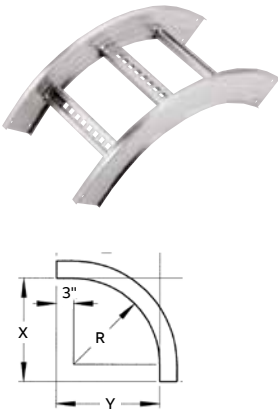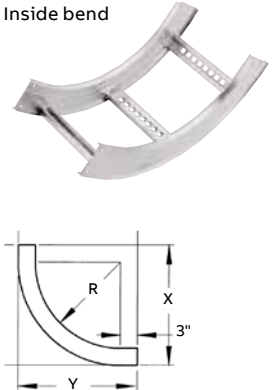	Nominal Radius Width (in.) (in.)		Cat. no.	Dimensions (in.)													
				(+) VO side rail				(+) VI side rail									
				¾ in. – 7 in.		3½ in.		4 in.		5 in.		6 in.		7 in.			
				X	Y	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y
	Outside bend	12	6	Prefix(t)-06-(*)-(+)90-12	12	12	15⅞	15⅞	16⅜	16⅜	17⅜	17⅜	18⅜	18⅜	19⅜	19⅜	
		12	9	Prefix(t)-09-(*)-(+)90-12	12	12	15⅞	15⅞	16⅜	16⅜	17⅜	17⅜	18⅜	18⅜	19⅜	19⅜	
		12	12	Prefix(t)-12-(*)-(+)90-12	12	12	15⅞	15⅞	16⅜	16⅜	17⅜	17⅜	18⅜	18⅜	19⅜	19⅜	
		12	18	Prefix(t)-18-(*)-(+)90-12	12	12	15⅞	15⅞	16⅜	16⅜	17⅜	17⅜	18⅜	18⅜	19⅜	19⅜	
		12	24	Prefix(t)-24-(*)-(+)90-12	12	12	15⅞	15⅞	16⅜	16⅜	17⅜	17⅜	18⅜	18⅜	19⅜	19⅜	
		12	30	Prefix(t)-30-(*)-(+)90-12	12	12	15⅞	15⅞	16⅜	16⅜	17⅜	17⅜	18⅜	18⅜	19⅜	19⅜	
		12	36	Prefix(t)-36-(*)-(+)90-12	12	12	15⅞	15⅞	16⅜	16⅜	17⅜	17⅜	18⅜	18⅜	19⅜	19⅜	
		12	42	Prefix(t)-42-(*)-(+)90-12	12	12	15⅞	15⅞	16⅜	16⅜	17⅜	17⅜	18⅜	18⅜	19⅜	19⅜	
		24	6	Prefix(t)-06-(*)-(+)90-24	24	24	27⅞	27⅞	28⅜	28⅜	29⅜	29⅜	30⅜	30⅜	31⅜	31⅜	
		24	9	Prefix(t)-09-(*)-(+)90-24	24	24	27⅞	27⅞	28⅜	28⅜	29⅜	29⅜	30⅜	30⅜	31⅜	31⅜	
		24	12	Prefix(t)-12-(*)-(+)90-24	24	24	27⅞	27⅞	28⅜	28⅜	29⅜	29⅜	30⅜	30⅜	31⅜	31⅜	
		24	18	Prefix(t)-18-(*)-(+)90-24	24	24	27⅞	27⅞	28⅜	28⅜	29⅜	29⅜	30⅜	30⅜	31⅜	31⅜	
		24	24	Prefix(t)-24-(*)-(+)90-24	24	24	27⅞	27⅞	28⅜	28⅜	29⅜	29⅜	30⅜	30⅜	31⅜	31⅜	
		24	30	Prefix(t)-30-(*)-(+)90-24	24	24	27⅞	27⅞	28⅜	28⅜	29⅜	29⅜	30⅜	30⅜	31⅜	31⅜	
		24	36	Prefix(t)-36-(*)-(+)90-24	24	24	27⅞	27⅞	28⅜	28⅜	29⅜	29⅜	30⅜	30⅜	31⅜	31⅜	
		24	42	Prefix(t)-42-(*)-(+)90-24	24	24	27⅞	27⅞	28⅜	28⅜	29⅜	29⅜	30⅜	30⅜	31⅜	31⅜	
	Inside bend	36	6	Prefix(t)-06-(*)-(+)90-36	36	36	39⅞	39⅞	40⅜	40⅜	41⅜	41⅜	42⅜	42⅜	43⅜	43⅜	
		36	9	Prefix(t)-09-(*)-(+)90-36	36	36	39⅞	39⅞	40⅜	40⅜	41⅜	41⅜	42⅜	42⅜	43⅜	43⅜	
		36	12	Prefix(t)-12-(*)-(+)90-36	36	36	39⅞	39⅞	40⅜	40⅜	41⅜	41⅜	42⅜	42⅜	43⅜	43⅜	
		36	18	Prefix(t)-18-(*)-(+)90-36	36	36	39⅞	39⅞	40⅜	40⅜	41⅜	41⅜	42⅜	42⅜	43⅜	43⅜	
		36	24	Prefix(t)-24-(*)-(+)90-36	36	36	39⅞	39⅞	40⅜	40⅜	41⅜	41⅜	42⅜	42⅜	43⅜	43⅜	
		36	30	Prefix(t)-30-(*)-(+)90-36	36	36	39⅞	39⅞	40⅜	40⅜	41⅜	41⅜	42⅜	42⅜	43⅜	43⅜	
		36	36	Prefix(t)-36-(*)-(+)90-36	36	36	39⅞	39⅞	40⅜	40⅜	41⅜	41⅜	42⅜	42⅜	43⅜	43⅜	
		36	42	Prefix(t)-42-(*)-(+)90-36	36	36	39⅞	39⅞	40⅜	40⅜	41⅜	41⅜	42⅜	42⅜	43⅜	43⅜	
		48	6	Prefix(t)-06-(*)-(+)90-48	48	48	51⅞	51⅞	52⅜	52⅜	53⅜	53⅜	54⅜	54⅜	55⅜	55⅜	
		48	9	Prefix(t)-09-(*)-(+)90-48	48	48	51⅞	51⅞	52⅜	52⅜	53⅜	53⅜	54⅜	54⅜	55⅜	55⅜	
		48	12	Prefix(t)-12-(*)-(+)90-48	48	48	51⅞	51⅞	52⅜	52⅜	53⅜	53⅜	54⅜	54⅜	55⅜	55⅜	
		48	18	Prefix(t)-18-(*)-(+)90-48	48	48	51⅞	51⅞	52⅜	52⅜	53⅜	53⅜	54⅜	54⅜	55⅜	55⅜	
		48	24	Prefix(t)-24-(*)-(+)90-48	48	48	51⅞	51⅞	52⅜	52⅜	53⅜	53⅜	54⅜	54⅜	55⅜	55⅜	
		48	30	Prefix(t)-30-(*)-(+)90-48	48	48	51⅞	51⅞	52⅜	52⅜	53⅜	53⅜	54⅜	54⅜	55⅜	55⅜	
		48	36	Prefix(t)-36-(*)-(+)90-48	48	48	51⅞	51⅞	52⅜	52⅜	53⅜	53⅜	54⅜	54⅜	55⅜	55⅜	
		48	42	Prefix(t)-42-(*)-(+)90-48	48	48	51⅞	51⅞	52⅜	52⅜	53⅜	53⅜	54⅜	54⅜	55⅜	55⅜	

(t) Insert side rail height. (*) Insert bottom (+) Insert "VO" for vertical outside or "VI" for vertical inside style to complete cat. no. Includes 1 pair of splice plates with hardware.





Part numbering system

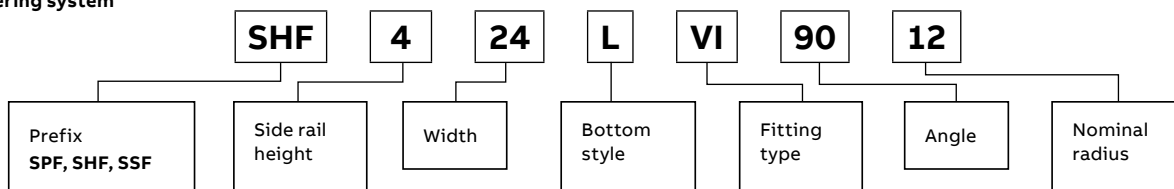

Steel fittings


60° Vertical bend fittings

60° Vertical bends

				Dimensions (in.)								
				(+) VO side rail			(+) VI side rail					
				3 7⁄8 in. – 7 in.			3 1⁄2 in.			4 in.		
	Radius (in.)	Width (in.)	Cat. no.	X	Y	Z	X	Y	Z	X	Y	Z
Outside bend  	12	6	Prefix(t)-06-(*)-(+)60-12	10 3⁄8	6	6 15⁄16	13 1⁄2	9 5⁄8	9	14	10 3⁄16	9 3⁄8
	12	9	Prefix(t)-09-(*)-(+)60-12	10 3⁄8	6	6 15⁄16	13 1⁄2	9 5⁄8	9	14	10 3⁄16	9 3⁄8
	12	12	Prefix(t)-12-(*)-(+)60-12	10 3⁄8	6	6 15⁄16	13 1⁄2	9 5⁄8	9	14	10 3⁄16	9 3⁄8
	12	18	Prefix(t)-18-(*)-(+)60-12	10 3⁄8	6	6 15⁄16	13 1⁄2	9 5⁄8	9	14	10 3⁄16	9 3⁄8
	12	24	Prefix(t)-24-(*)-(+)60-12	10 3⁄8	6	6 15⁄16	13 1⁄2	9 5⁄8	9	14	10 3⁄16	9 3⁄8
	12	30	Prefix(t)-30-(*)-(+)60-12	10 3⁄8	6	6 15⁄16	13 1⁄2	9 5⁄8	9	14	10 3⁄16	9 3⁄8
	12	36	Prefix(t)-36-(*)-(+)60-12	10 3⁄8	6	6 15⁄16	13 1⁄2	9 5⁄8	9	14	10 3⁄16	9 3⁄8
	12	42	Prefix(t)-42-(*)-(+)60-12	10 3⁄8	6	6 15⁄16	13 1⁄2	9 5⁄8	9	14	10 3⁄16	9 3⁄8
	24	6	Prefix(t)-06-(*)-(+)60-24	20 13⁄16	12	13 7⁄8	23 15⁄16	15 5⁄8	15 15⁄16	24 7⁄16	16 3⁄16	16 1⁄4
	24	9	Prefix(t)-09-(*)-(+)60-24	20 13⁄16	12	13 7⁄8	23 15⁄16	15 5⁄8	15 15⁄16	24 7⁄16	16 3⁄16	16 1⁄4
	24	12	Prefix(t)-12-(*)-(+)60-24	20 13⁄16	12	13 7⁄8	23 15⁄16	15 5⁄8	15 15⁄16	24 7⁄16	16 3⁄16	16 1⁄4
	24	18	Prefix(t)-18-(*)-(+)60-24	20 13⁄16	12	13 7⁄8	23 15⁄16	15 5⁄8	15 15⁄16	24 7⁄16	16 3⁄16	16 1⁄4
	24	24	Prefix(t)-24-(*)-(+)60-24	20 13⁄16	12	13 7⁄8	23 15⁄16	15 5⁄8	15 15⁄16	24 7⁄16	16 3⁄16	16 1⁄4
	24	30	Prefix(t)-30-(*)-(+)60-24	20 13⁄16	12	13 7⁄8	23 15⁄16	15 5⁄8	15 15⁄16	24 7⁄16	16 3⁄16	16 1⁄4
	24	36	Prefix(t)-36-(*)-(+)60-24	20 13⁄16	12	13 7⁄8	23 15⁄16	15 5⁄8	15 15⁄16	24 7⁄16	16 3⁄16	16 1⁄4
	24	42	Prefix(t)-42-(*)-(+)60-24	20 13⁄16	12	13 7⁄8	23 15⁄16	15 5⁄8	15 15⁄16	24 7⁄16	16 3⁄16	16 1⁄4
Inside bend  	36	6	Prefix(t)-06-(*)-(+)60-36	31 3⁄16	18	20 13⁄16	34 3⁄16	21 5⁄8	22 7⁄8	34 13⁄16	22 3⁄4	23 3⁄16
	36	9	Prefix(t)-09-(*)-(+)60-36	31 3⁄16	18	20 13⁄16	34 3⁄16	21 5⁄8	22 7⁄8	34 13⁄16	22 3⁄4	23 3⁄16
	36	12	Prefix(t)-12-(*)-(+)60-36	31 3⁄16	18	20 13⁄16	34 3⁄16	21 5⁄8	22 7⁄8	34 13⁄16	22 3⁄4	23 3⁄16
	36	18	Prefix(t)-18-(*)-(+)60-36	31 3⁄16	18	20 13⁄16	34 3⁄16	21 5⁄8	22 7⁄8	34 13⁄16	22 3⁄4	23 3⁄16
	36	24	Prefix(t)-24-(*)-(+)60-36	31 3⁄16	18	20 13⁄16	34 3⁄16	21 5⁄8	22 7⁄8	34 13⁄16	22 3⁄4	23 3⁄16
	36	30	Prefix(t)-30-(*)-(+)60-36	31 3⁄16	18	20 13⁄16	34 3⁄16	21 5⁄8	22 7⁄8	34 13⁄16	22 3⁄4	23 3⁄16
	36	36	Prefix(t)-36-(*)-(+)60-36	31 3⁄16	18	20 13⁄16	34 3⁄16	21 5⁄8	22 7⁄8	34 13⁄16	22 3⁄4	23 3⁄16
	36	42	Prefix(t)-42-(*)-(+)60-36	31 3⁄16	18	20 13⁄16	34 3⁄16	21 5⁄8	22 7⁄8	34 13⁄16	22 3⁄4	23 3⁄16
	48	6	Prefix(t)-06-(*)-(+)60-48	41 9⁄16	24	27 11⁄16	44 11⁄16	27 5⁄8	29 13⁄16	45 3⁄16	28 3⁄16	30 3⁄8
	48	9	Prefix(t)-09-(*)-(+)60-48	41 9⁄16	24	27 11⁄16	44 11⁄16	27 5⁄8	29 13⁄16	45 3⁄16	28 3⁄16	30 3⁄8
	48	12	Prefix(t)-12-(*)-(+)60-48	41 9⁄16	24	27 11⁄16	44 11⁄16	27 5⁄8	29 13⁄16	45 3⁄16	28 3⁄16	30 3⁄8
	48	18	Prefix(t)-18-(*)-(+)60-48	41 9⁄16	24	27 11⁄16	44 11⁄16	27 5⁄8	29 13⁄16	45 3⁄16	28 3⁄16	30 3⁄8
	48	24	Prefix(t)-24-(*)-(+)60-48	41 9⁄16	24	27 11⁄16	44 11⁄16	27 5⁄8	29 13⁄16	45 3⁄16	28 3⁄16	30 3⁄8
	48	30	Prefix(t)-30-(*)-(+)60-48	41 9⁄16	24	27 11⁄16	44 11⁄16	27 5⁄8	29 13⁄16	45 3⁄16	28 3⁄16	30 3⁄8
	48	36	Prefix(t)-36-(*)-(+)60-48	41 9⁄16	24	27 11⁄16	44 11⁄16	27 5⁄8	29 13⁄16	45 3⁄16	28 3⁄16	30 3⁄8
	48	42	Prefix(t)-42-(*)-(+)60-48	41 9⁄16	24	27 11⁄16	44 11⁄16	27 5⁄8	29 13⁄16	45 3⁄16	28 3⁄16	30 3⁄8

(t) Insert side rail height. (*) Insert bottom (+) Insert "VO" for vertical outside or "VI" for vertical inside style to complete cat. no. Includes 1 pair of splice plates with hardware.

Part numbering system

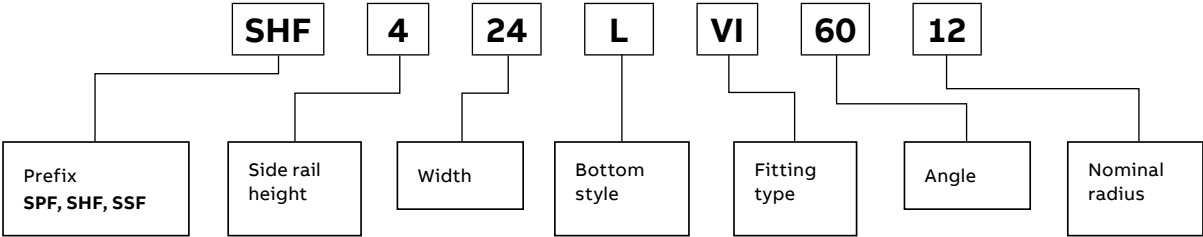

60° Vertical bends (continued)

			Dimensions (in.)								
			(+) VI side rail								
Nominal			5 in.			6 in.			7 in.		
Radius (in.)	Width (in.)	Cat. no.	X	Y	Z	X	Y	Z	X	Y	Z
12	6	Prefix(t)-06-(*)-(+)60-12	14 ⁷ / ₈	11 ³ / ₁₆	9 ¹⁵ / ₁₆	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂	16 ⁵ / ₈	13 ³ / ₁₆	11 ¹ / ₁₆
12	9	Prefix(t)-09-(*)-(+)60-12	14 ⁷ / ₈	11 ³ / ₁₆	9 ¹⁵ / ₁₆	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂	16 ⁵ / ₈	13 ³ / ₁₆	11 ¹ / ₁₆
12	12	Prefix(t)-12-(*)-(+)60-12	14 ⁷ / ₈	11 ³ / ₁₆	9 ¹⁵ / ₁₆	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂	16 ⁵ / ₈	13 ³ / ₁₆	11 ¹ / ₁₆
12	18	Prefix(t)-18-(*)-(+)60-12	14 ⁷ / ₈	11 ³ / ₁₆	9 ¹⁵ / ₁₆	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂	16 ⁵ / ₈	13 ³ / ₁₆	11 ¹ / ₁₆
12	24	Prefix(t)-24-(*)-(+)60-12	14 ⁷ / ₈	11 ³ / ₁₆	9 ¹⁵ / ₁₆	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂	16 ⁵ / ₈	13 ³ / ₁₆	11 ¹ / ₁₆
12	30	Prefix(t)-30-(*)-(+)60-12	14 ⁷ / ₈	11 ³ / ₁₆	9 ¹⁵ / ₁₆	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂	16 ⁵ / ₈	13 ³ / ₁₆	11 ¹ / ₁₆
12	36	Prefix(t)-36-(*)-(+)60-12	14 ⁷ / ₈	11 ³ / ₁₆	9 ¹⁵ / ₁₆	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂	16 ⁵ / ₈	13 ³ / ₁₆	11 ¹ / ₁₆
12	42	Prefix(t)-42-(*)-(+)60-12	14 ⁷ / ₈	11 ³ / ₁₆	9 ¹⁵ / ₁₆	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂	16 ⁵ / ₈	13 ³ / ₁₆	11 ¹ / ₁₆
24	6	Prefix(t)-06-(*)-(+)60-24	25 ³ / ₄	17 ³ / ₁₆	16 ⁷ / ₈	26 ³ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆	27	19 ³ / ₁₆	18
24	9	Prefix(t)-09-(*)-(+)60-24	25 ³ / ₄	17 ³ / ₁₆	16 ⁷ / ₈	26 ³ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆	27	19 ³ / ₁₆	18
24	12	Prefix(t)-12-(*)-(+)60-24	25 ³ / ₄	17 ³ / ₁₆	16 ⁷ / ₈	26 ³ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆	27	19 ³ / ₁₆	18
24	18	Prefix(t)-18-(*)-(+)60-24	25 ³ / ₄	17 ³ / ₁₆	16 ⁷ / ₈	26 ³ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆	27	19 ³ / ₁₆	18
24	24	Prefix(t)-24-(*)-(+)60-24	25 ³ / ₄	17 ³ / ₁₆	16 ⁷ / ₈	26 ³ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆	27	19 ³ / ₁₆	18
24	30	Prefix(t)-30-(*)-(+)60-24	25 ³ / ₄	17 ³ / ₁₆	16 ⁷ / ₈	26 ³ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆	27	19 ³ / ₁₆	18
24	36	Prefix(t)-36-(*)-(+)60-24	25 ³ / ₄	17 ³ / ₁₆	16 ⁷ / ₈	26 ³ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆	27	19 ³ / ₁₆	18
24	42	Prefix(t)-42-(*)-(+)60-24	25 ³ / ₄	17 ³ / ₁₆	16 ⁷ / ₈	26 ³ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆	27	19 ³ / ₁₆	18
36	6	Prefix(t)-06-(*)-(+)60-36	35 ¹¹ / ₁₆	23 ³ / ₁₆	23 ³ / ₄	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈	37 ⁷ / ₁₆	25 ³ / ₁₆	24 ¹⁵ / ₁₆
36	9	Prefix(t)-09-(*)-(+)60-36	35 ¹¹ / ₁₆	23 ³ / ₁₆	23 ³ / ₄	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈	37 ⁷ / ₁₆	25 ³ / ₁₆	24 ¹⁵ / ₁₆
36	12	Prefix(t)-12-(*)-(+)60-36	35 ¹¹ / ₁₆	23 ³ / ₁₆	23 ³ / ₄	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈	37 ⁷ / ₁₆	25 ³ / ₁₆	24 ¹⁵ / ₁₆
36	18	Prefix(t)-18-(*)-(+)60-36	35 ¹¹ / ₁₆	23 ³ / ₁₆	23 ³ / ₄	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈	37 ⁷ / ₁₆	25 ³ / ₁₆	24 ¹⁵ / ₁₆
36	24	Prefix(t)-24-(*)-(+)60-36	35 ¹¹ / ₁₆	23 ³ / ₁₆	23 ³ / ₄	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈	37 ⁷ / ₁₆	25 ³ / ₁₆	24 ¹⁵ / ₁₆
36	30	Prefix(t)-30-(*)-(+)60-36	35 ¹¹ / ₁₆	23 ³ / ₁₆	23 ³ / ₄	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈	37 ⁷ / ₁₆	25 ³ / ₁₆	24 ¹⁵ / ₁₆
36	36	Prefix(t)-36-(*)-(+)60-36	35 ¹¹ / ₁₆	23 ³ / ₁₆	23 ³ / ₄	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈	37 ⁷ / ₁₆	25 ³ / ₁₆	24 ¹⁵ / ₁₆
36	42	Prefix(t)-42-(*)-(+)60-36	35 ¹¹ / ₁₆	23 ³ / ₁₆	23 ³ / ₄	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈	37 ⁷ / ₁₆	25 ³ / ₁₆	24 ¹⁵ / ₁₆
48	6	Prefix(t)-06-(*)-(+)60-48	46 ³ / ₁₆	29 ³ / ₁₆	30 ¹¹ / ₁₆	46 ¹⁵ / ₁₆	30 ³ / ₁₆	31 ¹ / ₈	47 ¹³ / ₁₆	31 ³ / ₁₆	31 ⁷ / ₈
48	9	Prefix(t)-09-(*)-(+)60-48	46 ³ / ₁₆	29 ³ / ₁₆	30 ¹¹ / ₁₆	46 ¹⁵ / ₁₆	30 ³ / ₁₆	31 ¹ / ₈	47 ¹³ / ₁₆	31 ³ / ₁₆	31 ⁷ / ₈
48	12	Prefix(t)-12-(*)-(+)60-48	46 ³ / ₁₆	29 ³ / ₁₆	30 ¹¹ / ₁₆	46 ¹⁵ / ₁₆	30 ³ / ₁₆	31 ¹ / ₈	47 ¹³ / ₁₆	31 ³ / ₁₆	31 ⁷ / ₈
48	18	Prefix(t)-18-(*)-(+)60-48	46 ³ / ₁₆	29 ³ / ₁₆	30 ¹¹ / ₁₆	46 ¹⁵ / ₁₆	30 ³ / ₁₆	31 ¹ / ₈	47 ¹³ / ₁₆	31 ³ / ₁₆	31 ⁷ / ₈
48	24	Prefix(t)-24-(*)-(+)60-48	46 ³ / ₁₆	29 ³ / ₁₆	30 ¹¹ / ₁₆	46 ¹⁵ / ₁₆	30 ³ / ₁₆	31 ¹ / ₈	47 ¹³ / ₁₆	31 ³ / ₁₆	31 ⁷ / ₈
48	30	Prefix(t)-30-(*)-(+)60-48	46 ³ / ₁₆	29 ³ / ₁₆	30 ¹¹ / ₁₆	46 ¹⁵ / ₁₆	30 ³ / ₁₆	31 ¹ / ₈	47 ¹³ / ₁₆	31 ³ / ₁₆	31 ⁷ / ₈
48	36	Prefix(t)-36-(*)-(+)60-48	46 ³ / ₁₆	29 ³ / ₁₆	30 ¹¹ / ₁₆	46 ¹⁵ / ₁₆	30 ³ / ₁₆	31 ¹ / ₈	47 ¹³ / ₁₆	31 ³ / ₁₆	31 ⁷ / ₈
48	42	Prefix(t)-42-(*)-(+)60-48	46 ³ / ₁₆	29 ³ / ₁₆	30 ¹¹ / ₁₆	46 ¹⁵ / ₁₆	30 ³ / ₁₆	31 ¹ / ₈	47 ¹³ / ₁₆	31 ³ / ₁₆	31 ⁷ / ₈

(t) Insert side rail height. (*) Insert bottom (+) Insert "VO" for vertical outside or "VI" for vertical inside style to complete cat. no. Includes 1 pair of splice plates with hardware.



Selection guide

- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 60°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.

Steel fittings


45° Vertical bend fittings

45° Vertical bends

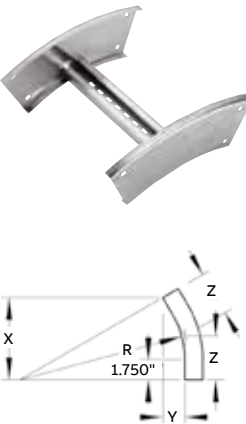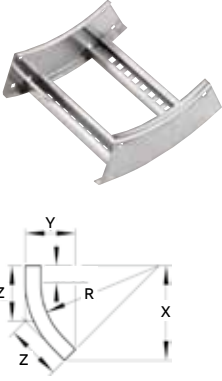	Nominal		Cat. no.	Dimensions (in.)								
				(+) VO side rail			(+) VI side rail					
				3 3/8 in. – 7 in.			3 1/2 in.			4 in.		
	Radius (in.)	Width (in.)		X	Y	Z	X	Y	Z	X	Y	Z
Outside bend 	12	6	Prefix(t)-06-(*)-(+)45-12	8 1/2	3 1/2	5	11 1/16	7 1/8	6 1/2	11 7/16	7 11/16	6 11/16
	12	9	Prefix(t)-09-(*)-(+)45-12	8 1/2	3 1/2	5	11 1/16	7 1/8	6 1/2	11 7/16	7 11/16	6 11/16
	12	12	Prefix(t)-12-(*)-(+)45-12	8 1/2	3 1/2	5	11 1/16	7 1/8	6 1/2	11 7/16	7 11/16	6 11/16
	12	18	Prefix(t)-18-(*)-(+)45-12	8 1/2	3 1/2	5	11 1/16	7 1/8	6 1/2	11 7/16	7 11/16	6 11/16
	12	24	Prefix(t)-24-(*)-(+)45-12	8 1/2	3 1/2	5	11 1/16	7 1/8	6 1/2	11 7/16	7 11/16	6 11/16
	12	30	Prefix(t)-30-(*)-(+)45-12	8 1/2	3 1/2	5	11 1/16	7 1/8	6 1/2	11 7/16	7 11/16	6 11/16
	12	36	Prefix(t)-36-(*)-(+)45-12	8 1/2	3 1/2	5	11 1/16	7 1/8	6 1/2	11 7/16	7 11/16	6 11/16
	12	42	Prefix(t)-42-(*)-(+)45-12	8 1/2	3 1/2	5	11 1/16	7 1/8	6 1/2	11 7/16	7 11/16	6 11/16
	24	6	Prefix(t)-06-(*)-(+)45-24	17	7	9 15/16	19 1/2	10 5/8	11 7/16	19 15/16	11 3/16	11 11/16
	24	9	Prefix(t)-09-(*)-(+)45-24	17	7	9 15/16	19 1/2	10 5/8	11 7/16	19 15/16	11 3/16	11 11/16
	24	12	Prefix(t)-12-(*)-(+)45-24	17	7	9 15/16	19 1/2	10 5/8	11 7/16	19 15/16	11 3/16	11 11/16
	24	18	Prefix(t)-18-(*)-(+)45-24	17	7	9 15/16	19 1/2	10 5/8	11 7/16	19 15/16	11 3/16	11 11/16
Inside bend 	24	24	Prefix(t)-24-(*)-(+)45-24	17	7	9 15/16	19 1/2	10 5/8	11 7/16	19 15/16	11 3/16	11 11/16
	24	30	Prefix(t)-30-(*)-(+)45-24	17	7	9 15/16	19 1/2	10 5/8	11 7/16	19 15/16	11 3/16	11 11/16
	24	36	Prefix(t)-36-(*)-(+)45-24	17	7	9 15/16	19 1/2	10 5/8	11 7/16	19 15/16	11 3/16	11 11/16
	24	42	Prefix(t)-42-(*)-(+)45-24	17	7	9 15/16	19 1/2	10 5/8	11 7/16	19 15/16	11 3/16	11 11/16
	36	6	Prefix(t)-06-(*)-(+)45-36	25 7/16	10 9/16	14 15/16	28	14 3/16	16 7/16	28 7/16	14 3/4	16 5/8
	36	9	Prefix(t)-09-(*)-(+)45-36	25 7/16	10 9/16	14 15/16	28	14 3/16	16 7/16	28 7/16	14 3/4	16 5/8
	36	12	Prefix(t)-12-(*)-(+)45-36	25 7/16	10 9/16	14 15/16	28	14 3/16	16 7/16	28 7/16	14 3/4	16 5/8
	36	18	Prefix(t)-18-(*)-(+)45-36	25 7/16	10 9/16	14 15/16	28	14 3/16	16 7/16	28 7/16	14 3/4	16 5/8
	36	24	Prefix(t)-24-(*)-(+)45-36	25 7/16	10 9/16	14 15/16	28	14 3/16	16 7/16	28 7/16	14 3/4	16 5/8
	36	30	Prefix(t)-30-(*)-(+)45-36	25 7/16	10 9/16	14 15/16	28	14 3/16	16 7/16	28 7/16	14 3/4	16 5/8
	36	36	Prefix(t)-36-(*)-(+)45-36	25 7/16	10 9/16	14 15/16	28	14 3/16	16 7/16	28 7/16	14 3/4	16 5/8
	36	42	Prefix(t)-42-(*)-(+)45-36	25 7/16	10 9/16	14 15/16	28	14 3/16	16 7/16	28 7/16	14 3/4	16 5/8
	48	6	Prefix(t)-06-(*)-(+)45-48	33 15/16	14 1/16	19 7/8	36 1/2	17 11/16	21 3/8	36 7/8	18 3/4	21 5/8
	48	9	Prefix(t)-09-(*)-(+)45-48	33 15/16	14 1/16	19 7/8	36 1/2	17 11/16	21 3/8	36 7/8	18 3/4	21 5/8
	48	12	Prefix(t)-12-(*)-(+)45-48	33 15/16	14 1/16	19 7/8	36 1/2	17 11/16	21 3/8	36 7/8	18 3/4	21 5/8
	48	18	Prefix(t)-18-(*)-(+)45-48	33 15/16	14 1/16	19 7/8	36 1/2	17 11/16	21 3/8	36 7/8	18 3/4	21 5/8
	48	24	Prefix(t)-24-(*)-(+)45-48	33 15/16	14 1/16	19 7/8	36 1/2	17 11/16	21 3/8	36 7/8	18 3/4	21 5/8
	48	30	Prefix(t)-30-(*)-(+)45-48	33 15/16	14 1/16	19 7/8	36 1/2	17 11/16	21 3/8	36 7/8	18 3/4	21 5/8
	48	36	Prefix(t)-36-(*)-(+)45-48	33 15/16	14 1/16	19 7/8	36 1/2	17 11/16	21 3/8	36 7/8	18 3/4	21 5/8
	48	42	Prefix(t)-42-(*)-(+)45-48	33 15/16	14 1/16	19 7/8	36 1/2	17 11/16	21 3/8	36 7/8	18 3/4	21 5/8

(t) Insert side rail height. (*) Insert bottom (+) Insert "VO" for vertical outside or "VI" for vertical inside style to complete cat. no. Includes 1 pair of splice plates with hardware.

Part numbering system

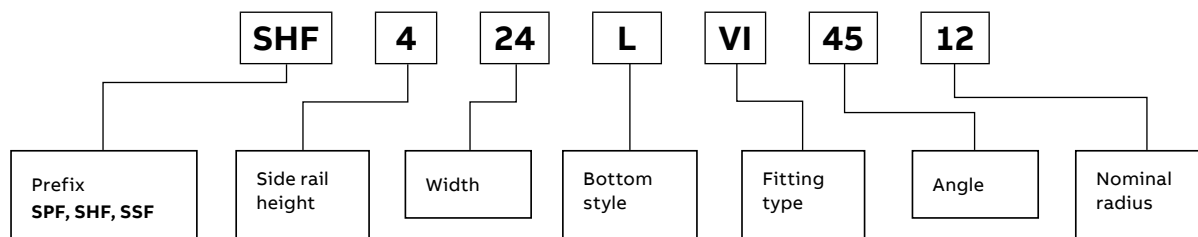

—
45° Vertical bends (continued)

			Dimensions (in.)								
			(+) VI side rail								
Nominal			5 in.			6 in.			7 in.		
Radius (in.)	Width (in.)	Cat. no.	X	Y	Z	X	Y	Z	X	Y	Z
12	6	Prefix(t)-06-(*)-(+)45-12	12 $\frac{3}{8}$	8 $\frac{11}{16}$	7 $\frac{1}{8}$	12 $\frac{3}{8}$	9 $\frac{11}{16}$	7 $\frac{1}{2}$	13 $\frac{9}{16}$	10 $\frac{11}{16}$	7 $\frac{15}{16}$
12	9	Prefix(t)-09-(*)-(+)45-12	12 $\frac{3}{8}$	8 $\frac{11}{16}$	7 $\frac{1}{8}$	12 $\frac{3}{8}$	9 $\frac{11}{16}$	7 $\frac{1}{2}$	13 $\frac{9}{16}$	10 $\frac{11}{16}$	7 $\frac{15}{16}$
12	12	Prefix(t)-12-(*)-(+)45-12	12 $\frac{3}{8}$	8 $\frac{11}{16}$	7 $\frac{1}{8}$	12 $\frac{3}{8}$	9 $\frac{11}{16}$	7 $\frac{1}{2}$	13 $\frac{9}{16}$	10 $\frac{11}{16}$	7 $\frac{15}{16}$
12	18	Prefix(t)-18-(*)-(+)45-12	12 $\frac{3}{8}$	8 $\frac{11}{16}$	7 $\frac{1}{8}$	12 $\frac{3}{8}$	9 $\frac{11}{16}$	7 $\frac{1}{2}$	13 $\frac{9}{16}$	10 $\frac{11}{16}$	7 $\frac{15}{16}$
12	24	Prefix(t)-24-(*)-(+)45-12	12 $\frac{3}{8}$	8 $\frac{11}{16}$	7 $\frac{1}{8}$	12 $\frac{3}{8}$	9 $\frac{11}{16}$	7 $\frac{1}{2}$	13 $\frac{9}{16}$	10 $\frac{11}{16}$	7 $\frac{15}{16}$
12	30	Prefix(t)-30-(*)-(+)45-12	12 $\frac{3}{8}$	8 $\frac{11}{16}$	7 $\frac{1}{8}$	12 $\frac{3}{8}$	9 $\frac{11}{16}$	7 $\frac{1}{2}$	13 $\frac{9}{16}$	10 $\frac{11}{16}$	7 $\frac{15}{16}$
12	36	Prefix(t)-36-(*)-(+)45-12	12 $\frac{3}{8}$	8 $\frac{11}{16}$	7 $\frac{1}{8}$	12 $\frac{3}{8}$	9 $\frac{11}{16}$	7 $\frac{1}{2}$	13 $\frac{9}{16}$	10 $\frac{11}{16}$	7 $\frac{15}{16}$
12	42	Prefix(t)-42-(*)-(+)45-12	12 $\frac{3}{8}$	8 $\frac{11}{16}$	7 $\frac{1}{8}$	12 $\frac{3}{8}$	9 $\frac{11}{16}$	7 $\frac{1}{2}$	13 $\frac{9}{16}$	10 $\frac{11}{16}$	7 $\frac{15}{16}$
24	6	Prefix(t)-06-(*)-(+)45-24	20 $\frac{3}{8}$	12 $\frac{3}{16}$	12 $\frac{1}{16}$	21 $\frac{3}{8}$	13 $\frac{3}{16}$	12 $\frac{1}{2}$	22 $\frac{1}{16}$	14 $\frac{3}{16}$	12 $\frac{15}{16}$
24	9	Prefix(t)-09-(*)-(+)45-24	20 $\frac{3}{8}$	12 $\frac{3}{16}$	12 $\frac{1}{16}$	21 $\frac{3}{8}$	13 $\frac{3}{16}$	12 $\frac{1}{2}$	22 $\frac{1}{16}$	14 $\frac{3}{16}$	12 $\frac{15}{16}$
24	12	Prefix(t)-12-(*)-(+)45-24	20 $\frac{3}{8}$	12 $\frac{3}{16}$	12 $\frac{1}{16}$	21 $\frac{3}{8}$	13 $\frac{3}{16}$	12 $\frac{1}{2}$	22 $\frac{1}{16}$	14 $\frac{3}{16}$	12 $\frac{15}{16}$
24	18	Prefix(t)-18-(*)-(+)45-24	20 $\frac{3}{8}$	12 $\frac{3}{16}$	12 $\frac{1}{16}$	21 $\frac{3}{8}$	13 $\frac{3}{16}$	12 $\frac{1}{2}$	22 $\frac{1}{16}$	14 $\frac{3}{16}$	12 $\frac{15}{16}$
24	24	Prefix(t)-24-(*)-(+)45-24	20 $\frac{3}{8}$	12 $\frac{3}{16}$	12 $\frac{1}{16}$	21 $\frac{3}{8}$	13 $\frac{3}{16}$	12 $\frac{1}{2}$	22 $\frac{1}{16}$	14 $\frac{3}{16}$	12 $\frac{15}{16}$
24	30	Prefix(t)-30-(*)-(+)45-24	20 $\frac{3}{8}$	12 $\frac{3}{16}$	12 $\frac{1}{16}$	21 $\frac{3}{8}$	13 $\frac{3}{16}$	12 $\frac{1}{2}$	22 $\frac{1}{16}$	14 $\frac{3}{16}$	12 $\frac{15}{16}$
24	36	Prefix(t)-36-(*)-(+)45-24	20 $\frac{3}{8}$	12 $\frac{3}{16}$	12 $\frac{1}{16}$	21 $\frac{3}{8}$	13 $\frac{3}{16}$	12 $\frac{1}{2}$	22 $\frac{1}{16}$	14 $\frac{3}{16}$	12 $\frac{15}{16}$
24	42	Prefix(t)-42-(*)-(+)45-24	20 $\frac{3}{8}$	12 $\frac{3}{16}$	12 $\frac{1}{16}$	21 $\frac{3}{8}$	13 $\frac{3}{16}$	12 $\frac{1}{2}$	22 $\frac{1}{16}$	14 $\frac{3}{16}$	12 $\frac{15}{16}$
36	6	Prefix(t)-06-(*)-(+)45-36	29 $\frac{1}{8}$	15 $\frac{3}{4}$	17 $\frac{1}{16}$	29 $\frac{13}{16}$	16 $\frac{3}{4}$	17 $\frac{1}{2}$	30 $\frac{1}{2}$	17 $\frac{3}{4}$	17 $\frac{7}{8}$
36	9	Prefix(t)-09-(*)-(+)45-36	29 $\frac{1}{8}$	15 $\frac{3}{4}$	17 $\frac{1}{16}$	29 $\frac{13}{16}$	16 $\frac{3}{4}$	17 $\frac{1}{2}$	30 $\frac{1}{2}$	17 $\frac{3}{4}$	17 $\frac{7}{8}$
36	12	Prefix(t)-12-(*)-(+)45-36	29 $\frac{1}{8}$	15 $\frac{3}{4}$	17 $\frac{1}{16}$	29 $\frac{13}{16}$	16 $\frac{3}{4}$	17 $\frac{1}{2}$	30 $\frac{1}{2}$	17 $\frac{3}{4}$	17 $\frac{7}{8}$
36	18	Prefix(t)-18-(*)-(+)45-36	29 $\frac{1}{8}$	15 $\frac{3}{4}$	17 $\frac{1}{16}$	29 $\frac{13}{16}$	16 $\frac{3}{4}$	17 $\frac{1}{2}$	30 $\frac{1}{2}$	17 $\frac{3}{4}$	17 $\frac{7}{8}$
36	24	Prefix(t)-24-(*)-(+)45-36	29 $\frac{1}{8}$	15 $\frac{3}{4}$	17 $\frac{1}{16}$	29 $\frac{13}{16}$	16 $\frac{3}{4}$	17 $\frac{1}{2}$	30 $\frac{1}{2}$	17 $\frac{3}{4}$	17 $\frac{7}{8}$
36	30	Prefix(t)-30-(*)-(+)45-36	29 $\frac{1}{8}$	15 $\frac{3}{4}$	17 $\frac{1}{16}$	29 $\frac{13}{16}$	16 $\frac{3}{4}$	17 $\frac{1}{2}$	30 $\frac{1}{2}$	17 $\frac{3}{4}$	17 $\frac{7}{8}$
36	36	Prefix(t)-36-(*)-(+)45-36	29 $\frac{1}{8}$	15 $\frac{3}{4}$	17 $\frac{1}{16}$	29 $\frac{13}{16}$	16 $\frac{3}{4}$	17 $\frac{1}{2}$	30 $\frac{1}{2}$	17 $\frac{3}{4}$	17 $\frac{7}{8}$
36	42	Prefix(t)-42-(*)-(+)45-36	29 $\frac{1}{8}$	15 $\frac{3}{4}$	17 $\frac{1}{16}$	29 $\frac{13}{16}$	16 $\frac{3}{4}$	17 $\frac{1}{2}$	30 $\frac{1}{2}$	17 $\frac{3}{4}$	17 $\frac{7}{8}$
48	6	Prefix(t)-06-(*)-(+)45-48	37 $\frac{7}{8}$	19 $\frac{1}{4}$	22	39 $\frac{5}{16}$	20 $\frac{1}{4}$	22 $\frac{7}{16}$	39	21 $\frac{1}{4}$	22 $\frac{7}{8}$
48	9	Prefix(t)-09-(*)-(+)45-48	37 $\frac{7}{8}$	19 $\frac{1}{4}$	22	39 $\frac{5}{16}$	20 $\frac{1}{4}$	22 $\frac{7}{16}$	39	21 $\frac{1}{4}$	22 $\frac{7}{8}$
48	12	Prefix(t)-12-(*)-(+)45-48	37 $\frac{7}{8}$	19 $\frac{1}{4}$	22	39 $\frac{5}{16}$	20 $\frac{1}{4}$	22 $\frac{7}{16}$	39	21 $\frac{1}{4}$	22 $\frac{7}{8}$
48	18	Prefix(t)-18-(*)-(+)45-48	37 $\frac{7}{8}$	19 $\frac{1}{4}$	22	39 $\frac{5}{16}$	20 $\frac{1}{4}$	22 $\frac{7}{16}$	39	21 $\frac{1}{4}$	22 $\frac{7}{8}$
48	24	Prefix(t)-24-(*)-(+)45-48	37 $\frac{7}{8}$	19 $\frac{1}{4}$	22	39 $\frac{5}{16}$	20 $\frac{1}{4}$	22 $\frac{7}{16}$	39	21 $\frac{1}{4}$	22 $\frac{7}{8}$
48	30	Prefix(t)-30-(*)-(+)45-48	37 $\frac{7}{8}$	19 $\frac{1}{4}$	22	39 $\frac{5}{16}$	20 $\frac{1}{4}$	22 $\frac{7}{16}$	39	21 $\frac{1}{4}$	22 $\frac{7}{8}$
48	36	Prefix(t)-36-(*)-(+)45-48	37 $\frac{7}{8}$	19 $\frac{1}{4}$	22	39 $\frac{5}{16}$	20 $\frac{1}{4}$	22 $\frac{7}{16}$	39	21 $\frac{1}{4}$	22 $\frac{7}{8}$
48	42	Prefix(t)-42-(*)-(+)45-48	37 $\frac{7}{8}$	19 $\frac{1}{4}$	22	39 $\frac{5}{16}$	20 $\frac{1}{4}$	22 $\frac{7}{16}$	39	21 $\frac{1}{4}$	22 $\frac{7}{8}$

(t) Insert side rail height. (*) Insert bottom (+) Insert "VO" for vertical outside or "VI" for vertical inside style to complete cat. no. Includes 1 pair of splice plates with hardware.



Selection guide

- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 45°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.

Steel fittings


30° Vertical bend fittings

30° Vertical bends

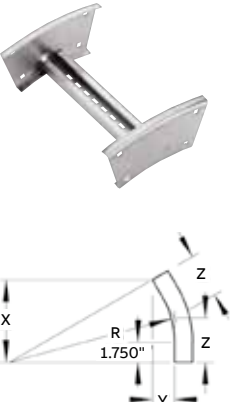	Nominal		Cat. no.	Dimensions (in.)								
				(+) VO side rail			(+) VI side rail					
				3 7/8 – 7 in.			3 1/2 in.			4 in.		
	Radius (in.)	Width (in.)		X	Y	Z	X	Y	Z	X	Y	Z
Outside bend 	12	6	Prefix(t)-06-(*)-(+)30-12	6	1 7/8	3 1/16	7 13/16	5 1/4	4 3/16	8 1/16	15 13/16	4 5/16
	12	9	Prefix(t)-09-(*)-(+)30-12	6	1 7/8	3 1/16	7 13/16	5 1/4	4 3/16	8 1/16	15 13/16	4 5/16
	12	12	Prefix(t)-12-(*)-(+)30-12	6	1 7/8	3 1/16	7 13/16	5 1/4	4 3/16	8 1/16	15 13/16	4 5/16
	12	18	Prefix(t)-18-(*)-(+)30-12	6	1 7/8	3 1/16	7 13/16	5 1/4	4 3/16	8 1/16	15 13/16	4 5/16
	12	24	Prefix(t)-24-(*)-(+)30-12	6	1 7/8	3 1/16	7 13/16	5 1/4	4 3/16	8 1/16	15 13/16	4 5/16
	12	30	Prefix(t)-30-(*)-(+)30-12	6	1 7/8	3 1/16	7 13/16	5 1/4	4 3/16	8 1/16	15 13/16	4 5/16
	12	36	Prefix(t)-36-(*)-(+)30-12	6	1 7/8	3 1/16	7 13/16	5 1/4	4 3/16	8 1/16	15 13/16	4 5/16
	12	42	Prefix(t)-42-(*)-(+)30-12	6	1 7/8	3 1/16	7 13/16	5 1/4	4 3/16	8 1/16	15 13/16	4 5/16
	24	6	Prefix(t)-06-(*)-(+)30-24	12	3 1/16	6 7/16	13 13/16	6 13/16	7 3/8	14 1/16	7 3/8	7 9/16
	24	9	Prefix(t)-09-(*)-(+)30-24	12	3 1/16	6 7/16	13 13/16	6 13/16	7 3/8	14 1/16	7 3/8	7 9/16
	24	12	Prefix(t)-12-(*)-(+)30-24	12	3 1/16	6 7/16	13 13/16	6 13/16	7 3/8	14 1/16	7 3/8	7 9/16
	24	18	Prefix(t)-18-(*)-(+)30-24	12	3 1/16	6 7/16	13 13/16	6 13/16	7 3/8	14 1/16	7 3/8	7 9/16
	24	24	Prefix(t)-24-(*)-(+)30-24	12	3 1/16	6 7/16	13 13/16	6 13/16	7 3/8	14 1/16	7 3/8	7 9/16
	24	30	Prefix(t)-30-(*)-(+)30-24	12	3 1/16	6 7/16	13 13/16	6 13/16	7 3/8	14 1/16	7 3/8	7 9/16
	24	36	Prefix(t)-36-(*)-(+)30-24	12	3 1/16	6 7/16	13 13/16	6 13/16	7 3/8	14 1/16	7 3/8	7 9/16
	24	42	Prefix(t)-42-(*)-(+)30-24	12	3 1/16	6 7/16	13 13/16	6 13/16	7 3/8	14 1/16	7 3/8	7 9/16
Inside bend 	36	6	Prefix(t)-06-(*)-(+)30-36	18	4 13/16	9 5/8	19 13/16	8 7/16	10 5/8	20 1/16	9	10 3/4
	36	9	Prefix(t)-09-(*)-(+)30-36	18	4 13/16	9 5/8	19 13/16	8 7/16	10 5/8	20 1/16	9	10 3/4
	36	12	Prefix(t)-12-(*)-(+)30-36	18	4 13/16	9 5/8	19 13/16	8 7/16	10 5/8	20 1/16	9	10 3/4
	36	18	Prefix(t)-18-(*)-(+)30-36	18	4 13/16	9 5/8	19 13/16	8 7/16	10 5/8	20 1/16	9	10 3/4
	36	24	Prefix(t)-24-(*)-(+)30-36	18	4 13/16	9 5/8	19 13/16	8 7/16	10 5/8	20 1/16	9	10 3/4
	36	30	Prefix(t)-30-(*)-(+)30-36	18	4 13/16	9 5/8	19 13/16	8 7/16	10 5/8	20 1/16	9	10 3/4
	36	36	Prefix(t)-36-(*)-(+)30-36	18	4 13/16	9 5/8	19 13/16	8 7/16	10 5/8	20 1/16	9	10 3/4
	36	42	Prefix(t)-42-(*)-(+)30-36	18	4 13/16	9 5/8	19 13/16	8 7/16	10 5/8	20 1/16	9	10 3/4
	48	6	Prefix(t)-06-(*)-(+)30-48	24	6 7/16	12 7/8	25 13/16	10 1/16	13 13/16	26 1/16	10 5/8	14
	48	9	Prefix(t)-09-(*)-(+)30-48	24	6 7/16	12 7/8	25 13/16	10 1/16	13 13/16	26 1/16	10 5/8	14
	48	12	Prefix(t)-12-(*)-(+)30-48	24	6 7/16	12 7/8	25 13/16	10 1/16	13 13/16	26 1/16	10 5/8	14
	48	18	Prefix(t)-18-(*)-(+)30-48	24	6 7/16	12 7/8	25 13/16	10 1/16	13 13/16	26 1/16	10 5/8	14
	48	24	Prefix(t)-24-(*)-(+)30-48	24	6 7/16	12 7/8	25 13/16	10 1/16	13 13/16	26 1/16	10 5/8	14
	48	30	Prefix(t)-30-(*)-(+)30-48	24	6 7/16	12 7/8	25 13/16	10 1/16	13 13/16	26 1/16	10 5/8	14
	48	36	Prefix(t)-36-(*)-(+)30-48	24	6 7/16	12 7/8	25 13/16	10 1/16	13 13/16	26 1/16	10 5/8	14
	48	42	Prefix(t)-42-(*)-(+)30-48	24	6 7/16	12 7/8	25 13/16	10 1/16	13 13/16	26 1/16	10 5/8	14

(t) Insert side rail height. (*) Insert bottom (+) Insert "VO" for vertical outside or "VI" for vertical inside style to complete cat. no. Includes 1 pair of splice plates with hardware.

Part numbering system

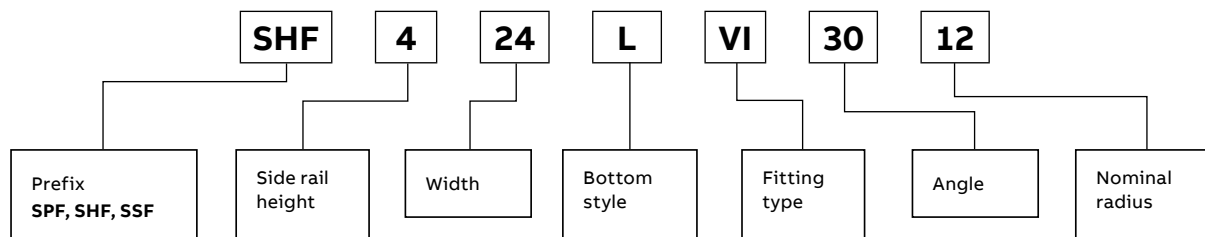

30° Vertical bends (continued)

			Dimensions (in.)								
			(+) VI side rail								
Nominal			5 in.			6 in.			7 in.		
Radius (in.)	Width (in.)	Cat. no.	X	Y	Z	X	Y	Z	X	Y	Z
12	6	Prefix(t)-06-(*)-(+)30-12	8 ⁹ / ₁₆	6 ¹³ / ₁₆	4 ⁵ / ₈	9 ¹ / ₁₆	7 ¹³ / ₁₆	4 ⁷ / ₈	9 ⁹ / ₁₆	8 ¹³ / ₁₆	5 ¹ / ₈
12	9	Prefix(t)-09-(*)-(+)30-12	8 ⁹ / ₁₆	6 ¹³ / ₁₆	4 ⁵ / ₈	9 ¹ / ₁₆	7 ¹³ / ₁₆	4 ⁷ / ₈	9 ⁹ / ₁₆	8 ¹³ / ₁₆	5 ¹ / ₈
12	12	Prefix(t)-12-(*)-(+)30-12	8 ⁹ / ₁₆	6 ¹³ / ₁₆	4 ⁵ / ₈	9 ¹ / ₁₆	7 ¹³ / ₁₆	4 ⁷ / ₈	9 ⁹ / ₁₆	8 ¹³ / ₁₆	5 ¹ / ₈
12	18	Prefix(t)-18-(*)-(+)30-12	8 ⁹ / ₁₆	6 ¹³ / ₁₆	4 ⁵ / ₈	9 ¹ / ₁₆	7 ¹³ / ₁₆	4 ⁷ / ₈	9 ⁹ / ₁₆	8 ¹³ / ₁₆	5 ¹ / ₈
12	24	Prefix(t)-24-(*)-(+)30-12	8 ⁹ / ₁₆	6 ¹³ / ₁₆	4 ⁵ / ₈	9 ¹ / ₁₆	7 ¹³ / ₁₆	4 ⁷ / ₈	9 ⁹ / ₁₆	8 ¹³ / ₁₆	5 ¹ / ₈
12	30	Prefix(t)-30-(*)-(+)30-12	8 ⁹ / ₁₆	6 ¹³ / ₁₆	4 ⁵ / ₈	9 ¹ / ₁₆	7 ¹³ / ₁₆	4 ⁷ / ₈	9 ⁹ / ₁₆	8 ¹³ / ₁₆	5 ¹ / ₈
12	36	Prefix(t)-36-(*)-(+)30-12	8 ⁹ / ₁₆	6 ¹³ / ₁₆	4 ⁵ / ₈	9 ¹ / ₁₆	7 ¹³ / ₁₆	4 ⁷ / ₈	9 ⁹ / ₁₆	8 ¹³ / ₁₆	5 ¹ / ₈
12	42	Prefix(t)-42-(*)-(+)30-12	8 ⁹ / ₁₆	6 ¹³ / ₁₆	4 ⁵ / ₈	9 ¹ / ₁₆	7 ¹³ / ₁₆	4 ⁷ / ₈	9 ⁹ / ₁₆	8 ¹³ / ₁₆	5 ¹ / ₈
24	6	Prefix(t)-06-(*)-(+)30-24	14 ⁹ / ₁₆	8 ³ / ₈	7 ¹³ / ₁₆	15 ¹ / ₁₆	9 ³ / ₈	8 ³ / ₁₆	15 ⁵ / ₁₆	10 ³ / ₈	8 ³ / ₈
24	9	Prefix(t)-09-(*)-(+)30-24	14 ⁹ / ₁₆	8 ³ / ₈	7 ¹³ / ₁₆	15 ¹ / ₁₆	9 ³ / ₈	8 ³ / ₁₆	15 ⁵ / ₁₆	10 ³ / ₈	8 ³ / ₈
24	12	Prefix(t)-12-(*)-(+)30-24	14 ⁹ / ₁₆	8 ³ / ₈	7 ¹³ / ₁₆	15 ¹ / ₁₆	9 ³ / ₈	8 ³ / ₁₆	15 ⁵ / ₁₆	10 ³ / ₈	8 ³ / ₈
24	18	Prefix(t)-18-(*)-(+)30-24	14 ⁹ / ₁₆	8 ³ / ₈	7 ¹³ / ₁₆	15 ¹ / ₁₆	9 ³ / ₈	8 ³ / ₁₆	15 ⁵ / ₁₆	10 ³ / ₈	8 ³ / ₈
24	24	Prefix(t)-24-(*)-(+)30-24	14 ⁹ / ₁₆	8 ³ / ₈	7 ¹³ / ₁₆	15 ¹ / ₁₆	9 ³ / ₈	8 ³ / ₁₆	15 ⁵ / ₁₆	10 ³ / ₈	8 ³ / ₈
24	30	Prefix(t)-30-(*)-(+)30-24	14 ⁹ / ₁₆	8 ³ / ₈	7 ¹³ / ₁₆	15 ¹ / ₁₆	9 ³ / ₈	8 ³ / ₁₆	15 ⁵ / ₁₆	10 ³ / ₈	8 ³ / ₈
24	36	Prefix(t)-36-(*)-(+)30-24	14 ⁹ / ₁₆	8 ³ / ₈	7 ¹³ / ₁₆	15 ¹ / ₁₆	9 ³ / ₈	8 ³ / ₁₆	15 ⁵ / ₁₆	10 ³ / ₈	8 ³ / ₈
24	42	Prefix(t)-42-(*)-(+)30-24	14 ⁹ / ₁₆	8 ³ / ₈	7 ¹³ / ₁₆	15 ¹ / ₁₆	9 ³ / ₈	8 ³ / ₁₆	15 ⁵ / ₁₆	10 ³ / ₈	8 ³ / ₈
36	6	Prefix(t)-06-(*)-(+)30-36	20 ¹ / ₁₆	10	11 ¹ / ₁₆	21 ¹ / ₁₆	11	11 ¹ / ₁₆	21 ¹ / ₁₆	12	11 ¹ / ₁₆
36	9	Prefix(t)-09-(*)-(+)30-36	20 ¹ / ₁₆	10	11 ¹ / ₁₆	21 ¹ / ₁₆	11	11 ¹ / ₁₆	21 ¹ / ₁₆	12	11 ¹ / ₁₆
36	12	Prefix(t)-12-(*)-(+)30-36	20 ¹ / ₁₆	10	11 ¹ / ₁₆	21 ¹ / ₁₆	11	11 ¹ / ₁₆	21 ¹ / ₁₆	12	11 ¹ / ₁₆
36	18	Prefix(t)-18-(*)-(+)30-36	20 ¹ / ₁₆	10	11 ¹ / ₁₆	21 ¹ / ₁₆	11	11 ¹ / ₁₆	21 ¹ / ₁₆	12	11 ¹ / ₁₆
36	24	Prefix(t)-24-(*)-(+)30-36	20 ¹ / ₁₆	10	11 ¹ / ₁₆	21 ¹ / ₁₆	11	11 ¹ / ₁₆	21 ¹ / ₁₆	12	11 ¹ / ₁₆
36	30	Prefix(t)-30-(*)-(+)30-36	20 ¹ / ₁₆	10	11 ¹ / ₁₆	21 ¹ / ₁₆	11	11 ¹ / ₁₆	21 ¹ / ₁₆	12	11 ¹ / ₁₆
36	36	Prefix(t)-36-(*)-(+)30-36	20 ¹ / ₁₆	10	11 ¹ / ₁₆	21 ¹ / ₁₆	11	11 ¹ / ₁₆	21 ¹ / ₁₆	12	11 ¹ / ₁₆
36	42	Prefix(t)-42-(*)-(+)30-36	20 ¹ / ₁₆	10	11 ¹ / ₁₆	21 ¹ / ₁₆	11	11 ¹ / ₁₆	21 ¹ / ₁₆	12	11 ¹ / ₁₆
48	6	Prefix(t)-06-(*)-(+)30-48	26 ⁹ / ₁₆	11 ⁹ / ₈	14 ¹ / ₄	27 ¹ / ₁₆	12 ⁵ / ₈	14 ¹ / ₂	27 ¹ / ₁₆	13 ⁵ / ₈	14 ¹³ / ₁₆
48	9	Prefix(t)-09-(*)-(+)30-48	26 ⁹ / ₁₆	11 ⁹ / ₈	14 ¹ / ₄	27 ¹ / ₁₆	12 ⁵ / ₈	14 ¹ / ₂	27 ¹ / ₁₆	13 ⁵ / ₈	14 ¹³ / ₁₆
48	12	Prefix(t)-12-(*)-(+)30-48	26 ⁹ / ₁₆	11 ⁹ / ₈	14 ¹ / ₄	27 ¹ / ₁₆	12 ⁵ / ₈	14 ¹ / ₂	27 ¹ / ₁₆	13 ⁵ / ₈	14 ¹³ / ₁₆
48	18	Prefix(t)-18-(*)-(+)30-48	26 ⁹ / ₁₆	11 ⁹ / ₈	14 ¹ / ₄	27 ¹ / ₁₆	12 ⁵ / ₈	14 ¹ / ₂	27 ¹ / ₁₆	13 ⁵ / ₈	14 ¹³ / ₁₆
48	24	Prefix(t)-24-(*)-(+)30-48	26 ⁹ / ₁₆	11 ⁹ / ₈	14 ¹ / ₄	27 ¹ / ₁₆	12 ⁵ / ₈	14 ¹ / ₂	27 ¹ / ₁₆	13 ⁵ / ₈	14 ¹³ / ₁₆
48	30	Prefix(t)-30-(*)-(+)30-48	26 ⁹ / ₁₆	11 ⁹ / ₈	14 ¹ / ₄	27 ¹ / ₁₆	12 ⁵ / ₈	14 ¹ / ₂	27 ¹ / ₁₆	13 ⁵ / ₈	14 ¹³ / ₁₆
48	36	Prefix(t)-36-(*)-(+)30-48	26 ⁹ / ₁₆	11 ⁹ / ₈	14 ¹ / ₄	27 ¹ / ₁₆	12 ⁵ / ₈	14 ¹ / ₂	27 ¹ / ₁₆	13 ⁵ / ₈	14 ¹³ / ₁₆
48	42	Prefix(t)-42-(*)-(+)30-48	26 ⁹ / ₁₆	11 ⁹ / ₈	14 ¹ / ₄	27 ¹ / ₁₆	12 ⁵ / ₈	14 ¹ / ₂	27 ¹ / ₁₆	13 ⁵ / ₈	14 ¹³ / ₁₆

(t) Insert side rail height. (*) Insert bottom (+) Insert "VO" for vertical outside or "VI" for vertical inside style to complete cat. no. Includes 1 pair of splice plates with hardware.

Selection guide

- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Angle: 30°
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.

Steel fittings

Reducer fittings

Offset reducer – left



Reducer – straight



Offset reducer – right




Selection guide

- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Tray widths W1: 42, 36, 30, 24, 18, 12, 9 in.
- Tray widths W2: 36, 30, 24, 18, 12, 9, 6 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.


Horizontal reducer

Widths (in.)		Left reducer cat. no.	Dim. X (in.)	Straight reducer (concentric) cat. no.	Dim. X (in.)	Right reducer cat. no.	Dim. X (in.)
W1	W2						
42	36	Prefix(t)-42-36-(*)-HLR	15 ⁷ / ₁₆	Prefix(t)-42-36-(*)-HSR	13 ³ / ₄	Prefix(t)-42-36-(*)-HRR	15 ⁷ / ₁₆
42	30	Prefix(t)-42-30-(*)-HLR	18 ¹⁵ / ₁₆	Prefix(t)-42-30-(*)-HSR	15 ⁷ / ₁₆	Prefix(t)-42-30-(*)-HRR	18 ¹⁵ / ₁₆
42	24	Prefix(t)-42-24-(*)-HLR	22 ³ / ₈	Prefix(t)-42-24-(*)-HSR	17 ³ / ₁₆	Prefix(t)-42-24-(*)-HRR	22 ³ / ₈
42	18	Prefix(t)-42-18-(*)-HLR	25 ⁷ / ₈	Prefix(t)-42-18-(*)-HSR	18 ⁵ / ₁₆	Prefix(t)-42-18-(*)-HRR	25 ⁷ / ₈
42	12	Prefix(t)-42-12-(*)-HLR	29 ⁵ / ₁₆	Prefix(t)-42-12-(*)-HSR	20 ⁹ / ₁₆	Prefix(t)-42-12-(*)-HRR	29 ⁵ / ₁₆
42	9	Prefix(t)-42-09-(*)-HLR	31 ¹ / ₁₆	Prefix(t)-42-09-(*)-HSR	21 ¹ / ₂	Prefix(t)-42-09-(*)-HRR	31 ¹ / ₁₆
42	6	Prefix(t)-42-06-(*)-HLR	32 ³ / ₄	Prefix(t)-42-06-(*)-HSR	22 ³ / ₈	Prefix(t)-42-06-(*)-HRR	32 ³ / ₄
36	30	Prefix(t)-36-30-(*)-HLR	15 ⁷ / ₁₆	Prefix(t)-36-30-(*)-HSR	13 ³ / ₄	Prefix(t)-36-30-(*)-HRR	15 ⁷ / ₁₆
36	24	Prefix(t)-36-24-(*)-HLR	18 ¹⁵ / ₁₆	Prefix(t)-36-24-(*)-HSR	15 ⁷ / ₁₆	Prefix(t)-36-24-(*)-HRR	18 ¹⁵ / ₁₆
36	18	Prefix(t)-36-18-(*)-HLR	22 ³ / ₈	Prefix(t)-36-18-(*)-HSR	17 ³ / ₁₆	Prefix(t)-36-18-(*)-HRR	22 ³ / ₈
36	12	Prefix(t)-36-12-(*)-HLR	25 ⁷ / ₈	Prefix(t)-36-12-(*)-HSR	18 ⁵ / ₁₆	Prefix(t)-36-12-(*)-HRR	25 ⁷ / ₈
36	9	Prefix(t)-36-09-(*)-HLR	27 ⁷ / ₁₆	Prefix(t)-36-09-(*)-HSR	19 ¹³ / ₁₆	Prefix(t)-36-09-(*)-HRR	27 ⁷ / ₁₆
36	6	Prefix(t)-36-06-(*)-HLR	29 ⁵ / ₁₆	Prefix(t)-36-06-(*)-HSR	20 ¹¹ / ₁₆	Prefix(t)-36-06-(*)-HRR	29 ⁵ / ₁₆
30	24	Prefix(t)-30-24-(*)-HLR	15 ⁷ / ₁₆	Prefix(t)-30-24-(*)-HSR	13 ³ / ₄	Prefix(t)-30-24-(*)-HRR	15 ⁷ / ₁₆
30	18	Prefix(t)-30-18-(*)-HLR	18 ¹⁵ / ₁₆	Prefix(t)-30-18-(*)-HSR	15 ⁷ / ₁₆	Prefix(t)-30-18-(*)-HRR	18 ¹⁵ / ₁₆
30	12	Prefix(t)-30-12-(*)-HLR	22 ³ / ₈	Prefix(t)-30-12-(*)-HSR	17 ³ / ₁₆	Prefix(t)-30-12-(*)-HRR	22 ³ / ₈
30	9	Prefix(t)-30-09-(*)-HLR	24 ¹ / ₈	Prefix(t)-30-09-(*)-HSR	18 ³ / ₁₆	Prefix(t)-30-09-(*)-HRR	24 ¹ / ₈
30	6	Prefix(t)-30-06-(*)-HLR	25 ⁷ / ₈	Prefix(t)-30-06-(*)-HSR	18 ¹⁵ / ₁₆	Prefix(t)-30-06-(*)-HRR	25 ⁷ / ₈
24	18	Prefix(t)-24-18-(*)-HLR	15 ⁷ / ₁₆	Prefix(t)-24-18-(*)-HSR	13 ³ / ₄	Prefix(t)-24-18-(*)-HRR	15 ⁷ / ₁₆
24	12	Prefix(t)-24-12-(*)-HLR	18 ¹⁵ / ₁₆	Prefix(t)-24-12-(*)-HSR	15 ⁷ / ₁₆	Prefix(t)-24-12-(*)-HRR	18 ¹⁵ / ₁₆
24	9	Prefix(t)-24-09-(*)-HLR	20 ¹¹ / ₁₆	Prefix(t)-24-09-(*)-HSR	16 ⁵ / ₁₆	Prefix(t)-24-09-(*)-HRR	20 ¹¹ / ₁₆
24	6	Prefix(t)-24-06-(*)-HLR	22 ³ / ₈	Prefix(t)-24-06-(*)-HSR	17 ³ / ₁₆	Prefix(t)-24-06-(*)-HRR	22 ³ / ₈
18	12	Prefix(t)-18-12-(*)-HLR	15 ⁷ / ₁₆	Prefix(t)-18-12-(*)-HSR	13 ³ / ₄	Prefix(t)-18-12-(*)-HRR	15 ⁷ / ₁₆
18	9	Prefix(t)-18-09-(*)-HLR	17 ³ / ₁₆	Prefix(t)-18-09-(*)-HSR	14 ⁵ / ₁₆	Prefix(t)-18-09-(*)-HRR	17 ³ / ₁₆
18	6	Prefix(t)-18-06-(*)-HLR	18 ¹⁵ / ₁₆	Prefix(t)-18-06-(*)-HSR	15 ⁷ / ₁₆	Prefix(t)-18-06-(*)-HRR	18 ¹⁵ / ₁₆
12	9	Prefix(t)-12-09-(*)-HLR	13 ³ / ₄	Prefix(t)-12-09-(*)-HSR	12 ⁷ / ₈	Prefix(t)-12-09-(*)-HRR	13 ³ / ₄
12	6	Prefix(t)-12-06-(*)-HLR	15 ⁷ / ₁₆	Prefix(t)-12-06-(*)-HSR	13 ³ / ₄	Prefix(t)-12-06-(*)-HRR	15 ⁷ / ₁₆
9	6	Prefix(t)-09-06-(*)-HLR	13 ³ / ₄	Prefix(t)-09-06-(*)-HSR	12 ⁷ / ₈	Prefix(t)-09-06-(*)-HRR	13 ³ / ₄


Offset reducer – left



Reducer – straight



Offset reducer – right



(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

Steel fittings

45° Horizontal wye fittings




Selection guide

- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.


45° Horizontal wye

Width (in.)	Left-hand wye cat. no.	Right-hand wye cat. no.	Dimensions (in.)		
			X	Y	Z
6	Prefix(t)-06-(*)-HYL	Prefix(t)-06-(*)-HYR	18 ⁹ / ₁₆	14 ¹³ / ₁₆	12 ⁷ / ₁₆
9	Prefix(t)-09-(*)-HYL	Prefix(t)-09-(*)-HYR	22 ¹ / ₂	19 ¹⁵ / ₁₆	15 ⁷ / ₁₆
12	Prefix(t)-12-(*)-HYL	Prefix(t)-12-(*)-HYR	26 ³ / ₄	25	18 ⁷ / ₁₆
18	Prefix(t)-18-(*)-HYL	Prefix(t)-18-(*)-HYR	35 ¹ / ₄	35 ¹ / ₄	24 ⁷ / ₁₆
24	Prefix(t)-24-(*)-HYL	Prefix(t)-24-(*)-HYR	43 ¹ / ₂	45 ¹ / ₂	30 ⁷ / ₁₆
30	Prefix(t)-30-(*)-HYL	Prefix(t)-30-(*)-HYR	52 ¹ / ₄	55 ³ / ₄	36 ⁷ / ₁₆
36	Prefix(t)-36-(*)-HYL	Prefix(t)-36-(*)-HYR	60 ¹¹ / ₁₆	66	42 ⁷ / ₁₆
42	Prefix(t)-42-(*)-HYL	Prefix(t)-42-(*)-HYR	69 ⁹ / ₁₆	76 ¹ / ₄	45 ⁷ / ₁₆

Left-hand wye




Right-hand wye




(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

Part numbering system (45° Horizontal wye)

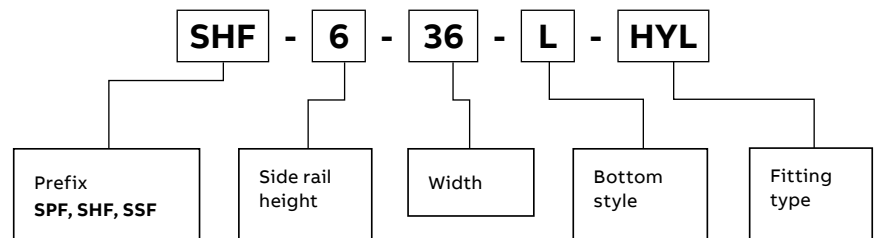

Part numbering system (Horizontal reducer – see page 146)

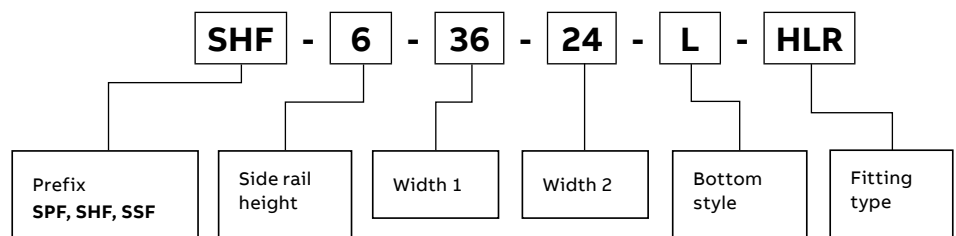

Steel fittings


Vertical tee up/down fittings

Vertical tee up/down

	Nominal		Vertical tee up cat. no.	Vertical tee down cat. no.	Dimensions (in.)			
					Side rail height "H"			
					3 1/2 in.		4 in.	
	Radius (in.)	Width (in.)			X	Y	X	Y
Up	12	6	Prefix(t)-06-(*)-VTU12	Prefix(t)-06-(*)-VTD12	13 ¹³ / ₁₆	27 ⁵ / ₈	14 ¹ / ₈	28 ³ / ₁₆
	12	9	Prefix(t)-09-(*)-VTU12	Prefix(t)-09-(*)-VTD12	13 ¹³ / ₁₆	27 ⁵ / ₈	14 ¹ / ₈	28 ³ / ₁₆
	12	12	Prefix(t)-12-(*)-VTU12	Prefix(t)-12-(*)-VTD12	13 ¹³ / ₁₆	27 ⁵ / ₈	14 ¹ / ₈	28 ³ / ₁₆
	12	18	Prefix(t)-18-(*)-VTU12	Prefix(t)-18-(*)-VTD12	13 ¹³ / ₁₆	27 ⁵ / ₈	14 ¹ / ₈	28 ³ / ₁₆
	12	24	Prefix(t)-24-(*)-VTU12	Prefix(t)-24-(*)-VTD12	13 ¹³ / ₁₆	27 ⁵ / ₈	14 ¹ / ₈	28 ³ / ₁₆
	12	30	Prefix(t)-30-(*)-VTU12	Prefix(t)-30-(*)-VTD12	13 ¹³ / ₁₆	27 ⁵ / ₈	14 ¹ / ₈	28 ³ / ₁₆
	12	36	Prefix(t)-36-(*)-VTU12	Prefix(t)-36-(*)-VTD12	13 ¹³ / ₁₆	27 ⁵ / ₈	14 ¹ / ₈	28 ³ / ₁₆
	12	42	Prefix(t)-42-(*)-VTU12	Prefix(t)-42-(*)-VTD12	13 ¹³ / ₁₆	27 ⁵ / ₈	14 ¹ / ₈	28 ³ / ₁₆
	24	6	Prefix(t)-06-(*)-VTU24	Prefix(t)-06-(*)-VTD24	25 ¹³ / ₁₆	51 ⁵ / ₈	26 ³ / ₈	52 ³ / ₁₆
	24	9	Prefix(t)-09-(*)-VTU24	Prefix(t)-09-(*)-VTD24	25 ¹³ / ₁₆	51 ⁵ / ₈	26 ³ / ₈	52 ³ / ₁₆
	24	12	Prefix(t)-12-(*)-VTU24	Prefix(t)-12-(*)-VTD24	25 ¹³ / ₁₆	51 ⁵ / ₈	26 ³ / ₈	52 ³ / ₁₆
	24	18	Prefix(t)-18-(*)-VTU24	Prefix(t)-18-(*)-VTD24	25 ¹³ / ₁₆	51 ⁵ / ₈	26 ³ / ₈	52 ³ / ₁₆
Down	24	24	Prefix(t)-24-(*)-VTU24	Prefix(t)-24-(*)-VTD24	25 ¹³ / ₁₆	51 ⁵ / ₈	26 ³ / ₈	52 ³ / ₁₆
	24	30	Prefix(t)-30-(*)-VTU24	Prefix(t)-30-(*)-VTD24	25 ¹³ / ₁₆	51 ⁵ / ₈	26 ³ / ₈	52 ³ / ₁₆
	24	36	Prefix(t)-36-(*)-VTU24	Prefix(t)-36-(*)-VTD24	25 ¹³ / ₁₆	51 ⁵ / ₈	26 ³ / ₈	52 ³ / ₁₆
	24	42	Prefix(t)-42-(*)-VTU24	Prefix(t)-42-(*)-VTD24	25 ¹³ / ₁₆	51 ⁵ / ₈	26 ³ / ₈	52 ³ / ₁₆
	36	6	Prefix(t)-06-(*)-VTU36	Prefix(t)-06-(*)-VTD36	37 ¹³ / ₁₆	75 ⁵ / ₈	38 ³ / ₈	76 ³ / ₁₆
	36	9	Prefix(t)-09-(*)-VTU36	Prefix(t)-09-(*)-VTD36	37 ¹³ / ₁₆	75 ⁵ / ₈	38 ³ / ₈	76 ³ / ₁₆
	36	12	Prefix(t)-12-(*)-VTU36	Prefix(t)-12-(*)-VTD36	37 ¹³ / ₁₆	75 ⁵ / ₈	38 ³ / ₈	76 ³ / ₁₆
	36	18	Prefix(t)-18-(*)-VTU36	Prefix(t)-18-(*)-VTD36	37 ¹³ / ₁₆	75 ⁵ / ₈	38 ³ / ₈	76 ³ / ₁₆
	36	24	Prefix(t)-24-(*)-VTU36	Prefix(t)-24-(*)-VTD36	37 ¹³ / ₁₆	75 ⁵ / ₈	38 ³ / ₈	76 ³ / ₁₆
	36	30	Prefix(t)-30-(*)-VTU36	Prefix(t)-30-(*)-VTD36	37 ¹³ / ₁₆	75 ⁵ / ₈	38 ³ / ₈	76 ³ / ₁₆
	36	36	Prefix(t)-36-(*)-VTU36	Prefix(t)-36-(*)-VTD36	37 ¹³ / ₁₆	75 ⁵ / ₈	38 ³ / ₈	76 ³ / ₁₆
	36	42	Prefix(t)-42-(*)-VTU36	Prefix(t)-42-(*)-VTD36	37 ¹³ / ₁₆	75 ⁵ / ₈	38 ³ / ₈	76 ³ / ₁₆
	48	6	Prefix(t)-06-(*)-VTU48	Prefix(t)-06-(*)-VTD48	49 ¹³ / ₁₆	99 ⁵ / ₈	50 ³ / ₈	100 ³ / ₁₆
	48	9	Prefix(t)-09-(*)-VTU48	Prefix(t)-09-(*)-VTD48	49 ¹³ / ₁₆	99 ⁵ / ₈	50 ³ / ₈	100 ³ / ₁₆
	48	12	Prefix(t)-12-(*)-VTU48	Prefix(t)-12-(*)-VTD48	49 ¹³ / ₁₆	99 ⁵ / ₈	50 ³ / ₈	100 ³ / ₁₆
	48	18	Prefix(t)-18-(*)-VTU48	Prefix(t)-18-(*)-VTD48	49 ¹³ / ₁₆	99 ⁵ / ₈	50 ³ / ₈	100 ³ / ₁₆
	48	24	Prefix(t)-24-(*)-VTU48	Prefix(t)-24-(*)-VTD48	49 ¹³ / ₁₆	99 ⁵ / ₈	50 ³ / ₈	100 ³ / ₁₆
	48	30	Prefix(t)-30-(*)-VTU48	Prefix(t)-30-(*)-VTD48	49 ¹³ / ₁₆	99 ⁵ / ₈	50 ³ / ₈	100 ³ / ₁₆
	48	36	Prefix(t)-36-(*)-VTU48	Prefix(t)-36-(*)-VTD48	49 ¹³ / ₁₆	99 ⁵ / ₈	50 ³ / ₈	100 ³ / ₁₆
	48	42	Prefix(t)-42-(*)-VTU48	Prefix(t)-42-(*)-VTD48	49 ¹³ / ₁₆	99 ⁵ / ₈	50 ³ / ₈	100 ³ / ₁₆

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

Part numbering system

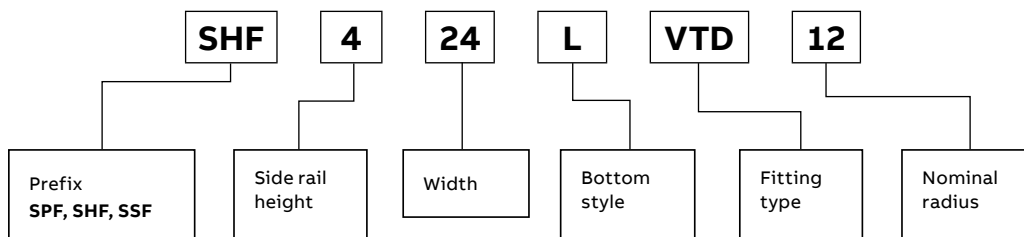

Vertical tee up/down (continued)

				Dimensions (in.)					
				Side rail height "H"					
Nominal		Vertical tee up cat. no.	Vertical tee down cat. no.	5 in.		6 in.		7 in.	
Radius (in.)	Width (in.)			X	Y	X	Y	X	Y
12	6	Prefix(t)-06-(*)-VTU12	Prefix(t)-06-(*)-VTD12	14 $\frac{5}{8}$	29 $\frac{3}{16}$	15 $\frac{1}{8}$	30 $\frac{3}{16}$	15 $\frac{5}{8}$	31 $\frac{3}{16}$
12	9	Prefix(t)-09-(*)-VTU12	Prefix(t)-09-(*)-VTD12	14 $\frac{5}{8}$	29 $\frac{3}{16}$	15 $\frac{1}{8}$	30 $\frac{3}{16}$	15 $\frac{5}{8}$	31 $\frac{3}{16}$
12	12	Prefix(t)-12-(*)-VTU12	Prefix(t)-12-(*)-VTD12	14 $\frac{5}{8}$	29 $\frac{3}{16}$	15 $\frac{1}{8}$	30 $\frac{3}{16}$	15 $\frac{5}{8}$	31 $\frac{3}{16}$
12	18	Prefix(t)-18-(*)-VTU12	Prefix(t)-18-(*)-VTD12	14 $\frac{5}{8}$	29 $\frac{3}{16}$	15 $\frac{1}{8}$	30 $\frac{3}{16}$	15 $\frac{5}{8}$	31 $\frac{3}{16}$
12	24	Prefix(t)-24-(*)-VTU12	Prefix(t)-24-(*)-VTD12	14 $\frac{5}{8}$	29 $\frac{3}{16}$	15 $\frac{1}{8}$	30 $\frac{3}{16}$	15 $\frac{5}{8}$	31 $\frac{3}{16}$
12	30	Prefix(t)-30-(*)-VTU12	Prefix(t)-30-(*)-VTD12	14 $\frac{5}{8}$	29 $\frac{3}{16}$	15 $\frac{1}{8}$	30 $\frac{3}{16}$	15 $\frac{5}{8}$	31 $\frac{3}{16}$
12	36	Prefix(t)-36-(*)-VTU12	Prefix(t)-36-(*)-VTD12	14 $\frac{5}{8}$	29 $\frac{3}{16}$	15 $\frac{1}{8}$	30 $\frac{3}{16}$	15 $\frac{5}{8}$	31 $\frac{3}{16}$
12	42	Prefix(t)-42-(*)-VTU12	Prefix(t)-42-(*)-VTD12	14 $\frac{5}{8}$	29 $\frac{3}{16}$	15 $\frac{1}{8}$	30 $\frac{3}{16}$	15 $\frac{5}{8}$	31 $\frac{3}{16}$
24	6	Prefix(t)-06-(*)-VTU24	Prefix(t)-06-(*)-VTD24	26 $\frac{5}{8}$	53 $\frac{3}{16}$	27 $\frac{7}{8}$	54 $\frac{3}{16}$	27 $\frac{5}{8}$	55 $\frac{3}{16}$
24	9	Prefix(t)-09-(*)-VTU24	Prefix(t)-09-(*)-VTD24	26 $\frac{5}{8}$	53 $\frac{3}{16}$	27 $\frac{7}{8}$	54 $\frac{3}{16}$	27 $\frac{5}{8}$	55 $\frac{3}{16}$
24	12	Prefix(t)-12-(*)-VTU24	Prefix(t)-12-(*)-VTD24	26 $\frac{5}{8}$	53 $\frac{3}{16}$	27 $\frac{7}{8}$	54 $\frac{3}{16}$	27 $\frac{5}{8}$	55 $\frac{3}{16}$
24	18	Prefix(t)-18-(*)-VTU24	Prefix(t)-18-(*)-VTD24	26 $\frac{5}{8}$	53 $\frac{3}{16}$	27 $\frac{7}{8}$	54 $\frac{3}{16}$	27 $\frac{5}{8}$	55 $\frac{3}{16}$
24	24	Prefix(t)-24-(*)-VTU24	Prefix(t)-24-(*)-VTD24	26 $\frac{5}{8}$	53 $\frac{3}{16}$	27 $\frac{7}{8}$	54 $\frac{3}{16}$	27 $\frac{5}{8}$	55 $\frac{3}{16}$
24	30	Prefix(t)-30-(*)-VTU24	Prefix(t)-30-(*)-VTD24	26 $\frac{5}{8}$	53 $\frac{3}{16}$	27 $\frac{7}{8}$	54 $\frac{3}{16}$	27 $\frac{5}{8}$	55 $\frac{3}{16}$
24	36	Prefix(t)-36-(*)-VTU24	Prefix(t)-36-(*)-VTD24	26 $\frac{5}{8}$	53 $\frac{3}{16}$	27 $\frac{7}{8}$	54 $\frac{3}{16}$	27 $\frac{5}{8}$	55 $\frac{3}{16}$
24	42	Prefix(t)-42-(*)-VTU24	Prefix(t)-42-(*)-VTD24	26 $\frac{5}{8}$	53 $\frac{3}{16}$	27 $\frac{7}{8}$	54 $\frac{3}{16}$	27 $\frac{5}{8}$	55 $\frac{3}{16}$
36	6	Prefix(t)-06-(*)-VTU36	Prefix(t)-06-(*)-VTD36	38 $\frac{5}{8}$	77 $\frac{3}{16}$	39 $\frac{1}{2}$	78 $\frac{3}{16}$	39 $\frac{5}{8}$	79 $\frac{3}{16}$
36	9	Prefix(t)-09-(*)-VTU36	Prefix(t)-09-(*)-VTD36	38 $\frac{5}{8}$	77 $\frac{3}{16}$	39 $\frac{1}{2}$	78 $\frac{3}{16}$	39 $\frac{5}{8}$	79 $\frac{3}{16}$
36	12	Prefix(t)-12-(*)-VTU36	Prefix(t)-12-(*)-VTD36	38 $\frac{5}{8}$	77 $\frac{3}{16}$	39 $\frac{1}{2}$	78 $\frac{3}{16}$	39 $\frac{5}{8}$	79 $\frac{3}{16}$
36	18	Prefix(t)-18-(*)-VTU36	Prefix(t)-18-(*)-VTD36	38 $\frac{5}{8}$	77 $\frac{3}{16}$	39 $\frac{1}{2}$	78 $\frac{3}{16}$	39 $\frac{5}{8}$	79 $\frac{3}{16}$
36	24	Prefix(t)-24-(*)-VTU36	Prefix(t)-24-(*)-VTD36	38 $\frac{5}{8}$	77 $\frac{3}{16}$	39 $\frac{1}{2}$	78 $\frac{3}{16}$	39 $\frac{5}{8}$	79 $\frac{3}{16}$
36	30	Prefix(t)-30-(*)-VTU36	Prefix(t)-30-(*)-VTD36	38 $\frac{5}{8}$	77 $\frac{3}{16}$	39 $\frac{1}{2}$	78 $\frac{3}{16}$	39 $\frac{5}{8}$	79 $\frac{3}{16}$
36	36	Prefix(t)-36-(*)-VTU36	Prefix(t)-36-(*)-VTD36	38 $\frac{5}{8}$	77 $\frac{3}{16}$	39 $\frac{1}{2}$	78 $\frac{3}{16}$	39 $\frac{5}{8}$	79 $\frac{3}{16}$
36	42	Prefix(t)-42-(*)-VTU36	Prefix(t)-42-(*)-VTD36	38 $\frac{5}{8}$	77 $\frac{3}{16}$	39 $\frac{1}{2}$	78 $\frac{3}{16}$	39 $\frac{5}{8}$	79 $\frac{3}{16}$
48	6	Prefix(t)-06-(*)-VTU48	Prefix(t)-06-(*)-VTD48	50 $\frac{5}{8}$	101 $\frac{3}{16}$	51 $\frac{1}{8}$	102 $\frac{3}{16}$	51 $\frac{5}{8}$	103 $\frac{3}{16}$
48	9	Prefix(t)-09-(*)-VTU48	Prefix(t)-09-(*)-VTD48	50 $\frac{5}{8}$	101 $\frac{3}{16}$	51 $\frac{1}{8}$	102 $\frac{3}{16}$	51 $\frac{5}{8}$	103 $\frac{3}{16}$
48	12	Prefix(t)-12-(*)-VTU48	Prefix(t)-12-(*)-VTD48	50 $\frac{5}{8}$	101 $\frac{3}{16}$	51 $\frac{1}{8}$	102 $\frac{3}{16}$	51 $\frac{5}{8}$	103 $\frac{3}{16}$
48	18	Prefix(t)-18-(*)-VTU48	Prefix(t)-18-(*)-VTD48	50 $\frac{5}{8}$	101 $\frac{3}{16}$	51 $\frac{1}{8}$	102 $\frac{3}{16}$	51 $\frac{5}{8}$	103 $\frac{3}{16}$
48	24	Prefix(t)-24-(*)-VTU48	Prefix(t)-24-(*)-VTD48	50 $\frac{5}{8}$	101 $\frac{3}{16}$	51 $\frac{1}{8}$	102 $\frac{3}{16}$	51 $\frac{5}{8}$	103 $\frac{3}{16}$
48	30	Prefix(t)-30-(*)-VTU48	Prefix(t)-30-(*)-VTD48	50 $\frac{5}{8}$	101 $\frac{3}{16}$	51 $\frac{1}{8}$	102 $\frac{3}{16}$	51 $\frac{5}{8}$	103 $\frac{3}{16}$
48	36	Prefix(t)-36-(*)-VTU48	Prefix(t)-36-(*)-VTD48	50 $\frac{5}{8}$	101 $\frac{3}{16}$	51 $\frac{1}{8}$	102 $\frac{3}{16}$	51 $\frac{5}{8}$	103 $\frac{3}{16}$
48	42	Prefix(t)-42-(*)-VTU48	Prefix(t)-42-(*)-VTD48	50 $\frac{5}{8}$	101 $\frac{3}{16}$	51 $\frac{1}{8}$	102 $\frac{3}{16}$	51 $\frac{5}{8}$	103 $\frac{3}{16}$

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

Selection guide

- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.


Steel fittings

Cable support fittings

Cable support


Selection guide


- Prefix: SPF (pregalv.), SHF (hot-dip), SSF (stainless steel)
- Inside tray widths: 6, 9, 12, 18, 24, 30, 36, 42 in.
- Nominal radius: 12, 24, 36, 48 in.
- Bottom styles: L– ladder, V– ventilated, S– solid
- Side rail heights: 3 in., 4 in., 5 in., 6 in., 7 in.

				Dimensions (in.)				
				Side rail height "H"				
				3½ in.	4 in.	5 in.	6 in.	7 in.
Nominal				X				
Radius (in.)	Width (in.)	Cat. no.						
	12	6	Prefix(t)-06-(*)-CS12	15⅞	16⅜ ₁₆	17⅜ ₁₆	18⅜ ₁₆	19⅜ ₁₆
	12	9	Prefix(t)-09-(*)-CS12	15⅞	16⅜ ₁₆	17⅜ ₁₆	18⅜ ₁₆	19⅜ ₁₆
	12	12	Prefix(t)-12-(*)-CS12	15⅞	16⅜ ₁₆	17⅜ ₁₆	18⅜ ₁₆	19⅜ ₁₆
	12	18	Prefix(t)-18-(*)-CS12	15⅞	16⅜ ₁₆	17⅜ ₁₆	18⅜ ₁₆	19⅜ ₁₆
	12	24	Prefix(t)-24-(*)-CS12	15⅞	16⅜ ₁₆	17⅜ ₁₆	18⅜ ₁₆	19⅜ ₁₆
	12	30	Prefix(t)-30-(*)-CS12	15⅞	16⅜ ₁₆	17⅜ ₁₆	18⅜ ₁₆	19⅜ ₁₆
	12	36	Prefix(t)-36-(*)-CS12	15⅞	16⅜ ₁₆	17⅜ ₁₆	18⅜ ₁₆	19⅜ ₁₆
	12	42	Prefix(t)-42-(*)-CS12	15⅞	16⅜ ₁₆	17⅜ ₁₆	18⅜ ₁₆	19⅜ ₁₆
	24	6	Prefix(t)-06-(*)-CS24	27⅞	28⅜ ₁₆	29⅜ ₁₆	30⅜ ₁₆	31⅜ ₁₆
	24	9	Prefix(t)-09-(*)-CS24	27⅞	28⅜ ₁₆	29⅜ ₁₆	30⅜ ₁₆	31⅜ ₁₆
	24	12	Prefix(t)-12-(*)-CS24	27⅞	28⅜ ₁₆	29⅜ ₁₆	30⅜ ₁₆	31⅜ ₁₆
	24	18	Prefix(t)-18-(*)-CS24	27⅞	28⅜ ₁₆	29⅜ ₁₆	30⅜ ₁₆	31⅜ ₁₆
	24	24	Prefix(t)-24-(*)-CS24	27⅞	28⅜ ₁₆	29⅜ ₁₆	30⅜ ₁₆	31⅜ ₁₆
	24	30	Prefix(t)-30-(*)-CS24	27⅞	28⅜ ₁₆	29⅜ ₁₆	30⅜ ₁₆	31⅜ ₁₆
	24	36	Prefix(t)-36-(*)-CS24	27⅞	28⅜ ₁₆	29⅜ ₁₆	30⅜ ₁₆	31⅜ ₁₆
	24	42	Prefix(t)-42-(*)-CS24	27⅞	28⅜ ₁₆	29⅜ ₁₆	30⅜ ₁₆	31⅜ ₁₆
	36	6	Prefix(t)-06-(*)-CS36	39⅞	40⅜ ₁₆	41⅜ ₁₆	42⅜ ₁₆	43⅜ ₁₆
	36	9	Prefix(t)-09-(*)-CS36	39⅞	40⅜ ₁₆	41⅜ ₁₆	42⅜ ₁₆	43⅜ ₁₆
	36	12	Prefix(t)-12-(*)-CS36	39⅞	40⅜ ₁₆	41⅜ ₁₆	42⅜ ₁₆	43⅜ ₁₆
	36	18	Prefix(t)-18-(*)-CS36	39⅞	40⅜ ₁₆	41⅜ ₁₆	42⅜ ₁₆	43⅜ ₁₆
	36	24	Prefix(t)-24-(*)-CS36	39⅞	40⅜ ₁₆	41⅜ ₁₆	42⅜ ₁₆	43⅜ ₁₆
	36	30	Prefix(t)-30-(*)-CS36	39⅞	40⅜ ₁₆	41⅜ ₁₆	42⅜ ₁₆	43⅜ ₁₆
	36	36	Prefix(t)-36-(*)-CS36	39⅞	40⅜ ₁₆	41⅜ ₁₆	42⅜ ₁₆	43⅜ ₁₆
	36	42	Prefix(t)-42-(*)-CS36	39⅞	40⅜ ₁₆	41⅜ ₁₆	42⅜ ₁₆	43⅜ ₁₆
	48	6	Prefix(t)-06-(*)-CS48	51⅞	52⅜ ₁₆	53⅜ ₁₆	54⅜ ₁₆	55⅜ ₁₆
	48	9	Prefix(t)-09-(*)-CS48	51⅞	52⅜ ₁₆	53⅜ ₁₆	54⅜ ₁₆	55⅜ ₁₆
	48	12	Prefix(t)-12-(*)-CS48	51⅞	52⅜ ₁₆	53⅜ ₁₆	54⅜ ₁₆	55⅜ ₁₆
	48	18	Prefix(t)-18-(*)-CS48	51⅞	52⅜ ₁₆	53⅜ ₁₆	54⅜ ₁₆	55⅜ ₁₆
	48	24	Prefix(t)-24-(*)-CS48	51⅞	52⅜ ₁₆	53⅜ ₁₆	54⅜ ₁₆	55⅜ ₁₆
	48	30	Prefix(t)-30-(*)-CS48	51⅞	52⅜ ₁₆	53⅜ ₁₆	54⅜ ₁₆	55⅜ ₁₆
	48	36	Prefix(t)-36-(*)-CS48	51⅞	52⅜ ₁₆	53⅜ ₁₆	54⅜ ₁₆	55⅜ ₁₆
	48	42	Prefix(t)-42-(*)-CS48	51⅞	52⅜ ₁₆	53⅜ ₁₆	54⅜ ₁₆	55⅜ ₁₆

(t) Insert side rail height. (*) Insert bottom style to complete cat. no. Includes 1 pair of splice plates with hardware.

Part numbering system

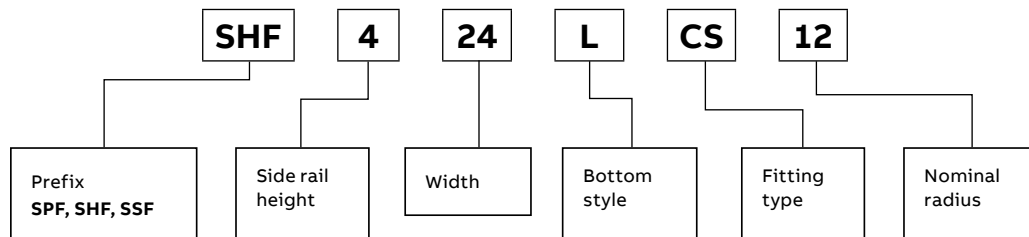

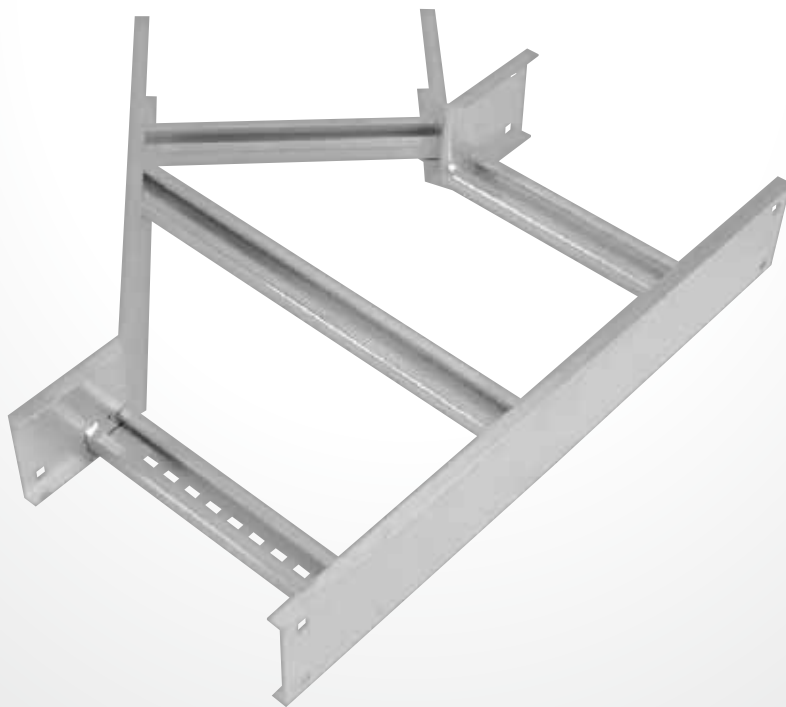

Steel fittings

Helix cable tray fitting

01 Right-turn assembly
02 Left-turn assembly

The Helix cable tray fitting.
Efficiency is in its DNA


Go from horizontal to vertical, maximum cable protection, minimum space.
Making transitions from horizontal to vertical cable tray runs has never been easier or more efficient. The latest evolution in cable tray fittings, the Helix fitting assembly was developed specifically for use in confined areas. It allows installers to transition from horizontal to vertical surfaces in less time, using significantly less space.

- Enables installation close to walls and other surfaces, eliminating need for distance
- Provides enhanced cable protection in confined spaces
- Secures cables within fitting for clean, organized cable runs

Helix cable tray fitting

Cat. no.	Material	Side rail (in.)	Width (in.)	Direction
SPF612LHVR	Pregalvanized steel	6	12	Right turn
SPF612LHVL	Pregalvanized steel	6	12	Left turn
SPF624LHVR	Pregalvanized steel	6	24	Right turn
SPF624LHVL	Pregalvanized steel	6	24	Left turn
SSF612LHVR	Stainless steel	6	12	Right turn
SSF612LHVL	Stainless steel	6	12	Left turn
SSF624LHVR	Stainless steel	6	24	Right turn
SSF624LHVL	Stainless steel	6	24	Left turn


Supports should be positioned within 24" (610 mm) of each Helix fitting extremity.

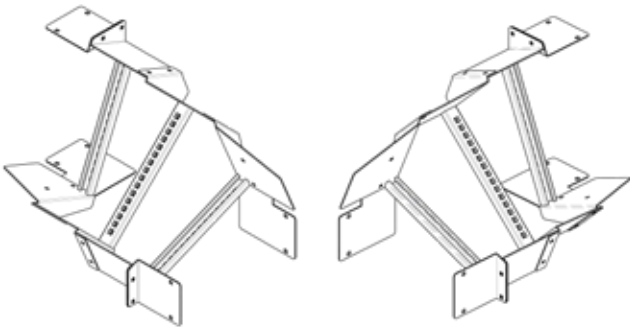

01

02



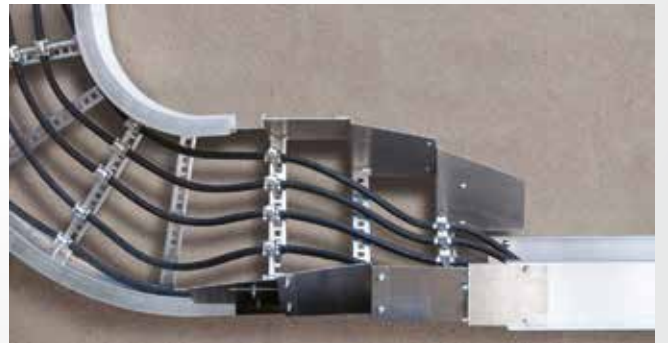

Steel

Tray covers

- 01 Solid flanged
- 02 Solid non-flanged
- 03 Ventilated flanged
- 04 Peaked flanged

Tray covers

Tray covers are available for all classes of tray. They should be installed where falling objects may damage cables or where a vertical tray run is accessible by pedestrian or vehicular traffic.

Outside cable tray runs should be covered with a peaked flanged cover to protect cable from the elements and excess build up of snow and ice.

Solid covers

These covers provide maximum mechanical protection for cables with limited heat build up. Solid covers are available with or without flange. Flanged covers have ½ in. flange.


Ventilated flanged covers

This design offers excellent mechanical protection while allowing heat produced by cables to dissipate.


Peaked flanged covers

Peaked covers offer mechanical protection plus prevent accumulation of liquid on the cover. Peaked covers have 15° rise at the peak.

Cover mounting hardware must be ordered separately.

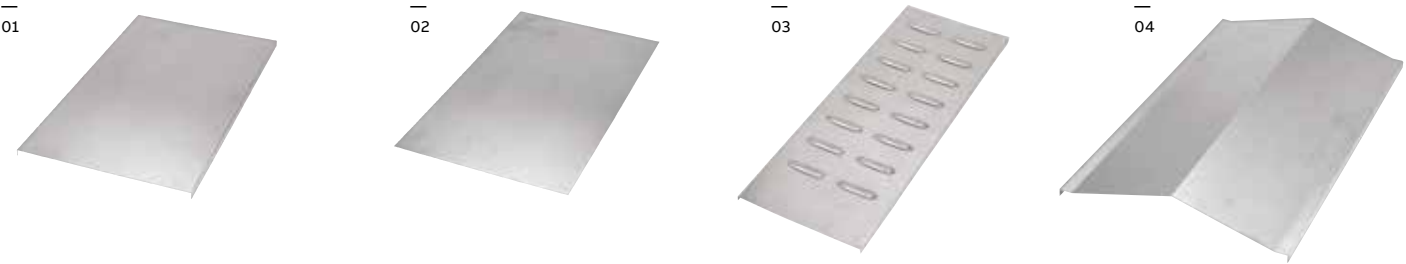




Straight cover number selection

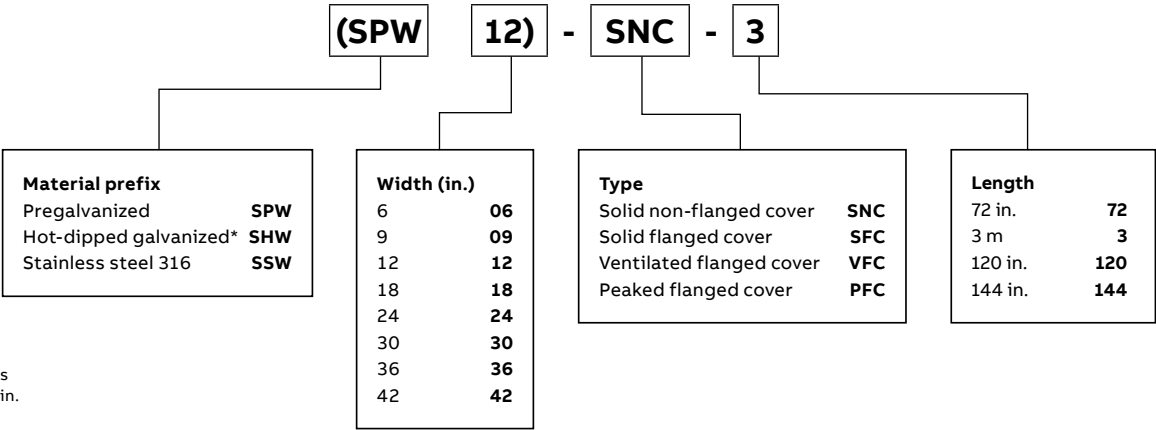

Steel

Fitting covers




Fitting cover number selection

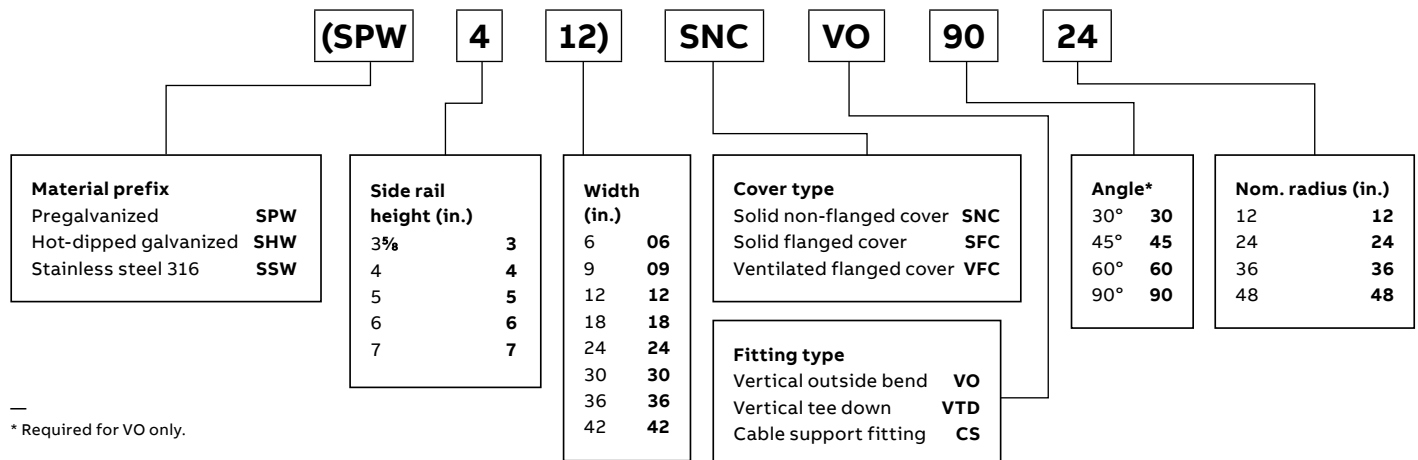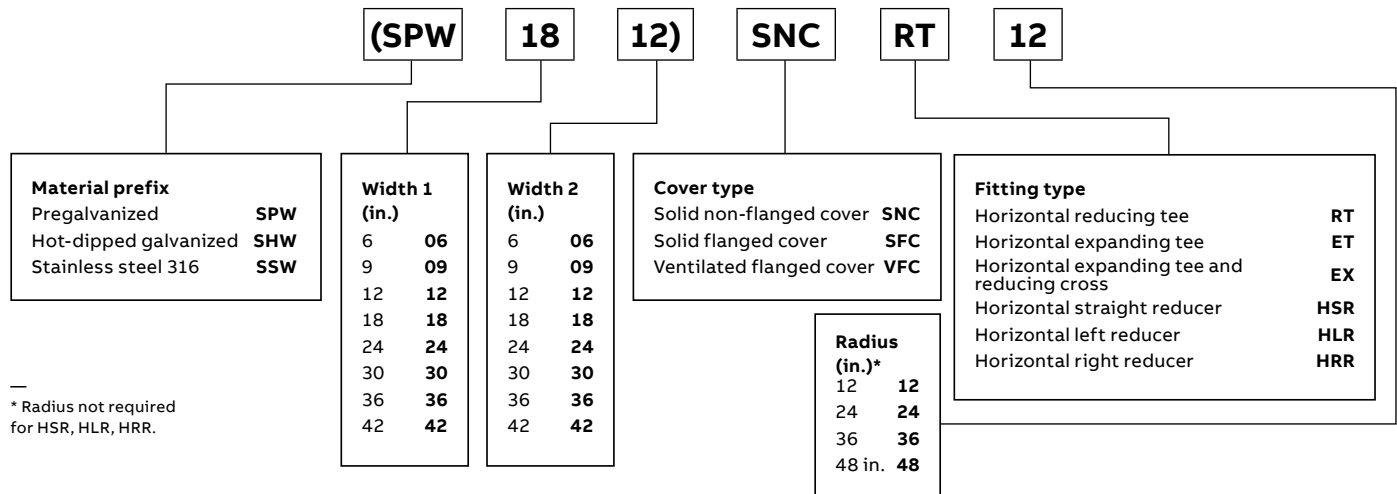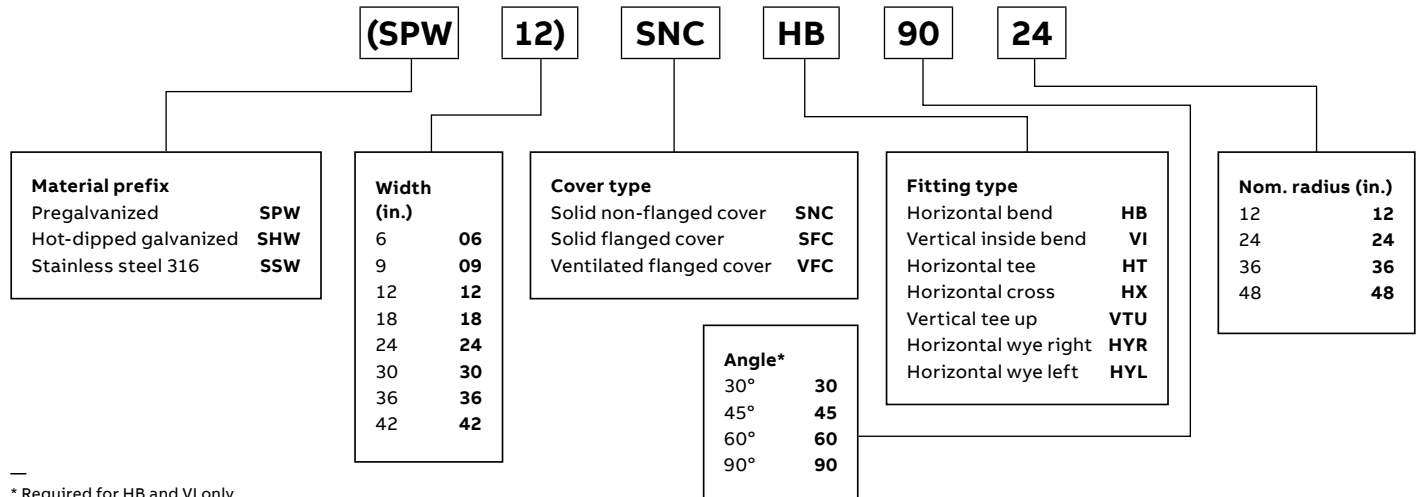

Steel

Peaked covers


Peaked covers number selection

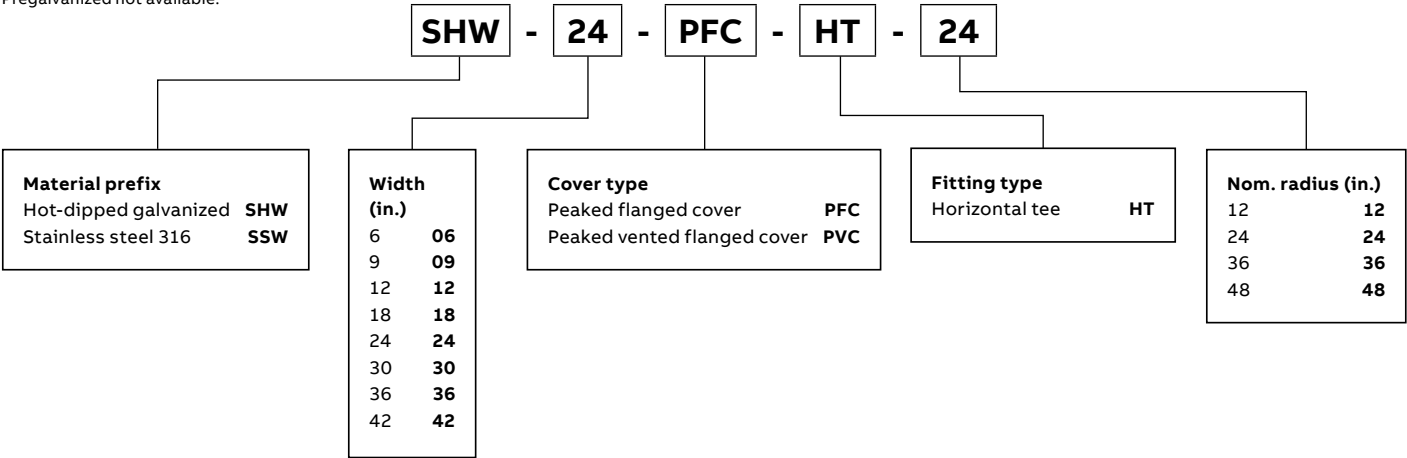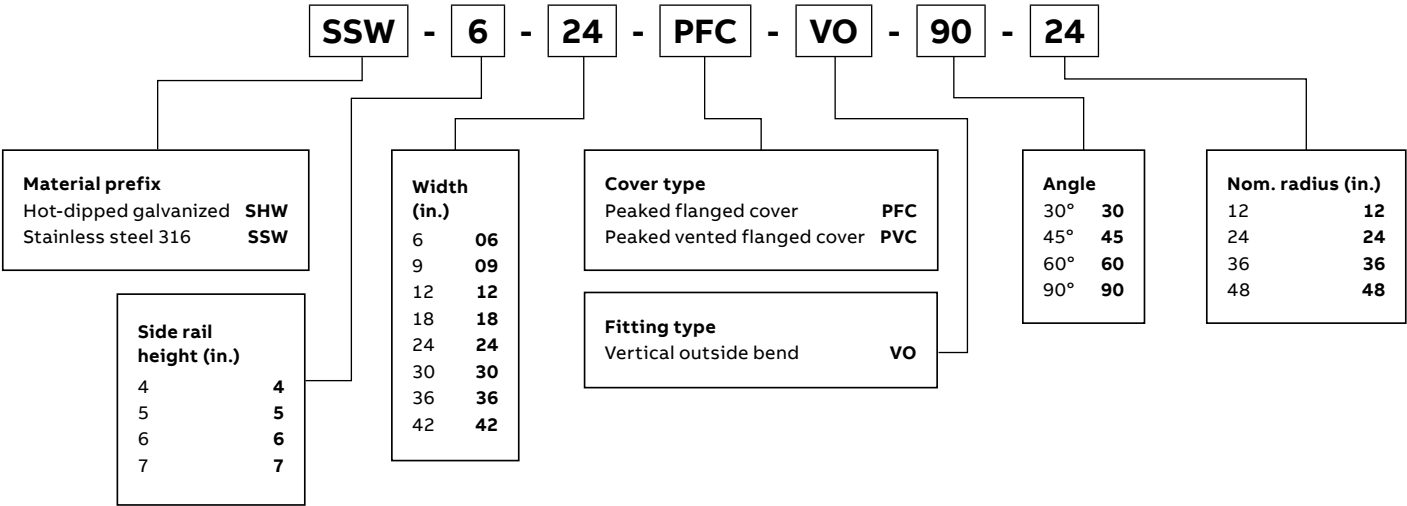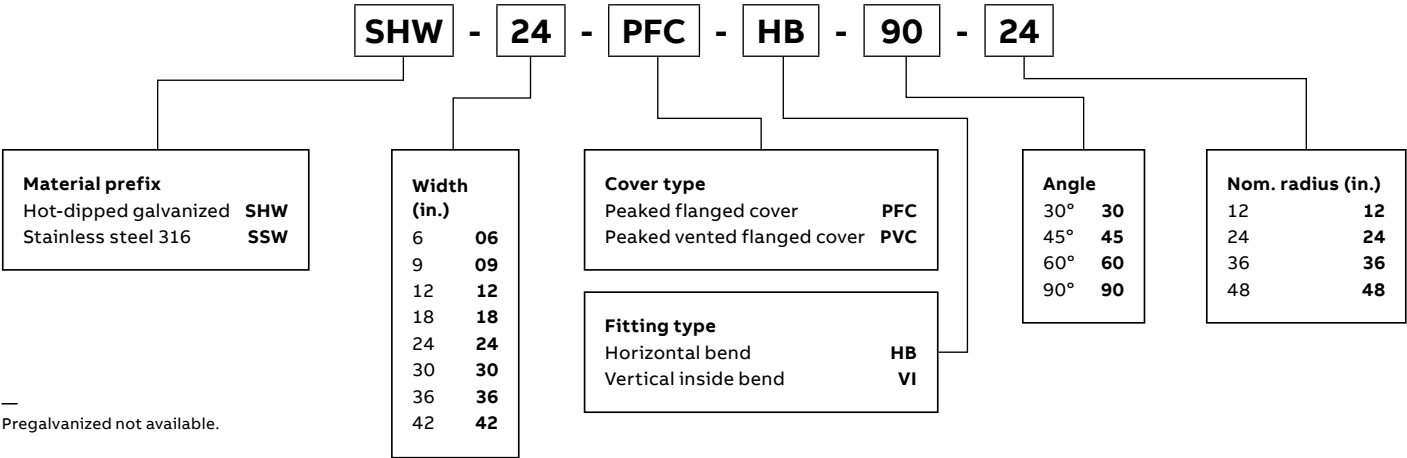


Steel

Peaked covers


Horizontal bend/vertical inside bend peaked cover number selection

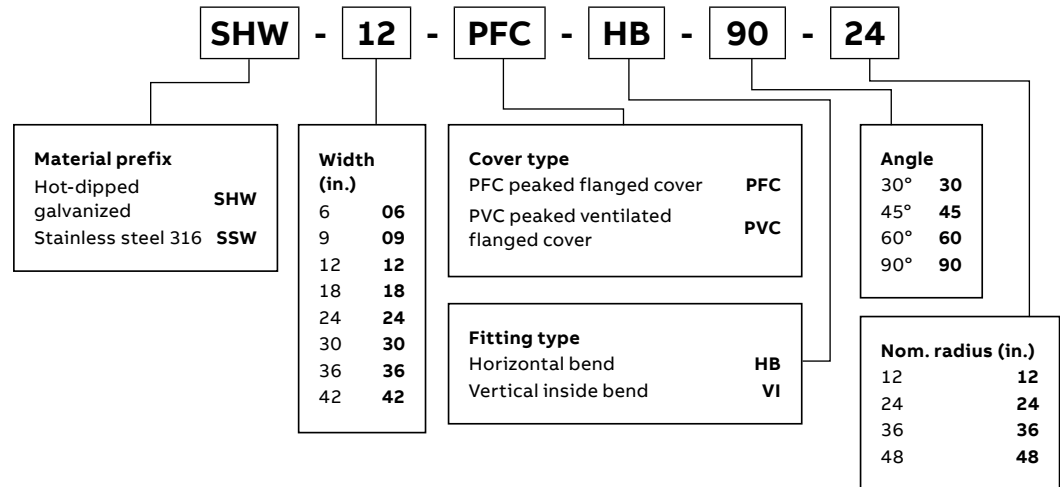

Vertical outside bend peaked cover number selection

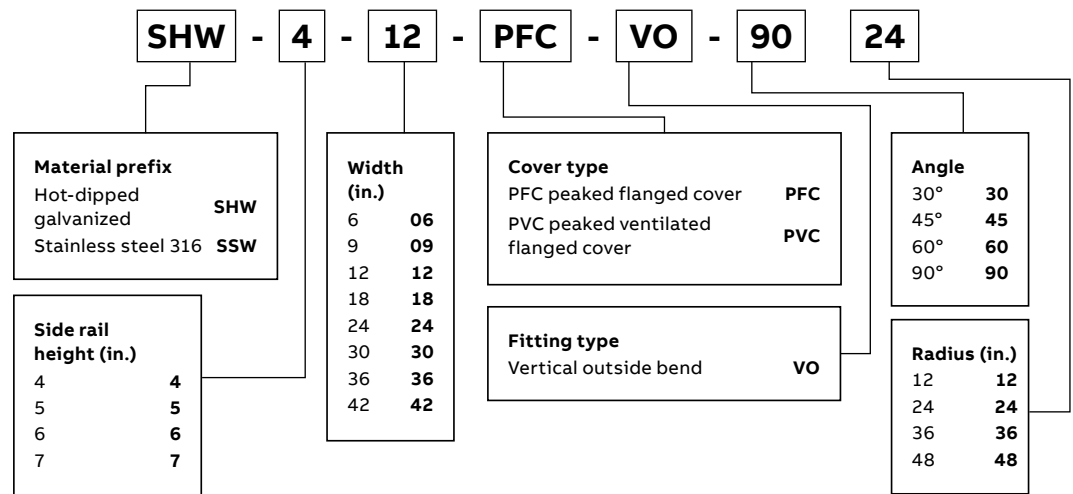

Horizontal tee peaked cover number selection

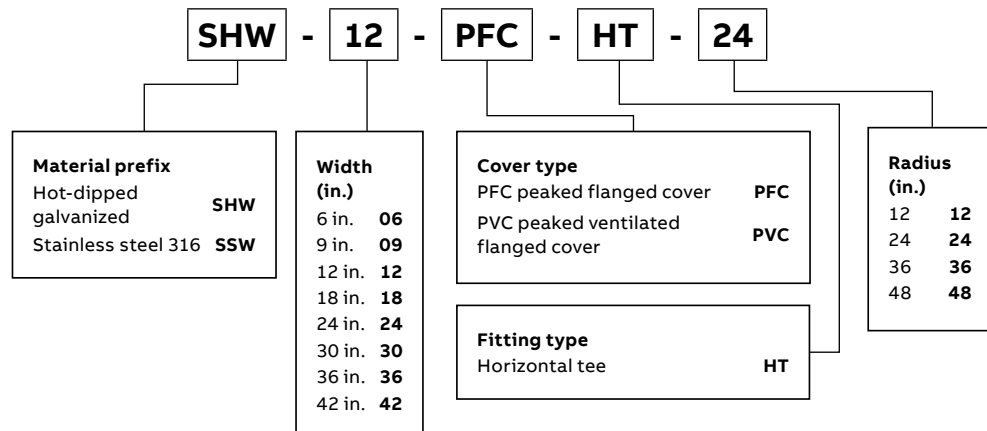


— Pregalvanized not available.

Steel
Accessories

Quantity of standard cover clamps required			
Straight section (6 ft.)		4 pcs.	
Straight section (12 ft./ 3 m)		6 pcs.	
Horizontal and vertical bends		4 pcs.	

When using the heavy-duty cover clamp, only half the quantity of pieces are required.

Raised cover clamp

		Cat. no.	Material prefix	Cover offset (in.)*
		SPW(*)RCC†	SPW, SHW, SSW	1
			SPW, SSW	2

Designed to raise cover above tray for added ventilation.

(*) Insert cover offset.

† For indoor applications only.


Peaked end cap

		Cat. no.	Material prefix	Width (in.)
		SPW(*)PEC	SPW, SHW, SSW	06
		SHW(*)PEC	SPW, SHW, SSW	09
		SSW(*)PEC	SPW, SHW, SSW	12
			SPW, SHW, SSW	18
			SPW, SHW, SSW	24
			SPW, SHW, SSW	30
			SPW, SHW, SSW	36
			SPW, SHW, SSW	42

Used for transition between peaked covers to straight covers.

(*) Insert width

Cover clamp

		Cat. no.	Material prefix	Side rail height (in.)
		(Prefix)-3-SCC	SPW, SHW, SSW	3
		(Prefix)-4-SCC	SPW, SHW, SSW	4
		(Prefix)-5-SCC	SPW, SHW, SSW	5
		(Prefix)-6-SCC	SPW, SHW, SSW	6
		(Prefix)-7-SCC	SPW, SHW, SSW	7

Rigid indoor cover clamp for flat and flanged covers.


Heavy-duty cover clamp

	Cat. no.	Material prefix	Tray width (in.)	Side rail height (in.)
	(Prefix)-3-(*)-HCC	SPW, SHW, SSW	06	3
	(Prefix)-4-(*)-HCC	SPW, SHW, SSW	09	4
	(Prefix)-5-(*)-HCC	SPW, SHW, SSW	12	5
	(Prefix)-6-(*)-HCC	SPW, SHW, SSW	18	6
	(Prefix)-7-(*)-HCC	SPW, SHW, SSW	24	7
		SPW, SHW, SSW	30	7
		SPW, SHW, SSW	36	7
		SPW, SHW, SSW	42	7

Wrap-around design offers added protection for rugged applications and outdoor conditions. Hardware included.

(*) Insert tray width

Heavy-duty peaked cover clamp

	Cat. no.	Material prefix	Tray width (in.)	Side rail height (in.)
	(Prefix)-3-(*)-HPC	SPW, SHW, SSW	06	3
	(Prefix)-4-(*)-HPC	SPW, SHW, SSW	09	4
	(Prefix)-5-(*)-HPC	SPW, SHW, SSW	12	5
	(Prefix)-6-(*)-HPC	SPW, SHW, SSW	18	6
	(Prefix)-7-(*)-HPC	SPW, SHW, SSW	24	7
		SPW, SHW, SSW	30	7
		SPW, SHW, SSW	36	7
		SPW, SHW, SSW	42	7

Wrap-around design formed to fit peaked cover for outdoor applications. Hardware included.

(*) Insert tray width

Cover joint strip

	Cat. no.	Material	Tray width (in.)
	ABW-(*)-PCS	Plastic	06
		Plastic	09
		Plastic	12
		Plastic	18
		Plastic	24
		Plastic	30
		Plastic	36
		Plastic	42

Strip used for joining covers end to end.

(*) Insert tray width

Steel splice plates

Splice, expansion and transition plates



Splice plate

- Packaged in pairs with zinc-plated hardware
- Kit contents: 8 bolts, 8 serrated flange nuts
3/8 in. diameter
- Provided as standard with each straight and/or fitting

Cat. no.	Material prefix	Side rail height (in.)
(Prefix)-3-SSP	SPW, SHW, SSW	3
(Prefix)-4-SSP	SPW, SHW, SSW	4
(Prefix)-5-SSP	SPW, SHW, SSW	5
(Prefix)-6-SSP	SPW, SHW, SSW	6
(Prefix)-7-SSP	SPW, SHW, SSW	7



- Allows for a 1 in. expansion or contraction of tray s system
- Packaged in pairs with hardware
- Kit contents: 8 bolts, 4 stop nuts, 4 serrated flange nuts 3/8 in. diameter

Expansion splice plate

Cat. no.	Material prefix	Side rail height (in.)
(Prefix)-3-ESP	SPW, SHW, SSW	3
(Prefix)-4-ESP	SPW, SHW, SSW	4
(Prefix)-5-ESP	SPW, SHW, SSW	5
(Prefix)-6-ESP	SPW, SHW, SSW	6
(Prefix)-7-ESP	SPW, SHW, SSW	7



- Designed to make the transition from aluminum to steel cable tray
- Works for all 6 in. side rails

Transition splice plate

Cat. no.	Material	Side rail height (in.)
XNM-XP400-(*)-SS6	Polyester/fiberglass	6

Each pair of plates:
8 x carriage bolt (3/8 x 1 in.) SS316
8 x 3/8 in. serrated flange nut SS316


Steel splice plates

Step-down splice plate and horizontal adjustable plate



- Connects side rails of different heights
- Hardware included
- Kit contents: 8 bolts, 8 serrated flange nuts
3/8 in. diameter


Step-down splice plate

	Cat. no.	Material prefix	Side rail width (in.)
	(Prefix)-(*)-(**)-SDS	SPW, SHW, SSW	4
		SPW, SHW, SSW	5
		SPW, SHW, SSW	6
		SPW, SHW, SSW	7


(*) Insert side rail height 1.

(**) Insert side rail height 2.

NOTE: Side rail height 1 is greater than side rail height 2.

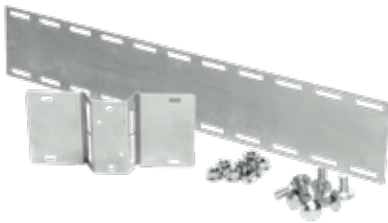

Horizontal adjustable plate

	Cat. no.	Material prefix	Side rail height (in.)	Tray width (in.)
	(Prefix)-(*)06HBP	SPW, SHW, SSW	3 to 7	06
	(Prefix)-(*)09HBP	SPW, SHW, SSW	3 to 7	09
	(Prefix)-(*)12HBP	SPW, SHW, SSW	3 to 7	12
	(Prefix)-(*)18HBP(**)	SPW, SHW, SSW	3 to 7	18
	(Prefix)-(*)24HBP	SPW, SHW, SSW	3 to 7	24
	(Prefix)-(*)30HBP	SPW, SHW, SSW	3 to 7	30
	(Prefix)-(*)36HBP	SPW, SHW, SSW	3 to 7	36
	(Prefix)-(*)42HBP	SPW, SHW, SSW	3 to 7	42


Furnished in pairs with hardware.

(*) Insert side rail height.

(**) Exception only for SHW finish in 18" width product is SHW618HBPC, a "C" must be added at the end of the product code.


Steel splice plates

Vertical adjustable plates, branch pivot connectors and box-to-tray plates



- Hinged vertical plates provide maximum flexibility for changes in elevation
- Packaged in pairs with hardware

Vertical adjustable plate


	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-3-VSP	SPW, SHW, SSW	3
	(Prefix)-4-VSP	SPW, SHW, SSW	4
	(Prefix)-5-VSP	SPW, SHW, SSW	5
	(Prefix)-6-VSP	SPW, SHW, SSW	6
	(Prefix)-7-VSP	SPW, SHW, SSW	7

Branch pivot connectors

	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-3-BPC	SPW, SHW, SSW	3
	(Prefix)-4-BPC	SPW, SHW, SSW	4
	(Prefix)-5-BPC	SPW, SHW, SSW	5
	(Prefix)-6-BPC	SPW, SHW, SSW	6
	(Prefix)-7-BPC	SPW, SHW, SSW	7

Allows cables to run from one tray level to another.

Box-to-tray plates

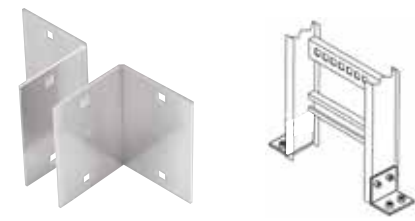	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-3-BSP	SPW, SHW, SSW	3
	(Prefix)-4-BSP	SPW, SHW, SSW	4
	(Prefix)-5-BSP	SPW, SHW, SSW	5
	(Prefix)-6-BSP	SPW, SHW, SSW	6
	(Prefix)-7-BSP	SPW, SHW, SSW	7

Designed to secure tray to electrical panels or boxes, walls or end supports. Packaged in pairs with hardware.

Steel splice plates

Closure end plate and reducing splice plate



- Used in pairs to provide a straight reduction or used with a standard splice plate for an offset reduction
- One per package with hardware

Reducing splice plate

	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-3-(*)RSP	SPW, SHW, SSW	3
	(Prefix)-4-(*)RSP	SPW, SHW, SSW	4
	(Prefix)-5-(*)RSP	SPW, SHW, SSW	5
	(Prefix)-6-(*)RSP	SPW, SHW, SSW	6
	(Prefix)-7-(*)RSP	SPW, SHW, SSW	7

* For offset reduction: Insert width to be reduced. For straight reduction: Insert $\frac{1}{2}$ width to be reduced (2 required).
Example: SPW-503-RSP = 3 in. offset reducer

Closure end plate

	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-3-(*)-CEP	SPW, SHW, SSW	3
	(Prefix)-4-(*)-CEP	SPW, SHW, SSW	4
	(Prefix)-5-(*)-CEP	SPW, SHW, SSW	5
	(Prefix)-6-(*)-CEP	SPW, SHW, SSW	6
	(Prefix)-7-(*)-CEP	SPW, SHW, SSW	7

Provides closure for any tray end. Hardware included.
(*) Insert tray width

Steel splice plates

Super-Duty Splice Plate




- High-strength design enables reduction of supports recommended for NEMA standard installations at the expansion joint, significantly reducing material and labour costs
- Unique reinforced design eliminates the need to drill and install additional hardware on the flange, saving installation time

Super-Duty Splice Plate


Cat. no.	Material prefix	Side rail height (in.)
(Prefix)-4-SDP	SPW, SHW, SSW	4
(Prefix)-5-SDP	SPW, SHW, SSW	5
(Prefix)-6-SDP	SPW, SHW, SSW	6
(Prefix)-7-SDP	SPW, SHW, SSW	7

Comes complete with 16 bolts, 8 stop nuts, 8 nuts, 8 nylon, washers, 3/8 in. diameter required, for either expansion or mid-span splicing.

01

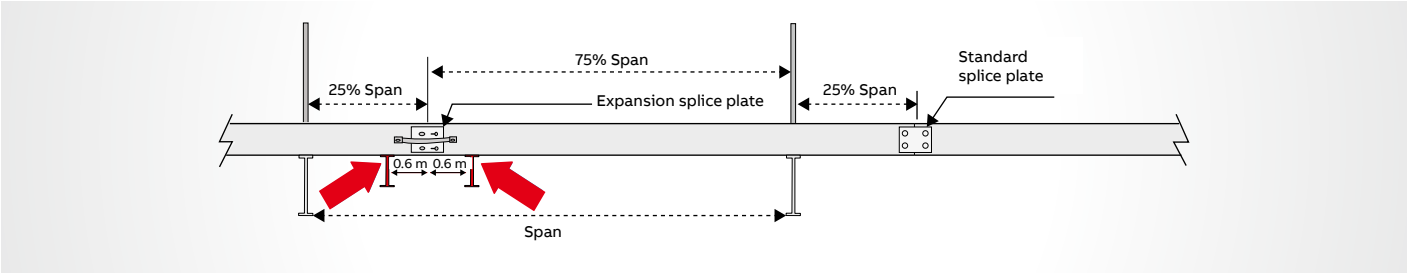

02

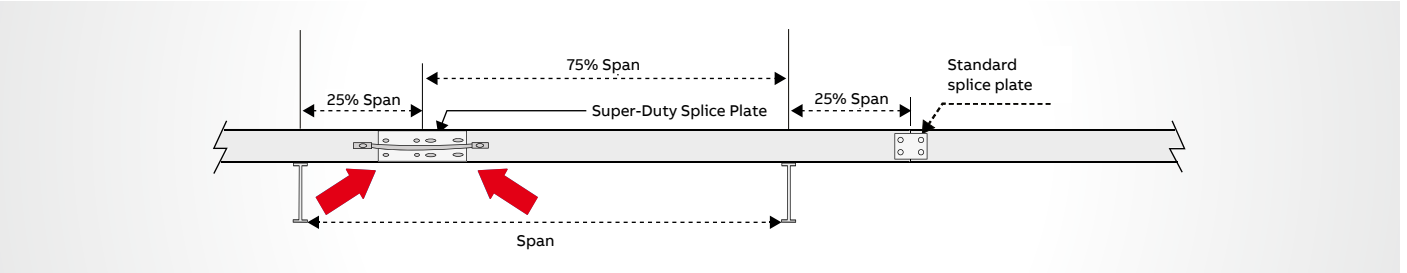

- 01 Additional supports per NEMA standard installation
- 02 No additional supports needed with Super-Duty Splice Plate

Steel cable protection

Drop out and wall penetration sleeve



- Designed to provide a smooth radius surface at any position on the tray or trough bottom
- Drop outs are easily attached using hardware provided
- Standard radius = 4 in.

Drop out

	Cat. no.	Material prefix	Tray width (in.)
	(Prefix)-(*)-DO	SPW, SHW, SSW	06
	(Prefix)-(*)-DOS +	SPW, SHW, SSW	09
		SPW, SHW, SSW	12
		SPW, SHW, SSW	18
		SPW, SHW, SSW	24
		SPW, SHW, SSW	30
		SPW, SHW, SSW	36
		SPW, SHW, SSW	42

(*) Insert tray width
+ DOS = is for solid tray.



Sold with cover

- Designed to pass through walls and fire walls
- Hardware included
- Note: not fire rated
- Fire stop not included


Wall penetration sleeve

Cat. no.	Material prefix	Tray width (in.)	Side rail height (in.)
(Prefix)-(*)-(**)-WPS	SPW, SHW, SSW	06	3
	SPW, SHW, SSW	09	4
	SPW, SHW, SSW	12	5
	SPW, SHW, SSW	18	6
	SPW, SHW, SSW	24	7
	SPW, SHW, SSW	30	7
	SPW, SHW, SSW	36	7
	SPW, SHW, SSW	42	7

(*) Insert side rail height.
(**) Insert tray width

Steel cable protection

Frame-type tray-to-box plate and nylon expansion pad



- Designed to secure tray to electrical enclosures and panels
- Hardware included

Frame-type tray-to-box plate

Cat. no.	Material prefix	Tray width (in.)	Side rail height (in.)
(Prefix)-(*)-(**)-FBP	SPW, SHW, SSW	06	3
	SPW, SHW, SSW	09	4
	SPW, SHW, SSW	12	5
	SPW, SHW, SSW	18	6
	SPW, SHW, SSW	24	7
	SPW, SHW, SSW	30	7
	SPW, SHW, SSW	36	7
	SPW, SHW, SSW	42	7

(*) Insert side rail height.
(**) Insert tray width


Nylon expansion pad

	Cat. no.	Material
	ABW-NSP	Natural nylon

Allows for thermal expansion and contraction of cable trays over supports.

Steel barrier strips

Barrier strips and vertical bend barriers

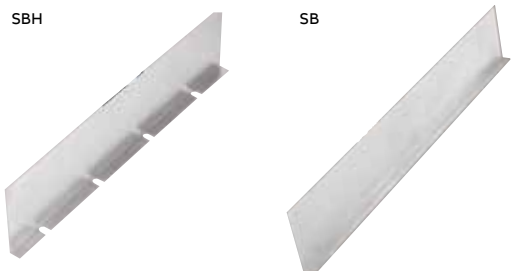

- Barrier strips provide a method of separating cables in tray and trough systems
- Easily installed using supplied hardware or barrier strip clamps (sold separately)
- 72 in. barriers are flexible for use with horizontal fittings

Barrier strips

Cat. no.	Material prefix	Designed for side rail height (in.)	Length
(Prefix)-3-SBH-72	SPW, SHW, SSW	3	72 in.
(Prefix)-4-SBH-72	SPW, SHW, SSW	4	72 in.
(Prefix)-5-SBH-72	SPW, SHW, SSW	5	72 in.
(Prefix)-6-SBH-72	SPW, SHW, SSW	6	72 in.
(Prefix)-7-SBH-72	SPW, SHW, SSW	7	72 in.
(Prefix)-3-SB-(*)	SPW, SHW, SSW	3	144 in. (3 m)
(Prefix)-4-SB-(*)	SPW, SHW, SSW	4	144 in. (3 m)
(Prefix)-5-SB-(*)	SPW, SHW, SSW	5	144 in. (3 m)
(Prefix)-6-SB-(*)	SPW, SHW, SSW	6	144 in. (3 m)
(Prefix)-7-SB-(*)	SPW, SHW, SSW	7	144 in. (3 m)

Barriers provided with self drilling-tapping screw CAT. NO. SPW10SCR 72 in. length: 3 screw 3 m length: 5 screw 144 in. length: 6 screw. SHW barriers are only available in 72 in. or 1,500 mm.

(*) Insert length.



- Preformed to fit all standard steel vertical bends
- Provided with hardware

Inside/outside vertical bend barriers

Inside bend cat. no.	Outside bend cat. no.	Material prefix	Designed for side rail height (in.)
(Prefix)-3-VIB-(*)-(+)	(Prefix)-3-VOB-(*)-(+)	SPW, SHW, SSW	3
(Prefix)-4-VIB-(*)-(+)	(Prefix)-4-VOB-(*)-(+)	SPW, SHW, SSW	4
(Prefix)-5-VIB-(*)-(+)	(Prefix)-5-VOB-(*)-(+)	SPW, SHW, SSW	5
(Prefix)-6-VIB-(*)-(+)	(Prefix)-6-VOB-(*)-(+)	SPW, SHW, SSW	6
(Prefix)-7-VIB-(*)-(+)	(Prefix)-7-VOB-(*)-(+)	SPW, SHW, SSW	7

(*) Insert bend degree

(+) Insert bend radius.

Steel clamps and hardware

Barrier strip clamp and strip splice



- Barrier strip clamps mount barrier strips to ladder rungs and ventilated trough bottoms
- Complete mounting hardware supplied

Barrier strip clamp

	Cat. no.	Material prefix
	(Prefix)-BSC	SPW
		SSW

Barrier strip splice

	Cat. no.
	ABW-BSS

Alignment splice for joining connecting barrier strips.

Steel clamps and hardware

Cable tray combo clamp

Cable tray combo clamp

	Cat. no.	Material	Hardware size (in.)
	SPWCHGC	Pregalvanized steel	3/8
	SHWCHGC	Hot-dip galvanized steel	3/8
	SSWCHGC	316 stainless	3/8
	SPWCHGC-HDW	Pregalvanized steel	3/8
	SHWCHGC-HDW	Hot-dip galvanized steel	3/8
	SSWCHGC-HDW	316 stainless	3/8
			
			

*Hardware supplied: 1 bolt and 1 springless strut nut 3/8 in. diameter.

Steel tray hardware

	Cat. no.	Material	Description
	SPW-1/4-CB	Zinc-plated steel	1/4 in. carriage bolt
	SPW-3/8-CB	Zinc-plated steel	3/8 in. carriage bolt
	SPW-1/4-HN	Zinc-plated steel	1/4 in. serrated flange hex nut
	SPW-3/8-HN	Zinc-plated steel	3/8 in. hex nut
	SPW3/8HWK*	Zinc-plated steel	Hardware kit
	SPW-3/8HXHWK**	Zinc-plated steel	Hardware kit 3/8 in. for large radius crosses
	SSW-3/8-CB	316 stainless	3/8 in. carriage bolt
	SSW-3/8-HN	316 stainless	3/8 in. hex nut
	SSW38HWK*	316 stainless	316 stainless steel hardware kit
	SSW-3/8HXHWK**	316 stainless	Hardware kit 3/8 in. for large radius crosses

Square shoulder self-positioning carriage bolt.

* Contains 8 nuts and 8 bolts.

**Contains 6 bolts, 6 nuts and 6 washers.


Steel clamps and hardware

Tapping screw, hold-down clamps and conduit clamp

Self-drilling tapping screw

	Cat. no.	Material	Description
	SPW-10-SCR	Zinc-plated steel	Self-drilling tapping screw
	SSW-10-SCR	Stainless steel	Self-drilling tapping screw

Hold-down clamp

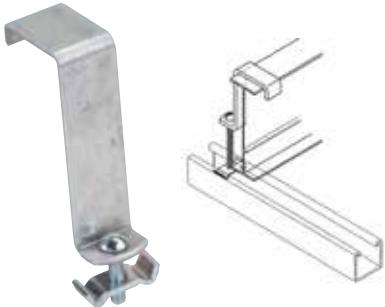
	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-3-HDC	SPW, SHW, SSW	3
	(Prefix)-4-HDC	SPW, SHW, SSW	4
	(Prefix)-5-HDC	SPW, SHW, SSW	5
	(Prefix)-6-HDC	SPW, SHW, SSW	6
	(Prefix)-7-HDC	SPW, SHW, SSW	7

Hardware included. Kit contains 1 bolt and 1 channel nut.

Hold-down clamp

	Cat. no.	Type	Material	Design load
	SPWHDCS	Single	Pregalvanized	800 lb/pair
	SHWHDCS	Single	Hot-dipped galvanized	800 lb/pair
	SSWHDCS	Single	Stainless steel 316	800 lb/pair
	SPWHDCD	Double	Pregalvanized	1,500 lb/pair
	SHWHDCD	Double	Hot-dipped galvanized	1,500 lb/pair
	SSWHDCD	Double	Stainless steel 316	1,500 lb/pair

Conduit clamp

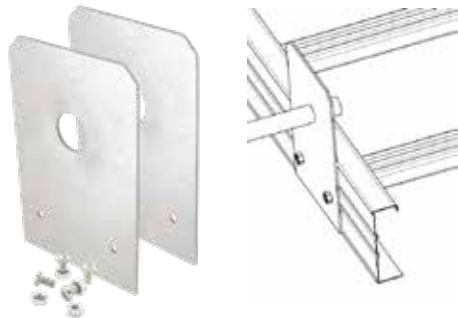	Cat. no.	Size (in.)	Material
	PU100CC	1	Pregalvanized
	PU125CC	1¼	Pregalvanized
	PU150CC	1½	Pregalvanized
	PU200CC	2	Pregalvanized
	PU250CC	2½	Pregalvanized
	PU300CC	3	Pregalvanized
	PU400CC	4	Pregalvanized


Steel clamps and hardware

Cable tray guide, clamp and vertical tray hanger




- Expansion guide for single or double runs of cable tray
- No need to field drill channel or I-beam

Cable tray guide


	Cat. no.	Material
	SPW-CTG	Zinc-plated steel
	SHW-CTG	Hot-dipped galvanized steel
	SSW-CTG	Stainless steel



Cable tray clamp

	Cat. no.	Material
	SPW-CTC	Zinc-plated steel
	SHW-CTC	Hot-dipped galvanized steel
	SSW-CTC	Stainless steel

Vertical tray hanger

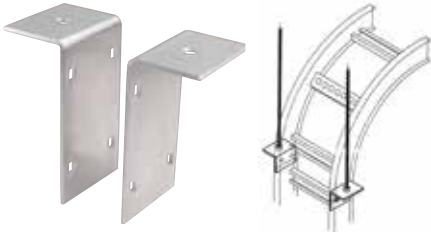	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-(*)-VTH	SPW, SHW, SSW	3
		SPW, SHW, SSW	4
		SPW, SHW, SSW	5
		SPW, SHW, SSW	6
		SPW, SHW	7

(*) Insert side rail height

One-piece tray

Selection guide



Ventilated trough

- Formed from a pre-punched sheet to produce a one-piece ventilated trough
- Available in aluminum, pregalvanized steel, hot-dipped galvanized steel and stainless steel 316
- Fittings are also available to complete this cable tray system



Solid trough

- Fabricated from one sheet to form a continuous one-piece tray design
- Available in aluminum, pregalvanized steel, hot-dipped galvanized steel and stainless steel 316
- Fittings are also available to complete this cable tray system

One-piece tray

Selection guide


Straight section number selection

How to create part numbers

ABB has created a numbering system based on the order of selection criteria. For example, the first selection issue is the environment to which the cable tray will be subjected. This selection will lead to the best material for your application. For complete details on the cable tray selection process, see page A8.

Methods

1. Select the material best suited to your environment. Refer to technical section page A8.
2. Determine the tray series using the NEMA load/span designations page A14, and sizing cable tray page A21.
3. Select nominal depth and width of tray based on cable loading. See sizing cable tray page A21.
4. Select the bottom type based on cables and spacing requirements.
5. The last number is the length of the cable tray.

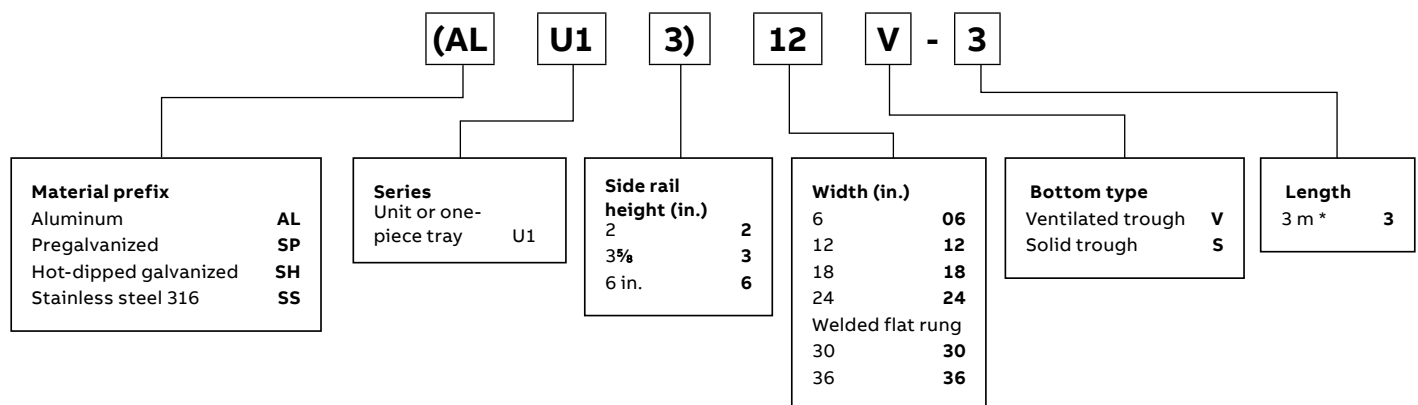

Standard straight length is 10 feet
nominal = actually 3 m (3 m = 9.842 ft.)

One-piece tray straight lengths

2 in. straight sections/AL, SP, SH, SS – Solid and vented



Technical specifications


All calculations and data are based on 36 in. wide cable trays with rungs spaced on 12 in. centers with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

2 in. straight sections/AL, SP, SH, SS – Solid and vented

		Support span (feet)		
Series		6	8	10
ALU12	Load (lb/ft.)	69	39	25
	Deflection (in.)	0.382	0.730	1.000
	Deflection factor	0.006	0.019	0.040
SPU12 SHU12	Load (lb/ft.)	69	39	25
	Deflection (in.)	0.382	0.730	1.000
	Deflection factor	0.006	0.019	0.040
SSU12	Load (lb/ft.)	69	39	25
	Deflection (in.)	0.382	0.730	1.000
	Deflection factor	0.006	0.019	0.040

Straight section number selection

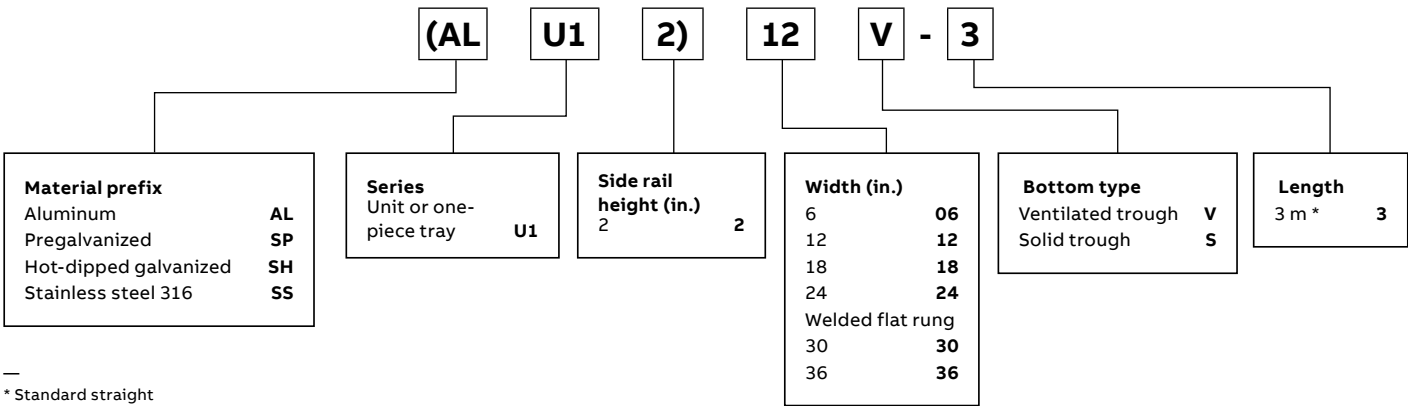


* Standard straight length is 10 feet nominal = actually 3 m (3 m = 9.842 ft.)

For fittings, consult pages A182 to A200.

—

Dimensions

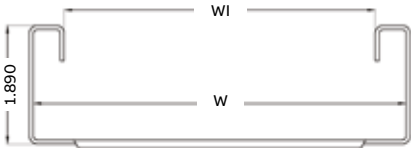	All U12 series (dimensions)	
	W (in.)	Wi (in.)
	6	5.0
	9	8.0
	12	11.0
	18	17.0
	24	23.0
	30	29.0
	36	35.0

Technical specifications
Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray above and beyond published load class.

—

Load ratings: 1.5 safety factor

			Classifications	
Series	Dimensions		NEMA	CSA
ALU12	See above		–	A
SPU12	See above		–	A
SHU12	See above		–	A
SSU12	See above		–	A

One-piece tray straight lengths

35⁄8 in. straight sections/AL, SP, SH, SS – Solid and vented



Technical specifications


All calculations and data are based on 36 in. wide cable trays with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

35⁄8 straight sections/AL, SP, SH, SS – Solid and vented

		Support span (feet)		
Series		6	8	10
ALU13	Load (lb/ft.)	180	101	65
	Deflection (in.)	0.382	0.430	0.540
	Deflection factor	0.002	0.004	0.008
SPU13 SHU13	Load (lb/ft.)	180	101	65
	Deflection (in.)	0.125	0.250	0.320
	Deflection factor	0.001	0.002	0.005
SSU13	Load (lb/ft.)	180	101	65
	Deflection (in.)	0.125	0.250	0.320
	Deflection factor	0.001	0.002	0.005


Straight section number selection

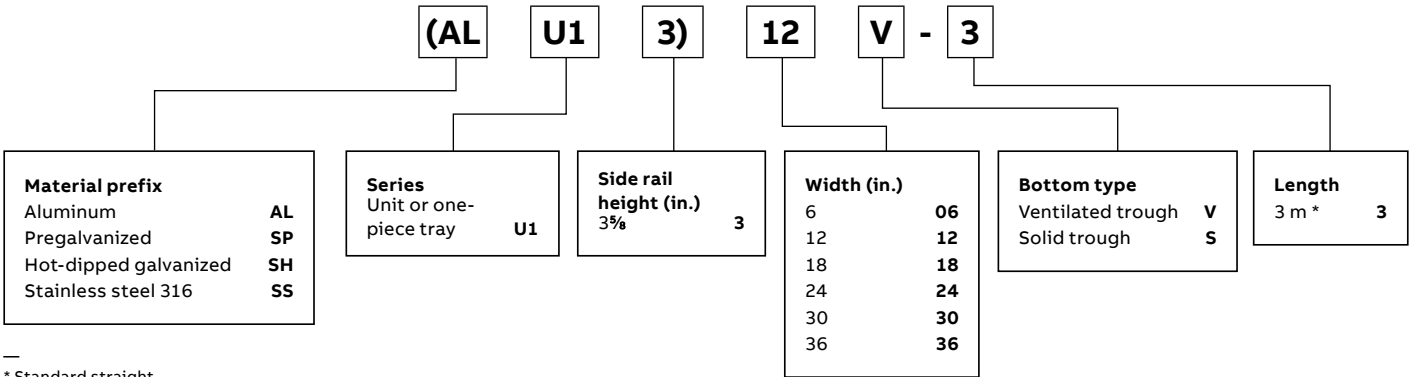

* Standard straight length is 10 feet nominal = actually 3 m.
1 m = 3.2808 ft.
3 m = 9.842 ft.

For fittings consult pages A182 to A200.

Dimensions

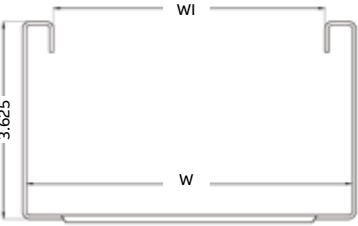All U13 series (dimensions)		
	W (in.)	Wi (in.)
	6	5.0
	9	8.0
	12	11.0
	18	17.0
	24	23.0
	30	29.0
	36	35.0

Technical specifications
Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray above and beyond published load class.

Load ratings: 1.5 safety factor

			Classifications	
Series	Dimensions	NEMA	CSA	
ALU13	See above	8C	C	
SPU13	See above	8C	C	
SHU13	See above	8C	C	
SSU13	See above	8C	C	

One-piece tray straight lengths

6 in. straight sections/AL, SP, SH, SS – Solid and vented



Technical specifications


All calculations and data are based on 36 in. wide cable trays with tray supported as simple spans with deflection measured at the midpoint. Continuous spans may reduce deflection by as much as 50%.

Deflection factor: For lighter loads, deflection at any length can be calculated by multiplying the load by the deflection factor.

6 in. straight sections/AL, SP, SH, SS – Solid and vented


		Support span (feet)		
Series		6	8	10
ALU16	Load (lb/ft.)	180	101	65
	Deflection (in.)	0.082	0.128	0.160
	Deflection Factor	0.000	0.001	0.008
SPU16 SHU16	Load (lb/ft.)	180	101	65
	Deflection (in.)	0.125	0.250	0.320
	Deflection Factor	0.001	0.002	0.005
SSU16	Load (lb/ft.)	180	101	65
	Deflection (in.)	0.125	0.250	0.320
	Deflection Factor	0.001	0.002	0.005

Straight section number selection

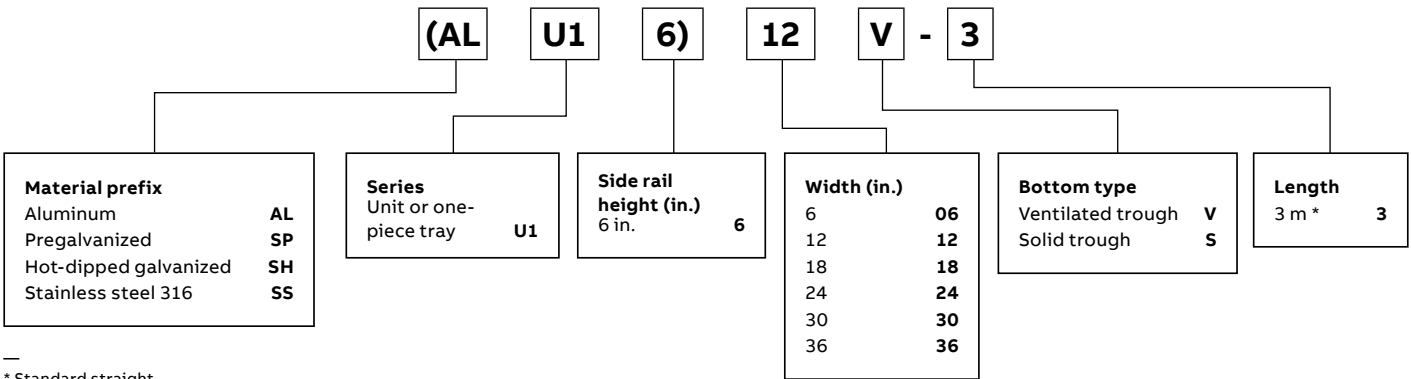

—

Dimensions

	All U16 series (dimensions)	
	W (in.)	Wi (in.)
	6	5.0
	9	8.0
	12	11.0
	18	17.0
	24	23.0
	30	29.0
	36	35.0

Technical specifications
Load ratings: 1.5 safety factor. All tray sections will support an additional 200 lb concentrated load on any portion of tray above and beyond published load class.

—

Load ratings: 1.5 safety factor


	Series	Dimensions	Classifications	
			NEMA	CSA
	ALU16	See above	8C	C
	SPU16	See above	8C	C
	SHU16	See above	8C	C
	SSU16	See above	8C	C

One-piece tray

Fittings



Fittings number selection

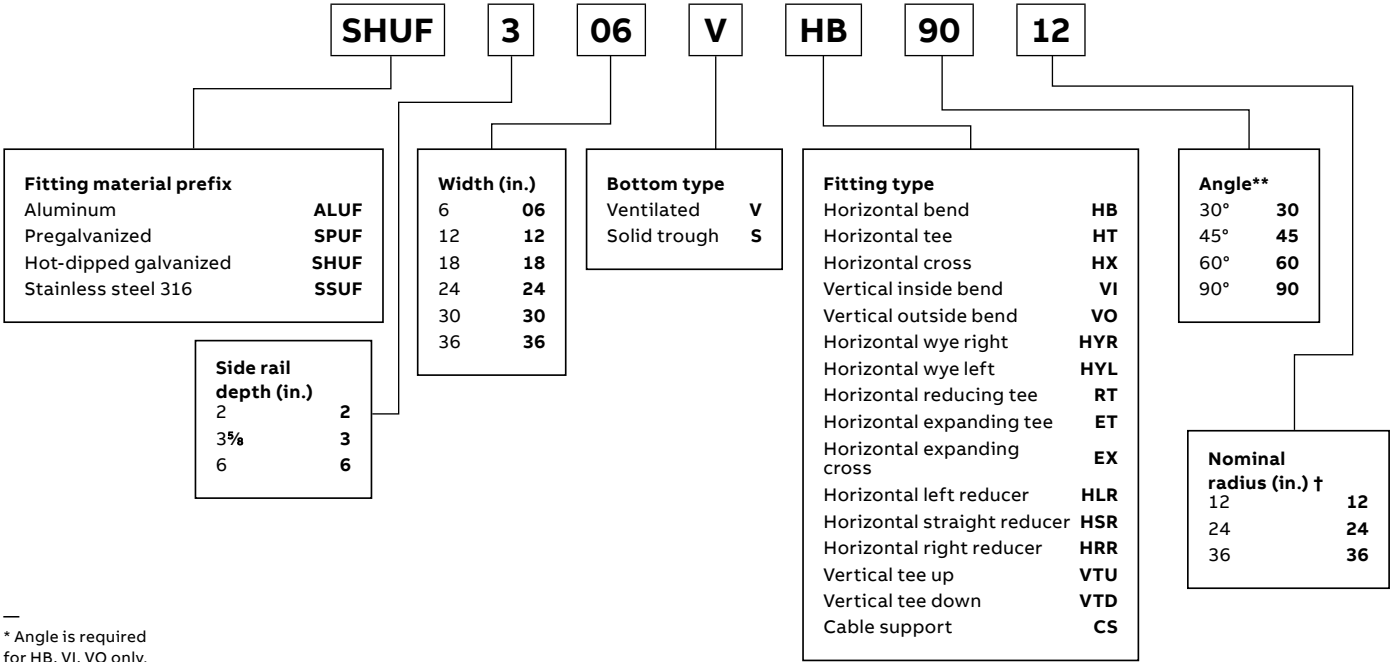


* Angle is required for HB, VI, VO only.

† Radius is not required for the following fitting types: HYR, HYL, HLR, HRR, HSR

One-piece tray

90° Horizontal bend fittings

90° Horizontal bend




	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	6	Prefix(t)-06-(*)-HB90-12	15	15	15
	12	12	Prefix(t)-12-(*)-HB90-12	18	18	18
	12	18	Prefix(t)-18-(*)-HB90-12	21	21	21
	12	24	Prefix(t)-24-(*)-HB90-12	24	24	24
	12	30	Prefix(t)-30-(*)-HB90-12	27	27	27
	12	36	Prefix(t)-36-(*)-HB90-12	30	30	30
	24	6	Prefix(t)-06-(*)-HB90-24	27	27	17
	24	12	Prefix(t)-12-(*)-HB90-24	30	30	30
	24	18	Prefix(t)-18-(*)-HB90-24	33	33	33
	24	24	Prefix(t)-24-(*)-HB90-24	36	36	36
	24	30	Prefix(t)-30-(*)-HB90-24	39	39	39
	24	36	Prefix(t)-36-(*)-HB90-24	42	42	42
	36	6	Prefix(t)-06-(*)-HB90-36	39	39	39
	36	12	Prefix(t)-12-(*)-HB90-36	42	42	42
	36	18	Prefix(t)-18-(*)-HB90-36	45	45	45
	36	24	Prefix(t)-24-(*)-HB90-36	48	48	48
	36	30	Prefix(t)-30-(*)-HB90-36	51	51	51
	36	36	Prefix(t)-36-(*)-HB90-36	54	54	54

(t) Insert side rail depth. (*) Insert bottom style to complete cat. no.
Includes 1 pair of splice plates with hardware.

Selection guide


- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 6, 9, 12, 18, 24, 30, 36 in.
- Angle: 90°
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail depth: 2 in., 3 in., 6 in.

Part numbering system

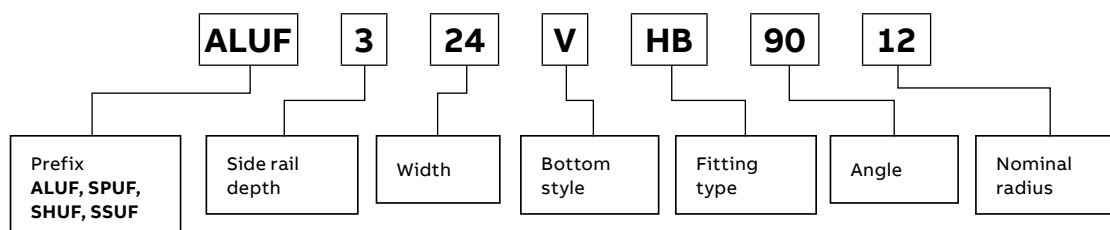

One-piece tray
60° Horizontal bend fittings


60° Horizontal bend

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	6	Prefix(t)-06-(*)-HB60-12	14 ⁷ / ₈	8 ⁵ / ₈	9 ¹⁵ / ₁₆
	12	12	Prefix(t)-12-(*)-HB60-12	17 ¹ / ₂	10 ³ / ₈	11 ¹¹ / ₁₆
	12	18	Prefix(t)-18-(*)-HB60-12	20 ¹ / ₁₆	11 ¹ / ₈	13 ³ / ₈
	12	24	Prefix(t)-24-(*)-HB60-12	22 ¹¹ / ₁₆	13 ³ / ₈	15 ¹ / ₈
	12	30	Prefix(t)-30-(*)-HB60-12	25 ⁵ / ₁₆	14 ⁵ / ₈	16 ⁷ / ₈
	12	36	Prefix(t)-36-(*)-HB60-12	27 ⁷ / ₈	16 ¹ / ₈	18 ⁹ / ₁₆
	24	6	Prefix(t)-06-(*)-HB60-24	25 ⁵ / ₁₆	14 ⁵ / ₈	16 ⁷ / ₈
	24	12	Prefix(t)-12-(*)-HB60-24	27 ⁷ / ₈	16 ¹ / ₈	18 ⁹ / ₁₆
	24	18	Prefix(t)-18-(*)-HB60-24	30 ¹ / ₂	17 ⁷ / ₈	20 ⁹ / ₁₆
	24	24	Prefix(t)-24-(*)-HB60-24	33 ¹ / ₁₆	19 ¹ / ₈	22 ¹ / ₁₆
	24	30	Prefix(t)-30-(*)-HB60-24	35 ¹¹ / ₁₆	20 ⁹ / ₈	23 ¹³ / ₁₆
	24	36	Prefix(t)-36-(*)-HB60-24	38 ¹ / ₄	22 ¹ / ₈	25 ¹ / ₂
	36	6	Prefix(t)-06-(*)-HB60-36	35 ¹¹ / ₁₆	20 ⁹ / ₈	23 ¹³ / ₁₆
	36	12	Prefix(t)-12-(*)-HB60-36	38 ¹ / ₄	22 ¹ / ₈	25 ¹ / ₂
	36	18	Prefix(t)-18-(*)-HB60-36	40 ⁷ / ₈	23 ³ / ₈	27 ¹ / ₄
	36	24	Prefix(t)-24-(*)-HB60-36	43 ¹ / ₂	25 ¹ / ₈	29
	36	30	Prefix(t)-30-(*)-HB60-36	46 ¹ / ₁₆	26 ⁵ / ₈	30 ¹¹ / ₁₆
	36	36	Prefix(t)-36-(*)-HB60-36	48 ¹¹ / ₁₆	28 ³ / ₈	32 ⁷ / ₁₆

(t) Insert side rail depth. (*) Insert bottom style to complete cat. no.
Includes 1 pair of splice plates with hardware.

- Selection guide**
- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
 - Inside tray widths: 6, 9, 12, 18, 24, 30, 36 in.
 - Angle: 60°
 - Nominal radius: 12, 24, 36 in.
 - Bottom styles: V– ventilated, S– solid
 - Side rail depth: 2 in., 3 in., 6 in.


Part numbering system

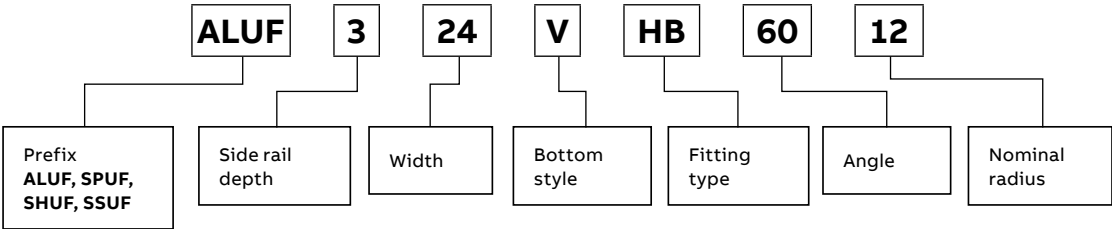

One-piece tray

45° Horizontal bend fittings

45° Horizontal bend




	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	6	Prefix(t)-06-(*)-HB45-12	13 $\frac{5}{8}$	5 $\frac{5}{8}$	8
	12	12	Prefix(t)-12-(*)-HB45-12	15 $\frac{3}{4}$	6 $\frac{1}{2}$	9 $\frac{3}{16}$
	12	18	Prefix(t)-18-(*)-HB45-12	17 $\frac{7}{8}$	7 $\frac{3}{8}$	10 $\frac{7}{16}$
	12	24	Prefix(t)-24-(*)-HB45-12	20	8 $\frac{3}{4}$	11 $\frac{11}{16}$
	12	30	Prefix(t)-30-(*)-HB45-12	22 $\frac{1}{16}$	9 $\frac{3}{8}$	12 $\frac{15}{16}$
	12	36	Prefix(t)-36-(*)-HB45-12	24 $\frac{3}{16}$	10	14 $\frac{3}{16}$
	24	6	Prefix(t)-06-(*)-HB45-24	22 $\frac{1}{16}$	9 $\frac{3}{8}$	12 $\frac{15}{16}$
	24	12	Prefix(t)-12-(*)-HB45-24	24 $\frac{3}{16}$	10	14 $\frac{3}{16}$
	24	18	Prefix(t)-18-(*)-HB45-24	26 $\frac{5}{16}$	10 $\frac{15}{16}$	15 $\frac{7}{16}$
	24	24	Prefix(t)-24-(*)-HB45-24	28 $\frac{7}{16}$	11 $\frac{13}{16}$	16 $\frac{11}{16}$
	24	30	Prefix(t)-30-(*)-HB45-24	30 $\frac{9}{16}$	12 $\frac{11}{16}$	17 $\frac{15}{16}$
	24	36	Prefix(t)-36-(*)-HB45-24	32 $\frac{11}{16}$	13 $\frac{9}{16}$	19 $\frac{1}{8}$
	36	6	Prefix(t)-06-(*)-HB45-36	30 $\frac{9}{16}$	12 $\frac{11}{16}$	17 $\frac{15}{16}$
	36	12	Prefix(t)-12-(*)-HB45-36	32 $\frac{11}{16}$	13 $\frac{9}{16}$	19 $\frac{1}{8}$
	36	18	Prefix(t)-18-(*)-HB45-36	34 $\frac{13}{16}$	14 $\frac{7}{16}$	20 $\frac{3}{8}$
	36	24	Prefix(t)-24-(*)-HB45-36	36 $\frac{15}{16}$	15 $\frac{5}{16}$	21 $\frac{7}{8}$
	36	30	Prefix(t)-30-(*)-HB45-36	39 $\frac{1}{16}$	16 $\frac{3}{16}$	22 $\frac{7}{8}$
	36	36	Prefix(t)-36-(*)-HB45-36	41 $\frac{3}{16}$	17 $\frac{1}{16}$	24 $\frac{1}{8}$

(t) Insert side rail depth. (*) Insert bottom style to complete cat. no.
Includes 1 pair of splice plates with hardware.

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 6, 12, 18, 24, 30, 36 in.
- Angle: 45°
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail depth: 2 in., 3 in., 6 in.


Part numbering system

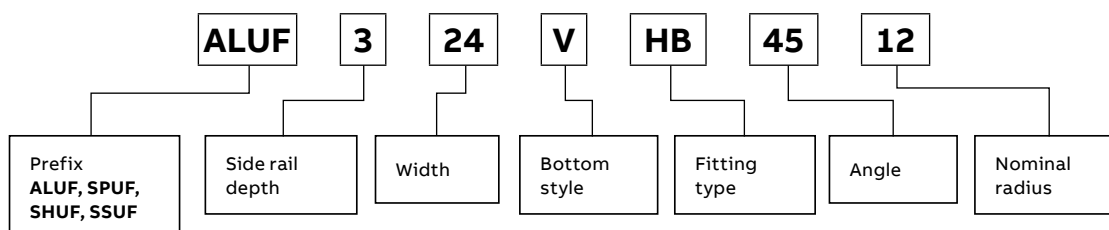

One-piece tray
30° Horizontal bend fittings

30° Horizontal bend


	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	6	Prefix(†)-06-(*)-HB30-12	11 ⁵ / ₈	3 ¹ / ₈	6 ³ / ₁₆
	12	12	Prefix(†)-12-(*)-HB30-12	13 ¹ / ₂	3 ¹ / ₂	7
	12	18	Prefix(†)-18-(*)-HB30-12	14 ⁵ / ₈	3 ¹⁵ / ₁₆	7 ¹³ / ₁₆
	12	24	Prefix(†)-24-(*)-HB30-12	16 ¹ / ₈	4 ⁵ / ₁₆	8 ⁵ / ₈
	12	30	Prefix(†)-30-(*)-HB30-12	17 ⁵ / ₈	4 ¹¹ / ₁₆	9 ⁷ / ₁₆
	12	36	Prefix(†)-36-(*)-HB30-12	19 ¹ / ₈	5 ¹ / ₈	10 ¹ / ₄
	24	6	Prefix(†)-06-(*)-HB30-24	17 ⁵ / ₈	4 ¹¹ / ₁₆	9 ⁷ / ₁₆
	24	12	Prefix(†)-12-(*)-HB30-24	19 ¹ / ₈	5 ¹ / ₈	10 ¹ / ₄
	24	18	Prefix(†)-18-(*)-HB30-24	20 ⁵ / ₈	5 ¹ / ₂	11 ¹ / ₁₆
	24	24	Prefix(†)-24-(*)-HB30-24	22 ¹ / ₈	5 ¹⁵ / ₁₆	11 ¹³ / ₁₆
	24	30	Prefix(†)-30-(*)-HB30-24	23 ³ / ₈	6 ⁵ / ₁₆	12 ⁵ / ₈
	24	36	Prefix(†)-36-(*)-HB30-24	25 ¹ / ₈	6 ³ / ₄	13 ⁷ / ₁₆
	36	6	Prefix(†)-06-(*)-HB30-36	23 ³ / ₈	6 ⁵ / ₁₆	12 ⁵ / ₈
	36	12	Prefix(†)-12-(*)-HB30-36	25 ¹ / ₈	6 ³ / ₄	13 ⁷ / ₁₆
	36	18	Prefix(†)-18-(*)-HB30-36	26 ⁵ / ₈	7 ¹ / ₄	14 ¹ / ₄
	36	24	Prefix(†)-24-(*)-HB30-36	28 ¹ / ₈	7 ¹ / ₂	15 ¹ / ₁₆
	36	30	Prefix(†)-30-(*)-HB30-36	29 ³ / ₈	7 ¹⁵ / ₁₆	15 ⁷ / ₈
	36	36	Prefix(†)-36-(*)-HB30-36	31 ¹ / ₈	8 ⁵ / ₁₆	16 ¹¹ / ₁₆



(†) Insert side rail depth. (*) Insert bottom style to complete cat. no.
Includes 1 pair of splice plates with hardware.

- Selection guide**
- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
 - Inside tray widths: 6, 9, 12, 18, 24, 30, 36 in.
 - Angle: 30°
 - Nominal radius: 12, 24, 36 in.
 - Bottom styles: V– ventilated, S– solid
 - Side rail depth: 2 in., 3 in., 6 in.

Part numbering system

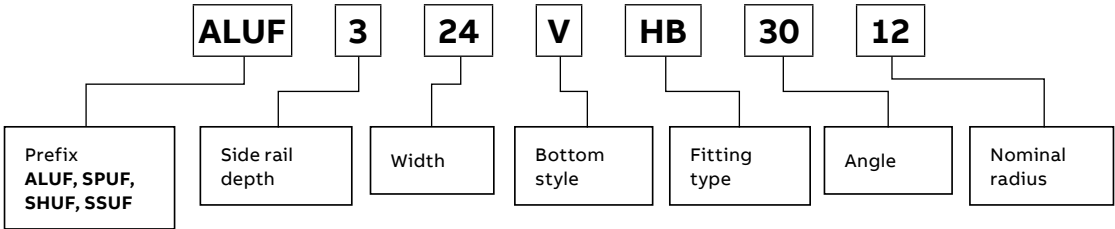

One-piece tray

Horizontal tee fittings


Horizontal tee

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)	
				X	Y
Solid	12	6	Prefix(t)-06-(*)-HT12	15	30
	12	12	Prefix(t)-12-(*)-HT12	18	36
	12	18	Prefix(t)-18-(*)-HT12	21	42
	12	24	Prefix(t)-24-(*)-HT12	24	48
	12	30	Prefix(t)-30-(*)-HT12	27	54
	12	36	Prefix(t)-36-(*)-HT12	30	60
Ventilated	24	6	Prefix(t)-06-(*)-HT24	27	54
	24	12	Prefix(t)-12-(*)-HT24	30	60
	24	18	Prefix(t)-18-(*)-HT24	33	66
	24	24	Prefix(t)-24-(*)-HT24	36	72
	24	30	Prefix(t)-30-(*)-HT24	39	78
	24	36	Prefix(t)-36-(*)-HT24	42	84
	36	6	Prefix(t)-06-(*)-HT36	39	78
	36	12	Prefix(t)-12-(*)-HT36	42	84
	36	18	Prefix(t)-18-(*)-HT36	45	90
	36	24	Prefix(t)-24-(*)-HT36	48	96
	36	30	Prefix(t)-30-(*)-HT36	51	102
	36	36	Prefix(t)-36-(*)-HT36	54	108

(t) Insert side rail depth. (*) Insert bottom style to complete cat. no.

Tees include 2 pairs/crosses include 3 pairs of splice plates with hardware.


Dimensions



Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 6, 12, 18, 24, 30, 36 in.
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail depth: 2 in., 3 in., 6 in.

Part numbering system

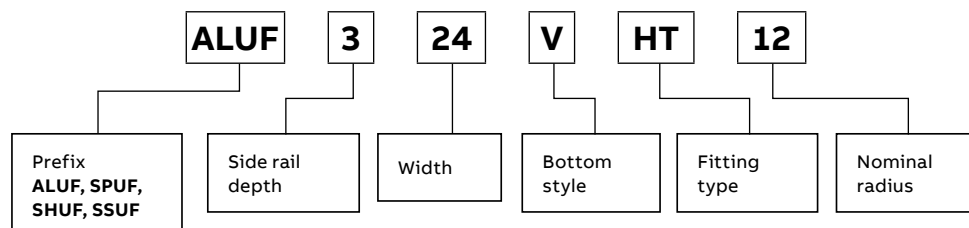

One-piece tray


Horizontal cross fittings

Horizontal cross

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)	
				X	Y
Solid	12	6	Prefix(t)-06-(*)-HX12	15	30
	12	12	Prefix(t)-12-(*)-HX12	18	36
	12	18	Prefix(t)-18-(*)-HX12	21	42
	12	24	Prefix(t)-24-(*)-HX12	24	48
	12	30	Prefix(t)-30-(*)-HX12	27	54
	12	36	Prefix(t)-36-(*)-HX12	30	60
Ventilated	24	6	Prefix(t)-06-(*)-HX24	27	54
	24	12	Prefix(t)-12-(*)-HX24	30	60
	24	18	Prefix(t)-18-(*)-HX24	33	66
	24	24	Prefix(t)-24-(*)-HX24	36	72
	24	30	Prefix(t)-30-(*)-HX24	39	78
	24	36	Prefix(t)-36-(*)-HX24	42	84
	36	6	Prefix(t)-06-(*)-HX36	39	78
	36	12	Prefix(t)-12-(*)-HX36	42	84
	36	18	Prefix(t)-18-(*)-HX36	45	90
	36	24	Prefix(t)-24-(*)-HX36	48	96
	36	30	Prefix(t)-30-(*)-HX36	51	102
	36	36	Prefix(t)-36-(*)-HX36	54	108

(t) Insert side rail depth. (*) Insert bottom style to complete cat. no.
Tees include 2 pairs / crosses include 3 pairs of splice plates with hardware.


Dimensions



Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 6, 12, 18, 24, 30, 36 in.
- Nominal radius: 12, 24, 38 in.
- Bottom styles: V– ventilated, S– solid
- Side rail depth: 2 in., 3 in., 6 in.

Part numbering system

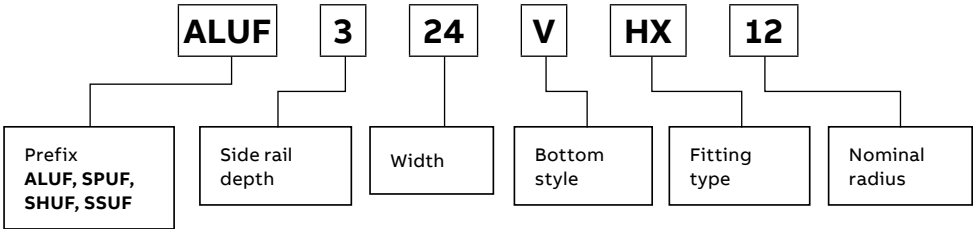


One-piece tray

Horizontal reducing tee fittings

Horizontal reducing tee

			Dimensions (in.)					
Widths (in.)			(+ 12 in. Nominal radius		(+ 24 in. Nominal radius		(+ 36 in. Nominal radius	
W1	W2	Cat. no.	X	Y	X	Y	X	Y
36	30	Prefix(t)-3630-(*)-RT(+)	30	54	42	78	54	102
36	24	Prefix(t)-3624-(*)-RT(+)	30	48	42	72	54	96
36	18	Prefix(t)-3618-(*)-RT(+)	30	42	42	66	54	90
36	12	Prefix(t)-3612-(*)-RT(+)	30	36	42	60	54	84
36	6	Prefix(t)-3606-(*)-RT(+)	30	30	42	54	54	78
30	24	Prefix(t)-3024-(*)-RT(+)	27	48	39	72	51	96
30	18	Prefix(t)-3018-(*)-RT(+)	27	42	39	66	51	90
30	12	Prefix(t)-3012-(*)-RT(+)	27	36	39	60	51	84
30	6	Prefix(t)-3006-(*)-RT(+)	27	30	39	54	51	78
24	18	Prefix(t)-2418-(*)-RT(+)	24	42	36	66	48	90
24	12	Prefix(t)-2412-(*)-RT(+)	24	36	36	60	48	84
24	6	Prefix(t)-2406-(*)-RT(+)	24	30	36	54	48	78
18	12	Prefix(t)-1812-(*)-RT(+)	21	36	33	60	45	84
18	6	Prefix(t)-1806-(*)-RT(+)	21	30	33	54	45	78
12	6	Prefix(t)-1206-(*)-RT(+)	18	30	30	54	42	78


(t) Insert side rail depth. (*) Insert bottom style (+) Insert radius (12 in. – 36 in.) to complete cat. no.
Includes 2 pairs of splice plates with hardware.



Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Tray widths W1: 36, 30, 24, 18, 12 in.
- Tray widths W2: 30, 24, 18, 12, 6 in.
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail depth: 2 in., 3 in., 6 in.

Part numbering system

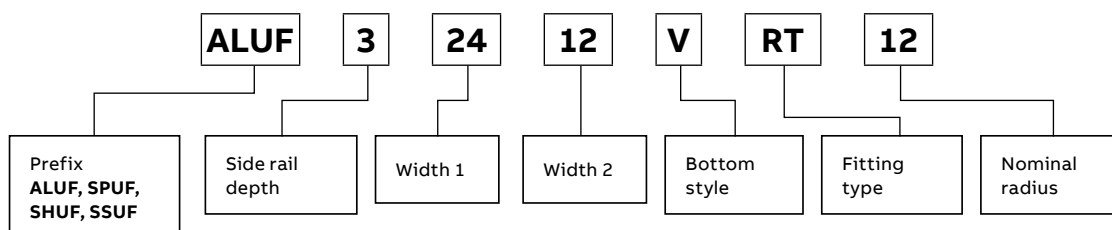

One-piece tray

Horizontal expanding tee fittings


Horizontal expanding tee

	Dimensions (in.)									
	Widths (in.)			(+ 12 in. Nominal radius		(+ 24 in. Nominal radius		(+ 36 in. Nominal radius		
				X	Y	X	Y	X	Y	
	W1	W2	Cat. no.							
	30	36	Prefix(†)-3036-(*)-ET(+)	27	60	39	84	51	108	
	24	30	Prefix(†)-2430-(*)-ET(+)	24	54	36	78	48	102	
	24	36	Prefix(†)-2436-(*)-ET(+)	24	60	36	84	48	108	
	18	24	Prefix(†)-1824-(*)-ET(+)	21	48	33	72	45	96	
	18	30	Prefix(†)-1830-(*)-ET(+)	21	54	33	78	45	102	
	18	36	Prefix(†)-1836-(*)-ET(+)	21	60	33	84	45	108	
	12	18	Prefix(†)-1218-(*)-ET(+)	18	42	30	66	42	90	
	12	24	Prefix(†)-1224-(*)-ET(+)	18	48	30	72	42	96	
	12	30	Prefix(†)-1230-(*)-ET(+)	18	54	30	78	42	102	
	12	36	Prefix(†)-1236-(*)-ET(+)	18	60	30	84	42	108	
	06	12	Prefix(†)-0612-(*)-ET(+)	15	36	27	60	39	84	
	06	18	Prefix(†)-0618-(*)-ET(+)	15	42	27	66	39	90	
	06	24	Prefix(†)-0624-(*)-ET(+)	15	48	27	72	39	96	
	06	30	Prefix(†)-0630-(*)-ET(+)	15	54	27	78	39	102	
	06	36	Prefix(†)-0636-(*)-ET(+)	15	60	27	84	39	108	

(t) Insert side rail depth. (*) Insert bottom style (+) Insert radius (12 in.–36 in.) to complete cat. no.
Includes 2 pairs of splice plates with hardware.

- Selection guide
- Prefix: SALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
 - Tray widths W1: 30, 24, 18, 12, 6 in.
 - Tray widths W2: 36, 30, 24, 18, 12 in.
 - Nominal radius: 12, 24, 36 in.
 - Bottom styles: V– ventilated, S– solid
 - Side rail depth: 2 in., 3 in., 6 in.

Part numbering system

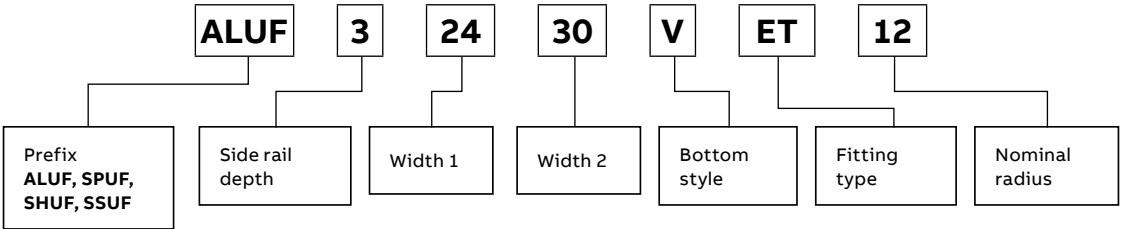

One-piece tray

Horizontal expanding cross fittings

Horizontal expanding cross


				Dimensions (in.)					
Widths (in.)			Cat. no.	(+ 12 in. Nominal radius		(+ 24 in. Nominal radius		(+ 36 in. Nominal radius	
W1	W2			X	Y	X	Y	X	Y
	30	36	Prefix(t)-3036-(*)-EX(+)	54	60	78	84	102	108
	24	30	Prefix(t)-2430-(*)-EX(+)	48	54	72	78	96	102
	24	36	Prefix(t)-2436-(*)-EX(+)	48	60	72	84	96	108
	18	24	Prefix(t)-1824-(*)-EX(+)	42	48	66	72	90	96
	18	30	Prefix(t)-1830-(*)-EX(+)	42	54	66	78	90	102
	18	36	Prefix(t)-1836-(*)-EX(+)	42	60	66	84	90	108
	12	18	Prefix(t)-1218-(*)-EX(+)	36	42	60	66	84	90
	12	24	Prefix(t)-1224-(*)-EX(+)	36	48	60	72	84	96
	12	30	Prefix(t)-1230-(*)-EX(+)	36	54	60	78	84	102
	12	36	Prefix(t)-1236-(*)-EX(+)	36	60	60	84	84	108
	06	12	Prefix(t)-0612-(*)-EX(+)	30	36	54	60	78	84
	06	18	Prefix(t)-0618-(*)-EX(+)	30	42	54	66	78	90
	06	24	Prefix(t)-0624-(*)-EX(+)	30	48	54	72	78	96
	06	30	Prefix(t)-0630-(*)-EX(+)	30	54	54	78	78	102
	06	36	Prefix(t)-0636-(*)-EX(+)	30	60	54	84	78	108

(t) Insert side rail depth. (*) Insert bottom style (+) Insert radius (12 in.–36 in.) to complete cat. no.
Includes 3 pairs of splice plates with hardware.

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Tray widths W1: 30, 24, 18, 12, 6 in.
- Tray widths W2: 36, 30, 24, 18, 12 in.
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail depth: 2 in., 3 in., 6 in.



Part numbering system

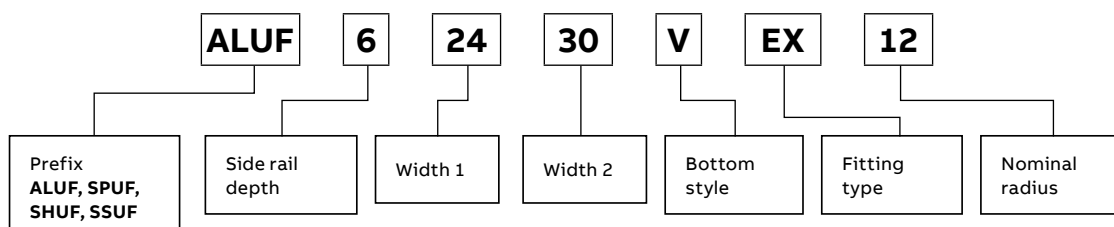

One-piece tray
90° Vertical bend fittings


90° Vertical bend

- Selection guide**
- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
 - Inside tray widths: 6, 12, 18, 24, 30, 36 in.
 - Angle: 90°
 - Nominal radius: 12, 24, 36 in.
 - Bottom styles: V– ventilated, S– solid
 - Side rail depth: 2 in., 3 in., 6 in.

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)											
				(+) VO side rail depth						(+) VI side rail depth					
				2 in., 3 in., 6 in.			2 in.			3 in.			6 in.		
				X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z
Outside bend ventilated  	12	6	Prefix(t)-06-(*)-(+)90-12	12	12	12	13 ⁷ / ₁₆	13 ⁷ / ₁₆	13 ⁷ / ₁₆	15 ⁵ / ₁₆	15 ⁵ / ₁₆	15 ⁵ / ₁₆	18 ³ / ₁₆	18 ³ / ₁₆	18 ³ / ₁₆
	12	12	Prefix(t)-12-(*)-(+)90-12	12	12	12	13 ⁷ / ₁₆	13 ⁷ / ₁₆	13 ⁷ / ₁₆	15 ⁵ / ₁₆	15 ⁵ / ₁₆	15 ⁵ / ₁₆	18 ³ / ₁₆	18 ³ / ₁₆	18 ³ / ₁₆
	12	18	Prefix(t)-18-(*)-(+)90-12	12	12	12	13 ⁷ / ₁₆	13 ⁷ / ₁₆	13 ⁷ / ₁₆	15 ⁵ / ₁₆	15 ⁵ / ₁₆	15 ⁵ / ₁₆	18 ³ / ₁₆	18 ³ / ₁₆	18 ³ / ₁₆
	12	24	Prefix(t)-24-(*)-(+)90-12	12	12	12	13 ⁷ / ₁₆	13 ⁷ / ₁₆	13 ⁷ / ₁₆	15 ⁵ / ₁₆	15 ⁵ / ₁₆	15 ⁵ / ₁₆	18 ³ / ₁₆	18 ³ / ₁₆	18 ³ / ₁₆
	12	36	Prefix(t)-36-(*)-(+)90-12	12	12	12	13 ⁷ / ₁₆	13 ⁷ / ₁₆	13 ⁷ / ₁₆	15 ⁵ / ₁₆	15 ⁵ / ₁₆	15 ⁵ / ₁₆	18 ³ / ₁₆	18 ³ / ₁₆	18 ³ / ₁₆
	24	6	Prefix(t)-06-(*)-(+)90-24	24	24	24	25 ⁷ / ₁₆	25 ⁷ / ₁₆	25 ⁷ / ₁₆	27 ⁵ / ₁₆	27 ⁵ / ₁₆	27 ⁵ / ₁₆	30 ³ / ₁₆	30 ³ / ₁₆	30 ³ / ₁₆
	24	12	Prefix(t)-12-(*)-(+)90-24	24	24	24	25 ⁷ / ₁₆	25 ⁷ / ₁₆	25 ⁷ / ₁₆	27 ⁵ / ₁₆	27 ⁵ / ₁₆	27 ⁵ / ₁₆	30 ³ / ₁₆	30 ³ / ₁₆	30 ³ / ₁₆
	24	18	Prefix(t)-18-(*)-(+)90-24	24	24	24	25 ⁷ / ₁₆	25 ⁷ / ₁₆	25 ⁷ / ₁₆	27 ⁵ / ₁₆	27 ⁵ / ₁₆	27 ⁵ / ₁₆	30 ³ / ₁₆	30 ³ / ₁₆	30 ³ / ₁₆
	24	24	Prefix(t)-24-(*)-(+)90-24	24	24	24	25 ⁷ / ₁₆	25 ⁷ / ₁₆	25 ⁷ / ₁₆	27 ⁵ / ₁₆	27 ⁵ / ₁₆	27 ⁵ / ₁₆	30 ³ / ₁₆	30 ³ / ₁₆	30 ³ / ₁₆
	24	30	Prefix(t)-30-(*)-(+)90-24	24	24	24	25 ⁷ / ₁₆	25 ⁷ / ₁₆	25 ⁷ / ₁₆	27 ⁵ / ₁₆	27 ⁵ / ₁₆	27 ⁵ / ₁₆	30 ³ / ₁₆	30 ³ / ₁₆	30 ³ / ₁₆
	24	36	Prefix(t)-36-(*)-(+)90-24	24	24	24	25 ⁷ / ₁₆	25 ⁷ / ₁₆	25 ⁷ / ₁₆	27 ⁵ / ₁₆	27 ⁵ / ₁₆	27 ⁵ / ₁₆	30 ³ / ₁₆	30 ³ / ₁₆	30 ³ / ₁₆
	36	6	Prefix(t)-06-(*)-(+)90-36	36	36	36	37 ⁷ / ₁₆	37 ⁷ / ₁₆	37 ⁷ / ₁₆	39 ⁵ / ₁₆	39 ⁵ / ₁₆	39 ⁵ / ₁₆	42 ³ / ₁₆	42 ³ / ₁₆	42 ³ / ₁₆
Inside bend ventilated  	36	12	Prefix(t)-12-(*)-(+)90-36	36	36	36	37 ⁷ / ₁₆	37 ⁷ / ₁₆	37 ⁷ / ₁₆	39 ⁵ / ₁₆	39 ⁵ / ₁₆	39 ⁵ / ₁₆	42 ³ / ₁₆	42 ³ / ₁₆	42 ³ / ₁₆
	36	18	Prefix(t)-18-(*)-(+)90-36	36	36	36	37 ⁷ / ₁₆	37 ⁷ / ₁₆	37 ⁷ / ₁₆	39 ⁵ / ₁₆	39 ⁵ / ₁₆	39 ⁵ / ₁₆	42 ³ / ₁₆	42 ³ / ₁₆	42 ³ / ₁₆
	36	24	Prefix(t)-24-(*)-(+)90-36	36	36	36	37 ⁷ / ₁₆	37 ⁷ / ₁₆	37 ⁷ / ₁₆	39 ⁵ / ₁₆	39 ⁵ / ₁₆	39 ⁵ / ₁₆	42 ³ / ₁₆	42 ³ / ₁₆	42 ³ / ₁₆
	36	30	Prefix(t)-30-(*)-(+)90-36	36	36	36	37 ⁷ / ₁₆	37 ⁷ / ₁₆	37 ⁷ / ₁₆	39 ⁵ / ₁₆	39 ⁵ / ₁₆	39 ⁵ / ₁₆	42 ³ / ₁₆	42 ³ / ₁₆	42 ³ / ₁₆
	36	36	Prefix(t)-36-(*)-(+)90-36	36	36	36	37 ⁷ / ₁₆	37 ⁷ / ₁₆	37 ⁷ / ₁₆	39 ⁵ / ₁₆	39 ⁵ / ₁₆	39 ⁵ / ₁₆	42 ³ / ₁₆	42 ³ / ₁₆	42 ³ / ₁₆

(t) Insert side rail depth. (*) Insert bottom style (+) Insert “VO” for vertical outside or “VI” for vertical inside to complete cat. no.
Includes 1 pair of splice plates with hardware.

Part numbering system

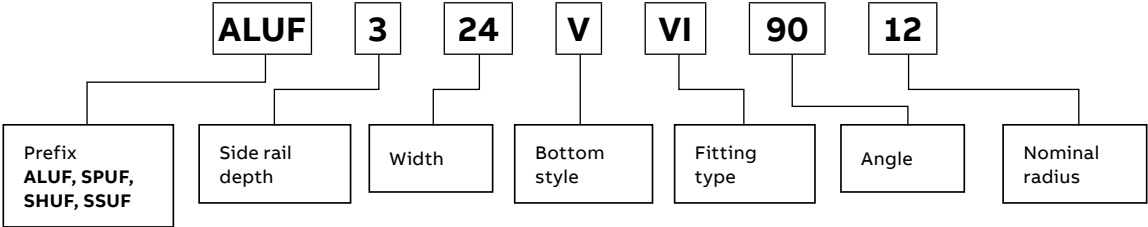



One-piece tray

60° Vertical bend fittings

60° Vertical bend


Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 6, 12, 18, 24, 30, 36
- Angle: 60°
- Nominal radius: 12, 24, 36
- Bottom styles: V– ventilated, S– solid
- Side rail depth: 2 in., 3 in., 6 in.

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)											
				(+ VO side rail depth			(+ VI side rail depth								
				2 in., 3 in., 6 in.			2 in.			3 in.			6 in.		
				X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z
Outside bend 	12	6	Prefix(+)-06-(*)-(+)60-12	10 ³ / ₈	6	6 ¹⁵ / ₁₆	12	7 ⁷ / ₈	8	13 ³ / ₂	9 ⁵ / ₈	9	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂
	12	12	Prefix(+)-12-(*)-(+)60-12	10 ³ / ₈	6	6 ¹⁵ / ₁₆	12	7 ⁷ / ₈	8	13 ³ / ₂	9 ⁵ / ₈	9	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂
	12	18	Prefix(+)-18-(*)-(+)60-12	10 ³ / ₈	6	6 ¹⁵ / ₁₆	12	7 ⁷ / ₈	8	13 ³ / ₂	9 ⁵ / ₈	9	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂
	12	24	Prefix(+)-24-(*)-(+)60-12	10 ³ / ₈	6	6 ¹⁵ / ₁₆	12	7 ⁷ / ₈	8	13 ³ / ₂	9 ⁵ / ₈	9	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂
	12	30	Prefix(+)-30-(*)-(+)60-12	10 ³ / ₈	6	6 ¹⁵ / ₁₆	12	7 ⁷ / ₈	8	13 ³ / ₂	9 ⁵ / ₈	9	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂
	12	36	Prefix(+)-36-(*)-(+)60-12	10 ³ / ₈	6	6 ¹⁵ / ₁₆	12	7 ⁷ / ₈	8	13 ³ / ₂	9 ⁵ / ₈	9	15 ³ / ₄	12 ³ / ₁₆	10 ¹ / ₂
	24	6	Prefix(+)-06-(*)-(+)60-24	20 ¹³ / ₁₆	12	13 ⁷ / ₈	22 ⁷ / ₁₆	13 ⁷ / ₈	14 ¹⁵ / ₁₆	23 ¹⁵ / ₁₆	15 ⁵ / ₈	15 ¹⁵ / ₁₆	26 ⁷ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆
	24	12	Prefix(+)-12-(*)-(+)60-24	20 ¹³ / ₁₆	12	13 ⁷ / ₈	22 ⁷ / ₁₆	13 ⁷ / ₈	14 ¹⁵ / ₁₆	23 ¹⁵ / ₁₆	15 ⁵ / ₈	15 ¹⁵ / ₁₆	26 ⁷ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆
	24	18	Prefix(+)-18-(*)-(+)60-24	20 ¹³ / ₁₆	12	13 ⁷ / ₈	22 ⁷ / ₁₆	13 ⁷ / ₈	14 ¹⁵ / ₁₆	23 ¹⁵ / ₁₆	15 ⁵ / ₈	15 ¹⁵ / ₁₆	26 ⁷ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆
	24	24	Prefix(+)-24-(*)-(+)60-24	20 ¹³ / ₁₆	12	13 ⁷ / ₈	22 ⁷ / ₁₆	13 ⁷ / ₈	14 ¹⁵ / ₁₆	23 ¹⁵ / ₁₆	15 ⁵ / ₈	15 ¹⁵ / ₁₆	26 ⁷ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆
	24	30	Prefix(+)-30-(*)-(+)60-24	20 ¹³ / ₁₆	12	13 ⁷ / ₈	22 ⁷ / ₁₆	13 ⁷ / ₈	14 ¹⁵ / ₁₆	23 ¹⁵ / ₁₆	15 ⁵ / ₈	15 ¹⁵ / ₁₆	26 ⁷ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆
	24	36	Prefix(+)-36-(*)-(+)60-24	20 ¹³ / ₁₆	12	13 ⁷ / ₈	22 ⁷ / ₁₆	13 ⁷ / ₈	14 ¹⁵ / ₁₆	23 ¹⁵ / ₁₆	15 ⁵ / ₈	15 ¹⁵ / ₁₆	26 ⁷ / ₈	18 ³ / ₁₆	17 ⁷ / ₁₆
Inside bend 	36	6	Prefix(+)-06-(*)-(+)60-36	31 ³ / ₈	18	20 ¹³ / ₁₆	32 ¹³ / ₁₆	19 ⁷ / ₈	21 ⁷ / ₈	34 ⁵ / ₈	21 ⁵ / ₈	22 ⁷ / ₈	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈
	36	12	Prefix(+)-12-(*)-(+)60-36	31 ³ / ₈	18	20 ¹³ / ₁₆	32 ¹³ / ₁₆	19 ⁷ / ₈	21 ⁷ / ₈	34 ⁵ / ₈	21 ⁵ / ₈	22 ⁷ / ₈	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈
	36	18	Prefix(+)-18-(*)-(+)60-36	31 ³ / ₈	18	20 ¹³ / ₁₆	32 ¹³ / ₁₆	19 ⁷ / ₈	21 ⁷ / ₈	34 ⁵ / ₈	21 ⁵ / ₈	22 ⁷ / ₈	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈
	36	24	Prefix(+)-24-(*)-(+)60-36	31 ³ / ₈	18	20 ¹³ / ₁₆	32 ¹³ / ₁₆	19 ⁷ / ₈	21 ⁷ / ₈	34 ⁵ / ₈	21 ⁵ / ₈	22 ⁷ / ₈	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈
	36	30	Prefix(+)-30-(*)-(+)60-36	31 ³ / ₈	18	20 ¹³ / ₁₆	32 ¹³ / ₁₆	19 ⁷ / ₈	21 ⁷ / ₈	34 ⁵ / ₈	21 ⁵ / ₈	22 ⁷ / ₈	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈
	36	36	Prefix(+)-36-(*)-(+)60-36	31 ³ / ₈	18	20 ¹³ / ₁₆	32 ¹³ / ₁₆	19 ⁷ / ₈	21 ⁷ / ₈	34 ⁵ / ₈	21 ⁵ / ₈	22 ⁷ / ₈	36 ¹ / ₂	24 ³ / ₁₆	24 ³ / ₈

(+) Insert side rail depth. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no.
Includes 1 pair of splice plates with hardware.

Part numbering system

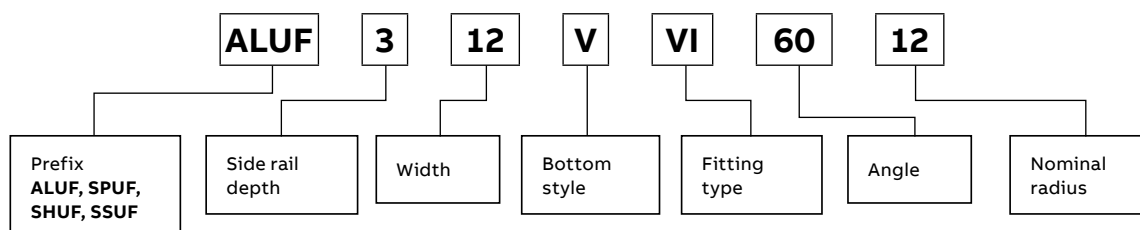

One-piece tray

45° Vertical bend fittings

45° Vertical bend


	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)											
				(+ VO side rail depth						(+ VI side rail depth					
				2 in., 3 in., 6 in.			2 in.			3 in.			6 in.		
				X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z
Outside bend ventilated	12	6	Prefix(t)-06-(*)-(+)45-12	8½	3½	5	9⅜ ₁₆	5⅝	5¾	11⅜ ₁₆	7⅝	6⅜ ₁₆	12⅞	9⅜ ₁₆	7⅝
	12	12	Prefix(t)-12-(*)-(+)45-12	8½	3½	5	9⅜ ₁₆	5⅝	5¾	11⅜ ₁₆	7⅝	6⅜ ₁₆	12⅞	9⅜ ₁₆	7⅝
	12	18	Prefix(t)-18-(*)-(+)45-12	8½	3½	5	9⅜ ₁₆	5⅝	5¾	11⅜ ₁₆	7⅝	6⅜ ₁₆	12⅞	9⅜ ₁₆	7⅝
	12	24	Prefix(t)-24-(*)-(+)45-12	8½	3½	5	9⅜ ₁₆	5⅝	5¾	11⅜ ₁₆	7⅝	6⅜ ₁₆	12⅞	9⅜ ₁₆	7⅝
	12	30	Prefix(t)-30-(*)-(+)45-12	8½	3½	5	9⅜ ₁₆	5⅝	5¾	11⅜ ₁₆	7⅝	6⅜ ₁₆	12⅞	9⅜ ₁₆	7⅝
	12	36	Prefix(t)-36-(*)-(+)45-12	8½	3½	5	9⅜ ₁₆	5⅝	5¾	11⅜ ₁₆	7⅝	6⅜ ₁₆	12⅞	9⅜ ₁₆	7⅝
Inside bend ventilated	24	6	Prefix(t)-06-(*)-(+)45-24	17	7	9⅜ ₁₆	18⅜ ₁₆	8⅞	10⅜ ₁₆	19½	10⅞	11⅞ ₁₆	21⅜	13⅜ ₁₆	12½
	24	12	Prefix(t)-12-(*)-(+)45-24	17	7	9⅜ ₁₆	18⅜ ₁₆	8⅞	10⅜ ₁₆	19½	10⅞	11⅞ ₁₆	21⅜	13⅜ ₁₆	12½
	24	18	Prefix(t)-18-(*)-(+)45-24	17	7	9⅜ ₁₆	18⅜ ₁₆	8⅞	10⅜ ₁₆	19½	10⅞	11⅞ ₁₆	21⅜	13⅜ ₁₆	12½
	24	24	Prefix(t)-24-(*)-(+)45-24	17	7	9⅜ ₁₆	18⅜ ₁₆	8⅞	10⅜ ₁₆	19½	10⅞	11⅞ ₁₆	21⅜	13⅜ ₁₆	12½
	24	30	Prefix(t)-30-(*)-(+)45-24	17	7	9⅜ ₁₆	18⅜ ₁₆	8⅞	10⅜ ₁₆	19½	10⅞	11⅞ ₁₆	21⅜	13⅜ ₁₆	12½
	24	36	Prefix(t)-36-(*)-(+)45-24	17	7	9⅜ ₁₆	18⅜ ₁₆	8⅞	10⅜ ₁₆	19½	10⅞	11⅞ ₁₆	21⅜	13⅜ ₁₆	12½
	36	6	Prefix(t)-06-(*)-(+)45-36	25⅞ ₁₆	10⅞ ₁₆	14⅜ ₁₆	26⅜ ₁₆	12⅞ ₁₆	15⅜ ₁₆	28	14⅜ ₁₆	16⅞ ₁₆	29⅜ ₁₆	16¾	17½
	36	12	Prefix(t)-12-(*)-(+)45-36	25⅞ ₁₆	10⅞ ₁₆	14⅜ ₁₆	26⅜ ₁₆	12⅞ ₁₆	15⅜ ₁₆	28	14⅜ ₁₆	16⅞ ₁₆	29⅜ ₁₆	16¾	17½
	36	18	Prefix(t)-18-(*)-(+)45-36	25⅞ ₁₆	10⅞ ₁₆	14⅜ ₁₆	26⅜ ₁₆	12⅞ ₁₆	15⅜ ₁₆	28	14⅜ ₁₆	16⅞ ₁₆	29⅜ ₁₆	16¾	17½
	36	24	Prefix(t)-24-(*)-(+)45-36	25⅞ ₁₆	10⅞ ₁₆	14⅜ ₁₆	26⅜ ₁₆	12⅞ ₁₆	15⅜ ₁₆	28	14⅜ ₁₆	16⅞ ₁₆	29⅜ ₁₆	16¾	17½
	36	30	Prefix(t)-30-(*)-(+)45-36	25⅞ ₁₆	10⅞ ₁₆	14⅜ ₁₆	26⅜ ₁₆	12⅞ ₁₆	15⅜ ₁₆	28	14⅜ ₁₆	16⅞ ₁₆	29⅜ ₁₆	16¾	17½
	36	36	Prefix(t)-36-(*)-(+)45-36	25⅞ ₁₆	10⅞ ₁₆	14⅜ ₁₆	26⅜ ₁₆	12⅞ ₁₆	15⅜ ₁₆	28	14⅜ ₁₆	16⅞ ₁₆	29⅜ ₁₆	16¾	17½

(t) Insert side rail depth. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no.
Includes 1 pair of splice plates with hardware.

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 6, 12, 18, 24, 30, 36 in.
- Angle: 45°
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail depth: 2 in., 3 in., 6 in.

Part numbering system

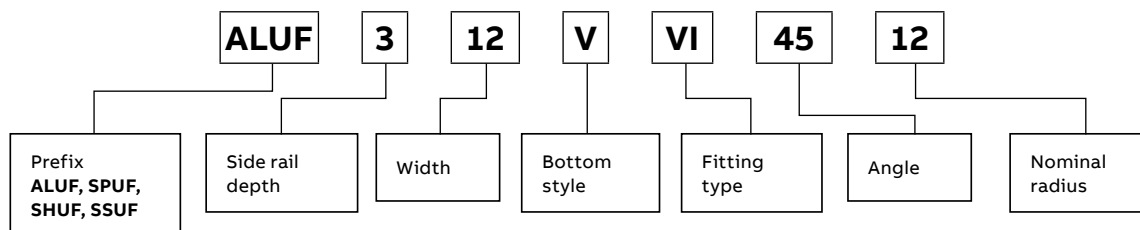

One-piece tray

30° Vertical bend fittings

30° Vertical bend


	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Dimensions (in.)											
				(+ VO side rail depth						(+ VI Side Rail Depth					
				2 in., 3 in., 6 in.			2 in.			3 in.			6 in.		
				X	Y	Z	X	Y	Z	X	Y	Z	X	Y	Z
Outside bend ventilated	12	6	Prefix(t)-06-(*)-(+)30-12	6	1 ⁵ / ₈	3 ³ / ₁₆	6 ¹⁵ / ₁₆	3 ¹ / ₂	3 ¹¹ / ₁₆	7 ¹³ / ₁₆	5 ¹ / ₄	4 ³ / ₁₆	9 ¹ / ₈	7 ¹³ / ₁₆	4 ⁷ / ₈
	12	12	Prefix(t)-12-(*)-(+)30-12	6	1 ⁵ / ₈	3 ³ / ₁₆	6 ¹⁵ / ₁₆	3 ¹ / ₂	3 ¹¹ / ₁₆	7 ¹³ / ₁₆	5 ¹ / ₄	4 ³ / ₁₆	9 ¹ / ₈	7 ¹³ / ₁₆	4 ⁷ / ₈
	12	18	Prefix(t)-18-(*)-(+)30-12	6	1 ⁵ / ₈	3 ³ / ₁₆	6 ¹⁵ / ₁₆	3 ¹ / ₂	3 ¹¹ / ₁₆	7 ¹³ / ₁₆	5 ¹ / ₄	4 ³ / ₁₆	9 ¹ / ₈	7 ¹³ / ₁₆	4 ⁷ / ₈
	12	24	Prefix(t)-24-(*)-(+)30-12	6	1 ⁵ / ₈	3 ³ / ₁₆	6 ¹⁵ / ₁₆	3 ¹ / ₂	3 ¹¹ / ₁₆	7 ¹³ / ₁₆	5 ¹ / ₄	4 ³ / ₁₆	9 ¹ / ₈	7 ¹³ / ₁₆	4 ⁷ / ₈
	12	30	Prefix(t)-30-(*)-(+)30-12	6	1 ⁵ / ₈	3 ³ / ₁₆	6 ¹⁵ / ₁₆	3 ¹ / ₂	3 ¹¹ / ₁₆	7 ¹³ / ₁₆	5 ¹ / ₄	4 ³ / ₁₆	9 ¹ / ₈	7 ¹³ / ₁₆	4 ⁷ / ₈
	12	36	Prefix(t)-36-(*)-(+)30-12	6	1 ⁵ / ₈	3 ³ / ₁₆	6 ¹⁵ / ₁₆	3 ¹ / ₂	3 ¹¹ / ₁₆	7 ¹³ / ₁₆	5 ¹ / ₄	4 ³ / ₁₆	9 ¹ / ₈	7 ¹³ / ₁₆	4 ⁷ / ₈
Inside bend ventilated	24	6	Prefix(t)-06-(*)-(+)30-24	12	3 ³ / ₁₆	6 ⁷ / ₁₆	12 ¹⁵ / ₁₆	5 ¹ / ₁₆	6 ¹⁵ / ₁₆	13 ¹³ / ₁₆	6 ¹³ / ₁₆	7 ³ / ₈	15 ¹ / ₈	9 ³ / ₈	8 ³ / ₁₆
	24	12	Prefix(t)-12-(*)-(+)30-24	12	3 ³ / ₁₆	6 ⁷ / ₁₆	12 ¹⁵ / ₁₆	5 ¹ / ₁₆	6 ¹⁵ / ₁₆	13 ¹³ / ₁₆	6 ¹³ / ₁₆	7 ³ / ₈	15 ¹ / ₈	9 ³ / ₈	8 ³ / ₁₆
	24	18	Prefix(t)-18-(*)-(+)30-24	12	3 ³ / ₁₆	6 ⁷ / ₁₆	12 ¹⁵ / ₁₆	5 ¹ / ₁₆	6 ¹⁵ / ₁₆	13 ¹³ / ₁₆	6 ¹³ / ₁₆	7 ³ / ₈	15 ¹ / ₈	9 ³ / ₈	8 ³ / ₁₆
	24	24	Prefix(t)-24-(*)-(+)30-24	12	3 ³ / ₁₆	6 ⁷ / ₁₆	12 ¹⁵ / ₁₆	5 ¹ / ₁₆	6 ¹⁵ / ₁₆	13 ¹³ / ₁₆	6 ¹³ / ₁₆	7 ³ / ₈	15 ¹ / ₈	9 ³ / ₈	8 ³ / ₁₆
	24	30	Prefix(t)-30-(*)-(+)30-24	12	3 ³ / ₁₆	6 ⁷ / ₁₆	12 ¹⁵ / ₁₆	5 ¹ / ₁₆	6 ¹⁵ / ₁₆	13 ¹³ / ₁₆	6 ¹³ / ₁₆	7 ³ / ₈	15 ¹ / ₈	9 ³ / ₈	8 ³ / ₁₆
	24	36	Prefix(t)-36-(*)-(+)30-24	12	3 ³ / ₁₆	6 ⁷ / ₁₆	12 ¹⁵ / ₁₆	5 ¹ / ₁₆	6 ¹⁵ / ₁₆	13 ¹³ / ₁₆	6 ¹³ / ₁₆	7 ³ / ₈	15 ¹ / ₈	9 ³ / ₈	8 ³ / ₁₆
	36	6	Prefix(t)-06-(*)-(+)30-36	18	4 ¹³ / ₁₆	9 ⁵ / ₈	18 ¹⁵ / ₁₆	6 ¹¹ / ₁₆	10 ³ / ₈	19 ¹³ / ₁₆	8 ⁷ / ₁₆	10 ⁵ / ₈	21 ¹ / ₈	11	11 ¹¹ / ₁₆
	36	12	Prefix(t)-12-(*)-(+)30-36	18	4 ¹³ / ₁₆	9 ⁵ / ₈	18 ¹⁵ / ₁₆	6 ¹¹ / ₁₆	10 ³ / ₈	19 ¹³ / ₁₆	8 ⁷ / ₁₆	10 ⁵ / ₈	21 ¹ / ₈	11	11 ¹¹ / ₁₆
	36	18	Prefix(t)-18-(*)-(+)30-36	18	4 ¹³ / ₁₆	9 ⁵ / ₈	18 ¹⁵ / ₁₆	6 ¹¹ / ₁₆	10 ³ / ₈	19 ¹³ / ₁₆	8 ⁷ / ₁₆	10 ⁵ / ₈	21 ¹ / ₈	11	11 ¹¹ / ₁₆
	36	24	Prefix(t)-24-(*)-(+)30-36	18	4 ¹³ / ₁₆	9 ⁵ / ₈	18 ¹⁵ / ₁₆	6 ¹¹ / ₁₆	10 ³ / ₈	19 ¹³ / ₁₆	8 ⁷ / ₁₆	10 ⁵ / ₈	21 ¹ / ₈	11	11 ¹¹ / ₁₆
	36	30	Prefix(t)-30-(*)-(+)30-36	18	4 ¹³ / ₁₆	9 ⁵ / ₈	18 ¹⁵ / ₁₆	6 ¹¹ / ₁₆	10 ³ / ₈	19 ¹³ / ₁₆	8 ⁷ / ₁₆	10 ⁵ / ₈	21 ¹ / ₈	11	11 ¹¹ / ₁₆
	36	36	Prefix(t)-36-(*)-(+)30-36	18	4 ¹³ / ₁₆	9 ⁵ / ₈	18 ¹⁵ / ₁₆	6 ¹¹ / ₁₆	10 ³ / ₈	19 ¹³ / ₁₆	8 ⁷ / ₁₆	10 ⁵ / ₈	21 ¹ / ₈	11	11 ¹¹ / ₁₆

(t) Insert side rail depth. (*) Insert bottom style (+) Insert "VO" for vertical outside or "VI" for vertical inside to complete cat. no.
Includes 1 pair of splice plates with hardware.

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 6, 12, 18, 24, 30, 36 in.
- Angle: 30°
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail depth: 2 in., 3 in., 6 in.

Part numbering system

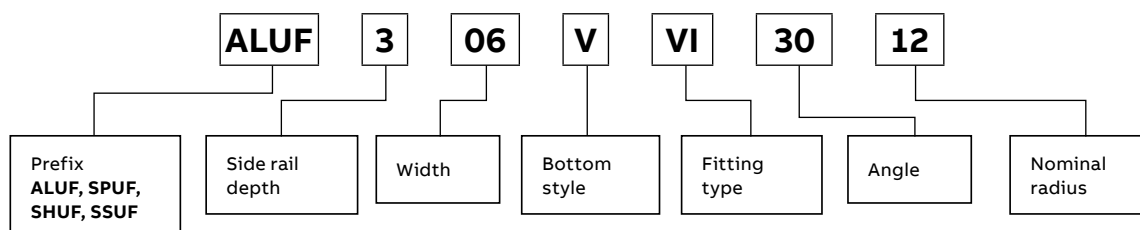

One-piece tray

Horizontal reducer fittings

Straight reducer solid



Straight reducer ventilated



Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Tray widths W1: 36, 30, 24, 18, 12 in.
- Tray widths W2: 30, 24, 18, 12, 6 in.
- Bottom styles: V– ventilated, S– solid
- Side rail depth: 2 in., 3 in., 6 in.


Horizontal reducer

Widths (in.)		LH reducer	
W1	W2	Cat. no.	Dim. X (in.)
36	30	Prefix(t)-36-30-(*)-HLR	15 ⁷ / ₁₆
36	24	Prefix(t)-36-24-(*)-HLR	18 ¹⁵ / ₁₆
36	18	Prefix(t)-36-18-(*)-HLR	22 ³ / ₈
36	12	Prefix(t)-36-12-(*)-HLR	25 ⁷ / ₈
36	06	Prefix(t)-36-06-(*)-HLR	29 ⁵ / ₁₆
30	24	Prefix(t)-30-24-(*)-HLR	15 ⁷ / ₁₆
30	18	Prefix(t)-30-18-(*)-HLR	18 ¹⁵ / ₁₆
30	12	Prefix(t)-30-12-(*)-HLR	22 ³ / ₈
30	06	Prefix(t)-30-06-(*)-HLR	25 ⁷ / ₈
24	18	Prefix(t)-24-18-(*)-HLR	15 ⁷ / ₁₆
24	12	Prefix(t)-24-12-(*)-HLR	18 ¹⁵ / ₁₆
24	06	Prefix(t)-24-06-(*)-HLR	22 ³ / ₈
18	12	Prefix(t)-18-12-(*)-HLR	15 ⁷ / ₁₆
18	06	Prefix(t)-18-06-(*)-HLR	18 ¹⁵ / ₁₆
24	06	Prefix(t)-12-06-(*)-HLR	15 ⁷ / ₁₆


Straight reducer	
Cat. no.	Dim. X (in.)
Prefix(t)-36-30-(*)-HSR	13 ³ / ₄
Prefix(t)-36-24-(*)-HSR	15 ⁷ / ₁₆
Prefix(t)-36-18-(*)-HSR	17 ³ / ₈
Prefix(t)-36-12-(*)-HSR	18 ⁵ / ₁₆
Prefix(t)-36-06-(*)-HSR	20 ¹¹ / ₁₆
Prefix(t)-30-24-(*)-HSR	13 ³ / ₄
Prefix(t)-30-18-(*)-HSR	15 ⁷ / ₁₆
Prefix(t)-30-12-(*)-HSR	17 ³ / ₁₆
Prefix(t)-30-06-(*)-HSR	18 ¹⁵ / ₁₆
Prefix(t)-24-18-(*)-HSR	13 ³ / ₄
Prefix(t)-24-12-(*)-HSR	15 ⁷ / ₁₆
Prefix(t)-24-06-(*)-HSR	17 ³ / ₁₆
Prefix(t)-18-12-(*)-HSR	13 ³ / ₄
Prefix(t)-18-06-(*)-HSR	15 ⁷ / ₁₆
Prefix(t)-12-06-(*)-HSR	13 ³ / ₄

RH reducer	
Cat. no.	Dim. X (in.)
Prefix(t)-36-30-(*)-HRR	15 ⁷ / ₁₆
Prefix(t)-36-24-(*)-HRR	18 ¹⁵ / ₁₆
Prefix(t)-36-18-(*)-HRR	22 ³ / ₈
Prefix(t)-36-12-(*)-HRR	25 ⁷ / ₈
Prefix(t)-36-06-(*)-HRR	29 ⁵ / ₁₆
Prefix(t)-30-24-(*)-HRR	15 ⁷ / ₁₆
Prefix(t)-30-18-(*)-HRR	18 ¹⁵ / ₁₆
Prefix(t)-30-12-(*)-HRR	22 ³ / ₈
Prefix(t)-30-06-(*)-HRR	25 ⁷ / ₈
Prefix(t)-24-18-(*)-HRR	15 ⁷ / ₁₆
Prefix(t)-24-12-(*)-HRR	18 ¹⁵ / ₁₆
Prefix(t)-24-06-(*)-HRR	22 ³ / ₈
Prefix(t)-18-12-(*)-HRR	15 ⁷ / ₁₆
Prefix(t)-18-06-(*)-HRR	18 ¹⁵ / ₁₆
Prefix(t)-12-06-(*)-HRR	15 ⁷ / ₁₆


Straight reducer



Offset reducer – right




Offset reducer – left



(t) Insert side rail depth. (*) Insert bottom style to complete cat. no.
Includes 1 pair of splice plates with hardware.


Part numbering system

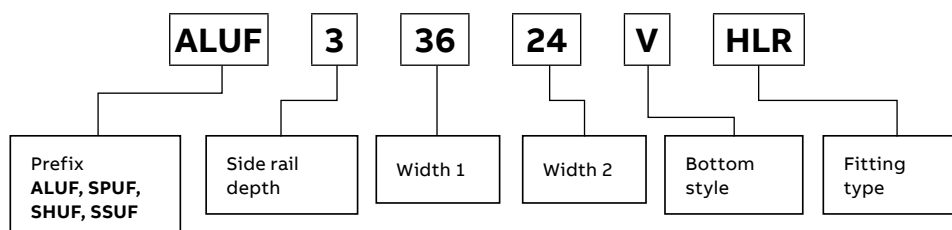

One-piece tray

45° Horizontal wye fittings

Solid – left



Ventilated – left



Selection guide



- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 6, 12, 18, 24, 30, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail depth: 2 in., 3 in., 6 in.

45° Horizontal wye

Width (in.)	Left-hand wye cat. no.	Right-hand wye cat. no.	Dimensions (in.)		
			X	Y	Z
06	Prefix(t)-06-(*)-HYL	Prefix(t)-06-(*)-HYR	18 ⁹ / ₁₆	14 ¹³ / ₁₆	12 ⁷ / ₁₆
12	Prefix(t)-12-(*)-HYL	Prefix(t)-12-(*)-HYR	26 ³ / ₄	25	18 ⁷ / ₁₆
18	Prefix(t)-18-(*)-HYL	Prefix(t)-18-(*)-HYR	35 ³ / ₄	35 ³ / ₄	24 ⁷ / ₁₆
24	Prefix(t)-24-(*)-HYL	Prefix(t)-24-(*)-HYR	43 ¹ / ₂	45 ¹ / ₂	30 ⁷ / ₁₆
30	Prefix(t)-30-(*)-HYL	Prefix(t)-30-(*)-HYR	52 ¹ / ₄	55 ³ / ₄	36 ⁷ / ₁₆
36	Prefix(t)-36-(*)-HYL	Prefix(t)-36-(*)-HYR	60 ¹¹ / ₁₆	66	42 ⁷ / ₁₆


Left hand wye

Right hand wye



(t) Insert side rail depth. (*) Insert bottom style to complete cat. no.
Includes 2 pairs of splice plates with hardware.





Part numbering system

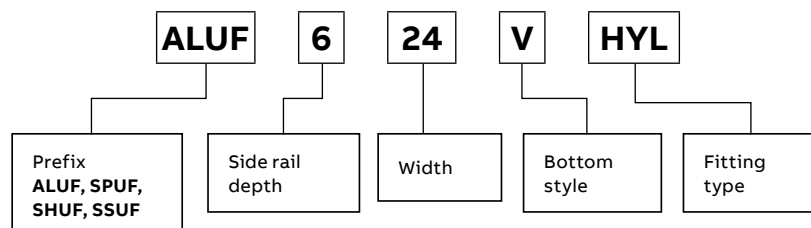

One-piece tray

Vertical tee up/down fittings

Vertical tee up/down


	Nominal radius (in.)	Nominal width (in.)	Vertical tee up cat. no.	Vertical tee down cat. no.	Dimensions (in.)					
					Side rail height "D"					
					2 in.		3 in.		6 in.	
					X	Y	X	Y	X	Y
Ventilated 	12	6	Prefix(t)-06-(*)-VTU12	Prefix-06-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
	12	12	Prefix(t)-12-(*)-VTU12	Prefix-12-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
	12	18	Prefix(t)-18-(*)-VTU12	Prefix-18-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
	12	24	Prefix(t)-24-(*)-VTU12	Prefix-24-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
	12	30	Prefix(t)-30-(*)-VTU12	Prefix-30-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
	12	36	Prefix(t)-36-(*)-VTU12	Prefix-36-(*)-VTD12	12 ¹⁵ / ₁₆	25 ⁷ / ₈	13 ¹³ / ₁₆	27 ⁵ / ₈	15 ¹ / ₈	30 ³ / ₁₆
Down 	24	6	Prefix(t)-06-(*)-VTU24	Prefix-06-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ⁵ / ₈	27 ⁵ / ₈	54 ³ / ₁₆
	24	12	Prefix(t)-12-(*)-VTU24	Prefix-12-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ⁵ / ₈	27 ⁵ / ₈	54 ³ / ₁₆
	24	18	Prefix(t)-18-(*)-VTU24	Prefix-18-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ⁵ / ₈	27 ⁵ / ₈	54 ³ / ₁₆
	24	24	Prefix(t)-24-(*)-VTU24	Prefix-24-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ⁵ / ₈	27 ⁵ / ₈	54 ³ / ₁₆
	24	30	Prefix(t)-30-(*)-VTU24	Prefix-30-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ⁵ / ₈	27 ⁵ / ₈	54 ³ / ₁₆
	24	36	Prefix(t)-36-(*)-VTU24	Prefix-36-(*)-VTD24	24 ¹⁵ / ₁₆	49 ⁷ / ₈	25 ¹³ / ₁₆	51 ⁵ / ₈	27 ⁵ / ₈	54 ³ / ₁₆
Solid 	36	6	Prefix(t)-06-(*)-VTU36	Prefix-06-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
	36	12	Prefix(t)-12-(*)-VTU36	Prefix-12-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
	36	18	Prefix(t)-18-(*)-VTU36	Prefix-18-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
	36	24	Prefix(t)-24-(*)-VTU36	Prefix-24-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
	36	30	Prefix(t)-30-(*)-VTU36	Prefix-30-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
	36	36	Prefix(t)-36-(*)-VTU36	Prefix-36-(*)-VTD36	36 ¹⁵ / ₁₆	73 ⁷ / ₈	37 ¹³ / ₁₆	75 ⁵ / ₈	39 ¹ / ₈	78 ³ / ₁₆
Up 										

(t) Insert side rail depth. (*) Insert bottom style to complete cat. no.
Includes 2 pairs of splice plates with hardware.

Selection guide

- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
- Inside tray widths: 6, 12, 18, 24, 30, 36 in.
- Nominal radius: 12, 24, 36 in.
- Bottom styles: V– ventilated, S– solid
- Side rail depth: 2 in., 3 in., 6 in.


Part numbering system

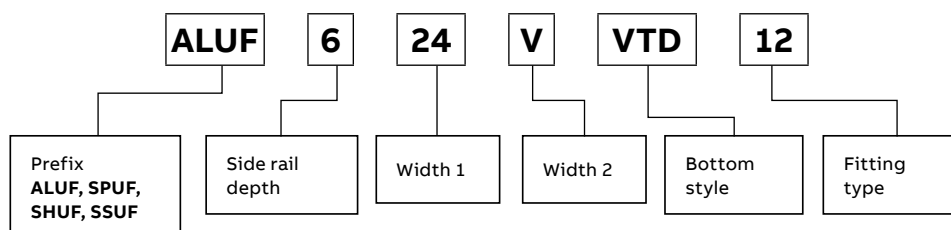

One-piece tray

Cable support fittings


Cable support

	Nominal radius (in.)	Nominal width (in.)	Cat. no.	Side rail depth "D"		
				2 in.	3 in.	6 in.
				X (in.)		
	12	6	Prefix(t)-06-(*)-CS12	13 ⁷ / ₁₆	15 ⁵ / ₁₆	18 ³ / ₁₆
	12	12	Prefix(t)-12-(*)-CS12	13 ⁷ / ₁₆	15 ⁵ / ₁₆	18 ³ / ₁₆
	12	18	Prefix(t)-18-(*)-CS12	13 ⁷ / ₁₆	15 ⁵ / ₁₆	18 ³ / ₁₆
	12	24	Prefix(t)-24-(*)-CS12	13 ⁷ / ₁₆	15 ⁵ / ₁₆	18 ³ / ₁₆
	12	30	Prefix(t)-30-(*)-CS12	13 ⁷ / ₁₆	15 ⁵ / ₁₆	18 ³ / ₁₆
	12	36	Prefix(t)-36-(*)-CS12	13 ⁷ / ₁₆	15 ⁵ / ₁₆	18 ³ / ₁₆
	24	6	Prefix(t)-06-(*)-CS24	25 ⁷ / ₁₆	27 ⁵ / ₁₆	30 ³ / ₁₆
	24	12	Prefix(t)-12-(*)-CS24	25 ⁷ / ₁₆	27 ⁵ / ₁₆	30 ³ / ₁₆
	24	18	Prefix(t)-18-(*)-CS24	25 ⁷ / ₁₆	27 ⁵ / ₁₆	30 ³ / ₁₆
	24	24	Prefix(t)-24-(*)-CS24	25 ⁷ / ₁₆	27 ⁵ / ₁₆	30 ³ / ₁₆
	24	30	Prefix(t)-30-(*)-CS24	25 ⁷ / ₁₆	27 ⁵ / ₁₆	30 ³ / ₁₆
	24	36	Prefix(t)-36-(*)-CS24	25 ⁷ / ₁₆	27 ⁵ / ₁₆	30 ³ / ₁₆
	36	6	Prefix(t)-06-(*)-CS36	37 ⁷ / ₁₆	39 ⁵ / ₁₆	42 ³ / ₁₆
	36	12	Prefix(t)-12-(*)-CS36	37 ⁷ / ₁₆	39 ⁵ / ₁₆	42 ³ / ₁₆
	36	18	Prefix(t)-18-(*)-CS36	37 ⁷ / ₁₆	39 ⁵ / ₁₆	42 ³ / ₁₆
	36	24	Prefix(t)-24-(*)-CS36	37 ⁷ / ₁₆	39 ⁵ / ₁₆	42 ³ / ₁₆
	36	30	Prefix(t)-30-(*)-CS36	37 ⁷ / ₁₆	39 ⁵ / ₁₆	42 ³ / ₁₆
	36	36	Prefix(t)-36-(*)-CS36	37 ⁷ / ₁₆	39 ⁵ / ₁₆	42 ³ / ₁₆

(t) Insert side rail depth. (*) Insert bottom style to complete cat. no.
Includes 1 pair of splice plates with hardware.

- Selection guide
- Prefix: ALUF (aluminum), SPUF (pregalv.), SHUF (hot-dip galv.), SSUF (stainless steel)
 - Inside tray widths: 6, 12, 18, 24, 30, 36 in.
 - Nominal radius: 12, 24, 36 in.
 - Bottom styles: V– ventilated, S– solid
 - Side rail depth: 2 in., 3 in., 6 in.


Part numbering system

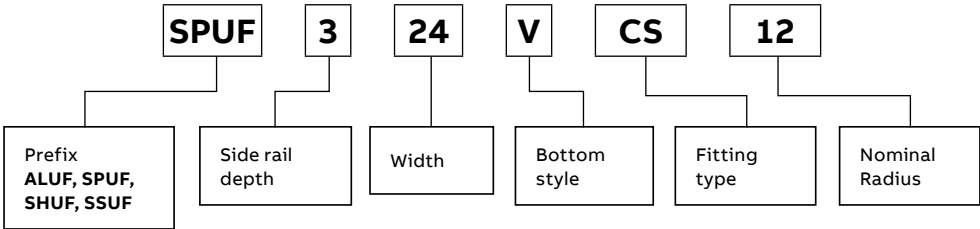


One-piece tray covers

Straight and fitting covers

Straight cover number selection

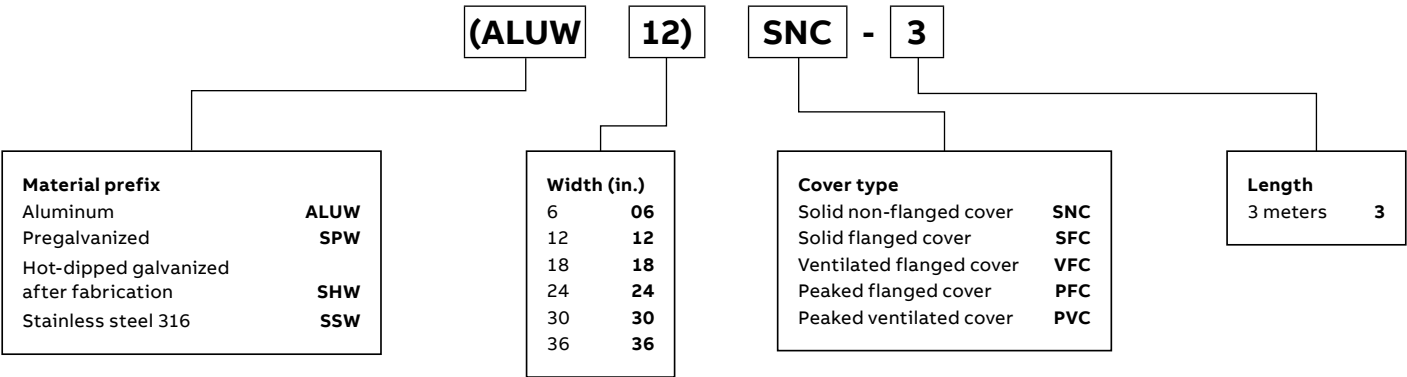



Fitting cover number selection

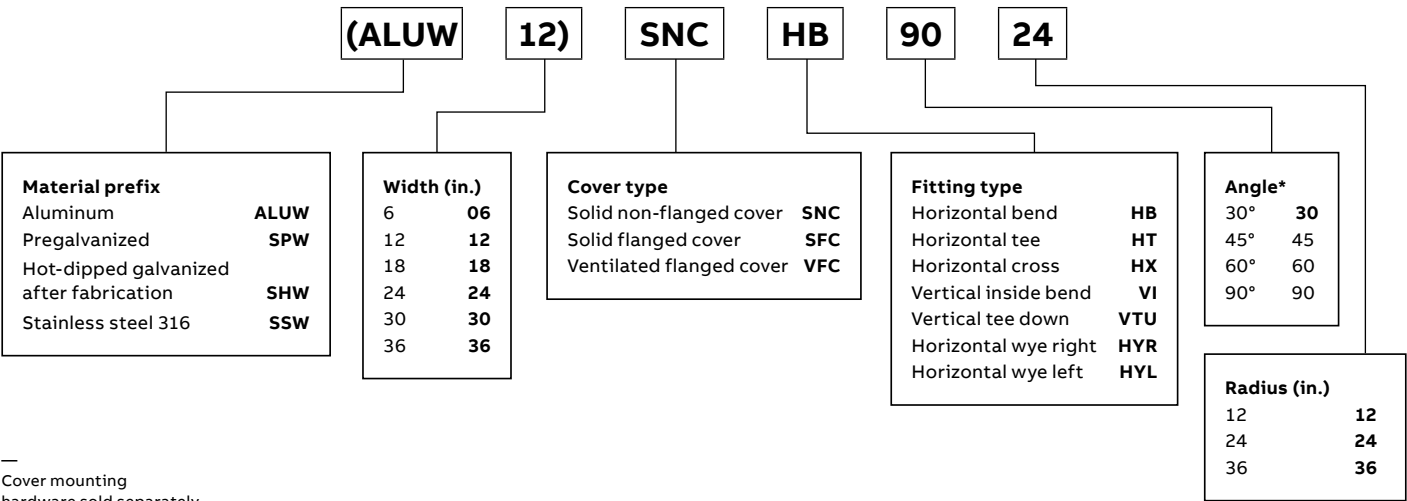

One-piece tray covers

Fitting covers


Fitting cover number selection (continued)

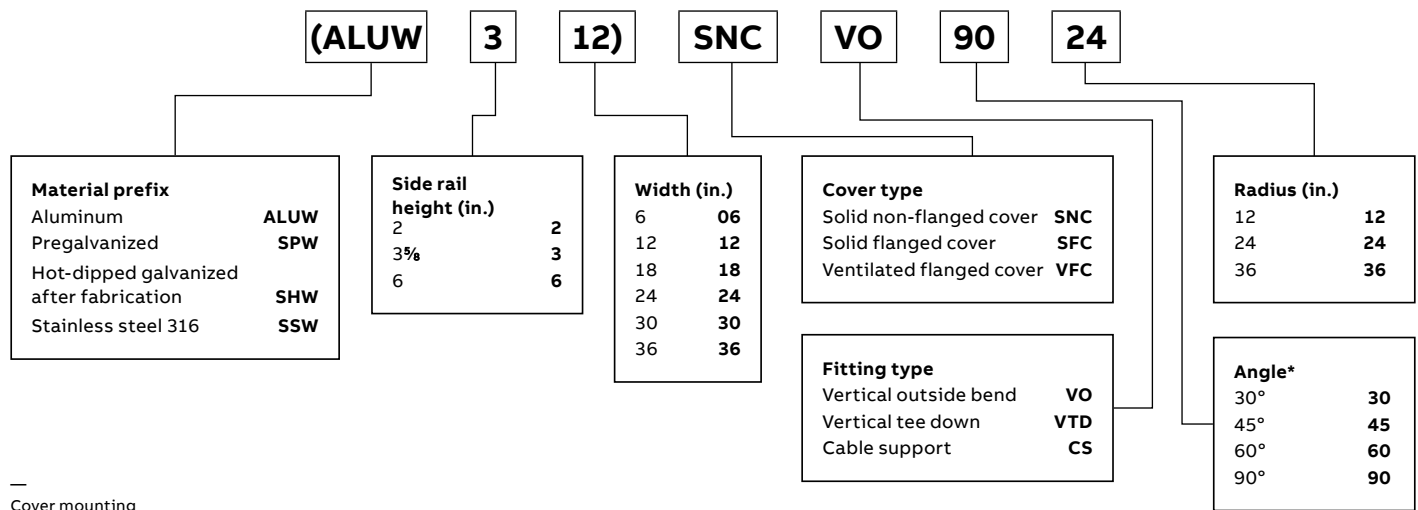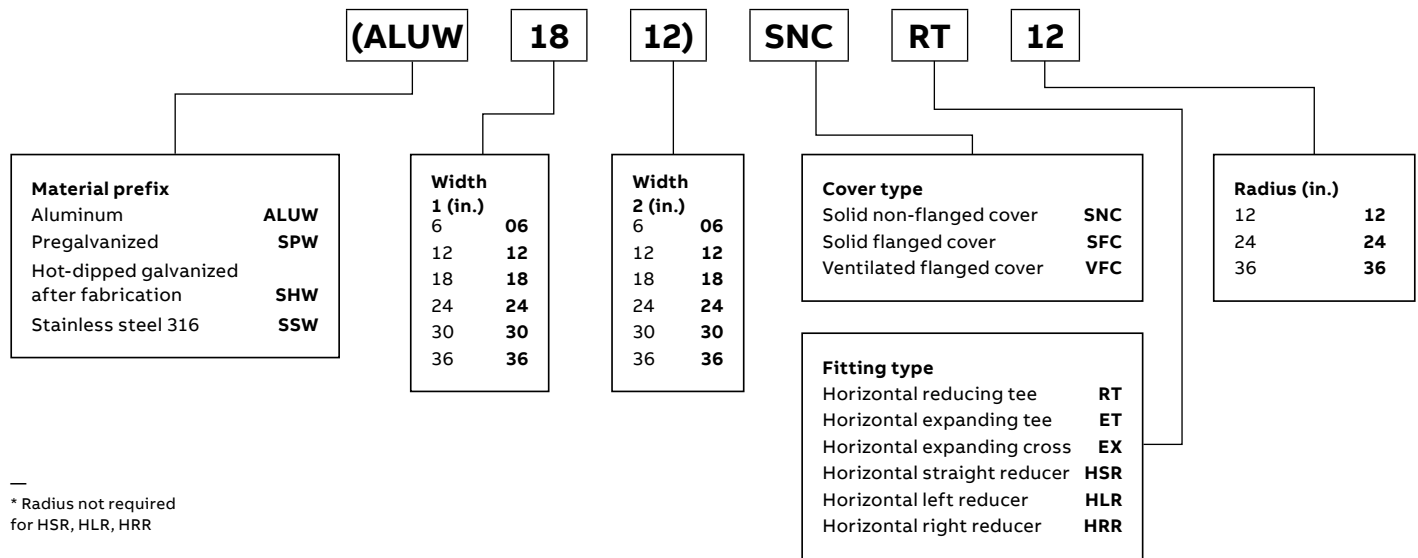

One-piece tray covers


Accessories for covers

Hold-down clamp

	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-2-HDC	SPUW	2
	(Prefix)-3-HDC	SSUW	3
	(Prefix)-6-HDC	SHUW	6

Designed to secure cable tray to support system.

Cover clamp

	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-2-SCC	SPUW	2
		SSUW	2
	(Prefix)-3-SCC	SPW	3
	(Prefix)-6-SCC	SSW	6

Rigid cover clamp for flat and flanged covers.

Heavy-duty cover clamp

	Cat. no.	Material prefix	Side rail height (in.)	Tray width (in.)
	(Prefix)-2-**-HCC	ALUW	2	6
		SHUW	2	12
		SPUW	2	18
		SSUW	2	24
	(Prefix)-3-**-HCC	ALUW	3	30
	(Prefix)-6-**-HCC	SHW	6	36
		SPW	6	36
		SSW	6	36

** Insert tray width

One-piece tray splice plates

Standard, expansion splice plate and reducing splice



Standard splice plate

- Packaged in pairs with hardware
- Kit contents: 8 bolts, 8 nuts, 8 washers, $\frac{3}{8}$ in. diameter
- Provided as standard with each straight and/or fitting

Cat. no.	Material prefix	Side rail height (in.)
(Prefix)-2-SSP	ALUW	2
	SHUW	2
	SPUW	2
	SSUW	2
(Prefix)-3-SSP	ALUW	3
	SHW	3
(Prefix)-6-SSP	SPW	6
	SSW	6



Expansion splice plate

- Allows for a 1 in. expansion or contraction of tray system
- Packaged in pairs with hardware
- Kit contents: 8 bolts, 8 nuts, 8 washers, $\frac{3}{8}$ in. diameter

Cat. no.	Material prefix	Side rail height (in.)
(Prefix)-2-ESP	ALUW	2
	SHUW	2
	SPUW	2
	SSUW	2
(Prefix)-3-ESP	ALUW	3
	SHW	3
(Prefix)-6-ESP	SPW	6
	SSW	6



Reducing splice

- Used in pairs to provide a straight reduction or used with a standard splice plate for an offset reduction
- One per package with hardware
- Kit contents: 8 bolts, 8 nuts, 8 washers, $\frac{3}{8}$ in. diameter

	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-2(*)-RSP	ALUW	2
		SHUW	2
		SPUW	2
		SSUW	2
	(Prefix)-3(*)-RSP	ALUW	3
		SHW	3
	(Prefix)-6(*)-RSP	SPW	6
		SSW	6

*Note: For offset reduction: Insert width to be reduced. For straight reduction: Insert $\frac{1}{2}$ width to be reduced (2 required)
Example: ALUW-603-RSP = 3 in. offset reducer

One-piece tray barrier strips

Horizontal and vertical barriers strips, barrier clamp and splice strips



Horizontal barrier strips

Cat. no.	Material prefix	Height (in.)	Length
(Prefix)-2-SB-3	ALUW	2	3 m
(Prefix)-3-SB-3	SPUW	3	3 m
(Prefix)-6-SB-3	SHUW*	6	3 m
(Prefix)-2-SBH-72	SSUW	2	72 in.
(Prefix)-3-SBH-72	SSUW	3	72 in.
(Prefix)-6-SBH-72	SSUW	6	72 in.

NOTE: 72 in. barriers provided with 3 SPW10SCR, 3 m barriers provided with 6 SPW10SCR
*Available in 1500 mm only.

- Barrier strips provide a method of separating cables in tray and trough systems
- Easily installed using supplied hardware or barrier strip clamps (sold separately)
- 72 in. barriers are flexible for use with horizontal fittings



Vertical barriers strips

Inside bend cat. no.	Outside bend cat. no.	Material prefix	Height (in.)	Angle (°)	Radius (in.)
(Prefix)-2-VIB-(*)-(**)	Prefix-2-VOB-(*)-(**)	ALUW	2	90	12
(Prefix)-3-VIB-(*)-(**)	Prefix-3-VOB-(*)-(**)	SPUW	3	60	24
(Prefix)-6-VIB-(*)-(**)	Prefix-6-VOB-(*)-(**)	SHUW†	6	30	36
		SSUW	6	45	36

(*) Insert angle (**) Insert radius. †Available in 1500 mm only.

- Preformed to fit all standard steel vertical bends.
- Provided with hardware

Barrier strip clamp

	Cat. no.	Material
	SPW-BSC	Zinc-plated steel
	SSW-BSC	Stainless steel 316

- Barrier strip clamps mount barrier strips to ladder rungs and ventilated bottoms
- Complete mounting hardware supplied

Barrier strip splice


	Cat. no.	Material prefix
	ABW-BSS	SPW
		SPW

Alignment splice for joining connecting barrier strips.

One-piece tray accessories

Closure end plate and drop out

Closure end plate

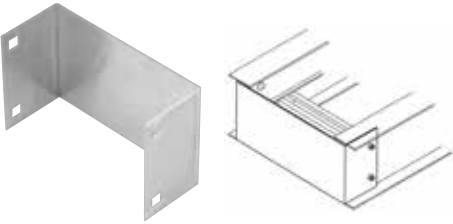		Cat. no.	Material prefix	Side rail height (in.)	Tray width (in.)
	(Prefix)-2-**-CEP		ALUW	2	6
			SPUW	2	12
			SHUW	2	18
			SSUW	2	24
	(Prefix)-3-**-CEP		ALUW	3	30
			SPW	6	36
	(Prefix)-6-**-CEP		SHW	6	36
			SSW	6	36

Provides closure for any tray end. Hardware included.

** Insert tray width



- Designed to provide a smooth radius surface at any position on the tray or trough bottom
- Drop outs are easily attached using hardware provided
- Standard radius = 4 in.

Drop out

Cat. no.	Material prefix	Width (in.)
(Prefix)-**-DOS	ALUW	6
	SPW	12
	SSW	18
	SHW	24
	SHW	30
	SHW	36

** Insert tray width


One-piece tray accessories

Steel tray hardware, horizontal and vertical adjustable plates

Steel tray hardware

	Cat. no.	Material	Description
	SPW-1/4-CB	Zinc-plated steel	¼ in. carriage bolt
	SPW-3/8-CB	Zinc-plated steel	¾ in. carriage bolt
	SPW-1/4-HN	Zinc-plated steel	¼ in. serrated flange nuts
	SPW-3/8-HN	Zinc-plated steel	¾ in. serrated flange nuts
	SSW-3/8-CB	316 stainless	¾ in. carriage bolt
	SSW-3/8-HN	316 stainless	¾ in. hex. nut
	SSW-3/8-HWK*	316 stainless	316 stainless steel hardware kit

Square shoulder self-positioning carriage bolt.
* Hardware kit: Contains 8 serrated flange nuts, 8 bolts, 8 lock washers.



- Adjustable hinge plates provide maximum horizontal installation flexibility.
- Furnished as a kit with hardware.

Horizontal adjustable plate

Cat. no.	Material prefix	Side rail height (in.)	Tray width (in.)
(Prefix)-(*)06-HAP	ALUW	2	6
(Prefix)-(*)08-HAP	SPUW	3	8
(Prefix)-(*)12-HAP	SSUW	6	12
(Prefix)-(*)18-HAP	SHUW	6	18
(Prefix)-(*)24-HAP	SHUW	6	24
(Prefix)-(*)30-HAP	SHUW	6	30
(Prefix)-(*)36-HAP	SHUW	6	36

(*) Insert side rail height



- Adjustable hinge plates provide maximum horizontal installation flexibility for elevation changes
- Furnished as a kit with hardware

Vertical adjustable plate

Cat. no.	Material prefix	Side rail height (in.)	Tray width (in.)
(Prefix)-2-**-VSP	ALUW	2	6
(Prefix)-3-**-VSP	SPUW	3	12
(Prefix)-6-**-VSP	SHUW	6	18
	SSUW	6	24
	SSUW	6	30
	SSUW	6	36

(**) Insert width

One-piece tray covers accessories

Horizontal tee branch and box-to-tray plates

Horizontal tee branch

	Cat. no.	Material prefix	Side rail height (in.)	Tray width (in.)
	(Prefix)-2-(**)-HTB	ALUW	2	6
	(Prefix)-3-(**)-HTB	SPUW	3	12
	(Prefix)-6-(**)-HTB	SHUW	6	18
		SSUW	6	24
		SSUW	6	30
		SSUW	6	36

(**) Insert width



- Designed to secure tray to electrical panels or boxes, walls or end supports
- Packaged in pairs with hardware

Box-to-tray plates

	Cat. no.	Material prefix	Side rail height (in.)
	(Prefix)-2-BSP	ALUW	2
		SPUW	2
		SHUW	2
		SSUW	2
	(Prefix)-3-BSP	ALUW	3
	(Prefix)-6-BSP	SPW	6
		SHW	6
		SSW	6

Channel tray

Selection guide

—
01 Solid channel

—
02 Ventilated channel

To ensure that your channel tray installation will meet your present and future needs, a sequence of decisions must be made. These decisions are relatively simple and can be condensed down to four steps.

1. Material choice

Materials

- Aluminum
- Pregalvanized steel
- Hot-dipped galvanized steel
- Stainless steel
- Coatings
- Other

T&B channel tray systems are fabricated from a corrosion-resistant metal (low-carbon steel, stainless steel or an aluminum alloy) or from a metal with a corrosion-resistant finish (zinc or epoxy). The choice of material for any particular installation depends on the installation environment (corrosion and electrical considerations) and cost. Please refer to the technical section (pages A8 to A29) for further explanation.

2. Type of tray bottom

Bottom type

- Ventilated
- Solid

Cable channel

- T&B offers cable channel in solid or ventilated straight sections.
- Ventilated channel has burr-free oblong punched holes for easy access.
- Ty-Rap cable tie slots are provided between each opening for securing of cable.
- T&B channel tray meets NEMA VE-1/CSA C22.22.

3. T&B channel tray width

Widths

- 1.5 in.
- 3 in.
- 4 in.
- 6 in.

The width of a channel tray is a function of the number, size, spacing and weight of the cables in the tray. Available nominal widths are 1.5, 3, 4 and 6 inches.

When specifying width, cable ties or other spacing devices may be used to maintain the required air space between cables.



—
01



—
02

4. Fittings selection

Fittings type

- Horizontal bends (90°, 60°, 45° and 30°)
- Horizontal tees and crosses
- Vertical bends (90°, 60°, 45° and 30°)

Fittings are used to change the size or direction of the channel tray. The most important decision to be made in fitting design concerns radius. The radius of the bend, whether horizontal or vertical, can be zero (non-radius), 12 in., 24 in. or greater on a custom basis. The selection requires a compromise with the considerations being available space, minimum bending radius of cables, ease of cable pulling and cost. The typical radius is 24 inches.

Fittings are also available for 30°, 45°, 60° and 90° angles. When a standard angle will not work, adjustable elbows can be used. It may be necessary to add supports to the tray at these points.

Refer to CSA/NEMA VE2 installation guidelines for suggested support locations.

Straight section number selection


How to create straight section part numbers

1. Select the material
2. Select nominal width of tray
3. Select the bottom type
4. The last number is the length of the channel tray

Example:

ALTC04V-3

- Aluminum
- 4 in. wide
- Ventilated bottom
- 10 ft. length

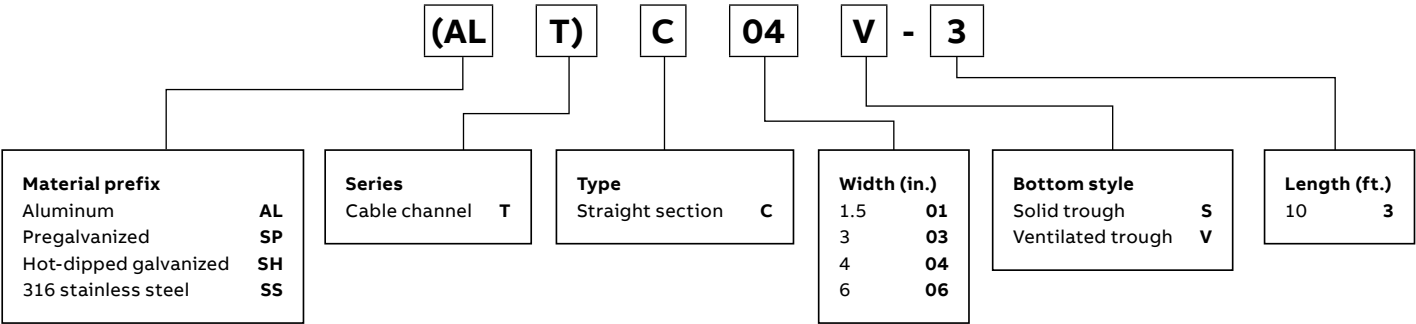


Channel tray straight lengths

Straight lengths – Solid and ventilated


01 Bottom view of ventilated channel tray larger than 1.5 in. wide

- Selection guide**
- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dipped galv.), SST (stainless steel)
 - Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.
 - Bottom styles: V– ventilated, S– solid

01

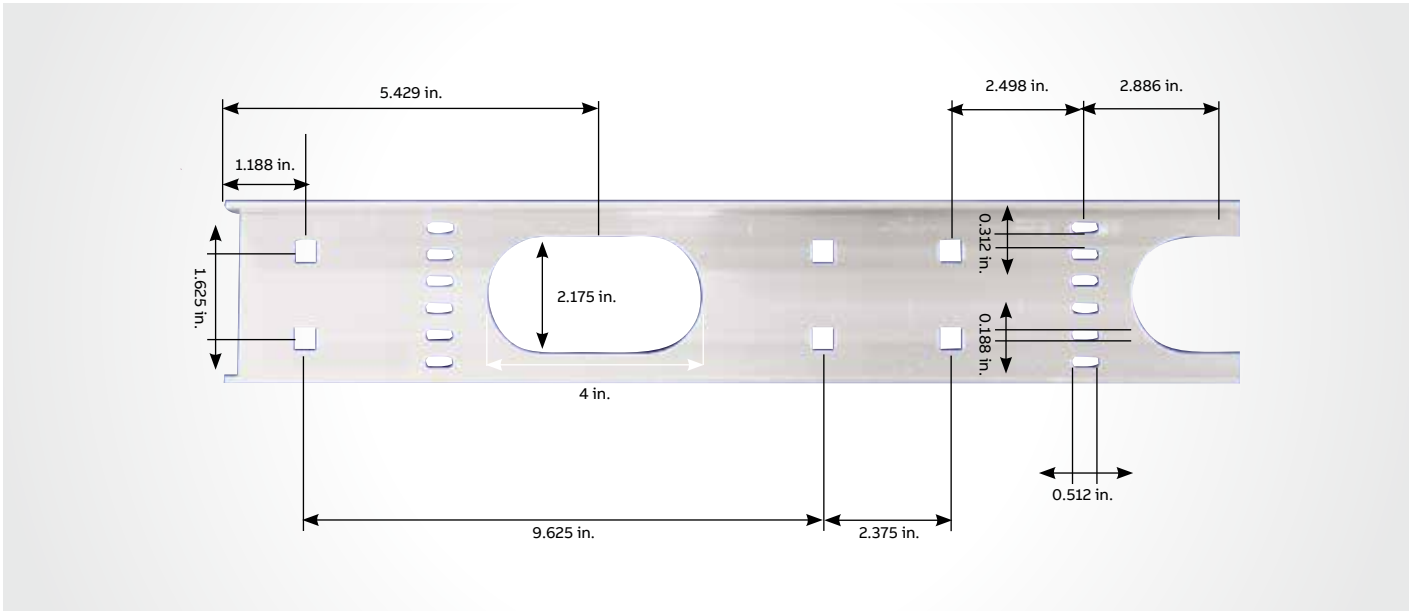

Part numbering system

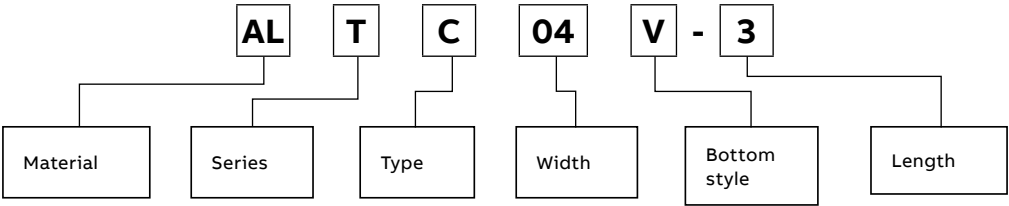

Channel tray straight lengths

Straight lengths selection guide – Solid and ventilated

—
01 Vented style offered
in 1.5 in. wide only

—
02 Vented style offered in
3 in., 4 in., 6 in. wide only

—
03 Solid offered
in all widths



—
01



—
02




—
03

Channel tray straight lengths

Aluminum straight lengths – Solid and ventilated

Aluminum

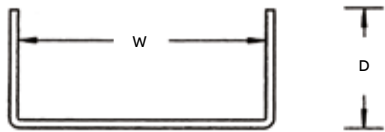

- Solid: Aluminum – extruded material
- Ventilated: Pre-punched burr-free oblong holes with Ty-Rap slots between each opening
- Accessories: One connector complete with hardware supplied with each length
- Material: Aluminum-6063-T6

Aluminum solid straight lengths

Aluminum solid	Channel width (W) (in.)	Depth (D) (in.)	Support span (feet)					
				2	4	6	8	10
ALTC	1.5	¾	Load (lb/ft.)	47.5	11.9	5.4	3.0	1.9
	1.5	¾	Deflection (in.)	0.170	0.680	0.745	1.325	2.070
	3	1⅝	Load (lb/ft.)	362.5	90.6	40.3	22.7	17.0
	3	1⅝	Deflection (in.)	0.083	0.330	0.743	1.322	2.065
	4	1⅝	Load (lb/ft.)	580.0	145.0	64.4	36.3	24.0
	4	1⅝	Deflection (in.)	0.065	0.260	0.585	1.041	1.626
	6	1¾	Load (lb/ft.)	607.5	151.9	67.5	38.0	25.0
	6	1¾	Deflection (in.)	0.061	0.244	0.550	0.977	1.527


Aluminum ventilated straight lengths

Aluminum ventilated	Channel width (W) (in.)	Depth (D) (in.)	Support span (feet)					
				2	4	6	8	10
ALTC	1.5	¾	Load (lb/ft.)	47.5	11.9	5.4	3.0	1.9
	1.5	¾	Deflection (in.)	0.170	0.680	0.745	1.325	2.070
	3	1⅝	Load (lb/ft.)	300.0	75.0	33.3	18.8	14.0
	3	1⅝	Deflection (in.)	0.100	0.400	0.900	1.600	2.500
	4	1⅝	Load (lb/ft.)	525.0	131.3	58.3	32.8	19.0
	4	1⅝	Deflection (in.)	0.074	0.295	0.664	1.181	1.846
	6	1¾	Load (lb/ft.)	580.0	145.0	64.4	36.3	21.0
	6	1¾	Deflection (in.)	0.065	0.261	0.587	1.044	1.631

Channel tray straight lengths

Steel straight lengths – Solid and ventilated

Steel

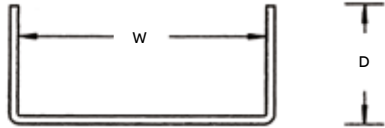

- Solid: Steel – roll-formed steel
- Ventilated: Pre-punched burr-free oblong holes with Ty-Rap slots between each opening
- Accessories: One connector complete with hardware supplied with each length
- Material: Pregalvanized, hot-dipped galvanized, 316 stainless steel

Steel solid straight lengths

Steel solid	Channel width (W) (in.)	Depth (D) (in.)	Support span (feet)					
				2	4	6	8	10
SPTC SHTC SSTC	1.5	¾	Load (lb/ft.)	97.5	24.4	10.8	6.1	3.9
	1.5	¾	Deflection (in.)	0.045	0.181	0.408	0.725	1.133
	3	1⅝	Load (lb/ft.)	252.0	63.0	28.0	15.8	17.0
	3	1⅝	Deflection (in.)	0.034	0.134	0.302	0.538	0.840
	4	1⅝	Load (lb/ft.)	408.0	102.0	45.3	25.5	24.0
	4	1⅝	Deflection (in.)	0.026	0.105	0.237	0.421	0.658
	6	1¾	Load (lb/ft.)	432.0	108.0	48.0	27.0	25.0
	6	1¾	Deflection (in.)	0.024	0.096	0.217	0.386	0.603

Steel ventilated straight lengths

Steel ventilated	Channel width (W) (in.)	Depth (D) (in.)	Support span (feet)					
				2	4	6	8	10
SPTC SHTC SSTC	1.5	¾	Load (lb/ft.)	97.5	24.4	10.8	6.1	3.9
	1.5	¾	Deflection (in.)	0.045	0.181	0.408	0.725	1.133
	3	1⅝	Load (lb/ft.)	207.0	51.8	23.0	12.9	14.0
	3	1⅝	Deflection (in.)	0.041	0.163	0.366	0.652	1.018
	4	1⅝	Load (lb/ft.)	363.0	90.8	40.3	22.7	19.0
	4	1⅝	Deflection (in.)	0.030	0.119	0.269	0.477	0.746
	6	1¾	Load (lb/ft.)	405.0	101.3	45.0	25.3	21.0
	6	1¾	Deflection (in.)	0.027	0.106	0.239	0.425	0.664

Channel tray

Fittings

- 01 Horizontal cross
- 02 90° Horizontal bend



Fittings number selection


How to create fitting part numbers

1. Select fitting material
2. Select nominal width of fitting
3. Select type of fitting
4. Select degree of angle if required
5. Select radius

Example:

ALTF04SHB4512

- Aluminum
- 4 in. wide
- Horizontal bend
- 45° degree
- 12 in. radius

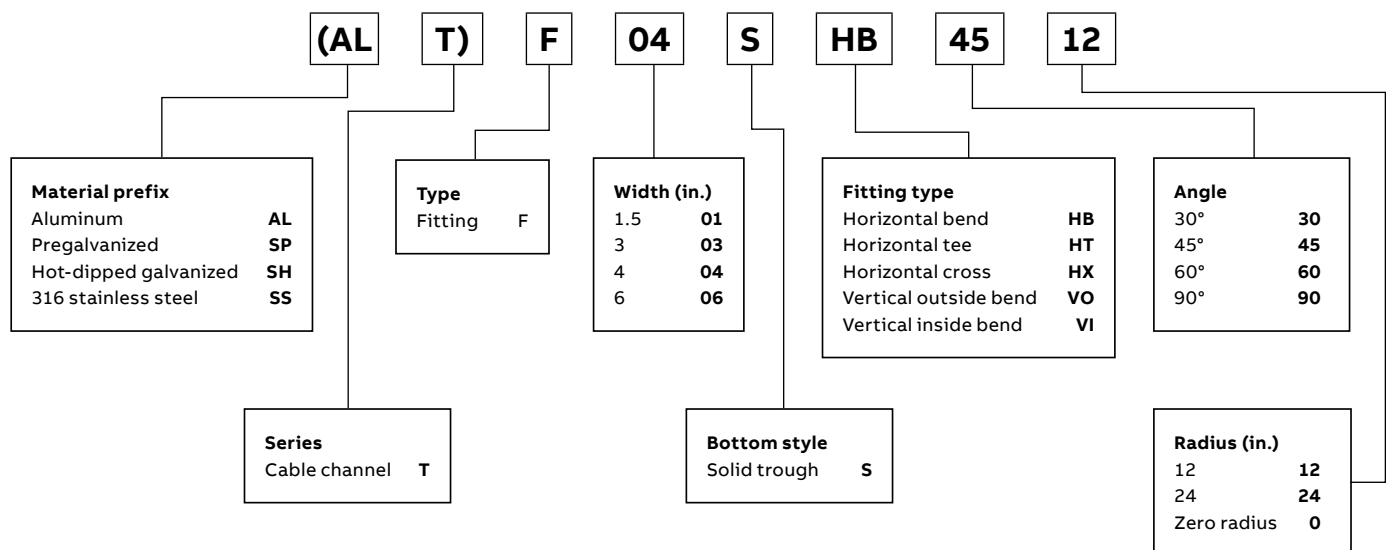


Channel tray fittings

90° Horizontal bend fittings

90° Horizontal bend

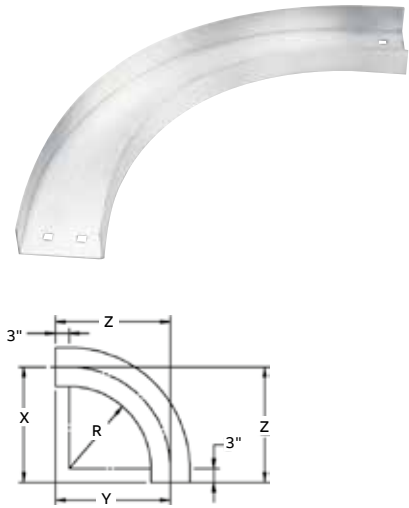


	Radius R (in.)	Width W (in.)	Cat. no.*	Dimensions (in.)	
				X	Y
	12	1.5	(Prefix)-F 01-S-HB90-12	15¾	15¾
	12	3	(Prefix)-F 03-S-HB90-12	16½	16½
	12	4	(Prefix)-F 04-S-HB90-12	17	17
	12	6	(Prefix)-F 06-S-HB90-12	18	18
	24	1.5	(Prefix)-F 01-S-HB90-24	27¾	27¾
	24	3	(Prefix)-F 03-S-HB90-24	28½	28½
	24	4	(Prefix)-F 04-S-HB90-24	29	29
	24	6	(Prefix)-F 06-S-HB90-24	30	30

*Specify prefixes ALT, SPT, SHT or SST

Selection guide

- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
- Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.
- Bottom style: S– solid

Part numbering system

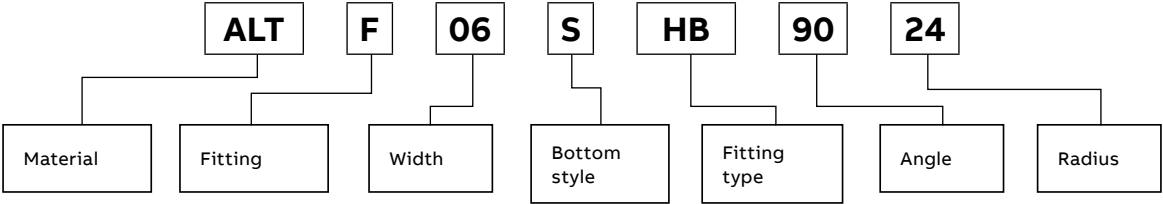


Channel tray fittings

60° Horizontal bend fittings

60° Horizontal bend




	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
 	12	1.5	(Prefix)-F 01-S-HB60-12	15½	9	10¼
	12	3	(Prefix)-F 03-S-HB60-12	16⅞	9⅞	10⅜
	12	4	(Prefix)-F 04-S-HB60-12	16⅞	9⅞	11¼
	12	6	(Prefix)-F 06-S-HB60-12	17½	10⅞	11⅜
	24	1.5	(Prefix)-F 01-S-HB60-24	26	15	17¼
	24	3	(Prefix)-F 03-S-HB60-24	26⅞	15⅞	17¾
	24	4	(Prefix)-F 04-S-HB60-24	27	15⅞	18
	24	6	(Prefix)-F 06-S-HB60-24	27⅞	16⅞	18⅞

*Specify prefixes ALT, SPT, SHT or SST

Selection guide

- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
- Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.
- Bottom style: S— solid

Part numbering system

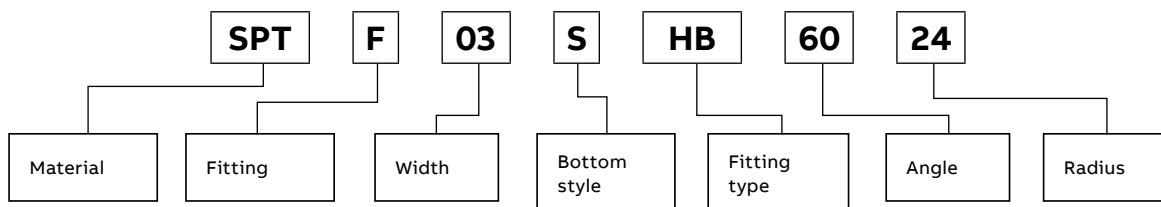


Channel tray fittings

45° Horizontal bend fittings

45° Horizontal bend




	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
 	12	1.5	(Prefix)-F 01-S-HB45-12	14 ¹ / ₈	5 ⁷ / ₈	8 ¹ / ₄
	12	3	(Prefix)-F 03-S-HB45-12	14 ¹¹ / ₁₆	6 ¹ / ₁₆	8 ⁹ / ₁₆
	12	4	(Prefix)-F 04-S-HB45-12	15	6 ¹ / ₄	8 ¹³ / ₁₆
	12	6	(Prefix)-F 06-S-HB45-12	15 ³ / ₄	6 ¹ / ₂	9 ³ / ₁₆
	24	1.5	(Prefix)-F 01-S-HB45-24	22 ⁵ / ₈	9 ³ / ₈	13 ¹ / ₄
	24	3	(Prefix)-F 03-S-HB45-24	23 ⁵ / ₈	9 ⁹ / ₁₆	13 ⁹ / ₁₆
	24	4	(Prefix)-F 04-S-HB45-24	23 ³ / ₂	9 ³ / ₄	13 ³ / ₄
	24	6	(Prefix)-F 06-S-HB45-24	24 ³ / ₁₆	10	14 ³ / ₁₆

*Specify prefixes ALT, SPT, SHT or SST

Selection guide

- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
- Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.
- Bottom style: S– solid

Part numbering system

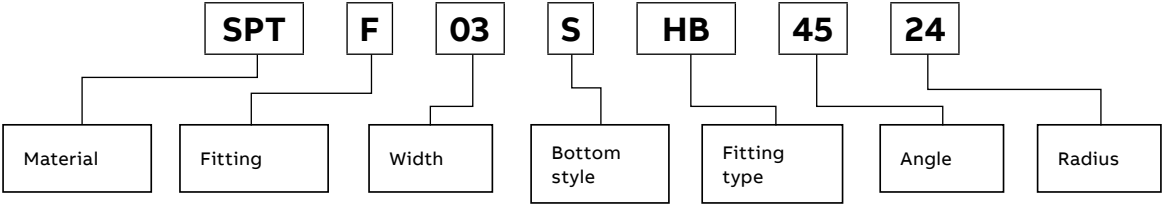


Channel tray fittings

30° Horizontal bend fittings

30° Horizontal bend




	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
 	12	1.5	(Prefix)-F 01-S-HB30-12	12	3 $\frac{3}{4}$	6 $\frac{1}{2}$
	12	3	(Prefix)-F 03-S-HB30-12	12 $\frac{3}{8}$	3 $\frac{15}{16}$	6 $\frac{5}{8}$
	12	4	(Prefix)-F 04-S-HB30-12	12 $\frac{3}{8}$	3- $\frac{3}{8}$	6 $\frac{3}{4}$
	12	6	(Prefix)-F 06-S-HB30-12	13 $\frac{1}{8}$	3 $\frac{1}{2}$	7
	24	1.5	(Prefix)-F 01-S-HB30-24	18	4 $\frac{3}{4}$	9 $\frac{5}{8}$
	24	3	(Prefix)-F 03-S-HB30-24	18 $\frac{3}{8}$	4 $\frac{15}{16}$	9 $\frac{13}{16}$
	24	4	(Prefix)-F 04-S-HB30-24	18 $\frac{3}{8}$	5	9 $\frac{15}{16}$
	24	6	(Prefix)-F 06-S-HB30-24	19 $\frac{1}{8}$	5 $\frac{1}{8}$	10 $\frac{1}{4}$

*Specify prefixes ALT, SPT, SHT or SST

Selection guide

- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
- Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.
- Bottom style: S— solid

Part numbering system

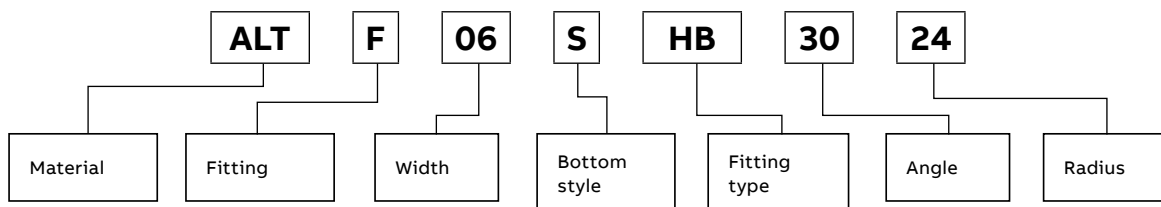


Channel tray fittings

Horizontal tee fittings

Horizontal tee




	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)	
				X	Y
	12	1.5	(Prefix)-F 01-S-HT-12	15¾	31½
	12	3	(Prefix)-F 03-S-HT-12	16½	33
	12	4	(Prefix)-F 04-S-HT-12	17	34
	12	6	(Prefix)-F 06-S-HT-12	18	36
	24	1.5	(Prefix)-F 01-S-HT-24	27¾	55½
	24	3	(Prefix)-F 03-S-HT-24	28½	57
	24	4	(Prefix)-F 04-S-HT-24	29	58
	24	6	(Prefix)-F 06-S-HT-24	30	60
					

*Specify prefixes ALT, SPT, SHT or SST

Selection guide

- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
- Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.
- Bottom style: S– solid

Part numbering system

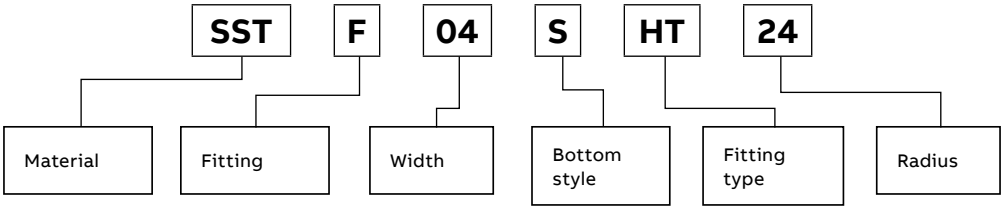


Channel tray fittings

Horizontal cross fittings

Horizontal cross




	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)	
				X	Y
 	12	1.5	(Prefix)-F 01-S-HX-12	15¾	31½
	12	3	(Prefix)-F 03-S-HX-12	16½	33
	12	4	(Prefix)-F 04-S-HX-12	17	34
	12	6	(Prefix)-F 06-S-HX-12	18	36
	24	1.5	(Prefix)-F 01-S-HX-24	27¾	55½
	24	3	(Prefix)-F 03-S-HX-24	28½	57
	24	4	(Prefix)-F 04-S-HX-24	29	58
	24	6	(Prefix)-F 06-S-HX-24	30	60

*Specify prefixes ALT, SPT, SHT or SST

- Selection guide
- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
 - Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.
 - Bottom style: S– solid

Part numbering system

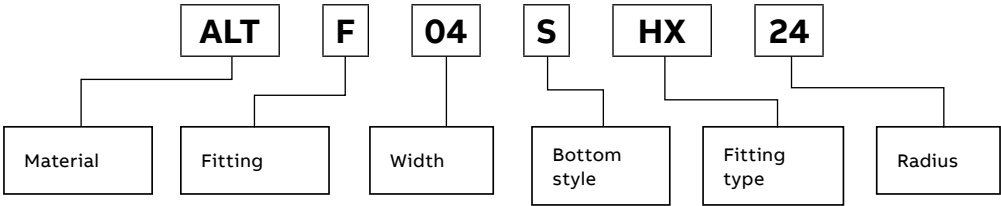

Channel tray fittings

90° Vertical outside/inside bend fittings

90° Vertical outside bend



	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)	
				X	Y
	12	1.5	(Prefix)-F 01-S-VO90-12	15	15
	12	3	(Prefix)-F 03-S-VO90-12	15	15
	12	4	(Prefix)-F 04-S-VO90-12	15	15
	12	6	(Prefix)-F 06-S-VO90-12	15	15
	24	1.5	(Prefix)-F 01-S-VO90-24	15	15
	24	3	(Prefix)-F 03-S-VO90-24	27	27
	24	4	(Prefix)-F 04-S-VO90-24	27	27
	24	6	(Prefix)-F 06-S-VO90-24	27	27

*Specify prefixes ALT, SPT, SHT or SST

90° Vertical inside bend





	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)	
				X	Y
	12	1.5	(Prefix)-F 01-S-VI90-12	15¾	15¾
	12	3	(Prefix)-F 03-S-VI90-12	16½	16½
	12	4	(Prefix)-F 04-S-VI90-12	16⅞	16⅞
	12	6	(Prefix)-F 06-S-VI90-12	16⅞	16⅞
	24	1.5	(Prefix)-F 01-S-VI90-24	27¾	27¾
	24	3	(Prefix)-F 03-S-VI90-24	28½	28½
	24	4	(Prefix)-F 04-S-VI90-24	28⅞	28⅞
	24	6	(Prefix)-F 06-S-VI90-24	28⅞	28⅞

*Specify prefixes ALT, SPT, SHT or SST

90° Outside bend


90° Inside bend



Selection guide

- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
- Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.
- Bottom style: S– solid

Part numbering system

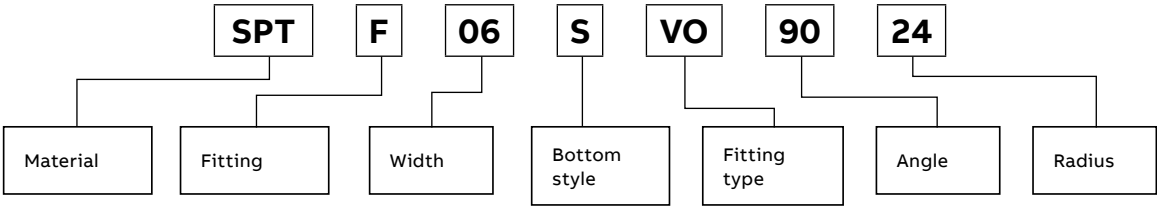

Channel tray fittings

60° Vertical outside/inside bend fittings

60° Vertical outside bend



	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	1.5	(Prefix)-F 01-S-VO60-12	14 $\frac{1}{8}$	8 $\frac{5}{8}$	9 $\frac{7}{8}$
	12	3	(Prefix)-F 03-S-VO60-12	14 $\frac{1}{8}$	8 $\frac{5}{8}$	9 $\frac{7}{8}$
	12	4	(Prefix)-F 04-S-VO60-12	14 $\frac{1}{8}$	8 $\frac{5}{8}$	9 $\frac{7}{8}$
	12	6	(Prefix)-F 06-S-VO60-12	14 $\frac{1}{8}$	8 $\frac{5}{8}$	9 $\frac{7}{8}$
	24	1.5	(Prefix)-F 01-S-VO60-24	25 $\frac{3}{4}$	14 $\frac{5}{8}$	16 $\frac{7}{8}$
	24	3	(Prefix)-F 03-S-VO60-24	25 $\frac{3}{4}$	14 $\frac{5}{8}$	16 $\frac{7}{8}$
	24	4	(Prefix)-F 04-S-VO60-24	25 $\frac{3}{4}$	14 $\frac{5}{8}$	16 $\frac{7}{8}$
	24	6	(Prefix)-F 06-S-VO60-24	25 $\frac{3}{4}$	14 $\frac{5}{8}$	16 $\frac{7}{8}$

*Specify prefixes ALT, SPT, SHT or SST


60° Vertical inside bend




	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	1.5	(Prefix)-F 01-S-VI60-12	15 $\frac{1}{2}$	9	10 $\frac{1}{4}$
	12	3	(Prefix)-F 03-S-VI60-12	16 $\frac{1}{8}$	9 $\frac{3}{4}$	10 $\frac{3}{4}$
	12	4	(Prefix)-F 04-S-VI60-12	16 $\frac{1}{4}$	9 $\frac{3}{8}$	10 $\frac{7}{8}$
	12	6	(Prefix)-F 06-S-VI60-12	16 $\frac{3}{8}$	9 $\frac{1}{2}$	11
	24	1.5	(Prefix)-F 01-S-VI60-24	26	15	17 $\frac{1}{4}$
	24	3	(Prefix)-F 03-S-VI60-24	26 $\frac{1}{2}$	15 $\frac{1}{4}$	17 $\frac{3}{8}$
	24	4	(Prefix)-F 04-S-VI60-24	26 $\frac{3}{4}$	15 $\frac{3}{8}$	17 $\frac{3}{4}$
	24	6	(Prefix)-F 06-S-VI60-24	26 $\frac{7}{8}$	15 $\frac{1}{2}$	17 $\frac{7}{8}$

*Specify prefixes ALT, SPT, SHT or SST

60° Outside bend




60° Inside bend



Selection guide

- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
- Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.
- Bottom style: S= solid

Part numbering system

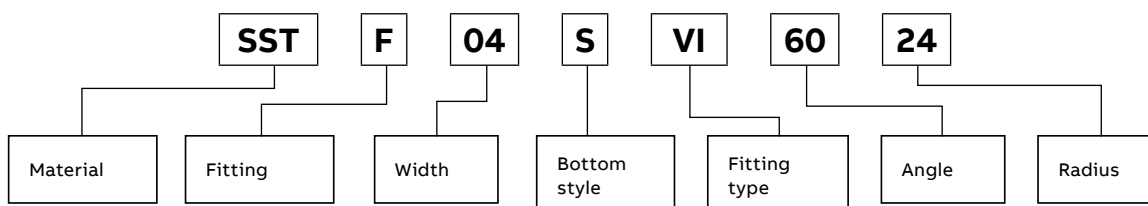

Channel tray fittings

45° Vertical outside/inside bend fittings

45° Vertical outside bend



	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	1.5	(Prefix)-F 01-S-VO45-12	13 ³ / ₈	5 ⁵ / ₈	8
	12	3	(Prefix)-F 03-S-VO45-12	13 ³ / ₈	5 ⁵ / ₈	8
	12	4	(Prefix)-F 04-S-VO45-12	13 ³ / ₈	5 ⁵ / ₈	8
	12	6	(Prefix)-F 06-S-VO45-12	13 ³ / ₈	5 ⁵ / ₈	8
	24	1.5	(Prefix)-F 01-S-VO45-24	22 ¹ / ₈	9 ¹ / ₈	12 ⁷ / ₈
	24	3	(Prefix)-F 03-S-VO45-24	22 ¹ / ₈	9 ¹ / ₈	13
	24	4	(Prefix)-F 04-S-VO45-24	11	11	13
	24	6	(Prefix)-F 06-S-VO45-24	11	11	13

*Specify prefixes ALT, SPT, SHT or SST


45° Vertical inside bend




	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	1.5	(Prefix)-F 01-S-VI45-12	13 ³ / ₈	5 ⁵ / ₈	8
	12	3	(Prefix)-F 03-S-VI45-12	13 ³ / ₈	5 ⁵ / ₈	8
	12	4	(Prefix)-F 04-S-VI45-12	13 ³ / ₈	5 ⁵ / ₈	8
	12	6	(Prefix)-F 06-S-VI45-12	13 ³ / ₈	5 ⁵ / ₈	8
	24	1.5	(Prefix)-F 01-S-VI45-24	22 ¹ / ₈	9 ¹ / ₈	12 ⁷ / ₈
	24	3	(Prefix)-F 03-S-VI45-24	22 ¹ / ₈	9 ¹ / ₈	13
	24	4	(Prefix)-F 04-S-VI45-24	11	11	13
	24	6	(Prefix)-F 06-S-VI45-24	11	11	13

*Specify prefixes ALT, SPT, SHT or SST

45° Outside bend




45° Inside bend



Selection guide

- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
- Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.
- Bottom style: S– solid

Part numbering system

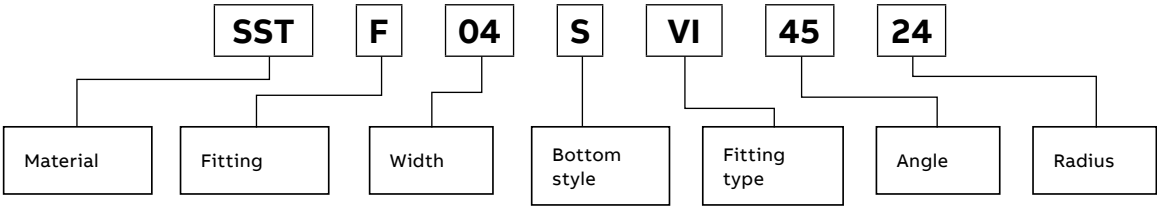

Channel tray fittings

30° Vertical outside/inside bend fittings

30° Vertical outside bend



	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	1.5	(Prefix)-F 01-S-VO30-12	10 $\frac{3}{8}$	1 $\frac{1}{8}$	5 $\frac{1}{4}$
	12	3	(Prefix)-F 03-S-VO30-12	11 $\frac{5}{8}$	3 $\frac{1}{8}$	6 $\frac{1}{8}$
	12	4	(Prefix)-F 04-S-VO30-12	11 $\frac{5}{8}$	3 $\frac{1}{8}$	6 $\frac{1}{8}$
	12	6	(Prefix)-F 06-S-VO30-12	11 $\frac{5}{8}$	3 $\frac{1}{8}$	6 $\frac{1}{8}$
	24	1.5	(Prefix)-F 01-S-VO30-24	17 $\frac{7}{8}$	4 $\frac{3}{4}$	9 $\frac{1}{2}$
	24	3	(Prefix)-F 03-S-VO30-24	17 $\frac{7}{8}$	4 $\frac{3}{4}$	9 $\frac{1}{4}$
	24	4	(Prefix)-F 04-S-VO30-24	17 $\frac{7}{8}$	4 $\frac{3}{4}$	9 $\frac{1}{4}$
	24	6	(Prefix)-F 06-S-VO30-24	17 $\frac{7}{8}$	4 $\frac{3}{4}$	9 $\frac{1}{4}$

*Specify prefixes ALT, SPT, SHT or SST

30° Vertical inside bend





	Radius R (in.)	Width W (in.)	Cat. no.	Dimensions (in.)		
				X	Y	Z
	12	1.5	(Prefix)-F 01-S-VI30-12	10 $\frac{3}{8}$	1 $\frac{1}{8}$	5 $\frac{3}{8}$
	12	3	(Prefix)-F 03-S-VI30-12	12 $\frac{1}{4}$	3 $\frac{1}{2}$	6 $\frac{3}{8}$
	12	4	(Prefix)-F 04-S-VI30-12	12 $\frac{3}{8}$	3 $\frac{3}{8}$	5 $\frac{5}{8}$
	12	6	(Prefix)-F 06-S-VI30-12	12 $\frac{1}{2}$	3 $\frac{3}{8}$	5 $\frac{5}{8}$
	24	1.5	(Prefix)-F 01-S-VI30-24	18	4 $\frac{3}{4}$	9 $\frac{5}{8}$
	24	3	(Prefix)-F 03-S-VI30-24	18 $\frac{1}{4}$	4 $\frac{7}{8}$	9 $\frac{3}{4}$
	24	4	(Prefix)-F 04-S-VI30-24	18 $\frac{3}{8}$	4 $\frac{7}{8}$	9 $\frac{7}{8}$
	24	6	(Prefix)-F 06-S-VI30-24	18 $\frac{1}{2}$	5	9 $\frac{7}{8}$

*Specify prefixes ALT, SPT, SHT or SST

30° Outside bend


30° Inside bend



Selection guide

- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
- Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.
- Bottom style: S– solid

Part numbering system

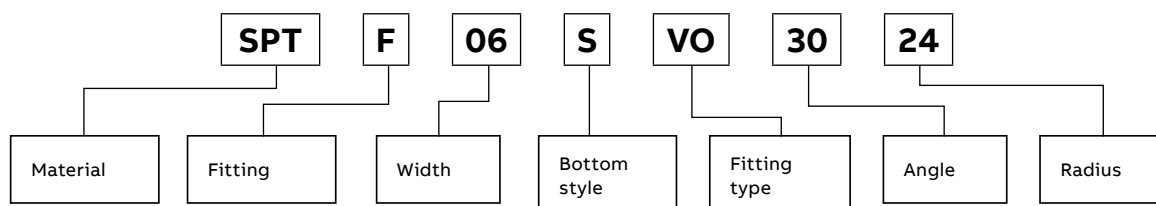

Channel tray covers

Cover selection guide

Cover mounting hardware must be ordered separately.



Tray covers

Tray covers are available for all widths of tray. They should be installed where falling objects may damage cables or where vertical tray run is accessible by pedestrian or vehicular traffic.

Straight covers


- These covers provide maximum mechanical protection for cables with limited heat build up
- Flanged covers have ½ in. flange

Quantity of standard cover clamps required	
Straight section (10 ft.)	6 pcs.

NOTE: When using the heavy-duty cover clamps, only half the quantity of pieces are required.



Straight cover number selection

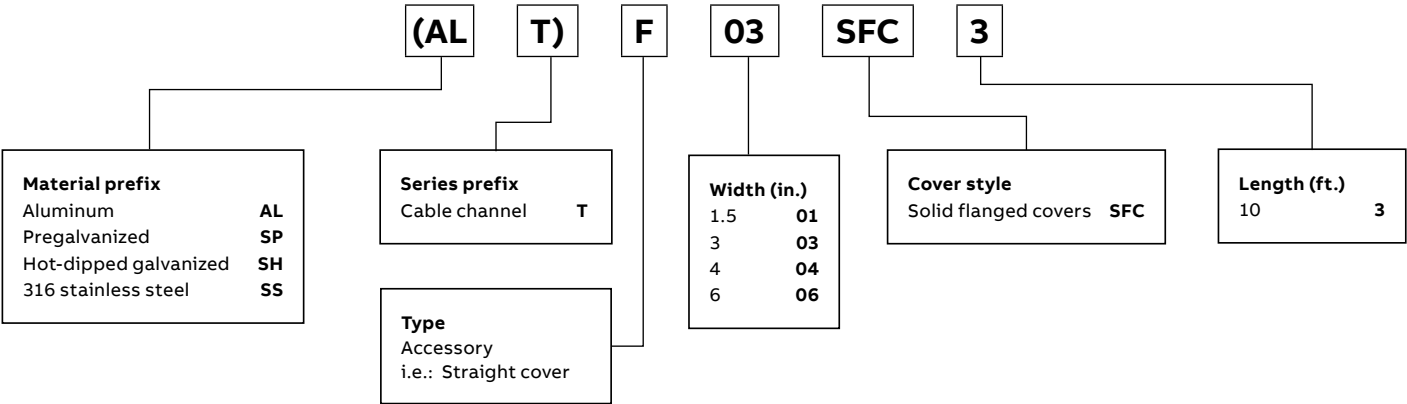

* Hot-dipped galvanized covers only available in 1500 mm lengths.

—
Cover mounting hardware must be ordered separately.



—
Fitting covers


- Fitting covers are available to complete your cable channel layout
- All fitting covers are flanged

Quantity of standard cover clamps required	
Horizontal and vertical bends	4 pcs.
Tees	6 pcs.
Crosses	8 pcs.

Note: When using the heavy-duty cover clamps, only half the quantity of pieces are required.



—
Fittings cover number selection

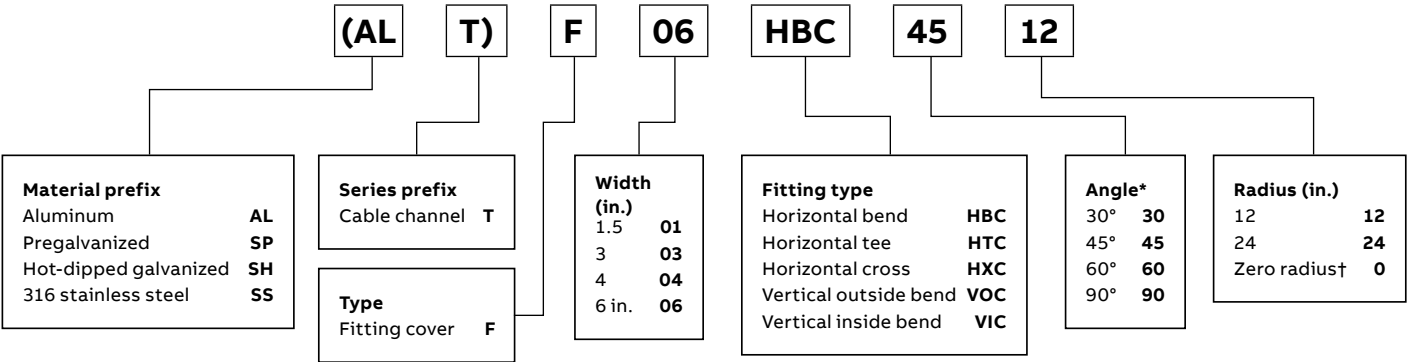

—
*Required for HB, VI and VO only.

† Contact your regional sales office for availability.

Channel tray splice plates

Standard and expansion splice plates

- Selection guide
- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
 - Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.

—

Standard 1.5 in. splice plate



Cat. no.	Width (in.)
(Prefix)-W-01-CCS	1.5

Supplied standard with each length.
Including hardware: 2 bolts, 2 washers, 3⁄16 in. diameter.

—

Standard splice plate



Cat. no.	Width (in.)
(Prefix)-W-03-CCS	3
(Prefix)-W-04-CCS	4
(Prefix)-W-06-CCS	6

Supplied standard with each length.
Including hardware: 4 bolts, 4 nuts, 4 washers, 3⁄16 in. diameter.

—

Expansion splice plate



Cat. no.	Width (in.)
(Prefix)-W-1.5-ESP	1.5
(Prefix)-W-03-ESP	3
(Prefix)-W-04-ESP	4
(Prefix)-W-06-ESP	6

Supplied with hardware for 1.5 in. wide channel: 2 bolts, 2 nuts; all other widths: 4 bolts, 2 stop nuts, 2 serrated flange nuts, 4 lock washers (stainless steel only), 3⁄16 in. diameter.

Channel tray splice plates

Wraparound and adjustable splice plates

- Selection guide**
- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
 - Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.

Wraparound splice plate

	Cat. no.	Width (in.)
	(Prefix)-W-01-ACS	1.5
	(Prefix)-W-03-ACS	3
	(Prefix)-W-04-ACS	4
	(Prefix)-W-06-ACS	6

Supplied with hardware for 1.5 in. wide channel: 2 bolts, 2 nuts; all other widths: 4 bolts, 4 nuts, 4 washers, 3/8 in. diameter.

Adjustable horizontal splice plate



	Cat. no.	Width (in.)
	(Prefix)-W-01-CHA	1.5
	(Prefix)-W-03-CHA	3
	(Prefix)-W-04-CHA	4
	(Prefix)-W-06-CHA	6

Standard vertical adjustable splice plate

	Cat. no.	Width (in.)
	(Prefix)-W-01-CCV	1.5
	(Prefix)-W-03-CCV	3
	(Prefix)-W-04-CCV	4
	(Prefix)-W-06-CCV	6

Channel tray clamps and hardware

Wraparound splice plates and clamps

- Selection guide
- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
 - Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.

Wraparound vertical adjustable splice plate

	Cat. no.	Width (in.)
	(Prefix)-W-01-WAV	1.5
	(Prefix)-W-03-WAV	3
	(Prefix)-W-04-WAV	4
	(Prefix)-W-06-WAV	6

Standard hold-down clamp

	Cat. no.	Width (in.)
	(Prefix)-W-01-SHC	1.5
	(Prefix)-W-03-SHC	3
	(Prefix)-W-04-SHC	4
	(Prefix)-W-06-SHC	6

Channel expansion guide clamp



	Cat. no.	Width (in.)
	(Prefix)-W-01-CEG	1.5
	(Prefix)-W-03-CEG	3
	(Prefix)-W-04-CEG	4
	(Prefix)-W-06-CEG	6

Combination hold-down/cover clamp

	Cat. no.	Width (in.)
	(Prefix)-W-01-CCC	1.5
	(Prefix)-W-03-CCC	3
	(Prefix)-W-04-CCC	4
	(Prefix)-W-06-CCC	6

Channel tray clamps and hardware

Cover clamps, end plates and channel brackets

Selection guide

- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
- Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.

Heavy-duty cover clamp



	Cat. no.	Width (in.)
	(Prefix)-W-01-HCC	1.5
	(Prefix)-W-03-HCC	3
	(Prefix)-W-04-HCC	4
	(Prefix)-W-06-HCC	6

Closed end plate



	Cat. no.	Width (in.)
	(Prefix)-W-01-CEP	1.5
	(Prefix)-W-03-CEP	3
	(Prefix)-W-04-CEP	4
	(Prefix)-W-06-CEP	6

Channel-mounting bracket



	Cat. no.	Width (in.)
	(Prefix)-W-01-CCB	1.5
	(Prefix)-W-03-CCB	3
	(Prefix)-W-04-CCB	4
	(Prefix)-W-06-CCB	6

Channel-to-cable-tray plate



	Cat. no.	Width (in.)
	(Prefix)-W-01-CCT	1.5
	(Prefix)-W-03-CCT	3
	(Prefix)-W-04-CCT	4
	(Prefix)-W-06-CCT	6

Channel tray brackets and hangers

Reducer plates, base plates, mounting brackets and hangers

Selection guide

- Prefix: ALT (alum.), SPT (pregalv.), SHT (hot-dip galv.), SST (stainless steel)
- Inside channel widths: 01=1.5 in., 03=3 in., 04=4 in., 06=6 in.

Channel straight reducer plate

	Cat. no.	Width (in.)
	(*)-W-03-01-RSP	3 to 1
	(*)-W-04-01-RSP	4 to 1
	(*)-W-06-01-RSP	6 to 1
	(*)-W-04-03-RSP	4 to 3
	(*)-W-06-03-RSP	6 to 3
	(*)-W-06-04-RSP	6 to 4

Channel-to-floor base plate

	Cat. no.	Width (in.)
	(Prefix)-W-01-CBP	1.5
	(Prefix)-W-03-CBP	3
	(Prefix)-W-04-CBP	4
	(Prefix)-W-06-CBP	6

Channel-to-tray mounting bracket



	Cat. no.	Width (in.)
	(Prefix)-W-01-TCB	1.5
	(Prefix)-W-03-TCB	3
	(Prefix)-W-04-TCB	4
	(Prefix)-W-06-TCB	6

Single channel hanger

	Cat. no.	Width (in.)
	SPT-W-06-CCH	For use with all widths
	SHT-W-06-CCH	For use with all widths
	SST-W-06-CCH	For use with all widths

Designed for use with 1/2 in. threaded rod

Channel tray brackets and hangers

Hangers and channel rubber edge trim




- Product specifications: Recommended temperature range: -40 °C through 107 °C
- Recommended temperature range if ordered with adhesive: -23 °C through 70 °C
- Base material: Dense neoprene rubber
- Very flexible to fit tight radius
- Wear- and fuel-resistant neoprene
- Available on request with pre-applied butyl sealant or hot-melted adhesive

Double channel hanger

	Cat. no.	Width (in.)
	SPT-W-06-DCH	For use with all widths
	SHT-W-06-DCH	For use with all widths

Designed for use with ½ in. threaded rod

Channel rubber edge trim

	Cat. no.	Width	Description
	RET-BUSH	For use with 3 in., 4 in. and 6 in.	Rubber edge trim – 10 ¾ in. bushing – standard pack of 10
	RET-50	For use with all widths	Rubber edge trim – 50 foot roll
	RET-500	For use with all widths	Rubber edge trim – 500 foot roll

Ice and wind loading maps

Figure 250-1USA and 250-2USA loading for grades B, C and D

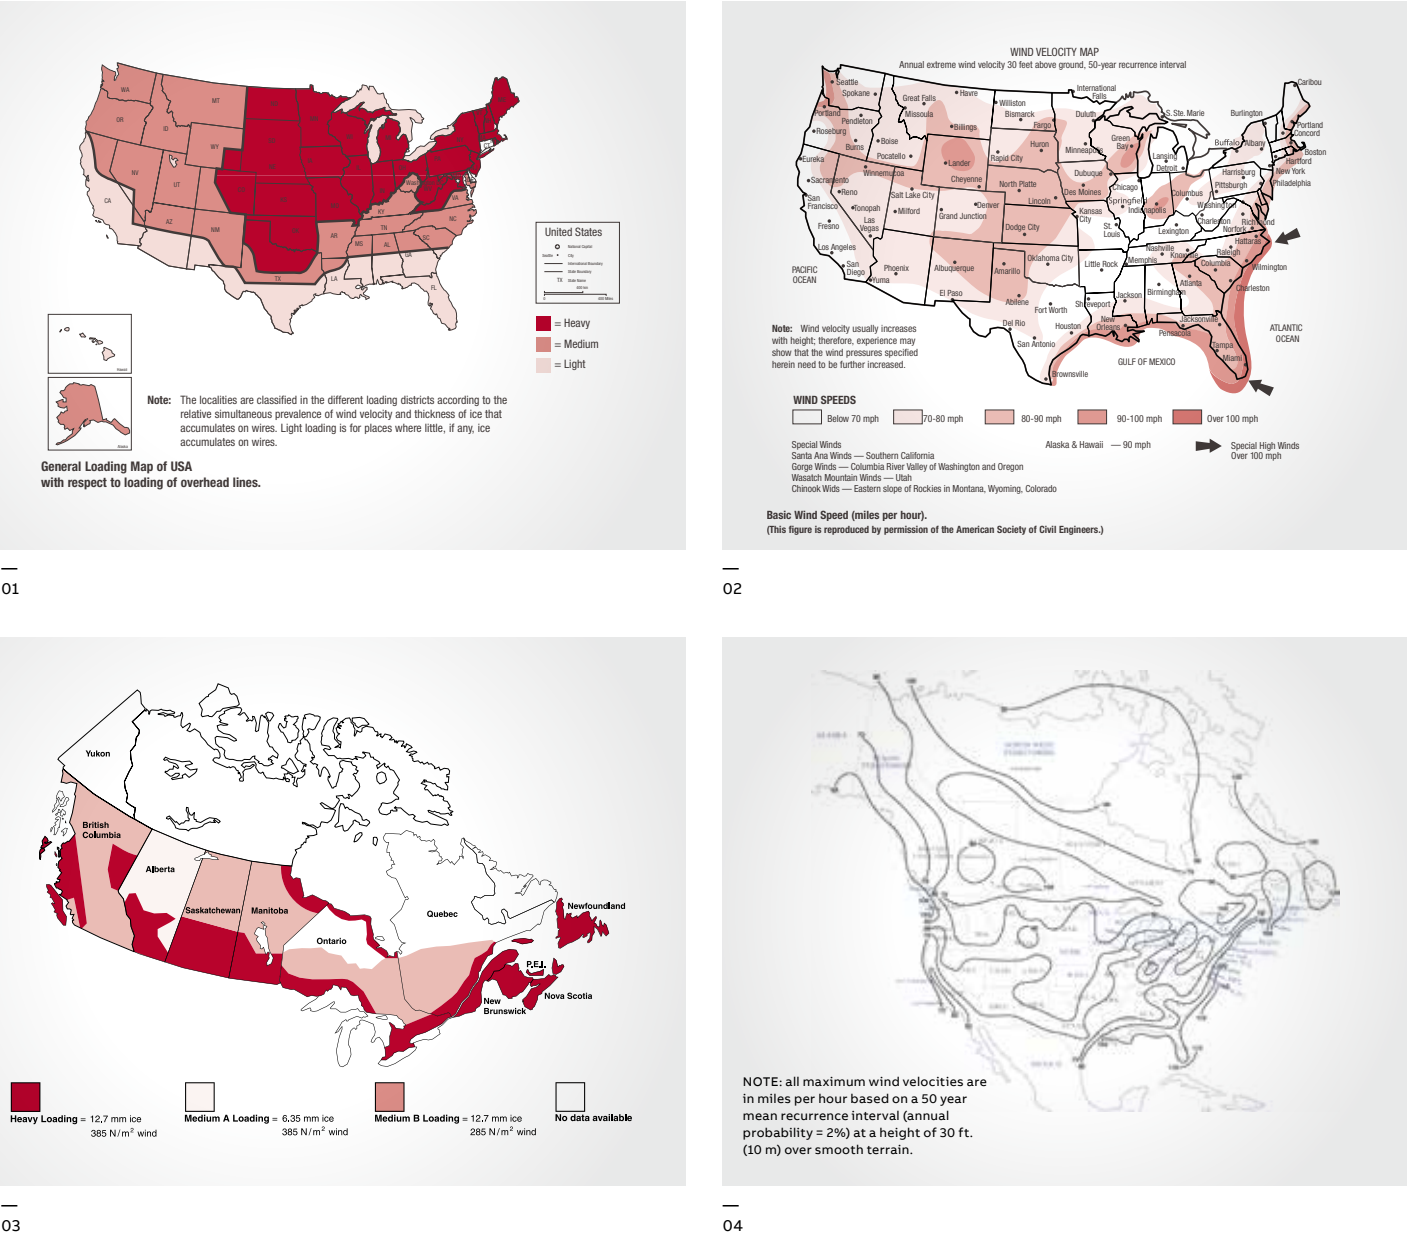


Figure 250-2CDN is a wind map of North America reproduced from ASCE 7-88 [52]. For Hawaii and Puerto Rico, the basic wind speeds are 80 mph and 95 mph, respectively.

Note: Wind velocity usually increases with height; therefore, experience may show that the wind pressures specified herein need to be further increased.

Common accessories

Custom maple block and cable rollers

Cable rollers

Why should rollers be used?

1. To reduce pulling stress on cables, avoiding undue fatigue or abrasions
2. Minimizes harmful “shear” load being placed on cable trays
3. To reduce installation time


Why purchase the T&B cable roller system?

- Universal – Fits virtually all tray systems
- Mounts from bottom of cable tray, eliminating the need for double handling cables and reducing possibility of cable damage
- Sideways telescopic adjustment allows rollers to accommodate virtually all tray widths
- Nylon bearings require no lubrication
- Independent rollers limit cable abrasion


Straight roller

	Cat. no.	Description	Fits
	HAR 1224	Straight	All profiles 12 in. to 24 in. (30 cm to 60 cm)
	HAR 1836	Straight	All profiles 18 in. to 36 in. (45 cm to 90 cm)

Corner roller

	Cat. no.	Description	Fits
	VHR04	Corner	All profiles

Maple hardwood block catalogue selector

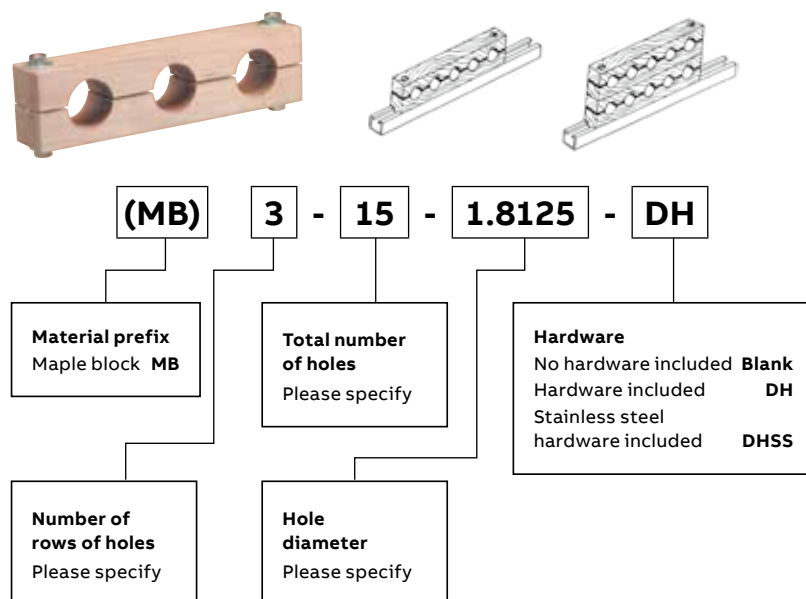

Custom maple hardwood block

- Maple hardwood, paraffin wax impregnated, multiple cable blocks can be made to your specific requirements.
- Cable blocks are to ensure proper separation of single conductor cables, which prevents any interference due to magnetic fields. The maple hardwood blocks are paraffin wax impregnated to prevent moisture from penetrating and causing rotting and splitting.
- Cable blocks are also available in high-density polyethylene.
- Price and delivery upon request.
- Electrogalvanized hardware included; however, stainless steel hardware is also available upon request.

Common accessories


Cable tray support systems




Hanger rod clamp

These clamps are designed for ladder and ventilated cable tray. They provide a fast and economical solution for a suspended cable tray installation. One kit is needed per each threaded rod location.

- Kit consists of: one bottom clamp, one top clamp
- Uses ½ in. threaded rod (order separately)
- 250 lb capacity per kit

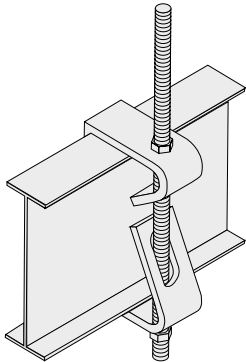

For steel cable tray						
Cat. no.		Material prefix		Height (in.)		
(Prefix)-3-HRC		SPW		3		
(Prefix)-4-HRC		SHW		4		
(Prefix)-5-HRC		SSW		5		
(Prefix)-6-HRC				6		
(Prefix)-7-HRC				7		
For aluminum cable tray						
Cat. no.		Tray series	Cat. no.	Tray series	Cat. no.	Tray series
ABW04-HRC		AH04	ABW25-HRC	AH25	ABW46-HRC	AH46
ABW14-HRC		AH14	ABW35-HRC	AH35	ABW56-HRC	AH56
ABW24-HRC		AH24	ABW45-HRC	AH45	ABW66-HRC	AH66
ABW34-HRC		AH34	ABW16-HRC	AH16	ABW27-HRC	AH27
ABW44-HRC		AH44	ABW26-HRC	AH26	ABW37-HRC	AH37
ABW54-HRC		AH54	ABW36-HRC	AH36	–	

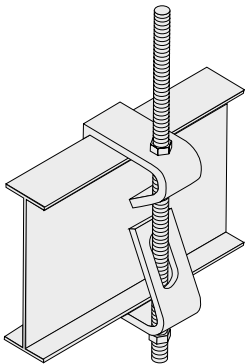


Center support bracket

This system is designed to reduce cable pulling by allowing access from both sides of cable tray. Installation cost and time are reduced significantly by single-point suspension.

- Supplied as a complete kit
- Uses ½ in. threaded rod (order separately)
- For use with up to 24 in. wide tray
- Load capacity : 700 lb per kit

Cat. no.	Material	Channel width (in.)	Tray width (in.)
SHW18CSB	Hot-dipped galvanized	18	6
	Hot-dipped galvanized	18	9
SHW30CSB	Hot-dipped galvanized	30	12
	Hot-dipped galvanized	30	18
	Hot-dipped galvanized	30	24



Common accessories

Cable tray support systems




Trapeze kit

This system is designed to support various cable tray widths in a suspending installation.

- Kit consists of: one piece of strut cut to length, four $\frac{3}{8}$ in. strut nuts, two hold-down clips, four $\frac{1}{2}$ in. hex nuts, two $\frac{3}{8}$ in. x $\frac{7}{8}$ in. hex head cap screws, four $\frac{1}{2}$ in. square washers
- Uses $\frac{1}{2}$ in. threaded rod (order separately)

	Cat. no.	Channel width (in.)	Tray width (in.)
	(*)-06-TPK	16 $\frac{7}{8}$	6
	(*)-09-TPK	18 $\frac{3}{4}$	9
	(*)-12-TPK	22 $\frac{1}{2}$	12
	(*)-18-TPK	28 $\frac{1}{8}$	18
	(*)-24-TPK	35 $\frac{5}{8}$	24
	(*)-30-TPK	41 $\frac{1}{4}$	30
	(*)-36-TPK	46 $\frac{7}{8}$	36
	(*)-42-TPK	52 $\frac{1}{2}$	42

(*) Insert SHW for hot-dipped galvanized. SSW for stainless steel 316 or SPW for pregalvanized.



- Hanging rods not included
- Standard finish: hot-dipped galvanized

Cross member

	Cat. no.	A (in.)	B (in.)	C (in.)
	S202-6HDG	6	5	—
	S202-9HDG	9	8	2
	S202-15HDG	5	14	8
	S202-21HDG	21	20	14
	S202-27HDG	27	26	20
	S202-33HDG	33	32	26

* Order hold-down clips separately, cat no. SSW-HEC.

Common accessories

Cable tray support systems




- Swivel tray clamp for aluminum and steel trays with regular or reinforced flanges
- Serrations and biting teeth on clamping saddle provide a high-quality bond between conduit and clamp
- ½ to 4 inch can be clamped to any position in a 90° arc
- Material: malleable iron hub and steel U-bolt
- Standard finish: zinc-plated

UL

Conduit-to-cable-tray swivel clamp

Cat. no.	Conduit size (in.)
6209	½–¾
6211	1–1¼
6214	1½–2
6216	2½–3
6218	3½–4

Cantilever support




Cat. no.	A (in.)	B (in.)	Design load/lb
S203-8HDG	8½	4½ ¹⁶	180
S203-14HDG	14½	5¾	325
S203-20HDG	20½	6 ¹¹ ₁₆	525
S203-26HDG	26½	8	675
S203-32HDG	32½	8	840
S203-38HDG	38½	8	1,050

* Order hold-down clips separately, cat no. SSW-HEC. Standard finish: hot-dipped galvanized.

Conduit-to-cable-tray clamp

- Material: steel
- Standard finish: electrogalvanized



Cat. no.	Conduit size (in.)
6210	½–¾
6212	1–1¼

SP

UL

Grounding and bonding

Grounding and bonding products



Cat. no. 10109

- Material: malleable iron
- Standard finish: zinc plated
- For use with aluminum and steel cable tray



Cable tray ground clamp

	Cat. no.	Cable	Description
	10105	Copper or aluminum	Cable for single conductors #4 solid to 2/0 str.
	10109	Copper or aluminum	Cable for single conductors 2/0 solid to 4/0 str.



- Bolt has square shank to prevent turning and allow clamp to be tightened with one wrench
- Material: copper alloy
- Standard finish: tin-plated for aluminum cable tray
- Castings are of high-strength, corrosion-resistant copper alloy



Blackburn® ground clamp

		Conductor range (AWG)			
		Cat. no.	Min.	Max.	Figure
		GTC13P	#4 sol.	2/0 str.	1
		GTC14P	2/0 str.	250 kcmil	1
		GTC23P	#4 sol.	2/0 str.	2
		GTC24P	2/0 str.	250 kcmil	2

Grounding and bonding

Grounding and bonding products



- Material: tin-plated high strength 6061-T6 aluminum alloy
- These grounding connectors are dual rated for aluminum and copper conductors
- The open face design allows the installer to quickly lay in the grounding conductor as a jumper

Blackburn lay-in lug



Cat. no.	Conductor range (AWG)		Stud size	
	Min.	Max.	(in.)	(mm²)
LL306	#6 solid	3/0 str.	0.33	8.38
LL2506	#6 str.	250 kcmil	0.33	8.38



- Custom braids are available
- Material: copper
- Standard finish: tin-plated

Bonding jumpers



Cat. no.	Bonding amp capacity (A)	Single bolt hole (in.)	Description
FBD12-1*	600	7/16	12 in. flat flexible braid
FBD16-1*	600	7/16	16 in. flat flexible braid
FBD18-1*	600	7/16	18 in. flat flexible braid
FBD24-1*	600	7/16	24 in. flat flexible braid
FBD30-1*	600	7/16	30 in. flat flexible braid
FBD36-1*	600	7/16	36 in. flat flexible braid
FBE12-1*	1200	9/16	12 in. flat flexible braid
FBE16-1*	1200	9/16	16 in. flat flexible braid
FBE18-1*	1200	9/16	18 in. flat flexible braid
FBE24-1*	1200	9/16	24 in. flat flexible braid
FBE30-1*	1200	9/16	30 in. flat flexible braid
FBE36-1*	1200	9/16	36 in. flat flexible braid
FBG12-1*	2000	9/16	12 in. flat flexible braid
FBG16-1*	2000	9/16	16 in. flat flexible braid
FBG18-1*	2000	9/16	18 in. flat flexible braid
FBG24-1*	2000	9/16	24 in. flat flexible braid
FBG30-1*	2000	9/16	30 in. flat flexible braid
FBG36-1*	2000	9/16	36 in. flat flexible braid

* CSA Certified and UL Listed for grounding and bonding equipment.

Grounding and bonding

Grounding and bonding products



Blackburn cable tray ground clamp



Cat. no.	Cable	Description
CTG250	Al or Cu	For parallel or tapping applications, #2 solid to 250 kcmil

Table 1 (NEC Table 392.7 (B))

Metal area requirements for cable trays used as equipment grounding conductors

Maximum fuse ampere rating, circuit breaker ampere trip setting, or circuit breaker protective relay ampere trip setting for ground fault protection of any cable circuit in the cable tray system	Minimum cross-sectional area of metal* in square inches	
	Steel cable trays	Aluminum cable trays
60	0.20	0.20
100	0.40	0.20
200	0.70	0.20
400	1.00	0.40
600	1.50**	0.40
1000	—	0.60
1200	—	1.00
1600	—	1.50
2000	—	2.00**

For SI units: one square inch = 645 square millimeters.

* Total cross-sectional area of both side rails for ladder or trough-type cable trays: or the minimum cross-sectional area of metal in channel-type cable trays or cable trays of one-piece construction.

** Steel cable trays shall not be used as equipment grounding conductors for circuits with ground-fault protection above 600 A. Aluminum cable trays shall not be used as equipment grounding conductors for circuits with ground-fault protection above 2000 A. For larger ampere ratings, an additional grounding conductor must be used.

Table 2 (Based on NEC Table 250-95 and CEC Table 16)

Minimum size equipment grounding Conductors for grounding and bonding raceway and equipment

Rating or setting of automatic overcurrent device in circuit ahead of equipment, conduit, etc. Not exceeding (amperes)	Size (AWG)	
	Copper wire no.	Aluminum or copper-clad aluminum wire no.*
15	14	12
20	12	10
30	10	8
40	10	8
60	10	8
100	8	6
200	6	4
300	4	2
400	3	1
500	2	1/0
600	1	2/0
800	1/0	3/0
1000	2/0	4/0
1200	3/0	250 kcmil
1600	4/0	350 kcmil
2000	250 kcmil	400 kcmil
2500	350 kcmil	600 kcmil
3000	400 kcmil	600 kcmil
4000	500 kcmil	800 kcmil
5000	700 kcmil	1,200 kcmil

* See installation restrictions in NEC Section 250-92(a).

For more information on grounding and bonding cable tray, refer to NEMA VE 2 cable tray installation guidelines.

Superstrut® support systems

1⁵/₈ in. x 1⁵/₈ in. channel and hardware

Superstrut 1⁵/₈ in. x 1⁵/₈ in. 12 gauge channel type A

Cat. no.	Description
A1200	Solid base
A1200-P	Punched
A1200-HS	Half slots
A1200-S	Long slots
A1200-KO	Knockouts
A1202	Back to back


Example: A1200HS10ALC, A120020HDGC

Superstrut 1⁵/₈ in. x 1⁵/₈ in.
12 gauge channel type A


Offered in 10 or 20 ft. lengths.
Aluminum, hot-dipped galvanized or stainless steel channels are recommended to support aluminum, steel or stainless steel cable tray.

Finishes and materials	
No suffix	Gold galvanized dichromate finish
PGC	Pregalvanized
HDGC	Hot-dipped galvanized
T316L	Stainless steel type 316
ALC	Aluminum
EG	Electrogalvanized


- 01 Solid base
- 02 Knockouts
- 03 Long slots
- 04 Half slots
- 05 Punched
- Back to back




01




02




03



04



05





06

Superstrut support systems

Hardware

Channel nuts

	Cat. no.	Size (in.)	
	A100-1/4EGC	1/4	Standard finish: electrogalvanized. Stainless steel channel nuts are recommended for aluminum channel and cable tray rungs. Change suffix to SS6(C).
	A100-5/16EGC	5/16	
	A100-3/8EGC	3/8	
	A100-1/2EGC	1/2	
	A100-5/8EGC	5/8	
	A100-3/4	3/4	
	A100-7/8EGC	7/8	
Nut is square over 1/2 in. size			
	AC100-1/4EGC	1/4	Standard finish: electrogalvanized. Stainless steel channel nuts are recommended for aluminum channel and cable tray rungs. Change suffix to SS6(C).
	AC100-3/8EGC	3/8	
	AC100-1/2EGC	1/2	
	AC100-5/8	5/8	
	AC100-3/4	3/4	
Nut is square over 1/2 in. size			
	UC100-1/4	1/4	Not available in stainless steel.
	UC100-3/8	3/8	
	UC100-1/2	1/2	


For all 1 5/8 in. and 1 1/2 in. channels; May be used with ALL strut depths.

Hex head cap screw


	Cat. no.	Size (in.)	
	E142-1/4x100EG	1/4 x 1	Standard finish: electrogalvanized. Available in stainless steel. Change suffix to SS6(C).
	E142-1/4x150EG	1/4 x 1 1/2	
	E142-3/8x100EG	3/8 x 1	
	E142-3/8x150EG	3/8 x 1 1/2	
	E142-1/2x100EG	1/2 x 1	
	E142-1/2x150EG	1/2 x 1 1/2	

Superstrut support systems


Superstrut fittings and brackets




01




02




03




04




05




06




07




08




09




10




11




12



13



14



15


01 AB206HDGC	10 AB214HDGC
02 AB207HDGC	11 AB254-LHDGC
03 X207HDGC	12 AB254-RHDGC
04 AB201HDGC	13 X289HDGC
05 AB202HDGC	14 AP232HDG
06 AB203HDGC	15 AP235HDGC
07 AB204HDGC	
08 AB205HDGC	
09 AB213HDGC	


NOTE: Hot-dipped galvanized HDG(C) or stainless steel SS6(C) fittings are recommended to assemble aluminum channel. Also available in electrogalvanized (EG) and gold galvanized dichromate (no suffix). Std. dimensions: Hole spacing 1 5/8 in. from end, hole spacing 1 7/8 in. centers, hole size 9/16 in. dia., fitting width 1 5/8 in.


Superstrut support systems

Superstrut fittings and brackets


Superstrut fittings and brackets

	Cat. no.	Hole size (in.)
	AB241-1/4HDGC	1/4
	AB241-3/8HDGC	3/8
	AB241-1/2HDGC	1/2
	AB241-3/4HDGC	3/4

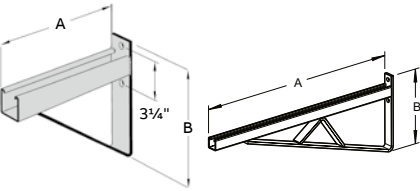	Cat. no.	A (in.)	B (in.)	Design load (lb)
	S249-8HDG	8 1/2	8	1,600
	S249-14HDG	14 1/2	9	1,325
	S249-20HDG	20 1/2	9	1,000
	S249-26HDG	26 1/2	11 1/2	850
	S249-32HDG	32 1/2	11 1/2	750
	S249-38HDG	38 1/2	11 1/2	600

	Cat. no.	A (in.)	Design load (lb)
	S256-8HDG	8 1/2	1,000
	S256-14HDG	14 1/2	500
	S256-20HDG	20 1/2	300
	S256-26HDG	26 1/2	250

When installed in inverted position, reduce load rating 40%. Strut section made from half-slot channel.

	Cat. no.	A (in.)	Design load (lb)
	S251-14HDGC	14 1/2	1,650
	S251-20HDGC	20 1/2	1,050
	S251-26HDGC	26 1/2	800
	S251-32HDGC	32 1/2	650
	S251-38HDGC	38 1/2	500

Hot-dipped galvanized HDG(C) or stainless steel SS6(C) fittings are recommended to assemble aluminum channel. Also available in electrogalvanized (EG) and gold galvanized dichromate (no suffix). Std. dimensions: Hole spacing 1 3/8 in. from end, hole spacing 1 7/8 in. centers, hole size 5/8 in. dia., fitting width 1 1/8 in.

Superstrut support systems

Quick Clamp II (TBQC)



- True one-piece construction – Arrives ready to install
- NO breaking apart – Half the installation time of break apart clamps
- Integral bolt and captive nut – No separate pieces to lose
- One size fits EMT and rigid conduit – Takes the guesswork out of clamp selection
- Pipe size and catalogue number stamped right on clamp
- Attaches a complete range of EMT and rigid conduit (½ in. to 4 in.) to strut channels
- Multi-driver combo bolt head – Accepts a wrench, most screwdrivers or ½ in. nut driver
- Field-adjustable angle (±4°) – Easy installation even when strut is not square
- Embossed J-hooks increase loading capabilities
- ABB flex window provides wrapping action around pipes
- Easy reconfiguration without complete disassembly – Easily accessible angled bolt allows for field adjustments and closer conduit spacing
- Electrogalvanized finish – Additional corrosion resistance

Ordering information




	Cat. no.	EMT	Rigid conduit
		Dimension A in. (mm)	dimension A in. (mm)
	TBQC050	1 5⁄16 (33.5)	1 ¼ (31.5)
	TBQC075	1 ¾ (44.5)	1 11⁄16 (43)
	TBQC100	1 13⁄16 (46)	1 ¾ (44.5)
	TBQC125	2 ½ (54)	2 (51)
	TBQC150	2 ¾ (60.5)	2 3⁄16 (55.5)
	TBQC200	2 5⁄8 (66.5)	2 ½ (63.5)
	TBQC250	3 1⁄16 (78)	3 3⁄16 (78)
	TBQC300	3 11⁄16 (93.5)	3 11⁄16 (93.5)
	TBQC350	4 3⁄16 (106.5)	4 3⁄16 (106.5)
	TBQC400	4 11⁄16 (119)	4 11⁄16 (119)

Superstrut support systems

Quick Clamp II (TBQC)

Loading data

	Cat. no.	Design load 1	Design load 2	Design load 3
		static load limit lb (kg)	lb (kg)	lb (kg)
	TBQC050	200 (90)	50 (23)	50 (23)
	TBQC075	200 (90)	50 (23)	50 (23)
	TBQC100	200 (90)	50 (23)	50 (23)
	TBQC125	200 (90)	50 (23)	50 (23)
	TBQC150	200 (90)	50 (23)	50 (23)
	TBQC200	200 (90)	50 (23)	50 (23)
	TBQC250	350 (158)	50 (23)	50 (23)
	TBQC300	350 (158)	50 (23)	50 (23)
	TBQC350	350 (158)	50 (23)	50 (23)
	TBQC400	350 (158)	50 (23)	50 (23)

Design load 1 has a safety factor of 4. Design loads 2 and 3 have a safety factor of 1.

Superstrut support systems

Cobra® cable and pipe clamp (CPC)

Clear markings on each clamp identify the catalogue number, min./max. outer cable diameters, EMT/rigid trade sizes, CSA and UL stamps. One size clamp works on equal trade sizes for both EMT and rigid conduit.

- Works with all depths of strut – $\frac{19}{16}$ in. to $3\frac{1}{4}$ in.
- Two hooks on the same side – Make the clamp easy to install and keep conduits and cable square with strut
- Rugged stirrup and wide saddle design – Holds securely with no damage to conduit or cable
- Suggested design load is 200 lb ($\frac{1}{2}$ in. to 2 in.); 350 lb ($2\frac{1}{2}$ in. to 4 in.); safety factor 4:1 (safety factor = ratio of ultimate load to the design load)
- Heavy-duty $\frac{5}{16}$ in. hex bolt – With multi-driver head (Robertson square, Phillips cross-recess and slot) provides full range of installation options – Virtually any tool will work
- Bright zinc finish clamps are electrogalvanized after fabrication for additional durability



Cobra cable and pipe clamp (CPC)

Standard material is commercial-grade, bright electrogalvanized steel. Stainless steel 316L is also available; add the suffix "SS6" to catalogue no. (i.e.: CPC050SS6).
Stainless steel bolt head is hexagonal and slotted only.

	Design load 1 Static load limit lb (kg)	Design load 2 lb (kg)	Design load 3 lb (kg)
	200 (91)	50 (23)	50 (23)
	200 (91)	50 (23)	50 (23)
	200 (91)	50 (23)	50 (23)
	200 (91)	50 (23)	50 (23)
	200 (91)	50 (23)	50 (23)
	200 (91)	50 (23)	50 (23)
	350 (159)	50 (23)	50 (23)
	350 (159)	50 (23)	50 (23)
	350 (159)	50 (23)	50 (23)

Superstrut support systems

Loc-King Cobra™ cable and pipe clamp (LKCPC)

Superior design load capabilities for industrial applications:

350 lb for ½ in. to 2 in. trade sizes; 450 lb for 2½ in. to 4 in. trade sizes.

Durable one-piece, heavy-duty steel construction – Designed specifically for use in industrial applications.

- Embosses on shoulder and hooks increase loading capability and durability, preventing deformation of clamps
- Rugged stirrup provides increased strength for heavier loads, minimizing deflection
- Wider saddle design with anti-rotation tabs distributes load evenly over a larger surface area, preventing jacket damage

- Increased corrosion protection – GoldGalv® (yellow zinc dichromate) finish stands up to harsh industrial applications, compared to conventional electrogalvanization
- Parallel hook design keeps conduit and cable square with strut
- Heavy-duty ⅝ in. hex bolt
- One size clamp works on equal trade sizes for both EMT and rigid conduit, simplifying clamp specification




Loc-King Cobra cable and pipe clamp (LKCPC)


	Design load 1 static load limit lb (kg)	Design load 2 lb (kg)	Design load 3 lb (kg)
	350 (159)	50 (23)	50 (23)
	350 (159)	50 (23)	50 (23)
	350 (159)	50 (23)	50 (23)
	350 (159)	50 (23)	50 (23)
	350 (159)	50 (23)	50 (23)
	350 (159)	50 (23)	50 (23)
	350 (159)	50 (23)	50 (23)
	450 (204)	50 (23)	50 (23)
	450 (204)	50 (23)	50 (23)
	450 (204)	50 (23)	50 (23)

Superstrut support systems clamps and hardware


Beam clamps and hanger rods

Beam clamps and hanger rods


	Cat. no.	Rod size (in.)	Design load load/lb
	U562HDG	1/2	800
	UM562HDGC	1/2	1200

	Cat. no.	Rod size (in.)	Design load load/lb
	US562HDGC	1/2	800

1/2 in. set screw included.

	Cat. no.	Beam flange width (in.)	A (in.)
	U568-3EG	6	9
	U568-4EG	9	12
	U568-5EG	12	15

16 ga. material.


	Cat. no.	Design load load/lb
	U514HDGC	750


3/8 in. x 1 1/2 in. set screw included.

Superstrut support systems clamps and hardware

Beam clamps and hanger rods

Beam clamps and hanger rods

	Cat. no.	Design load load/lb
	U515HDGC	800

	Cat. no.	Size (in.)
	ES145-3/8EG	3/8
	ES145-1/2EG	1/2

	Cat. no.	Size (in.)
	E146-1/4EG	1/4
	E146-5/16EG	5/16
	E146-3/8EG	3/8
	E146-1/2EG	1/2
	E146-5/8EG	5/8

	Cat. no.	Size (in.)	Threads per inch	Design load lb
	National coarse thread			
	H104-1/4x10EGC	1/4	20	150
	H104-3/8x10EGC	3/8	16	610
	H104-1/2x10EGC	1/2	13	1130
	H104-5/8x10EGC	5/8	11	1810
	H104-3/4x10EGC	3/4	10	2710
	H104-7/8x10EGC	7/8	9	3770

Also available in stainless steel (304 and 316) in length of 6 ft. Standard length 10 ft.

A technical drawing of a hexagonal rod with a threaded section. The rod is shown in perspective, with the threaded end on the left. A dimension line labeled 'A' indicates the length of the threaded section.

Rod size (in.)

A (in.)

1/4

7/8

5/16

7/8

3/8

1 1/8

1/2

1 1/4

5/8

2 1/8

3/4

2 1/4

7/8

2 1/2





1

2 3/4

Order by product number, rod size and finish. Example: H119-1/2EGC. Finish and materials: GoldGalv dichromate (no suffix), electrogalvanized (EG), hot-dipped galvanized (HDGC), stainless steel type 316 (SS6C).

Superstrut® support systems

Design applications/mechanical support

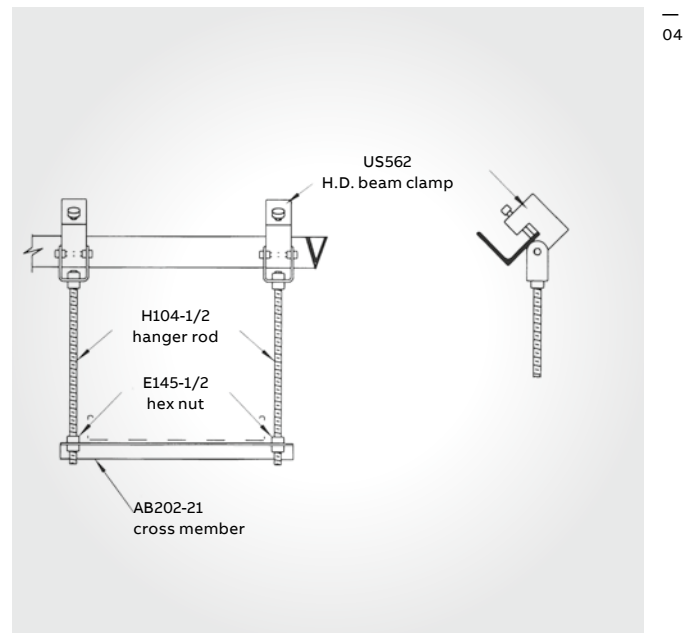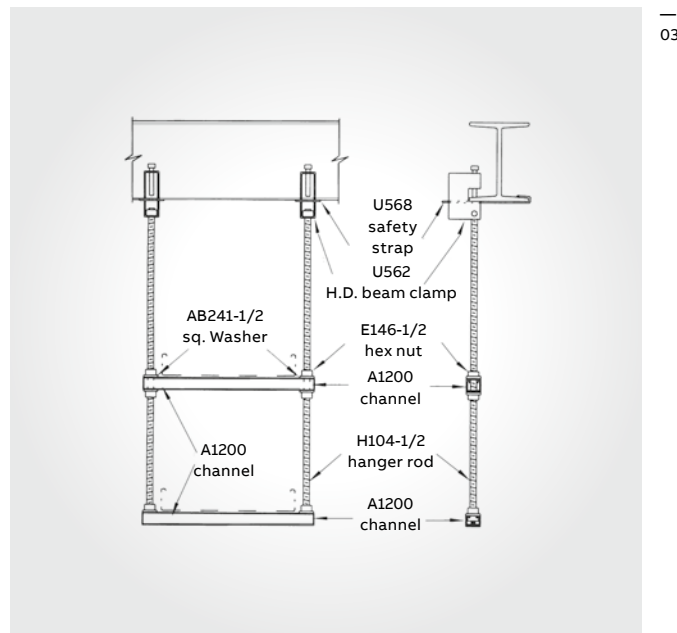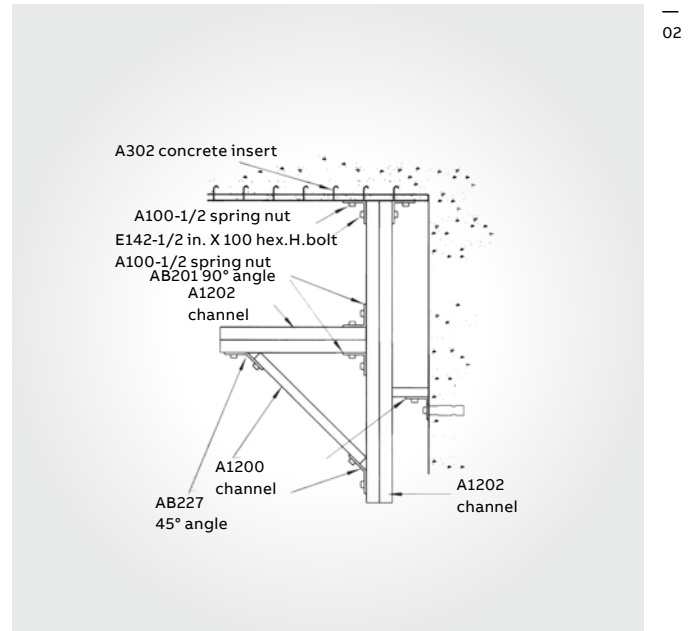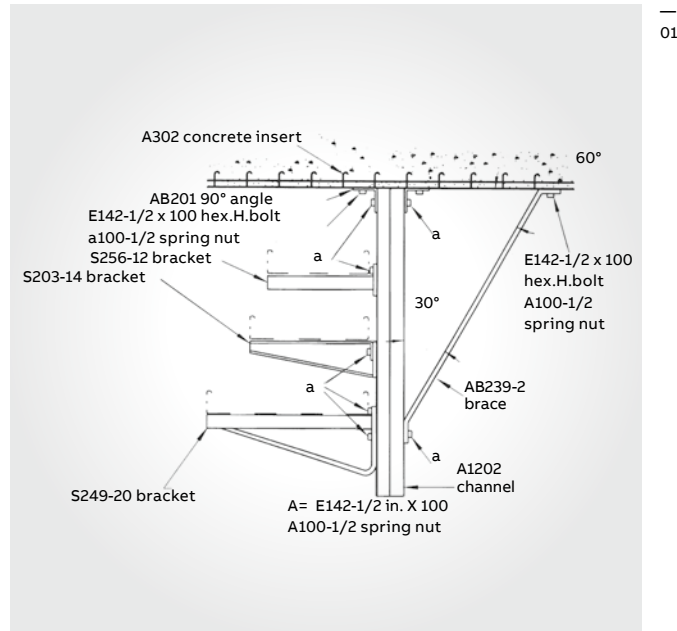


01 Example 1
Suspended column, carrying
brackets, braced to the ceiling.

02 Example 2
Suspended column, holding bracket and console braced to wall.


03 Example 3
Trapeze, ABB channels are used as cross members.

04 Example 4
Sketch depicts the use of beam clamps on slanted beams.


05

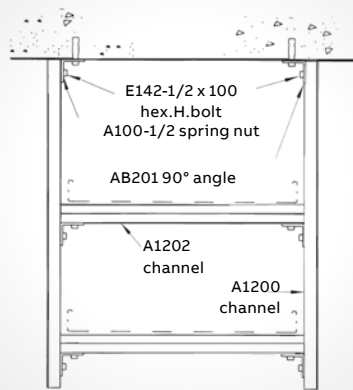


06

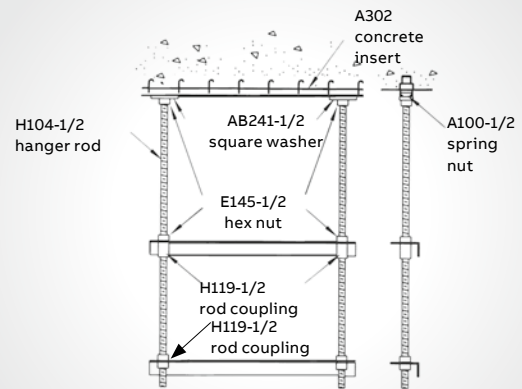

07

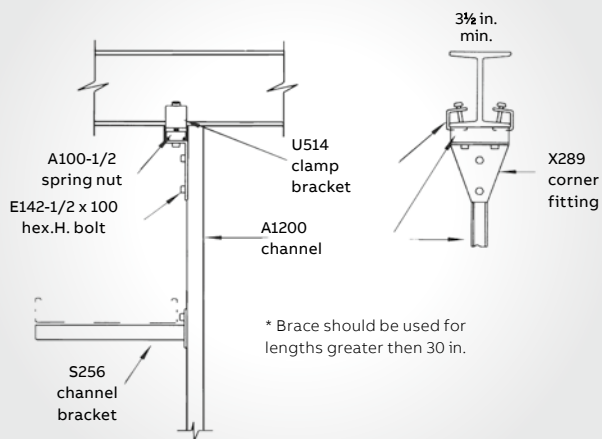

08

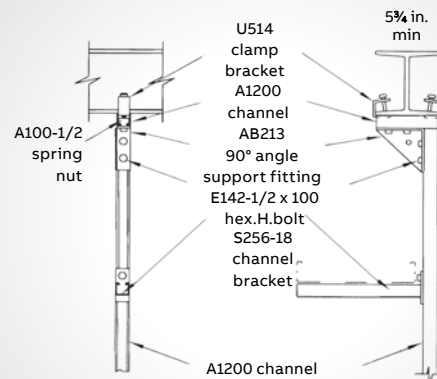**05 Example 5**

Trapeze, constructed from ABB channels, fittings. The use of spot inserts is shown.

06 Example 6

Trapeze, using ABB hanger rods, cross members.

07 Example 7


Single-sided bracket application.

08 Example 8


Single-sided bracket application.

Superstrut support systems


Design applications/mechanical support

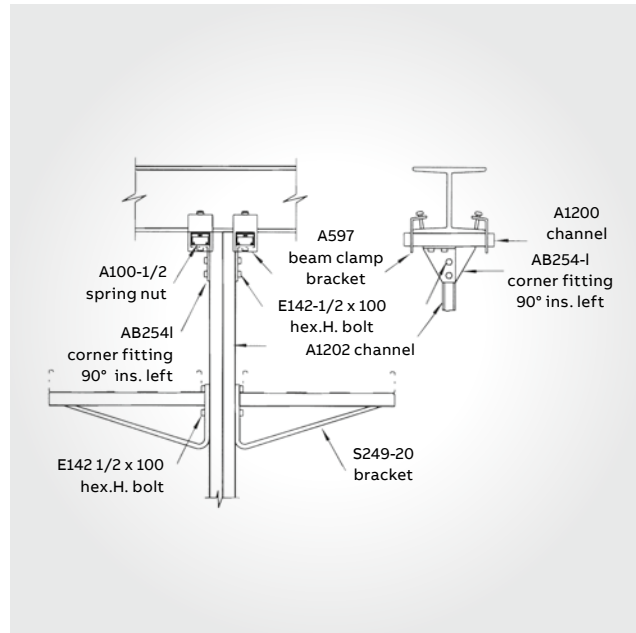


01

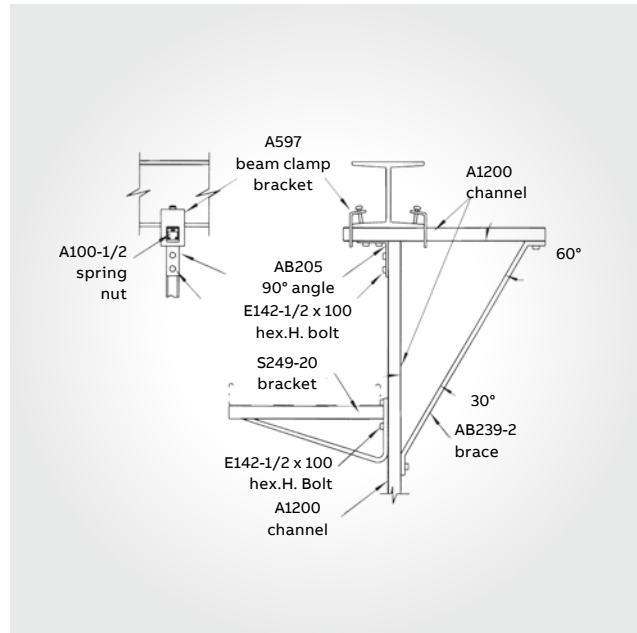

02

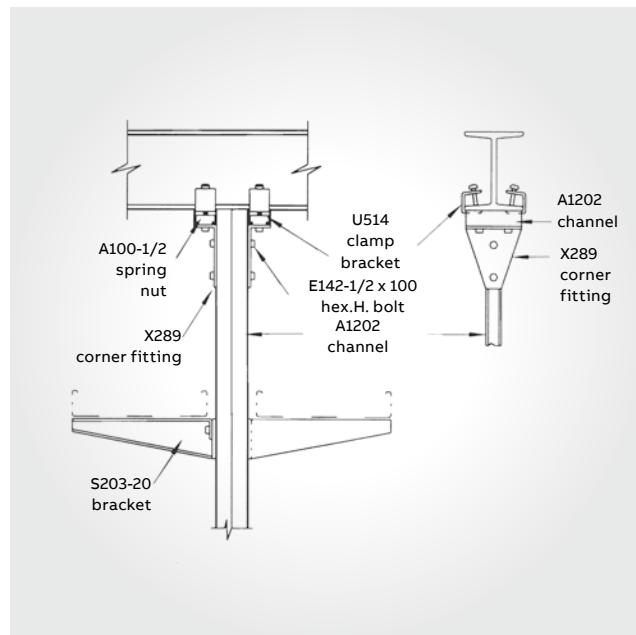

03

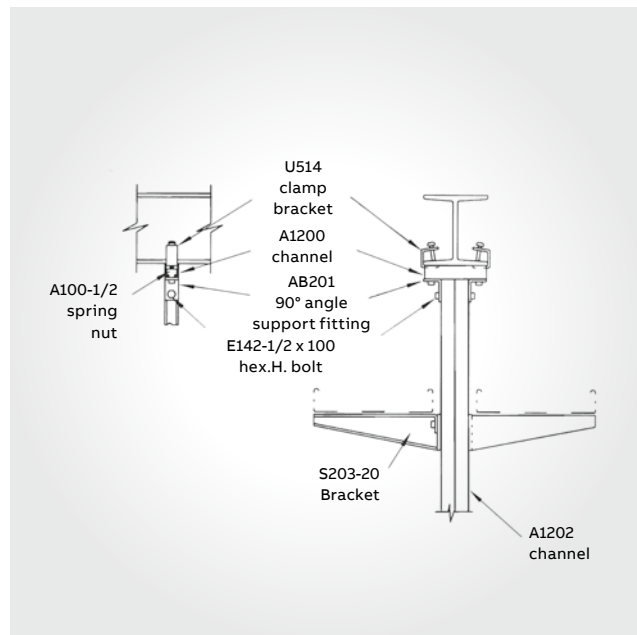

04

01 **Example 9**
Two-sided heavy-duty application.

02 **Example 10**
Heavy-duty bracket application.

03 **Example 11**
Brackets parallel to beam.

04 **Example 12**
Brackets perpendicular to beam.



