

Project: \_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_

Type: \_

Date: \_

# Individual Spec Sheet

# **PHOTOCELL AND PIR SENSOR FIELD INSTALLABLE**

### **ORDERING INFORMATION**

| Order code:    | 69167                          |
|----------------|--------------------------------|
| Description:   | ACCESSORY PHOTOCELL PIR SENSOR |
| UPC:           | 069549025073                   |
| Case quantity: | 100                            |

#### **COMPATIBLE WITH:**

| Order code | Model number                       |
|------------|------------------------------------|
| 69124      | CRN/PS36W/3CCT/BYP/120-277/E26/STD |


### **TECHNICAL SPECIFICATIONS**

| Input voltage:     | 15 V DC/0.1 A                    |
|--------------------|----------------------------------|
| Output voltage:    | 0-10 V DC/0.02 A                 |
| Power consumption: | 1.5 W                            |
| Operating temp.:   | -20 °C to 35 °C (-4 °F to 95 °F) |


#### **PROGRAMMING SETTINGS**

| Dimming level:     | 0-20%/-40%/-60%        |
|--------------------|------------------------|
| Hold time options: | 30 s/90 s/5 min/10 min |

## **MOUNTING TYPES**

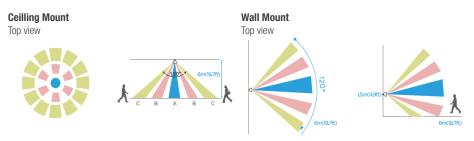

#### DIMENSIONS









This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Page 1/1 69167 • Rev. 29/3/2023

STANDARD®