

LED T8 Ballast Compatible

- Plug and play solution for quick and simple installation without any additional wiring needed.
- Compatible with a variety of electronic instant start, rapid start and program start ballasts.



T8
Ballast Compatible

LED T8 Metric Ballast Compatible

- LED T8 metric lamps are specifically designed for the Canadian market.
- Their 46" length makes these tubes perfect for many government building and educational facility fixtures.



T8 Metric
Ballast Compatible

Order code	Description	System watts (W)			Base	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)			Case qty (master)
		LBF ²	NBF ²	HBF ²					LBF ²	NBF ²	HBF ²	
T8 Ballast compatible												
2'												
65473	LED/T8/S4/9W/840/24/STD	10	12	16	G13	4 000	80	50 000	1 100	1 350	1 800	25
3'												
69296	T8/S5/10W/840/36/STD	-	11.5	-	G13	4 000	82	50 000	-	1 450	-	25
4'												
69297	T8/S5/11W/835/48/STD	-	13	-	G13	3 500	82	50 000	-	1 800	-	25
69298	T8/S5/11W/840/48/STD	-	13	-	G13	4 000	82	50 000	-	1 800	-	25
65474	LED/T8/S4/13W/835/48/STD	14	16	22	G13	3 500	80	50 000	1 550	1 800	2 400	25
65475	LED/T8/S4/13W/840/48/STD	14	16	22	G13	4 000	80	50 000	1 600	1 900	2 450	25
69299	T8/S5/11W/850/48/STD	-	13	-	G13	5 000	82	50 000	-	1 800	-	25
65477	LED/T8/S4/15W/835/48/STD	16	18	26	G13	3 500	80	50 000	1 750	2 000	2 800	25
69301	T8/S5/14W/840/48/STD	-	16	-	G13	4 000	82	50 000	-	2 200	-	25
69302	T8/S5/14W/850/48/STD	-	16	-	G13	5 000	82	50 000	-	2 200	-	25
Metric 46"												
65049 ¹	LED/T8/15W/835/46/METRIC/STD	16	18	26	G13	3 500	83	50 000	1 650	1 850	2 650	25
65050 ¹	LED/T8/15W/840/46/METRIC/STD	16	18	26	G13	4 000	83	50 000	1 700	1 950	2 750	25

Lumen values are derived from photometric testing
For a complete list of compatible ballasts and DLC qualified products, please visit www.standardpro.com
This lamp only operates on existing ballast in 120-277/347V application


¹ Not DLC

² LBF= Low ballast factor, NBF= Normal ballast factor, HBF= High ballast factor


6
damp
location

5
yrs
warranty



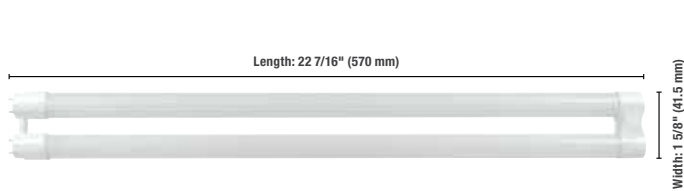

U-Bent U1

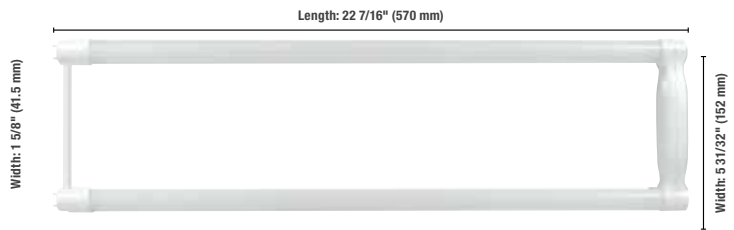

U-Bent U6

Order code	Description	System watts (W)			Base	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)			Case qty (master)
		LBF ²	NBF ²	HBF ²					LBF ²	NBF ²	HBF ²	
U-Bent												
66985 ³	T8/S2/15W/840/48/U1/ND/STD	16	18	24	G13	4 000	82	50 000	1 980	2 200	2 840	12
66986 ³	T8/S2/11.5W/835/48/U6/ND/STD	13	14	20	G13	3 500	82	50 000	1 570	1 750	2 270	12
66987 ³	T8/S2/11.5W/840/48/U6/ND/STD	13	14	20	G13	4 000	82	50 000	1 620	1 800	2 330	12
66988 ³	T8/S2/15W/840/48/U6/ND/STD	16	18	24	G13	4 000	82	50 000	1 980	2 200	2 840	12



T5 Ballast Compatible

Order code	Description	Watts (W)	Base	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Case qty (master)
T5 Ballast Compatible								
28 W replacement								
66992 ³	T5/13W/835/46/STD	13	G5	3 500	82	50 000	1 800	25
66993 ³	T5/13W/840/46/STD	13	G5	4 000	82	50 000	1 850	25
66994 ³	T5/13W/850/46/STD	13	G5	5 000	82	50 000	1 900	25
54 W replacement								
69315	T5/S3/25W/840/46/STD/SMX	25	G5	4 000	82	50 000	3 500	25
65481	LED/T5/S2/25.5W/850/46/STD/SMX	25.5	G5	5 000	>80	50 000	3 150	25
65482 ¹	LED/T5/S2/25.5W/865/46/STD/SMX	25.5	G5	6 500	>80	50 000	3 200	25

Lumen values are derived from photometric testing
 For a complete list of compatible ballasts and DLC qualified products, please visit www.standardpro.com
 This lamp only operates on existing ballast in 120-277/347V application

¹ Not DLC
² LBF= Low ballast factor, NBF= Normal ballast factor, HBF= High ballast factor
³ Not safety max coated, glass tube only



CONFORMS TO NSF/ANSI 2

LED Safety Max™

With the same advantages as regular LED fluorescent replacement lamps, safety coated lamps are shatter resistant to protect employees, production, customers and your business' reputation.

- PTFE coated lamps help to contain broken glass if a lamp is dropped.
- All lamps are NSF rated for food equipment safety.
- Perfect solution for commercial kitchens, art galleries, museums and schools.



T8 Ballast Compatible Safety Max™

Order code	Description	System watts (W)			Base	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)			Case qty (master)
		LBF ²	NBF ²	HBF ²					LBF ²	NBF ²	HBF ²	
T8 2'												
69303	T8/S5/8W/830/24/STD/SMX	-	10	-	G13	3 000	82	50 000	-	1 250	-	25
65506	LED/T8/S3/9W/840/24/STD/SMX	10	12	16	G13	4 000	80	50 000	1 000	1 200	1 600	25
T8 3'												
67001	LED/T8/S4/11W/835/36/STD/SMX	12	14	20	G13	3 500	82	50 000	1 450	1 600	2 200	25
67002	LED/T8/S4/11W/840/36/STD/SMX	12	14	20	G13	4 000	82	50 000	1 450	1 625	2 250	25
T8 4'												
65507 ³	LED/T8/S4/13W/830/48/STD/SMX	12	16	23	G13	3 000	80	50 000	1 400	1 750	2 300	25
65508 ³	LED/T8/S4/13W/835/48/STD/SMX	12	16	23	G13	3 500	80	50 000	1 450	1 800	2 350	25
69309 ³	T8/S5/11W/840/48/STD/SMX	-	13	-	G13	4 000	82	50 000	-	1 800	-	25
65510 ³	LED/T8/S4/13W/850/48/STD/SMX	12	16	23	G13	5 000	80	50 000	1 600	2 000	2 700	25
65511	LED/T8/S4/15W/830/48/STD/SMX	14	18	25	G13	3 000	80	50 000	1 550	1 950	2 650	25
69312	T8/S5/14W/835/48/STD/SMX	-	16	-	G13	3 500	82	50 000	-	2 200	-	25
69313	T8/S5/14W/840/48/STD/SMX	-	16	-	G13	4 000	82	50 000	-	2 200	-	25
69314	T8/S5/14W/850/48/STD/SMX	-	16	-	G13	5 000	82	50 000	-	2 200	-	25

Lumen values are derived from photometric testing
For a complete list of compatible ballasts and DLC qualified products, please visit www.standardpro.com
This lamp only operates on existing ballast in 120-277/347V application

¹ Not DLC

² LBF= Low ballast factor, NBF= Normal ballast factor, HBF= High ballast factor

³ Contact your sales representative for availabilities and lead times on these products

6
damp
location

5
yrs
warranty



CONFORMS TO NSF/ANSI 2