


Eaton D4PR11A

Catalog Number: D4PR11A

Eaton D4 Series General Purpose Plug-In Relay, QTY: 1, 120V coil, SPDT contact configuration, 10 A, 250 Vac/30 Vdc resistive load, 7.5A, 250 Vac/5 A, 30 Vdc inductive full load, 380 Vac/125 Vdc max. operating voltage

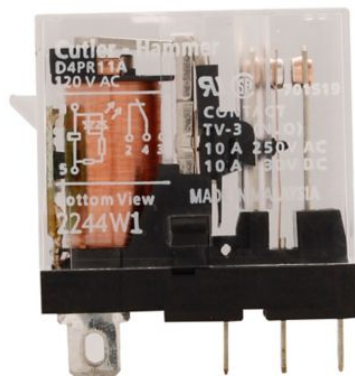

General specifications

Product Name

Eaton General-purpose relay

UPC

782114160213

Product Height

1.14 in

Product Weight

0.05 lb

Compliances

CE Marked

RoHS Compliant

Catalog Number

D4PR11A

Product Length/Depth

1.14 in

Product Width

0.51 in

Warranty

Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.

Certifications

UL Listed file E65657

CSA file No. LR701519

UL Listed file E1491

cRUus

Catalog Notes

Indicator lamp available. Consult sales office or customer support center for additional coil voltages.

defaultTaxonomyAttributeLabel

Amperage Rating

10A

Coil voltage

120 V

Contact configuration

SPDT

Indicators

Indicating light

Inductive full load

7.5 A at 250 Vac, 5 A at 30 Vdc

Quantity

1

Resistive load

10 A, 250 Vac, 30 Vdc

Series

D4

Voltage - max

380 Vac/125 Vdc

Resources

Catalogs

[Eaton's Volume 7—Logic Control, Operator Interface and Connectivity Solutions](#)

Drawings

[D4_R1 AutoCAD 2D Footprint \(mm\)](#)

[D4_R1 3D Model Xchange](#)

[D4_R1 2D PDF](#)

[D4_R1 AutoCAD 2D Footprint](#)

[D4_R1 3D Inventor](#)

[D4_R1 2D Drawing Xchange](#)

Specifications and datasheets

[Eaton Specification Sheet - D4PR11A](#)



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



[Eaton.com/socialmedia](https://www.eaton.com/socialmedia)