



PL-C Cluster 4-Pin Base

PL-C 26W/830/4P/ALTO 10PK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

Product data


General Information			
Cap-Base	G24q-3		
Light Technical			
Color Code	830 [CCT of 3000K]		
Luminous Flux	1,800 lm		
Luminous Efficacy (rated) (Nom)	67 lm/W		
Color Designation	Warm White (WW)		
Correlated Color Temperature (Nom)	3000 K		
Color rendering index (CRI)	82		
Operating and Electrical			
Power Consumption	26.0 W		
Lamp Current (Nom)	0.335 A		
Controls and Dimming			
Dimmable	Yes		

Approval and Application				
Mercury (Hg) Content (Nom)	1.4 mg			
Energy Consumption kWh/1000 h	29 kWh			
Product Data				
Order product name	PL-C 26W/830/4P/ALTO 10PK			
Full product name	PL-C 26W/830/4P/ALTO 10PK			
Order code	383356			
Material Nr. (12NC)	927907383030			
Numerator - Quantity Per Pack	1			
Net Weight (Piece)	60.400 g			
EAN/UPC - Product/Case	046677240257			
Numerator - Packs per outer box	10			
EAN/UPC - Case	60046677240259			

Datasheet, 2023, April 15 data subject to change


PL-C Cluster 4-Pin Base

Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-C 26W/830/4P/ALTO 10PK	27.1 mm	27.1 mm	130.5 mm	149.0 mm	163.9 mm


Photometric data

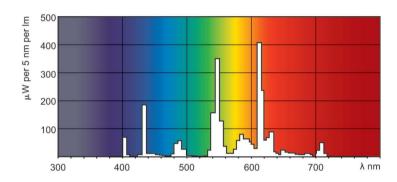

Spectral Power Distribution Colour - PL-C 26W/830/4P/ALTO 10PK

Lifetime

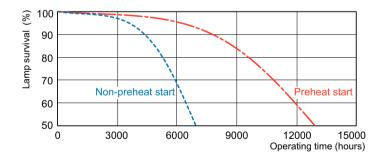

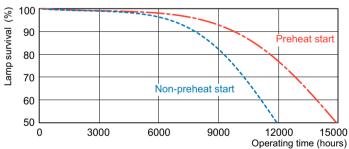


Life expectancy diagram - 3 hour cycle

Life expectancy diagram - 12 hour cycle

PL-C Cluster 4-Pin Base

Lifetime

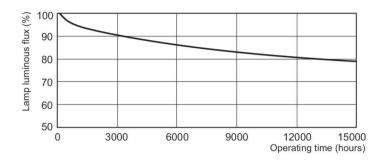

Lumen Maintenance Diagram - PL-C 26W/830/4P/ALTO 10PK

