



PL-T Triple 4-Pin Base

PL-T 26W/830/A/4P 1CT/5X10BOX ALTO

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

Product data


General Information				
Cap-Base	GX24q-3			
Light Technical				
Color Code	830 [CCT of 3000K]			
Luminous Flux	1,750 lm			
Luminous Efficacy (rated) (Nom)	64.8 lm/W			
Color Designation	Warm White (WW)			
Correlated Color Temperature (Nom)	3000 K			
Color rendering index (CRI)	>80			
Operating and Electrical				
Power Consumption	26 W			
Lamp Current (Nom)	0.335 A			
Controls and Dimming				
Dimmable	Yes			

Approval and Application				
Mercury (Hg) Content (Nom)	1.4 mg			
Product Data				
Order product name	PL-T 26W/830/A/4P 1CT/5X10BOX ALTO			
Full product name	PL-T 26W/830/A/4P 1CT/5X10BOX ALTO			
Order code	458257			
Material Nr. (12NC)	927910983050			
Numerator - Quantity Per Pack	1			
Net Weight (Piece)	64.000 g			
EAN/UPC - Product/Case	046677268237			
Numerator - Packs per outer box	10			
EAN/UPC - Case	50046677458251			

Datasheet, 2023, April 15 data subject to change


PL-T Triple 4-Pin Base

Dimensional drawing




Product	D (max)	A (max)	B (max)	C (max)
PL-T 26W/830/A/4P 1CT/5X10BOX ALTO	41 mm	86.7 mm	111.0 mm	126.7 mm


Photometric data

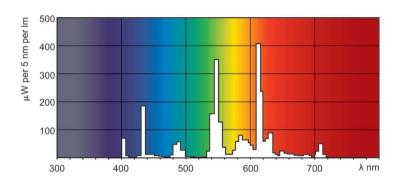

Spectral Power Distribution Colour - PL-T 26W/830/A/4P 1CT/5X10BOX ALTO

Lifetime

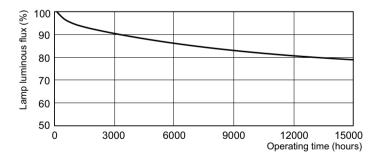




Lumen Maintenance Diagram - PL-T 26W/830/A/4P 1CT/5X10BOX ALTO

Life expectancy diagram - 3 hour cycle

PL-T Triple 4-Pin Base

Lifetime

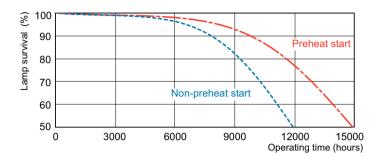

Life expectancy diagram - 12 hour cycle

