

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# A19

## LED LAMPS

5 CCT Selectable

### ORDERING INFORMATION

**Order Code:** 70622  
**Model Number:** A19/8.5W/5CCT/STD 4P  
**UPC:** 069549036086  
**Case Quantity:** 12 x 4 pack

### PHYSICAL DATA

**Base:** E26  
**Type:** A19 4 pack

### PERFORMANCE DATA

<b>Watts (W):</b>	8.5	<b>Life L70 (h)<sup>3</sup>:</b>	25 000
<b>Traditional Equivalent (W):</b>	60	<b>Beam Angle:</b>	240
<b>Volts (V AC):</b>	120	<b>Power Factor:</b>	≥0.7
<b>Color Temperature (K)<sup>1</sup>:</b>	2 700/3 000/3 500 4 000/5 000	<b>Frequency (Hz):</b>	60
<b>Lumen Output (lm)<sup>2</sup>:</b>	800	<b>Input Current (A):</b>	100
<b>Efficacy (lm/W):</b>	94	<b>Operating Temp. Range:</b>	- 40 °C / - 40 °F to 40 °C / 104 °F
<b>CRI:</b>	90	<b>Energy Star:</b>	No
<b>Dimmable:</b>	Yes	<b>Warranty:</b>	3 Years

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

### COMPATIBLE DIMMERS<sup>1</sup>

Brand	Model
LUTRON	HCL453P, DVCL-253P, AYCL-253P DVELV-300P, SELV-300P, MACL-153P
COOPER	DAL06P, AAL06, SAL06P3
LEVITON	6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1


Dimming performance might be impacted when using the above dimmers with only one lamp  
 Full performance achieved when using two or more lamps.

<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

### DEFAULT PROGRAMMING

2 700 K

### DIMENSIONS

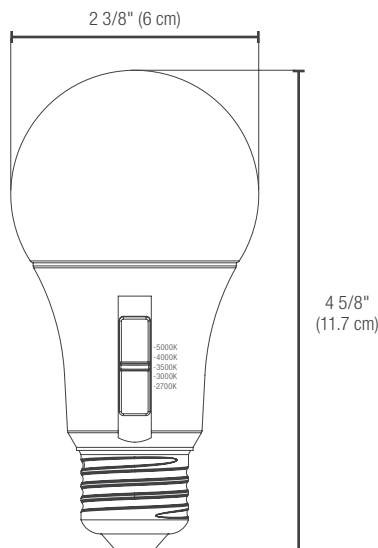

ICES  
005



enclosed  
fixture



This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.