

INDUSTRIAL RIGMASTER™ LED SERIES LUMINAIRES

STANDARD OR WITH EMERGENCY BATTERY BACKUP — ORDINARY LOCATIONS

FEATURES

- Lightweight and low profile luminaire, perfect for low clearance, obstructed areas or compact spaces
- Available in two sizes and output options, delivering up to 7600 lumens
- Adjustable yoke brackets (0°, 15°, 30°, 45°, 60° and 90°) with fixture position locking mechanism and various bolt patterns that accommodate most bolt patterns from Crouse-Hinds™ †, Dialight™ ✦ and other manufacturers
- Optional field installable pendant mount kit provides top wire entry applications
- Select a clear or diffused polycarbonate lens for the optimal level of work plane brightness and visual comfort. These lenses are field interchangeable for convenience and flexibility
- 5 casted points standard for secondary safety retention
- 90 or 180 minutes of emergency battery backup optional
- Loop in/out wiring capability for interconnecting fixtures
- Hinged wire compartment cover is secured with captive screws for safety and convenience

WARRANTY ◊

- 10 year standard warranty

TYPICAL APPLICATIONS

- Waste and sewer treatment
- Pulp and paper mills
- Food processing plants
- Foundries
- General manufacturing facilities
- Underground tunnels
- Hydrogen and Biofuels plants
- LNG (Liquid Natural Gas) plants

LUMINAIRE MATERIALS

- Housing: copperfree (4/10 of 1% max.) aluminum
- Lens: thermal shock- and impact-resistant polycarbonate
- Gasket: silicone rubber
- Bolts: stainless steel
- Close up plugs: (3) aluminum provided
- Mounting brackets: zinc plated steel

ACCESSORIES (PURCHASE SEPARATELY)

- Pendant Mount Kit: IRMPENDKIT / IRMHPENDKIT
- Beam clamp kit: RMBCKIT
- Safety Cable: LEDSC
- Wire guard: RMGUARD2 (2FT) and RMGUARD4 (4FT)

NEC/CEC LISTINGS ①

- Type 3R, 4, 4X
- IP66
- IK10
- 10G vibration on small/large brackets; 5G vibration on low profile bracket
- Simultaneous Exposure
- Suitable for Use in Wet Locations
- Marine Outside Type (Salt Water)

NOTABLE LISTINGS ①

- ABS Certified
- Dark Sky (IDA) Approved
- DLC listed

RELATED PRODUCTS

- Rigmaster LED Series Luminaires
- Explosionproof Rigmaster LED Series Luminaires



IRM*2 + Clear Lens + RMSSB



IRM*4 + Clear Lens + RMLSB

† Crouse-Hinds is a registered trademark of Eaton Corporation.

✦ Dialight is a registered trademark of Dialight.

① Refer to catalog pages for detailed certification information.

◊ For warranty details go to www.appleton.emerson.com.

PRODUCT SPECIFICATIONS

Series * Lumen Output	IRM*2	IRM*4
Nominal Wattage (W, @120 V)	33	55
Equivalencies (W, T8)	2 x 32W	3 x 32W
Nominal Lumens Standard Mode ①	4390	7650
Nominal Lumens Emergency Mode ①	1350 (90 min) 800 (180 min)	
Efficacy (up to, lm/W)	133	139
Color Temperature (CCT) (K)	5000/4000/3000	
Color Rendering index (CRI)	≥ 80 CRI	
Voltage	120-277 Vac, 50/60 Hz; 125-300 Vdc 347-480 Vac, 50/60 Hz	
Surge Protection	6 kV, 3 kA	
L70 Lifetime (hrs)	Reported: >60000 hours @ 25 °C >60000 hours @ 65 °C Calculated: >200000 hours @ 25 °C >200000 hours @ 65 °C	
Ambient Temperature	Standard: -40 °C to +65 °C (-40 °F to +149 °F) Emergency: -20 °C to +55 °C (-4 °F to +131 °F)	
Fixture Weight Standard Model - kg (lbs)	3.7 (8.2)	4.6 (10.1)
Fixture Weight Emergency Model - kg (lbs)	7.6 (16.8)	8.6 (19.0)
Replaceable Parts	Driver, Lens, Battery Management Module, Battery Pack	

① Nominal lumens based 5000K CCT with clear polycarbonate lens. Refer to catalog pages for detailed performance.

APPLETON™

For product information:
www.masteringled.com
1.800.621.1506


EMERSON™

INDUSTRIAL RIGMASTER™ LED SERIES LUMINAIRES

STANDARD OR WITH EMERGENCY BATTERY BACKUP — ORDINARY LOCATIONS

Project Information	Specifications
Part Number: _____ Date: _____	_____
Project: _____	_____
Fixture Type: _____	_____

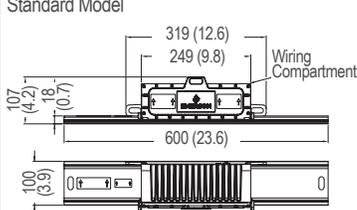
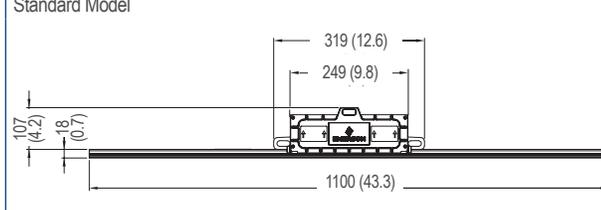

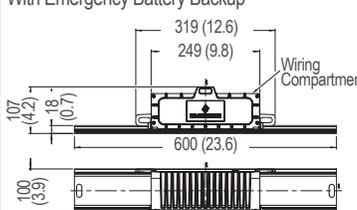
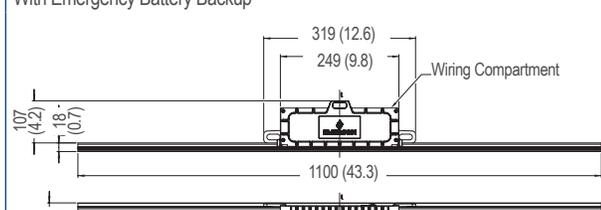

CATALOG NUMBERING GUIDE

Series Prefix	Mounting	Lumen (nominal)	Hub Size	Color Temperature	Lens Material	Light Distribution Pattern	Voltage	Emergency	Color	Wiring Method	Option
IRM						L			G		

SERIES PREFIX:	HUB SIZE:	LIGHT DISTRIBUTION PATTERN:	COLOR:
IRM Industrial Rigmaster LED	1 (4) 1/2" NPT	L Linear Pattern	G Appleton Gray (Standard)
MOUNTING: ④	2 (4) 3/4" NPT	VOLTAGE:	WIRING METHOD:
A Small Swivel Bracket ⑤	COLOR TEMPERATURE (CCT):	BU 120-277 Vac, 50/60 Hz; 125-300 Vdc	W Wire Nuts (Standard)
B Large Swivel Bracket	C Cool, 5000K	BH 347-480 Vac, 50/60 Hz ③	T Fixed Terminal Block ③
L Low Profile Bracket	N Neutral, 4000K	EMERGENCY: ⑥	OPTION: ④
N If None (Use if Ordering Appleton Bracket Separately)	W Warm, 3000K	N If None (Standard)	Blank If None
LUMEN (NOMINAL): ②	LENS MATERIAL:	H 90 Minutes	1 (1) Safety Cable
2 4,300 Lumens (2')	D Diffused Polycarbonate	E 180 Minutes	2 (2) Safety Cables
4 7,600 Lumens (4')	P Clear Polycarbonate		

- ① Marine Outside Type (Salt Water) is applicable to standard (non emergency) fixtures only.
- ② Refer to catalog pages for detailed lumen output information, see Lumen Output (Efficacy) Table.
- ③ Terminal block option available for BU voltage configuration only.
- ④ Brackets and safety cables can be ordered separately or included with fixture. Refer to catalog pages for more information.
- ⑤ Mounting option A is not available with emergency version.
- ⑥ Emergency battery back up version is only available with BU voltage configuration for 120-277 Vac operation.

DIMENSIONAL DRAWINGS ① | MILLIMETERS (INCHES)

IRM*2 Standard Model 	IRM*4 Standard Model 	IRM*2 and IRM*4 End View 
With Emergency Battery Backup 	With Emergency Battery Backup 	End View 

① Models shown with no mounting bracket. Refer to catalog pages or the Product Drawing configurator page for additional dimensional information; available on www.masteringled.com.