

# Product data sheet

Specifications



## Device monitoring and management, Network Management Cards, NMC3, secure remote UPS monitoring and management

AP9640

**Product availability: Non-Stock - Not normally stocked in distribution facility**

### Overview

Lead time Usually in Stock

### Main

Range of Product Network Management Cards

Range Compatibility Galaxy VM  
Galaxy VX  
Symmetra PX  
Easy UPS 3M Advanced  
Easy UPS 3-Phase Modular  
Galaxy PX  
Galaxy 3L Pro  
Smart-UPS  
Smart-UPS Ultra  
Smart-UPS Online  
Smart-UPS Modular Ultra  
Smart-UPS Battery Systems  
Back-UPS SX3  
Refurbished Smart-UPS

Product or Component Type Device monitoring and management

Provided Equipment Micro-USB cable  
Installation manual

Number of input phases 1  
3

Standards EN 55024  
BS EN 55024  
EN 61000-4-2  
BS EN 61000-4-2  
EN 61000-4-3  
BS EN 61000-4-3  
EN 61000-4-4  
BS EN 61000-4-4  
EN 61000-4-5  
BS EN 61000-4-5  
EN 61000-4-6  
BS EN 61000-4-6  
EN 61000-4-8  
BS EN 61000-4-8  
EN 61000-4-11  
BS EN 61000-4-11  
EN 55035  
BS EN 55035  
EN 62040-2  
BS EN 62040-2  
EN 61326-2  
BS EN 61326-2  
ICES-003 class A  
VCCI class A  
EN 61000-6-3  
BS EN 61000-6-3  
EN 55032:class A  
BS EN 55032:class A

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

## Physical

Product Weight	0.18 lb(US) (0.08 kg)
Width	4.8 in (12.1 cm)
Height	1.5 in (3.8 cm)
Depth	4.5 in (11.4 cm)

## Conformance

Product Certifications	FCC Class A AS/NZS AS/NZS 3548 (C-Tick) Class A FCC part 15 class A GOST UK PSTI
------------------------	---

## Environmental

Storage Relative Humidity	0...95 %
Relative Humidity	0...95 %
Ambient Air Temperature for Storage	5...149 °F (-15...65 °C)
Ambient Air Temperature for Operation	23...113 °F (-5...45 °C)
Storage altitude	0...50000 ft (0...15240 m)
Operating altitude	0...10000 ft

## Communications & Management

Communication Network Type	10/100/1000BASE-T
Authentication	Radius Lightweight Directory Access Protocol (LDAP)
Communication Port Protocol	HTTP over secure sockets Layer (HTTPS) SSH FTP HTTP SNMP DHCP BOOTP (Bootstrap Protocol) TCP/IP

## Ordering and shipping details

GTIN	731304355533
------	--------------

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.008 in (5.1 cm)
Package 1 Width	6.3 in (15.9 cm)
Package 1 Length	9.3 in (23.5 cm)
Package weight(Lbs)	0.75 lb(US) (0.34 kg)

## Contractual warranty

Warranty (in months)	24
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint	110 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	4 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	106 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0 kg CO2 eq.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Use Better



### Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
SCIP Number	1cdb2fed-a06f-4574-913d-8df8e70936b2
EU RoHS Directive	<a href="#">Compliant By Exemption</a>
REACH Regulation	<a href="#">Reference contains Substances of Very High Concern above the threshold</a>

## Use Longer



### Lifetime extension

Repair	No
--------	----

## Use Again



### Repack and remanufacture

Recyclability potential, in %	95
Circularity Profile	<a href="#">End of Life Information</a>
Removable battery	Yes
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Offer Marketing Illustration

Product benefits / Features

---

## Network Management Cards

### Benefits



#### Monitoring and alarming

Stay informed with real-time monitoring and instant alerts to quickly address issues before they impact operations.



#### Preventative management

Proactively manage systems to prevent failures and reduce downtime through early detection and action.



#### Ongoing security compliance

Ensure continuous adherence to security standards and protocols to protect against evolving threats.

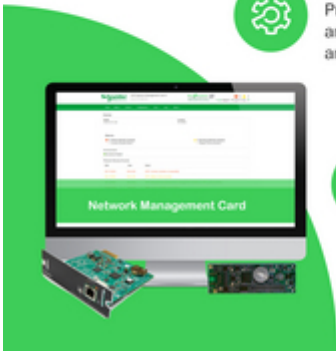


Image of product / Alternate images

Alternative

---

