





Color: ■ light gray

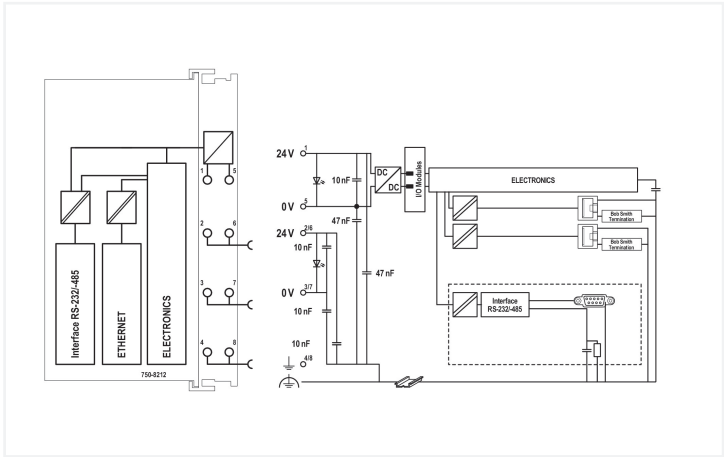

PFC200 Communication Options Overview

Option	Product version	Hardware	Software	Max. Temperature
U6	U6	U6	U6	U6
U5	U5	U5	U5	U5
U4	U4	U4	U4	U4
U3	U3	U3	U3	U3
U2	U2	U2	U2	U2
U1	U1	U1	U1	U1
U0	U0	U0	U0	U0
U7	U7	U7	U7	U7
U8	U8	U8	U8	U8
U9	U9	U9	U9	U9
U10	U10	U10	U10	U10
U11	U11	U11	U11	U11
U12	U12	U12	U12	U12
U13	U13	U13	U13	U13
U14	U14	U14	U14	U14
U15	U15	U15	U15	U15
U16	U16	U16	U16	U16
U17	U17	U17	U17	U17
U18	U18	U18	U18	U18
U19	U19	U19	U19	U19
U20	U20	U20	U20	U20
U21	U21	U21	U21	U21
U22	U22	U22	U22	U22
U23	U23	U23	U23	U23
U24	U24	U24	U24	U24
U25	U25	U25	U25	U25
U26	U26	U26	U26	U26
U27	U27	U27	U27	U27
U28	U28	U28	U28	U28
U29	U29	U29	U29	U29
U30	U30	U30	U30	U30
U31	U31	U31	U31	U31
U32	U32	U32	U32	U32
U33	U33	U33	U33	U33
U34	U34	U34	U34	U34
U35	U35	U35	U35	U35
U36	U36	U36	U36	U36
U37	U37	U37	U37	U37
U38	U38	U38	U38	U38
U39	U39	U39	U39	U39
U40	U40	U40	U40	U40
U41	U41	U41	U41	U41
U42	U42	U42	U42	U42
U43	U43	U43	U43	U43
U44	U44	U44	U44	U44
U45	U45	U45	U45	U45
U46	U46	U46	U46	U46
U47	U47	U47	U47	U47
U48	U48	U48	U48	U48
U49	U49	U49	U49	U49
U50	U50	U50	U50	U50
U51	U51	U51	U51	U51
U52	U52	U52	U52	U52
U53	U53	U53	U53	U53
U54	U54	U54	U54	U54
U55	U55	U55	U55	U55
U56	U56	U56	U56	U56
U57	U57	U57	U57	U57
U58	U58	U58	U58	U58
U59	U59	U59	U59	U59
U60	U60	U60	U60	U60
U61	U61	U61	U61	U61
U62	U62	U62	U62	U62
U63	U63	U63	U63	U63
U64	U64	U64	U64	U64
U65	U65	U65	U65	U65
U66	U66	U66	U66	U66
U67	U67	U67	U67	U67
U68	U68	U68	U68	U68
U69	U69	U69	U69	U69
U70	U70	U70	U70	U70
U71	U71	U71	U71	U71
U72	U72	U72	U72	U72
U73	U73	U73	U73	U73
U74	U74	U74	U74	U74
U75	U75	U75	U75	U75
U76	U76	U76	U76	U76
U77	U77	U77	U77	U77
U78	U78	U78	U78	U78
U79	U79	U79	U79	U79
U80	U80	U80	U80	U80
U81	U81	U81	U81	U81
U82	U82	U82	U82	U82
U83	U83	U83	U83	U83
U84	U84	U84	U84	U84
U85	U85	U85	U85	U85
U86	U86	U86	U86	U86
U87	U87	U87	U87	U87
U88	U88	U88	U88	U88
U89	U89	U89	U89	U89
U90	U90	U90	U90	U90
U91	U91	U91	U91	U91
U92	U92	U92	U92	U92
U93	U93	U93	U93	U93
U94	U94	U94	U94	U94
U95	U95	U95	U95	U95
U96	U96	U96	U96	U96
U97	U97	U97	U97	U97
U98	U98	U98	U98	U98
U99	U99	U99	U99	U99
U100	U100	U100	U100	U100

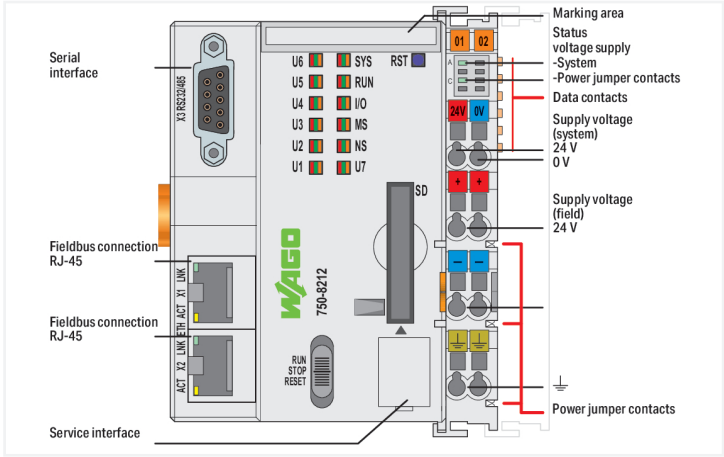

The PFC200 Controller is a compact PLC for the modular WAGO I/O System. Besides network and fieldbus interfaces, the controller supports all digital, analog and specialty modules found within the 750/753 Series.

Two ETHERNET interfaces and an integrated switch enable line topology wiring.

An integrated Webserver provides user configuration options, while displaying PFC200 status information.

Besides the processing industry and building automation, typical applications for the PFC200 include standard machinery and equipment control (e.g., packaging, bottling and manufacturing systems, as well as textile, metal and wood processing machines).

Programming per IEC 61131-3

- Programmable with CODESYS V3.5 from Firmware Release 23, WAGO-I/O-PRO V2.3 or **e!COCKPIT** up to Firmware Release 22
- Direct connection of WAGO's I/O modules
- 2 x ETHERNET (configurable), RS-232/-485
- Linux operating system with PREEMPT_RT patch
- Configuration via CODESYS or Web-Based Management user interface
- Maintenance-free

Technical data	
Communications	Modbus TCP master/slave Modbus (UDP), WagoAppPlcModbus Library Modbus (RTU), WagoAppPlcModbus Library ETHERNET EtherNet/IP™ Adapter (slave) EtherNet/IP™ Scanner EtherCAT® Master OPC UA Server/Client OPC UA Pub/Sub (can be installed later) MQTT RS-232 serial interface RS-485 interface BACnet/IP, requires an additional license Telecontrol protocols, requires an additional license
ETHERNET protocols	DHCP DNS NTP FTP FTPS SNMP HTTP HTTPS SSH
Telecontrol protocols	IEC 60870 (additional license as slave or master) IEC 61850 (additional license as Client or Server) DNP3 (additional license as Slave or Master)
Visualization	Web-Visu
Operating system	Real-time Linux (with PREEMPT_RT patch)
Support period for security updates	
CPU	Cortex A8; 1 GHz
Programming languages per IEC 61131-3	Instruction List (IL) Ladder Diagram (LD) Function Block Diagram (FBD) Continuous Function Chart (CFC) Structured Text (ST) Sequential Function Chart (SFC)
Programming environment	CODESYS V3.5, Firmware Release 23 or higher <i>e!COCKPIT</i> (based on CODESYS V3) up to Firmware Release 22 WAGO-I/O-PRO V2.3 (based on CODESYS V2.3), up to Firmware Release 22
Configuration options	CODESYS V3 <i>e!COCKPIT</i> WAGO-I/O-CHECK Web-Based Management <i>e!RUNTIME</i> library CODESYS Library
Transmission rate	ETHERNET: 10/100 Mbit/s
Transmission medium (communication/fieldbus)	ETHERNET: Twisted pair S-UTP; 100 Ω; Cat. 5; 100 m maximum cable length
Main memory (RAM)	512 MB
Internal memory (flash)	4096 MB
Non-volatile hardware memory	128 KB
Program memory	CODESYS V2: 16 MB; CODESYS V3: 32 MB
Data memory	CODESYS V2: 64 MB; CODESYS V3: 128 MB
Non-volatile software memory	128 KB
Non-volatile software memory	128 KB
Type of memory card	SD and SDHC up to 32 GB (all guaranteed properties only valid with WAGO's memory card)
Memory Card Slot	Push-push mechanism; cover lid (sealable)
Number of modules per node (max.)	250
Number of modules without a bus extension (max.)	64
Input and output process image (internal) max.	1000 words/1000 words
Input and output process image (Modbus®) max.	CODESYS V2: 1000 words/1000 words; CODESYS V3: 32000 words/32000 words
Drift – system clock (25 °C)	20 ppm
Drift – Real Time Clock (25 °C)	3 ppm
RTC backup time (25 °C)	30 days
Indicators	LED (SYS, RUN, I/O, U1 ... U7) red/green/orange: Status of system, program, local data bus, status programmable by user (can be used via CODESYS library); LED (A, B) green: Status of system power supply, field supply
Supply voltage (system)	24 VDC (-25 ... +30 %); via pluggable connector (CAGE CLAMP® connection)
Input current (typ.) at nominal load (24 V)	550 mA

Technical data

Total current (system supply)	1700 mA
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts
Current carrying capacity (power jumper contacts)	10 A
Number of outgoing power jumper contacts	3
Isolation	500 V system/field

Connection Data

Connection technology: communication/fieldbus	Modbus (TCP, UDP): 2 x RJ-45; Modbus RTU: 1 x D-sub 9 socket; RS-232 serial interface: 1 x D-sub 9 socket; RS-485 interface: 1 x D-sub 9 socket
Connection technology: system supply	2 x CAGE CLAMP®
Connection technology: field supply	6 x CAGE CLAMP®
Connectable conductor materials	Copper
Connection type	System/field supply
Solid conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Connection technology: device configuration	1 x Male connector; 4-pole

Physical data

Width	78.6 mm / 3.094 inches
Height	100 mm / 3.937 inches
Depth	71.9 mm / 2.831 inches
Depth from upper-edge of DIN-rail	64.7 mm / 2.547 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Color	light gray
Housing material	Polycarbonate; polyamide 6.6
Fire load	2.272 MJ
Weight	214.8 g
Conformity marking	CE

Environmental requirements

Ambient temperature (operation)	0 ... +55 °C
Ambient temperature (storage)	-25 ... +85 °C
Protection type	IP20
Pollution degree	2 per IEC 61131-2
Operating altitude	without temperature derating: 0 ... 2000 m; with temperature derating: 2000 ... 5000 m (0.5 K/100 m); 5000 m (max.)
Mounting position	Horizontal left, horizontal right, horizontal top, horizontal bottom, vertical top and vertical bottom
Relative humidity (without condensation)	95 %
Vibration resistance	4g per IEC 60068-2-6
Shock resistance	15g per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2, marine applications
EMC emission of interference	per EN 61000-6-3, marine applications
Exposure to pollutants	per IEC 60068-2-42 and IEC 60068-2-43
Permissible H ₂ S contaminant concentration at a relative humidity 75 %	10 ppm
Permissible SO ₂ contaminant concentration at a relative humidity 75 %	25 ppm



Commercial data		
PU (SPU)		1 pcs
Packaging type		Box
Country of origin		DE
GTIN		4055143758789
Customs tariff number		85371091990
Support period for security updates		

Product Classification		
UNSPSC	32151705	
eCl@ss 10.0	27-24-26-07	
eCl@ss 9.0	27-24-26-07	
ETIM 9.0	EC000236	
ETIM 10.0	EC000236	
ECCN	NO US CLASSIFICATION	

Environmental Product Compliance		
RoHS Compliance Status	Compliant, No Exemption	
SCIP notification number (Austria)	cdb3fb17-40de-4401-b69f-a4eba7617a35	
SCIP notification number (Belgium)	9df949dc-8215-49fb-bc3d-b8138adf3d54	
SCIP notification number (Bulgaria)	5e2cc238-0b57-44f5-841a-914b9a9106db	
SCIP notification number (Czech Republic)	6f2ec62b-b1d7-41fd-bd08-53f1f066579b	
SCIP notification number (Denmark)	dda30b2f-13b4-4ba2-8217-5f0911ac8064	
SCIP notification number (Finland)	bfb94d6c-4452-4dc4-98bf-4cf30aeadaf9	
SCIP notification number (France)	db8dc1da-3777-4580-86fe-b255678ad3e9	
SCIP notification number (Germany)	cdb9d8e9-1c7c-4cb5-82a9-d1a354436f8c	
SCIP notification number (Hungary)	f8f5a668-40a0-464c-b631-0b54aaa609d9	
SCIP notification number (Italy)	3e3ff0a4-e76c-467a-a261-16166081f0f4	
SCIP notification number (Netherlands)	610f023d-547b-4525-a177-7f59d1b13f66	
SCIP notification number (Poland)	03c368e7-1dea-4f72-9fd1-9476580f0177	
SCIP notification number (Romania)	37a892a9-87c6-421a-9519-f669f4cd6102	
SCIP notification number (Sweden)	88ce2c4e-8c0c-411c-a562-f03f7e9471cd	

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
  		
Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03083
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-PFC750
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	-	E175199
Declarations of conformity and manufacturer's declarations		
Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-




Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	22-2219060
BSH Bundesamt fuer See- schifffahrt und Hydrogra- phie	-	1104
BV Bureau Veritas S.A.	Rules for class. of Steel Ships	66711/A0
DNV DNV GL SE	DNV-CG-0339,Aug.2021	TAA0000194
KR Korean Register of Ship- ping	-	KR HMB05880-AC001
LR Lloyds Register EMEA	-	LR22180952TA
NK Nippon Kaiji Kyokai	Guidel. Perform. Type Ap- provals	TA25276M
PRS Polski Rejestr Statków	-	TE/1101/880590/23
RINA RINA Germany GmbH	-	ELE343521XG001

Approvals for hazardous areas

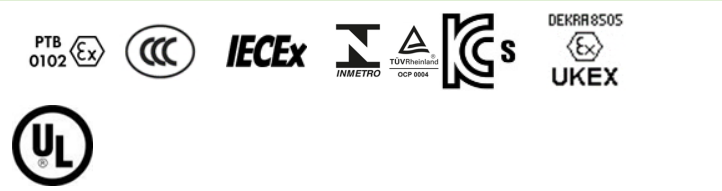

Approval	Standard	Certificate Name
ATEX TUEV Nord Cert GmbH	EN 60079-0	TUEV14ATEX148929X (II 3 G Ex ec IIC T4 Gc)
CCCEX CQST/CNEx	CNCA-C23-01	2020312310000213 (Ex ec IIC T4 Gc)
IECEX TUEV Nord Cert GmbH	IEC 60079-0	IECEX TUN 14.0035 X (Ex ec IIC T4 Gc)
INMETRO TÜV Rheinland do Brasil Ltda.	IEC 60079-0	TÜV 12.1297 X
KTL Korea Testing Laboratory	KOSHA Article 34, IEC60079-0	21-KA4BO-0557X
UKEx WAGO GmbH & Co. KG	EN 60079-0	UKCA_WA GO22UKEX003X_ec
UL Underwriters Laboratories Inc. (HAZARDOUS LOCA- TIONS)	UL 121201	E198726

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 750-8212

Documentation

Manual
WAGO Solution Builder
Function Manual for PFC100 2nd Generati- on, PFC200 2nd Gene- ration and PFC300
Cyber Security for Con- troller PFC100 / PFC200
Product Manual PFC200 G2 2ETH RS
System Manual Series 750/753
Product Manual OPC UA Mapping Editor
OPC-UA Mapping Edi- tor

Manual
Product Manual WAGO MODBUS Master Confi- gurator
Product Manual Docu- mentation WAGO Solu- tion Builder
Migration Guide
Migrationsleitfaden von e!COCKPIT-Projekten zu CODESYS V3.5



Compatibility Information			
Compatibility List DALI Sensors	V 1.2.4 19.02.2025	pdf 516.91 KB	↓

Tutorial			
Establish connection to a controller using SSH	1.0 05.08.2017	mp4 28368.02 KB	↓
Set IP address with Ethernet Settings	3.0 18.12.2017	mp4 86272.82 KB	↓
Installation Tutorial Application Controller		mp4 29848.12 KB	↓

Bid Text			
Tender text Lighting Management		doc 78.50 KB	↓
750-8212	19.02.2019	xml 9.88 KB	↓
750-8212	21.11.2018	docx 21.85 KB	↓
ausschreiben.de 750-8212			↓

System Description			
Overview on WAGO-I/O-SYSTEM 750 approvals		pdf 770.48 KB	↓
Controller PFC100/200, General Product Information		pdf 578.66 KB	↓

Additional Information			
Wiring-Instructions	2.1.0 28.07.2022	pdf 2541.41 KB	↓
Drawing Lighting Management maximum expansion	19.06.2018	pdf 1168.50 KB	↓
Drawing Lighting Management minimum expansion	19.06.2018	pdf 464.61 KB	↓
WAGO OPC UA Server	V 1.1.0 28.01.2021	pdf 1132.87 KB	↓

Instruction Leaflet			
CCC Ex (Additional information)	26.04.2023	pdf 159.76 KB	↓

Application Notes				
Application Note CoDeSys 2.3				
Application note for installing a MySQL-Server on a PFC-Controller	1.0.4 16.05.2019	zip 4392.22 KB		↓
Application note Cloud Connectivity	2019-09-17 17.09.2019	zip 3973.74 KB		↓
HART Tool Routing via ETHERNET with 750-820x/750-88x and CODESYS 2.3 (a116120)	1.0.0 22.03.2019	pdf 3798.36 KB		↓
Erreichen der Linuxkonsole des PFC200 (a100701)	1.0.0 29.08.2016	zip 509.13 KB		↓
Using the web visualization with Java™ runtime environment (JRE, JVM) 7 update 51 (7u51) (a500690)	1.2.4 26.02.2019	zip 4896.43 KB		↓
Application Note PowerMeasurement_03 Library	19.01.2011 19.03.2012	zip 932.08 KB		↓
Application Note: DMX_02	26.04.2017 26.04.2017	zip 733.43 KB		↓
HVAC System Macros	10.03.2017 15.03.2019	zip 13252.92 KB		↓
Application Note: Mp-Bus_03 Library	2020-08-14 14.08.2020	zip 513.66 KB		↓
Application Note CoDeSys 2.3				
Connection of a Thermokon Thanos SR L MODBUS room control unit to the WAGO-I/O-SYSTEM	02.05.2013 13.05.2013	zip 305.89 KB		↓
Anbindung der HKW-Elektronik Wetterprognose-Station WS-K xx T ModBus	1.1 07.07.2017	zip 762.78 KB		↓
Application Note Scheduler_03.lib	20.05.2011 20.05.2011	zip 1717.92 KB		↓
GRUNDFOS GENibus interface, application note	20.03.2017 20.03.2017	zip 279.86 KB		↓
Connection of Thermokon Multi-function room control units WRF 08	10.04.2019 10.04.2019	zip 855.84 KB		↓
Connection of DMX devices to the WAGO-I/O-SYSTEM via the ArtNet-DMX STAGE-PROFI 1.1	11.01.2013 11.01.2013	zip 1450.63 KB		↓
Connection of Thermokon Multi-function room control units WRF 06	10.04.2019 08.04.2016	zip 826.10 KB		↓
Application Note for the 750-494 3-Phase Power Measurement Module	24.01.2014 11.11.2014	zip 1629.99 KB		↓

Application Note CoDeSys 2.3			
Application Note: EnOcean_06 Library	30.11.2016 30.11.2016	zip 822.25 KB	↓
Application Note for the 750-495 3-Phase Power Measurement Module	24.01.2014 24.01.2014	zip 1806.18 KB	↓
Application Note Library WagoDatalogger_02	2020-05-20 20.05.2020	zip 1256.74 KB	↓
Application Note Weather Station Elsner P03 Modbus	01.12.2011 28.10.2011	zip 269.09 KB	↓
Application note: DALI 753-647 Configuration Interface	1.0.2 29.04.2019	zip 3032.71 KB	↓
HLK-Anlagenmakros für TRIC	2015-07-10 10.07.2015	zip 74963.43 KB	↓
Application Note Library ModuleAccess_01	05.01.2016 29.01.2016	zip 1001.22 KB	↓
Anwendungshinweis für die Steuerung eines IguS robolink	12.11.2015 12.11.2015	zip 1281.38 KB	↓

Application Note e!COCKPIT			
e!COCKPIT Application Note Application Weather Station	2021-11-08 06.12.2021	pdf 920.20 KB	↓
eCOCKPIT Application Note WagoAppMP_Bus	1.0.2 06.12.2021	pdf 625.92 KB	↓
eCOCKPIT Application Note WagoAppEnOcean	1.0.3 31.01.2023	pdf 804.01 KB	↓
eCOCKPIT application note WagoSolElsner	1.0.2 06.12.2021	pdf 512.20 KB	↓
eCOCKPIT Application Note WagoAppM_Bus	1.0.5 18.01.2022	pdf 1395.44 KB	↓
e!COCKPIT application note WagoAppDALI	2021-11-08 08.11.2021	pdf 2216.90 KB	↓
eCOCKPIT application note WagoAppBuilding	1.0.2 06.12.2021	pdf 1152.22 KB	↓
eCOCKPIT Application Note WagoAppSMI	2023-01-10 17.01.2023	zip 3598.46 KB	↓
eCOCKPIT Application Note WagoAppDatalogger	1.0.3 06.12.2021	pdf 1353.81 KB	↓
eCOCKPIT application note installation MySQL-Server	1.0.3 09.09.2019	pdf 1868.46 KB	↓
e!COCKPIT application note WagoSolHKW	1.0.2 06.12.2021	pdf 611.79 KB	↓
eCOCKPIT Application Note WagoAppKNX	1.0.3 06.12.2021	pdf 1109.70 KB	↓
eCOCKPIT Application Note WagoAppScheduler	2021-11-08 06.12.2021	pdf 964.05 KB	↓
eCOCKPIT Application Note WagoAppDMX	1.0.3 06.12.2021	pdf 749.91 KB	↓
e!COCKPIT Application Note HVAC macros	2021-12-06 06.12.2021	zip 10154.49 KB	↓
e!COCKPIT Application Note WagoAppControlSuite	1.0.2 06.12.2021	pdf 831.57 KB	↓
CODESYS 3 Application Note WagoAppCloud	2022-11-04 04.11.2022	zip 2678.52 KB	↓
HART Tool Routing via ETHERNET with 750-820x and e!RUNTIME (a116130)	1.0.0 22.03.2019	pdf 2867.01 KB	↓
e!COCKPIT Application Note Mobotix	1.0.1 17.01.2022	pdf 2186.52 KB	↓
SNMP Communication (a500850)	1.1.0 20.02.2020	zip 3743.05 KB	↓
e!COCKPIT Application Note WagoSolEAP (a2019006)	2021-11-08 06.12.2021	pdf 659.32 KB	↓
e!COCKPIT Application Note WagoAppIOLink (a2019002)	2021-11-08 06.12.2021	pdf 569.23 KB	↓
e!COCKPIT Application Note WagoAppFuse (a2019001)	2021-11-08 06.12.2021	pdf 548.17 KB	↓
e!COCKPIT application note WagoAppJSON (a2019003)	2021-11-08 06.12.2021	pdf 516.17 KB	↓
e!COCKPIT Application Note WagoAppPowerMeasurement	2021-11-08 06.12.2021	pdf 930.71 KB	↓



Application Note e!COCKPIT			
e!COCKPIT Application Note BACnet PFC	1.0.0 06.12.2021	pdf 3323.56 KB	↓
e!COCKPIT Application Note WagoSysDynam- cloMapping (a2019013)	1.0.2 06.12.2021	pdf 1631.42 KB	↓
e!COCKPIT Application Note WagoAppPower- Supply (a2019012)	1.1.1 06.12.2021	pdf 707.04 KB	↓
e!COCKPIT Application Note WagoAppSolen- id	1.0.1 06.12.2021	pdf 555.15 KB	↓
e!COCKPIT Application Note WagoAppStepper	1.0.1 06.12.2021	pdf 3306.34 KB	↓
e!COCKPIT AppNote GENIbus (a2021003)	1.0.1 06.12.2021	pdf 755.13 KB	↓
CODESYS 3 Anwen- dungshinweis WAGO Solution Builder (a2021012)	2021-12-06 06.12.2021	zip 2678.00 KB	↓
CODESYS 3 Anwen- dungshinweis Thies Wettersensoren (a2021014)	2021-12-06 06.12.2021	zip 924.51 KB	↓
CODESYS 3 Anwen- dungshinweis HLK BACnet Makros (a2021010)	1.3.0 27.02.2023	zip 67588.63 KB	↓
e!COCKPIT Application Note OPC UA Client (a2022001)	1.0.0 05.04.2022	zip 1336.65 KB	↓

Application note, other			
Application Note WA- GOupload Packages (a2020007)	1.0.3 19.07.2024	zip 94031.91 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 750-8212	↓

CAE data	
EPLAN Data Portal 750-8212	↓
ZUKEN Portal 750-8212	↓

Engineering-Software

Configuration and Commissioning Software			
CODESYS V3.5		png 315.13 KB	↓
(759-316) WAGO Ether- net Settings / Serie 750	06.18.01.01 02.09.2021	zip 26678.54 KB	↓
WAGOupload	1.16.1.0 02.02.2022	zip 12111.45 KB	↓



Runtime Software

Firmware			
Image Update (SD Karte) PFC100/200 für Codesys V2.3 u. Elcockpit	V 22 SP1 12.12.2022	zip 205815.20 KB	↓
PFC200, Firmware Update für CoDeSys V3.5	V 23 24.02.2023	zip 167985.38 KB	↓
WUP Update (WAGOuploadTool) PFC100/200 Codesys V2.3 u. Elcockpit	V 22 SP1 12.12.2022	zip 203580.70 KB	↓

Device Files

Device Driver			
KNX Interface Lighting Management	29.01.2018	zip 2.03 KB	↓

Libraries

Library			
Anbindung von RFID-Transpondern Fa. SICK RFU6xx		txt 0.00 KB	↓
WagoConfigToolLIB	1.0.0 08.10.2013	pdf 340.92 KB	↓
WagoLibLed	1.0.0	pdf 504.39 KB	↓
WagoLibNetSnmpManager	1.1.0	pdf 1090.83 KB	↓
WagoLibDiagnosticIDs	1.0.0	pdf 291.17 KB	↓
WagoLibCpuUsage	1.0.0	pdf 259.51 KB	↓
Library WagoLib-Cloud_02.lib	2.2.4 21.01.2020	zip 56.21 KB	↓
WAGO_Datalogger_02.lib	2.7 20.05.2020	zip 662.90 KB	↓

1 Compatible Products

1.1 Product Expansions

1.1.1 Runtime software



[Item No.: 2759-2283/211-1000](#)
Runtime; BACnet; 300; M; Single License; Online activation



[Item No.: 2759-2273/211-1000](#)
Runtime; BACnet; 300; S; Single License; Online activation



[Item No.: 2759-283/211-1000](#)
Runtime; BACnet; 300; Single License; Online activation



[Item No.: 2759-2293/211-1000](#)
Runtime; DNP3 Master; M; Single License; Online activation



[Item No.: 2759-2290/211-1000](#)
Runtime; DNP3 Slave; Single License; Online activation



[Item No.: 2759-293/211-1000](#)
Runtime; IEC60870 Master; M; Single License; Online activation



[Item No.: 2759-290/211-1000](#)
Runtime; IEC60870 Slave; Single License; Online activation



[Item No.: 2759-2243/211-1000](#)
Runtime; IEC61850 Client; M; Single License; Online activation



1.1.1 Runtime software



Item No.: 2759-2240/211-1000
Runtime; IEC61850 Server; Single License; Online activation



Item No.: 2759-248/211-1000
Runtime; Multi Cloud Connectivity; Single License; Online activation



Item No.: 2759-247/211-1000
Runtime; Sparkplug; Single License; Online activation

1.2 Optional Accessories

1.2.1 Cables and connectors

1.2.1.1 Connector plug



Item No.: 750-979/000-011
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief



Item No.: 750-979/000-021
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief



Item No.: 750-979/000-012
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief



Item No.: 750-979/000-022
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief



Item No.: 750-977/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22



Item No.: 750-978/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief



Item No.: 750-977/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24



Item No.: 750-978/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief



Item No.: 750-977/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22



Item No.: 750-978/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief



Item No.: 750-977/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24



Item No.: 750-978/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief



Item No.: 750-975
ETHERNET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly

1.2.2 Communication

1.2.2.1 Communication cable



Item No.: 750-923
Configuration cable; USB connector; Length: 2.5 m



Item No.: 750-923/000-001
Configuration cable; USB connector; Length: 5 m

1.2.3 DIN-rail

1.2.3.1 Mounting accessories



Item No.: 210-196
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



Item No.: 210-198
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



Item No.: 210-197
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



Item No.: 210-114
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



Item No.: 210-118
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



Item No.: 210-115
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



Item No.: 210-112
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



Item No.: 210-113
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



1.2.4 Marking

1.2.4.1 Group marker carrier



[Item No.: 750-107](#)
Group marker carrier

1.2.4.2 Marker

[Item No.: 2009-145/000-006](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[Item No.: 2009-145/000-007](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[Item No.: 2009-145/000-023](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

[Item No.: 2009-145/000-012](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[Item No.: 2009-145/000-005](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

[Item No.: 2009-145/000-024](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[Item No.: 2009-145](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[Item No.: 2009-145/000-002](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



[Item No.: 248-501/000-006](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

[Item No.: 248-501/000-007](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

[Item No.: 248-501/000-023](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[Item No.: 248-501/000-017](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green



[Item No.: 248-501/000-012](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

[Item No.: 248-501/000-005](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[Item No.: 248-501/000-024](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[Item No.: 248-501](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



[Item No.: 248-501/000-002](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow



1.2.4.3 Marker carrier



[Item No.: 750-103](#)
Group marker carrier

1.2.5 Memory card

1.2.5.1 Memory card



[Item No.: 758-879/000-2108](#)
Memory Card SD; pSLC-NAND; 8 GB; Temperature range: -40 to 90°C



[Item No.: 758-879/000-001](#)
Memory Card SD; SLC-NAND; 2 GByte; Temperature from -40 to 90 °C

1.2.6 Shield termination

1.2.6.1 Shield clamping saddles



Item No.: 790-108

Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm



Item No.: 790-208

Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm



Item No.: 790-116

Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm



Item No.: 790-216

Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm



Item No.: 790-124

Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm



Item No.: 790-220

Shield clamping saddle; 30 mm wide; 6 ... 20 mm



Item No.: 790-140

Shield clamping saddle; diameter of compatible conductor

1.2.7 Software

1.2.7.1 Software Application



Item No.: 2759-206/261-1000

Application Energy Data Management; Single License; Online activation



Item No.: 2759-2110/261-1000

Application flexROOM; Single License; Online activation



Item No.: 2759-2015/261-1000

Application Grid Gateway; Single License; Online activation



Item No.: 2759-204/261-1000

Application Lighting Management; Single License; Online activation



Item No.: 2759-241/261-1000

Application Weather Station; Single License; Online activation



Item No.: 2759-245/211-1000

Library Controller Redundancy Master; Single License; Online activation



Item No.: 2759-203/211-1000

Library Power Plant Control; VDE-AR-N 4110 / 4120; unlimited; Single License; Online activation



Item No.: 2759-207/271-1000

Visualization Energy Data Management; Single License; Online activation



Item No.: 2759-2103/271-1000

Visualization Lighting Management; L; Single License; Online activation



Item No.: 2759-2102/271-1000

Visualization Lighting Management; M; Single License; Online activation



Item No.: 2759-2101/271-1000

Visualization Lighting Management; S; Single License; Online activation

1.2.8 System enclosure

1.2.8.1 System enclosure



Item No.: 850-825

IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20



Item No.: 850-826

IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip



Item No.: 850-827

IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip



Item No.: 850-828

IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip



Item No.: 850-826/002-000

IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip



Item No.: 850-827/002-000

IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip



Item No.: 850-828/002-000

IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip



Item No.: 850-834

IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20



Item No.: 850-835

IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip



Item No.: 850-836

IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip



Item No.: 850-814/002-000

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate



Item No.: 850-815/002-000

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate



Item No.: 850-816/002-000

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate



Item No.: 850-817/002-000

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate

