

PANDUIT®

Laser/Ink Jet Labels



Laser/Inkjet Labels

Panduit is a global leader in reliable and innovative solutions for identification and safety. Products are engineered for a wide variety of industrial applications – including electrical, electronics, industrial, and network. Panduit offers a complete leading-edge line of labeling software and high-performance label materials (all RoHS compliant) that provide enhanced productivity, dependability, and value to all infrastructure labeling requirements. Laser/Inkjet Labels are on 8.5" x 11" sheets.





ALARM



DEL



RUN



DANGER
HIGH VOLTAGE



STOP



START



Cable/Wire Labels

Turn-Tell® Labels.....	4
Self-Laminating Polyester Labels.....	5
LabelCore™ Fiber Optic Cable Identification System.....	6
Non-Laminated Polyolefin Labels	7

Component Labels

Polyester Component Labels.....	8
Tedlar® Component Labels	9
Polyolefin Network Labels.....	9

Labeling Software

Easy-Mark™ Desktop Labeling Software	10
--	----

Turn-Tell® Labels

- Labels rotate and slide along cables after installation for visibility from any angle, and allow repositioning on the wire/cable to align legends for improved aesthetics
- Ideal for use in high-density or space-constrained cable applications
- Eliminate the need to disconnect wire or replace label in the event of re-termination
- Temperature range: -65°F to 225°F (-54°C to 107°C)
- Used in a wrap format application. Not recommended for flag format applications.



Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg.							
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm											
 R050X075X1J	White	0.50	12.7	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.1	Cat. 6 28 AWG/ 18 – 14 AWG	12	84	5000							
R050X125X1J				1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP/ 12 – 10 AWG		60								
R050X150X1J				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/ Cat. 6UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG		48	2500							
R100X075X1J		1.00	25.4	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.1	Cat. 6 28 AWG/ 18 – 14 AWG	6	42		1000						
R100X125X1J	1.25			31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP/ 12 – 10 AWG	30										
 R100X150X1J	TIA Blue			1.50	38.1	1.50	38.1	0.50	12.7	0.22	5.6	0.28		7.1	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG	4	24	500				
R100X150X2J	TIA Red																					
R100X150X7J	TIA Yellow																					
R100X150X8J	White	1.50	38.1	2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP/ Cat. 6A UTP/ Cat. 6A FTP/ 8 – 4 AWG	3	18	500							
R100X225X1J				4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG		12								
R100X400X1J				1.50	38.1	1.50	38.1	0.50	12.7	0.22	5.6	0.28		7.1	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG	4	16	500				
R150X150X1J		2.00	50.8	1.50	38.1								0.50				12.7		0.22	5.6	0.28	7.1
R200X150X1J	2.25			57.2	0.75								19.1				0.28	7.1	0.39	9.9	Cat. 6 FTP/ Cat. 6A UTP/ Cat. 6A FTP/ 8 – 4 AWG	9
R200X225X1J	White	2.00	50.8	4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG	3	6	500							
R200X400X1J																						

*Order number of labels required in multiples of Standard Package Quantity.

Self-Laminating Polyester Labels

- Include a colored print-on area and clear over-laminate to protect the legend for clear and durable identification
- Labels are sized specifically for wire and cable applications
- Provide durability; high-temperature resistance, and dimensional stability; do not stretch or easily tear; preferred material for wire/cable labeling
- White labels are ASTM E-595 rated for airspace handling
- Temperature Range: -65°F to 225°F (-54°C to 107°C)
- For YAJ parts only: UL recognized, UL969, File # MH14979
- Use in wrap format application. Not recommended for flag format applications.

Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
 S050X075YAJ	White	0.50	12.7	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	Cat. 6 28 AWG/ 18 – 14 AWG	13	169	5000
 S050X125YAJ				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/ 12 – 10 AWG		104	
 S050X150YAJ				1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG		78	
S075X075YAJ		0.75	19.1	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	Cat. 6 28 AWG/ 18 – 14 AWG	9	117	2500
 S075X125YAJ				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/ 12 – 10 AWG		72	
 S075X150YAJ				1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG		54	
 S100X075YAJ		1.00	25.4	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	Cat. 6 28 AWG/ 18 – 14 AWG	7	91	2500
 S100X125YAJ				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/ 12 – 10 AWG		56	
 S100X150YAJ				1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG	7	42	1000
 S100X150YBJ	TIA Blue														
S100X150YDJ	TIA Green														
S100X150YFJ	TIA Orange														
S100X150YHJ	TIA Red														
S100X150YIJ	TIA Yellow														
 S100X225YAJ	White	1.00	25.4	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/ Cat. 6A UPT/ Cat. 6A FTP/ 8 – 4 AWG	8	32	1000
S100X225YBJ	TIA Blue														
S100X225YDJ	TIA Green														
S100X225YFJ	TIA Orange														
S100X225YHJ	TIA Red														
S100X225YIJ	TIA Yellow														

*Order number of labels required in multiples of Standard Package Quantity.

Self-Laminating Polyester Labels (cont.)

Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
S100X400YAJ	White	1.00	25.4	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	7	14	1000
S100X650YAJ				6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 – 350 MCM		7	
S150X400YAJ		1.50	38.1	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	5	14	
S200X150YAJ		2.00	50.8	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG	4	24	1000
S200X225YAJ				2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/ Cat. 6A UPT/ Cat. 6A FTP/ 8 – 4 AWG		16	
S200X400YAJ				4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG		8	
S200X650YAJ				6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 – 350 MCM		4	500

*Order number of labels required in multiples of Standard Package Quantity.

LabelCore™ Fiber Optic Cable Identification System

- Provides a larger labeling surface on small fiber cables and allows legends to be clearly seen
- Sleeve is made of flexible PVC material
- Locate sleeve on straight section of cable at least 2 inches from fiber boot




Part Number	Color	Part Description	Std. Pkg. Qty.
NWSLC-2Y	Yellow	Yellow cable identification sleeve for 2mm simplex fiber cable, 1 inch long, 100 per pack, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAM (MP300 Hand-held Printer); S100X150VATY (Thermal Transfer Printer).	100
NWSLC-2Y-AQ	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 1 inch long, 100 per pack, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAM (MP300 Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	
NWSLC-3Y	Orange	Orange cable identification sleeve for 3mm simplex cable, 1 inch long, 100 per pack, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAM (MP300 Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	
NWSLC-7Y	White	White cable identification sleeve for 3mm duplex fiber cable, 1 inch long, 100 per pack, use with labels: S100X225YAJ (Laser/Inkjet); S100X225VAM (MP300 Hand-held Printer); S100X225VATY or S200X225VATY (Thermal Transfer Printer).	
NWSLC2-2Y	Yellow	Yellow cable identification sleeve for 2mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-2Y-AQ	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-3Y	Orange	Orange cable identification sleeve for 3mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-3Y-AQ	Aqua	Aqua cable identification sleeve for 3mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-3Y-WH	White	White cable identification sleeve for 3mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-3Y-YL	Yellow	Yellow cable identification sleeve for 3mm simplex cable, 2 inches long, 100 per pack, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-7Y	White	White cable identification sleeve for 3mm duplex fiber cable, 2 inches long, 100 per pack, use with labels: S200X225YAJ (Laser/Inkjet) S200X225VATY (Thermal Transfer Printer).	

*Order number of sleeves by Standard Package Quantity.

Non-Laminated Polyolefin Labels

- Use as wrap-around label or flag-style marker for wire/cable labeling
- Conformable material for general identification
- Temperature range: -40°F to 180°F (-40°C to 82°C)

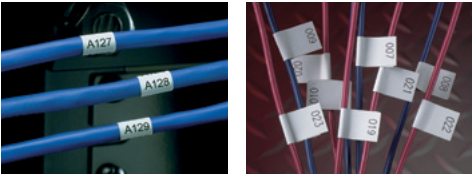

Part Number	Color	Width		Length		Min. Cable O.D.		Max. Cable O.D.		Wire/Cable Size Range	Labels Per Row	Labels Per Sheet	Labels Per Pkg.
		In.	mm	In.	mm	In.	mm	In.	mm				
N025X150FJJ	White	0.50	12.7	1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG	67	150	10000
N050X075FJJ				0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	14	154	
N050X125FJJ				1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		98	5000
N050X150FJJ				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		84	
N100X150FJJ				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		42	

*Order number of labels required in multiples of Standard Package Quantity.

Polyester Component Labels

- Used to identify patch panels, faceplates, punch-down blocks, and other network systems hardware
- Used to identify electrical and electronic components and devices
- Temperature range: -40°F to 311°F (-40°C to 154°C)
- UL recognized, UL969, File# MH14979
- cUL recognized, C22.2 No. 0.15-01, File# MH14979



Part Number	Color	Width		Height		Labels Per Row	Labels Per Sheet	Labels Per Pkg
		In.	mm	In.	mm			
C038X038YJJ	White	0.38	9.7	0.38	9.7	16	352	10000
C050X044YJJ		0.50	12.7	0.44	11.2	13	247	
C060X020YJJ		0.60	15.2	0.20	5.1	11	385	
C075X025YJJ		0.75	19.1	0.25	6.4	9	270	
C075X050YJJ				0.50	12.7		153	
C080X020YJJ		0.80	20.3	0.20	5.1	8	280	
C100X025YJJ		1.00	25.4	0.25	6.4	7	210	
C100X038YJJ				0.38	9.7		140	5000
C100X050YJJ				0.50	12.7		119	10000
C150X050YJJ		1.50	38.1	0.50	12.7	5	80	2500
C150X075YJJ				0.75	19.1		60	
C160X020YJJ		1.60	40.6	0.20	5.1	4	140	5000
C200X050YJJ		2.00	50.8	0.50	12.7		64	1000
C200X100YJJ				1.00	25.4		28	
C275X125YJJ		2.75	69.9	1.25	31.8	6	18	
C300X038YJJ		3.00	76.2	0.38	9.7	2	40	
C300X100YJJ				1.00	25.4		18	
C400X100YJJ		4.00	101.6	1.00	25.4		20	
C400X200YJJ				2.00	50.8	1	10	
C788X050YJJ		7.88	200.2	0.50	12.7		16	400
C850X1100YJJ		8.50	215.9	11.00	279.4		1	25

*Order number of labels required in multiples of Standard Package Quantity.

Tedlar® Component Labels

- Self-extinguishing and ideal for labeling high-temperature areas
- Temperature range: -40°F to 275°F (-40°C to 135°C)
- UL969 recognized, File # MH 14576, CUL recognized, C22.2 No 0.15-01, File # MH 14676



Part Number	Color	Width		Height		Labels Per Row	Labels Per Sheet	Labels Per Pkg
		In.	mm	In.	mm			
C050X125TJJ	White	0.5	12.7	1.25	31.8	5	80	1000
C090X025TJJ		0.9	22.9	0.25	6.4	8	224	5000
C100X038TJJ		1	25.4	0.38	9.7	7	140	
C200X038TJJ		2	50.8	0.38	9.7	3	60	1000

*Order number of labels required in multiples of Standard Package Quantity.
Tedlar® is a registered trademark of E. I du Pont de Nemours and Company.

Polyolefin Network Labels

- Used to identify patch panels, faceplates, and other systems hardware
- Used to identify electrical and electronic components and devices
- Temperature range: -40°F to 180°F (-40°C to 82°C)




Part Number	Color	Width		Height		Type of Application	Labels Per Row	Labels Per Sheet	Labels Per Pkg
		In.	mm	In.	mm				
C061X030FJJ	White	0.61	15.5	0.30	7.6	1-port identifier	13	325	5000
C125X030FJJ		1.25	31.8	0.30	7.6	2-port identifier	6	150	2500
C188X030FJJ		1.88	47.8	0.30	7.6	3-port identifier	4	100	1000
C200X100FJJ		2.00	50.8	1.00	25.4	General identifier		36	
C252X030FJJ		2.52	64.0	0.30	7.6	4-port identifier	3	75	
C261X030FJJ		2.61	66.3	0.30					
C379X030FJJ		3.79	96.3	0.30	7.6	6-port identifier	2	50	

*Order number of labels required in multiples of Standard Package Quantity.

Easy-Mark™ Desktop Labeling Software

- Advanced data import from AutoCAD, .pdf, and image files
- Link dynamically to database programs (Access, Oracle, SQL)
- Create workflow templates for importing lists of text, barcodes, and graphic files
- Design labels quickly and easily with line-based text entry
- Use object-based drag-and-drop capability for more complex label designs
- Intuitive user interface and realistic label view eliminate guesswork
- Versions available for downloading or on USB flash drive
- Share label files with Easy-Mark Mobile App
- Use with all existing Panduit Easy-Mark, Easy-Mark Plus, and Pan-Mark label files

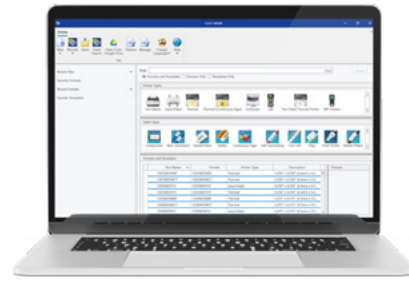

System Requirements:

- 4 GB hard drive space and 4 GB Memory
- Microsoft Windows 10 or higher (64 bit)
- Microsoft .NET Framework 4.8 or higher
- Mouse or compatible pointing device
- Keyboard
- For EM-DL downloadable version: Internet connection
- For EM-2GO version: USB Port

Note: Additional requirements for Server version only:

- Windows Server 2016 (64 bit) or higher
- 8 GB hard drive space and 32 GB memory

Part Number	Description
EM-DL*	Easy-Mark Desktop Labeling Software - Downloadable Version
EM-2GO	Easy-Mark Desktop Labeling Software - USB Flash Drive Version
EM-SERVER-DL*	Easy-Mark Desktop Labeling Software - Server Version - Downloadable
EM-SERVER-USB	Easy-Mark Desktop Labeling Software - Server Version - USB Flash Drive

Windows is a registered trademark of Microsoft Corp. in the United States and/or other countries.

*Customer will receive a DVD Case with information and serial number for the downloadable version

Customer Support

Need support with printing?

Our Identification Support team can connect you with the right resources to help!



866-871-4571

ga-techsupport@panduit.com

Learn more at
panduit.com/desktop-printers

We have the knowledge
and experience to help you
make the most of your
infrastructure investment.

panduit.com/desktop-printers



Connect with an Expert:
panduit.com/contact-us

PANDUIT®
infrastructure for a connected world