We connect and protect

Sun Shade

Designed to provide reliable protection for your industrial enclosure HMI screens. Built to withstand harsh environments, it effectively blocks direct sunlight, reducing glare and maintaining screen visibility.



APPLICATION

When the product is deployed to provide shade, it can be closed by folding the side panels inward toward the HMI screen it protects. Once the sides are folded, the main cover pivots downward, aligning with tabs that extend through a small opening in the cover. These tabs are designed with holes sized to accommodate a standard padlock, enabling the Sun Shade to be securely locked in the closed position.

INDUSTRY STANDARDS


- Maintains NEMA Enclosure Rating Type 3R, 4, and 4X
- UL Listed
- IP66 Rating

FEATURES

- Available in 3 different sizes
- .06" aluminum, grade 5052
- Aluminum rivets
- Stainless steel mounting hardware kit (included)
- Padlockable (Padlock not included)

FINISH

White smooth glossy powder-coat paint (paint code: 87400262)

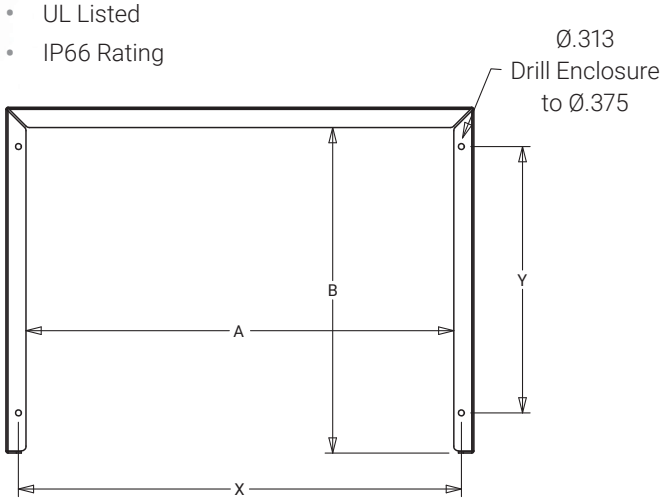

Model	A (in)	B (in)	X (in)	Y (in)
SSW08X10	10.4	8.1	11.28	5.0
SSW12X16	16.4	12.5	17.28	9.5
SSW17X22	22.4	17.1	23.28	14.0

Our powerful portfolio of brands:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE

©2025 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.
nVent reserves the right to change specifications without notice.