(BP320-V)

New

BP320 Series

320 A 600 V Self Contained Meter Socket

Product Specifications Overhead

- 320 A overhead 600 V maximum
- Self-contained meter socket with bypass mechanism
- Single phase service
- Line and load side termination; tunnel type connectors; Dual rated for 1 x 500 kcmil or 2 x 250 kcmil
- Neutral termination; tunnel type connectors; Dual rated 2 x 250 kcmil
- Supplied with screw type sealing ring
- Weatherproof type 3R enclosure
- Primarily uses in: All Provinces

Product Specifications Underground

- 320 A underground 600 V maximum
- Self-contained meter socket with bypass mechanism
- Single phase service
- Neutral and line side terminations; double 1/2 in. studs to accomodate compression lugs for underground service (1 x 500 kcmil or 2 x 250 kcmil)
- Load side terminations; tunnel type connectors; Dual rated for 1 x 500 kcmil or 2 x 250 kcmil
- Neutral load side terminations; tunnel type connectors; Dual rated 2 x 250 kcmil
- Supplied with screw type sealing ring
- Weatherproof type 3R enclosure
- Primarily uses in: All Provinces

CAT. NO.: BP250

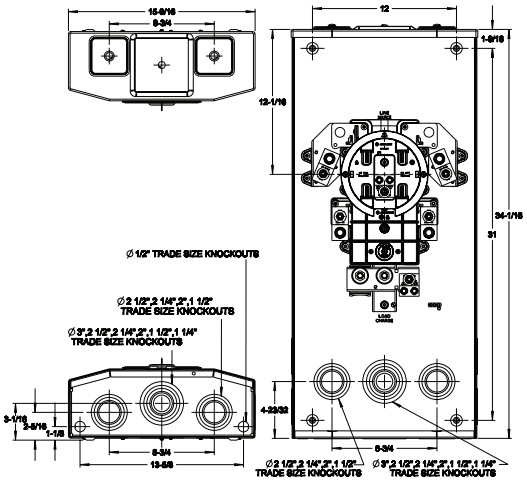

OVERHEAD

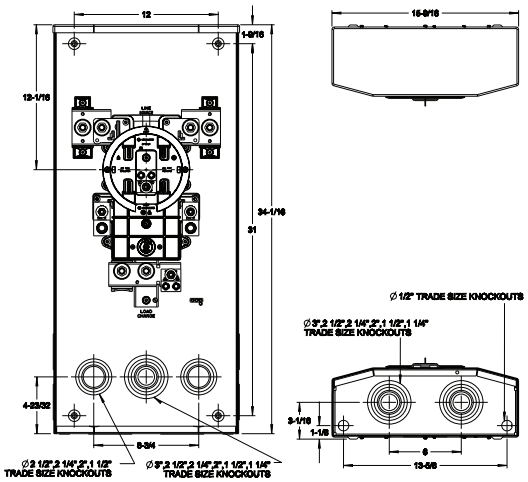

UNDERGROUND

Approved for copper or aluminum

Cat. No.	Type	Description	Color	Position	Dimensions (in.)			Weight Each	
					H	W	D	lb.	kg
BP320-V	OH	Overhead 320 A 120/240 with bypass mechanism	Grey	1	34-1/16	15-9/16	5-15/16	47	21.31
BP320-V-08			Dark Grey						
BP320-V-09			White						
BP320-V-11			Beige						
BP320-TV	UG	Underground 320 A 120/240 with bypass mechanism	Grey						
BP320-TV-08			Dark Grey						
BP320-TV-09			White						
BP320-TV-11			Beige						
Accessory									
BP250	Connector kit 2 x 250 kcmil								