


T8 /T5 - 8' VAPOR TIGHT, IP65 WET LOCATION LUMINAIRE
(1 OR 2 LAMP 8') OR (2 OR 4-LAMP 8' TANDEM)

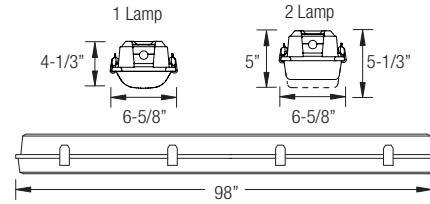

APPLICATION:

The OWVS series is a wet location luminaire that is suitable for exposure to areas where water might be a hazard. Common applications include parking garages, schools, industrial facilities, and stairways.

PRODUCT FEATURES:

- One-piece fiberglass housing with polycarbonate lens
- Easy install polycarbonate clips secure lens to housing and ensure vapor-tight operation
- Continuous one-piece gasket assures airtight seal, keeping out condensation, humidity and dust
- Suitable for wet environments
- Shallow design is ideal for commercial and industrial spaces requiring general illumination
- Suitable for suspension by chain or cable and can be surface mounted, all required hardware is included (less chain, cable)
- Lightweight design enables for quick, easy installation
- One-piece gasket replaces full metal enclosure
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

LISTING

- UL/C-UL listed to US and Canadian standard
- IP65 Rating

WARRANTY

Guaranteed for one year against mechanical defects



Ordering Information > Example: 8-OWVS-2-32-T8-ADV-10-MVOLT

8	OWVS						
---	------	--	--	--	--	--	--

FIXTURE SIZE	SERIES	# OF LAMPS/LAMP TYPE	VOLTAGE ²	# OF BALLAST	BALLAST FACTOR	LAMP INSTALLED
8- 8'	OWVS- Oracle Wet Location Vapor Tight	1-59-T8 (1 lamp/59W/T8) 2-59-T8 (2 lamps/59W/T8) 8' TANDEM FIXTURE 2-32-T8 (2 lamps/32W/T8) 4-32-T8 (4-lamps/32W/T8) 2-28-T5 (2 lamps/28W/T5) 4-28-T5 (4-lamps/28W/T5) 2-54-T5HO (2 lamps/54W/T5HO) 4-54-T5HO (4-lamps/54W/T5HO)	(Blank)- MVOLT (120/277) 120 277 347 480	(Blank)- 1 Ballast 2- 2 Ballasts	(Blank)- Normal BF HBF- High BF LBF- Low BF	(Blank)- No lamp L30K- 3000K L35K- 3500K L41K- 4100K L50K- 5000K

EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)

ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-T5-T5HO-700	Up to 700 L. for T5 or T5HO
EMG-T5-T5HO-1300	Up to 1300 L. for T5 or T5HO
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8, BX, T5 or T5HO
GTD	Generator Transfer Device

BALLAST CONFIGURATION & CODE

32W/T8	59W/T8	28W/T5	54W/T5HO	DESCRIPTION
(Blank)	(Blank)	-	-	Electronic Instant Start
EPS	EPS	(Blank) ¹	(Blank)	Electronic Program Start
ADV-7	-	-	ADV-7 ¹	Advance Mark-7 ²
ADV-10 ¹	-	-	ADV-10 ¹	Advance Mark-10 ²
-	-	ADV-OPT	-	Advance Optanium ²
ADV-ESS ¹	-	-	-	Advance Essential ²
ADV-ROVR	-	-	ADV-ROVR ¹	Advance Rover ²
LUT-EHD ¹	-	LUT-EHD ¹	LUT-EHD ¹	Lutron Ecosystem H-Series ²
LUT-2W ¹	-	-	-	Lutron Tu-Wire ²
LUT-EC5 ¹	-	LUT-EC5 ¹	-	Lutron Ecosystem ²
LUT-EC3 ¹	-	LUT-EC3 ¹	LUT-EC3 ¹	Lutron Eco-10 ²
LUT-TVE ¹	-	-	-	Lutron Tve ²
LUT-H3D ¹	-	LUT-H3D ¹	LUT-H3D ¹	Lutron Hi-Lume 3D ²
-	-	-	LUT-ECD ¹	Lutron Ecosystem (347V Only) ²

1- Requires 2 Ballasts for 4-lamps.

2- Voltage must be specified for dimming ballast.

WIRING OPTIONS

PCSB120	- 10' Nema 5-15R 120V Straight Blade Plug
PCSB277	- 10' Nema 7-15R 277V Straight Blade Plug
PCTL120	- 10' Nema L5-15R 120V Twist Lock Plug
PCTL277	- 10' Nema L7-15R 277V Twist Lock Plug
IPTL120	- 10' 120V IP Rated Twist lock Plug
IPTL277	- 10' 277V IP Rated Twist lock Plug
S01	- 10' 120V/277V SO Cord
S02	- 10' 480V SO Cord

(Consult Factory for 208V, 248V, 347V and 480V wiring)

OTHER OPTIONS

CH	- Heavy Duty Chain
MS	- Motion Sensor (Damp location only)
MSPH	- Motion Sensor with Photocell
GSS	- Gripple Suspension System
WLMS	- Wet Location Motion Sensor
USA	- Made in America Compliance