

12V XENON ACCENT / TASK DIMMABLE PUCK LIGHTING

The standard in low voltage puck lighting has never been easier to specify and install. GM Lighting's 12V Xenon Accent/Task Puck is offered either as a single puck, or as a 3 light kit with switched cord and plug and transformer.

- Recessed or surface mount
- Dimmable ▪ Captive frosted lens
- 20W pre-installed xenon lamp
- Easy lamp replacement
- 300 lumens per puck ▪ 2900K
- U.L. File E180625



XP20-BZ



| Catalog No. | Lamp | Description | Wattage | Dimensions | Mounting | Finish | Lamp Life |
|-------------|--------------|--|---------|-------------|---------------------|----------------|-----------|
| XP20-W | G4-12V Xenon | Individual | 20W | 2-7/8" x 1" | Surface or Recessed | White | 8000 hrs. |
| XP20-B | G4-12V Xenon | Puck | 20W | 2-7/8" x 1" | | Black | 8000 hrs. |
| XP20-BZ | G4-12V Xenon | w/ 48" Stripped Wire Leads | 20W | 2-7/8" x 1" | | Bronze | 8000 hrs. |
| XP20-C | G4-12V Xenon | | 20W | 2-7/8" x 1" | | Chrome | 8000 hrs. |
| XP20-BNK | G4-12V Xenon | | 20W | 2-7/8" x 1" | | Brushed Nickel | 8000 hrs. |
| XP20-3-W | G4-12V Xenon | 3 - Puck Kit w/ Switched Cord & Plug & Transformer | 3 x 20W | 2-7/8" x 1" | Surface or Recessed | White | 8000 hrs. |
| XP20-3-B | G4-12V Xenon | | 3 x 20W | 2-7/8" x 1" | | Black | 8000 hrs. |
| XP20-3-BZ | G4-12V Xenon | | 3 x 20W | 2-7/8" x 1" | | Bronze | 8000 hrs. |
| XP20-3-C | G4-12V Xenon | | 3 x 20W | 2-7/8" x 1" | | Chrome | 8000 hrs. |
| XP20-3-BNK | G4-12V Xenon | | 3 x 20W | 2-7/8" x 1" | | Brushed Nickel | 8000 hrs. |


Individual pucks supplied with 48" stripped wire leads. See page 58 for remote electronic transformers. XP20-3 kits cannot be altered.

XP20 Series Accessories

| | |
|--------|----------------------------|
| XPE-4 | 4' xenon puck extender |
| XPE-8 | 8' xenon puck extender |
| XPE-12 | 12' xenon puck extender |
| G4-12V | 20W xenon replacement lamp |

Note: XPE xenon puck extensions are for use with XP20-3, 3 light xenon puck kits only.

XP20 Series Dimensions and Configurations

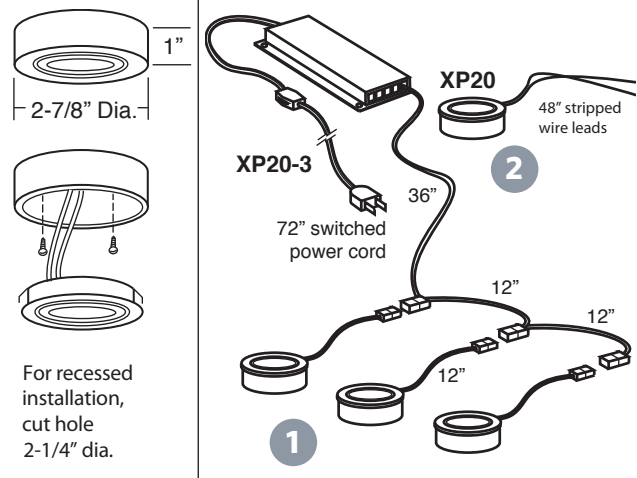

Key to XP20 Diagrams (above right): **1.** XP20-3, 3 light kit with switched cord & plug & transformer. **2.** XP20 individual pucks come with 48" stripped wire leads.