

## Nonmetallic Covers

### While-In-Use Applications

#### Technical Specifications



While-In-Use covers keep out moisture and take the hassle and cost out of installation. Single or two-gang kits accommodate various configurations, and some covers are designed with a method to secure using an external locking device. Perfect for all outdoor outlets including landscape lighting, lawn equipment, pool/hot tub pumps, holiday lighting and car play in heater blocks.

#### Applications :

- Protects receptacles and switches for single and two gang configurations in dry and wet locations while equipment is in use
- Prevents accidental equipment disconnects
- Deters theft and equipment removal (when locked)

#### Features/Benefits :

- Supplied in kit form covering most installation requirements
- Horizontal or vertical orientation
- Lockable cover design for added security
- High impact UV-resistant polycarbonate base construction
- Weatherproof, thermoplastic base configuration
- Accommodates most commonly used receptacles and switches
- Mounts to box or to device (all installation screws included)
- Device holes are keyed for easy installation in retrofit applications
- Nonmetallic, flame retardant

#### Standard Materials :

- Bases: polycarbonate
- Covers: thermoplastic or polycarbonate

#### Compliances :

Compliances as noted on each page of the catalogue include :

- CSA Certified
- UL Listed
- cUL Listed




## Nonmetallic Covers



### While-In-Use



CKNM-NG




2CKNM-NG



\*1-19/32 diameter fits up to 30A twist lock receptacle

CKNMW-NG




\*2-1/8 diameter  
\*\*1-19/32 diameter

CKNMG-NG





Cat. No.	Description	A (in.)	B (in.)	C (in.)
<b>Universal While-In-Use Covers (Nonmetallic)</b>				
CKNM-NG	Single Gang accommodates Duplex, GFCI, switch, single 1-19/32 horizontal or vertical receptacles – lockable	5-1/2	2-3/4	3.34
2CKNM-NG	Two Gang accommodates Duplex, GFCI, switch, single 1-19/32 or 2-1/8 horizontal or vertical receptacles – lockable	5	2-3/8	3.34
CKNMW-NG	Cover and base in white	5-1/2	2-3/4	3.34
CKNMG-NG	Cover and base in grey	5-1/2	2-3/4	3.34

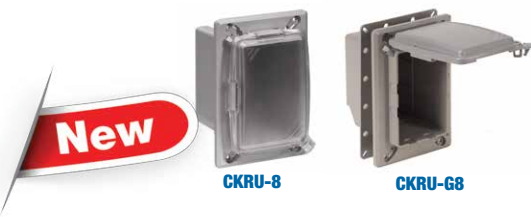

CKRU-8

CKRU-G8

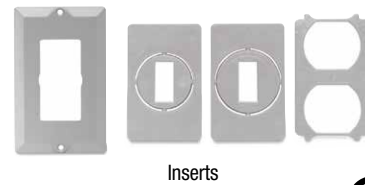

Inserts



Cat. No.	Description	A (in.)	B (in.)	C1 (in.)	C2 (in.)
<b>Universal Recessed Bodies (Nonmetallic)</b>					
CKRU-G8†	Grey body with grey cover. Accommodates GFCI, Duplex, toggle switch and single 1-9/16 receptacle – lockable	7-1/4	5	1-1/2	3-9/16
CKRU-WH8†	White body with white cover. Accommodates GFCI, Duplex, toggle switch and single 1-9/16 receptacle – lockable				
CKRU-8†	Grey body with clear cover. Accommodates GFCI/Duplex, toggle switch and single 1-9/16 receptacle – lockable				
CKNMW-NGD	Cover and base in white				
2CKNMG-NGD	Cover and base in grey				



† Not CSA Certified

## Nonmetallic Covers



### While-In-Use



E9UVCRN2



Inserts





Cat. No.	Description	Colour	A (in.)	B (in.)	D (in.)	F (in.)	G (in.)
<b>Vertical Mount – Standard Covers – 2-41/64 in. Deep (Nonmetallic)</b>							
E9UVGRN2	Accommodates Toggle, Duplex or GFCI receptacles	Grey	6-1/2	3-25/64	2-21/64	4-3/32	2-9/32
E9UVWRN2		White					
E9UVCRN2		Clear					


\* Lockable: drill a 7/32 hole on cover lug



E9UHGRN2



Inserts




Cat. No.	Description	Colour	A (in.)	B (in.)	D (in.)	F (in.)	G (in.)
<b>Horizontal Mount – Standard Covers – 2-17/32 in. Deep (Nonmetallic)</b>							
E9UHGRN2	Accommodates GFCI or Duplex receptacles	Grey	4-3/4	5-7/32	2-17/32	2-9/32	4-3/32
E9UHWRN2		White					
E9UHCRN2		Clear					

\* Lockable: drill a 7/32 hole on cover lug

## Nonmetallic Covers

### While-In-Use

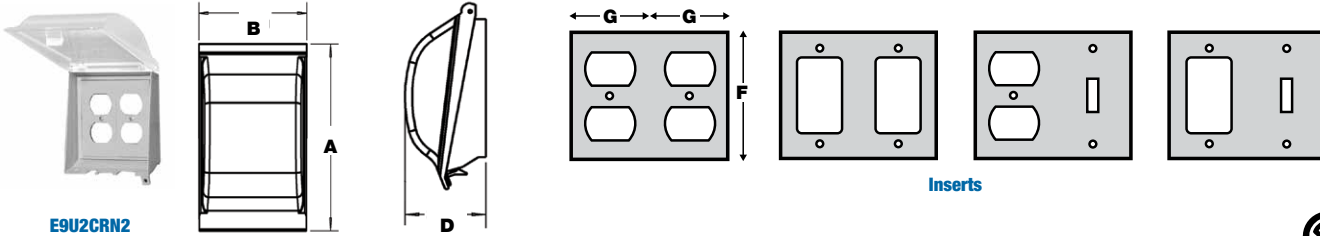

Cat. No.	Description	Colour	A (in.)	B (in.)	D (in.)	F (in.)	G (in.)
<b>Double Gang – Standard Covers – 2-21/64 in. Deep (Nonmetallic)</b>							
E9U2GRN2	Accommodates double Duplex, double GFCI, combination Duplex and Toggle or combination GFCI and Toggle receptacles	Grey	6-1/2	5-7/32	2-21/64	4-7/64	2-3/64
E9U2WRN2		White					
E9U2CRN2		Clear					

Lockable: drill a 7/32 hole on cover lug