

FEATURES & SPECIFICATIONS

INTENDED USE — The IBZ fluorescent high bay is ideal for new construction and renovation projects. It is a one-for-one replacement of common metal halide high bay systems. The unique Cool Running Plus™ technology provides industry-leading, trouble-free operation in ambient temperatures up to 155°F (68°C). Applications include manufacturing, warehousing, commercial and industrial facilities. The IBZ fixture performs well at mounting heights from 15'-40'. Certain airborne contaminants can diminish integrity of acrylic. Click here for Acrylic Environmental Compatibility table for suitable uses.

CONSTRUCTION — The highly configurable design of the IBZ high bay allows for a multitude of fixture options that can either be factory- or field-installed. The easy-access ballast channel houses the proprietary Cool Running Plus technology, which is the most advanced fluorescent ballast technology available for fluorescent high bay lighting. It has independent lamp operation to reduce lamp maintenance costs, is fast-starting to improve occupancy sensing, and a proprietary thermal-sensing processor that allows for reliable operation in environments where ambient temperatures can reach up to 155°F (68°C).

In addition to the reliable operation of IBZ fixtures, the reflectors tightly control the distribution of light and effectively manage lamp heat to increase the overall efficiency. The result is superior optics in either narrow distribution for aisles, or wide distribution for general lighting. Installation is made guick and easy with IBZ hanging accessories such as the aircraft cable and single-point mounting bracket. IBZ fixtures can be factorywired to have both sensors and cord sets, further reducing installation time. The configurability, performance and ease of installation make IBZ fixtures the preferred choice for fluorescent high bay lighting.

Channel is formed of heavy-duty code-gauge (22-gauge) steel to stand up to the most demanding elements. Lamp holder assembly protects from incidental damage or movement of sockets during handling and installation. Lamp holders (sockets) are manufactured from PBT (polybutylene terephthalate) material for increased chemical resistance along with secure positioning rotating collars and enclosed contacts. Access plate on the back of the channel housing allows quick and easy wiring.

paint adhesion and rust resistance.

OPTICS — Two optical systems are available. Narrow distribution is ideal for narrow or aisle lighting applications and features precision-formed segmented optics utilizing specular aluminum reflector. Provides 95% reflectivity and warranted for 25 years. Wide distribution includes high-reflectance white finish for general or open areas.

ELECTRICAL — Thermally protected, resetting, Class P, HPF, A sound-rated electronic ballast. AWM TFM or THHN wire used throughout rated for required temperatures. Ballast disconnect (BDP) is standard unless EL14 or cord set is requested.

INSTALLATION — Suitable for suspension by chain, cable, surface-mounting bracket, hook monopoint or single (pendant) monopoint. Surface mounting not recommended without optional surface mounting bracket. To maintain high ambient listing, fixture should be mounted at a minimum plenum height of 8".


LISTINGS — CSA Certified to U.S. and Canadian safety standards (UL1598 and CSA 250.0-08) for 55°C and 40°C lensed. Suitable for damp locations.

WARRANTY — 1-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Actual performance may differ as a result of end-user environment and application.

Note: Specifications subject to change without notice.


DIMENSIONS

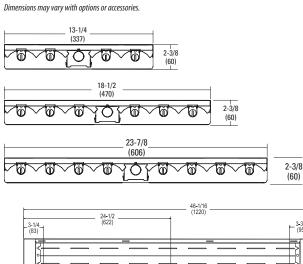

Finish: Channel is high-gloss white baked enamel; five-stage iron phosphate pretreatment ensures superior

	SPECIFICATIONS							
	Length	Width	Depth	Weight				
4-lamp	48-1/16 (1221)	13-1/4 (337)	2-3/8 (60)	16 lbs. (7.3 kg)				
6-lamp	48-1/16 (1221)	18-1/8 (460)	2-3/8 (60)	20 lbs (9.1 kg)				
8-lamp	48-1/16 (1221)	23-7/8 (606)	2-3/8 (60)	25 lbs. (11.3 kg)				

All dimensions are inches (millimeters) unless otherwise specified and may vary with options or accessories.

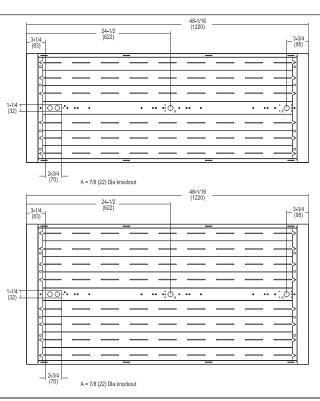

3-3/4 (95) 1-1/4 •• 2-3/4 7/8 (22) Dia knockou

INDUSTRIAL

Catalog Number Notes

Туре



Fluorescent High Bay



IBZ Fluorescent High Bay, T5HO

ORDERING INF	ORMATION	Lead times	will vary d	epending on options se	lected. Consul	t with your sales r	epresent	ative.				Exan	nple : IBZ 454
IBZ													
Series	Lamp type		Distribu	tion	Shielding	2, 3		Voltage		Ballast c	onfiguration	Ballast ⁶	
IBZ Fortandem double-length unit, add prefix "T". Ex: TIBZ	654L 6-lam 854L 8-lam <u>Unlamped</u> 454 4-lam 654 6-lam	ed ¹ 1p 54W T5H0 1p 54W T5H0 1p 54W T5H0 1p 54W T5H0 1p 54W T5H0 1p 54W T5H0	(blank) NDU WD WDU	Narrow distribution, \leq 5% uplight Narrow distribu- tion, enhanced uplight, \leq 13% uplight Wide distribution, \leq 5% uplight Wide distribution, enhanced uplight, \leq 13% uplight	(blank) A12125 ACL PCL125 NLWG	No shielding Pattern 12 acry 0.125" ⁴ Clear acrylic, O Clear polycarb 0.125" ⁴ No lens; wireg door frame	.125" ⁴ onate,	(blank) HVOLT	MVOLT; 120-277V 347V- 480V ⁵	(blank) 4-lamp = 6-lamp = 8-lamp =	(1) 2-lamp and (1) 4-lamp ballast	ACRP GEB10PS90	Cool Running Plus TS elec- tronic, 1.0 BF programmed rapid start TS electronic 1.0 BF, pro- grammed rapid start
.amp color		Options											
LP835 F. LP850 F. Amalgam lamp LP841A F. LP835A F. LP850A F. Energy-saving P841E49 F. P835E49 F.	54T5H0/841 54T5H0/835 54T5H0/850	GLR GMF EL14 EL14SD I162 OUTCTR OCS IMP FSP HBBSIC HBBS36IC	Internal si Emergence Emergence diagnosti 1250 lumo Wiring lea of fixture RELOC® OI Integrate Integrat fi Chain han	ens per lamp battery ^{10,} ads pulled through bacl nePass [®] 5' installed ⁸ d modular plug ^{13,} ull side panels	k center	CS3W Tw CS7W Str CS11W Tw CS25W Tw CS97W Tw CS93W 60 (not <u>Wireguards:</u> WGX Ext 2WGX Ext	ist-lock, aight plu ist-lock, ist-lock, ist-lock, 0 SO white voltage ternal wi ternal wi	g, 120V ^{14, 15} 120V ^{14, 15} g, 277V ^{14, 15} 277V ^{14, 15} 347V ^{14, 15} 480V ^{14, 15} te cord, no p required) ^{14,} reguard inst f fixture ¹⁶	LCC LCF LAC LAC LAF MS alled MS alled nPl nM	IOSZU Ai ZU Ai ZU 36 IOSZU 36 IOSZU 36 ZU 36 ZU 36 ZU 36 E360 36 P16D nL SI nL	5: sle motion sensor, mming ^{17,18} sle motion sensor v 50° motion sensor v 50° motion sensor, mming ^{17,18} 50° motion sensor, 50° motion sensor, 50° motion sensor, 50° motion sensor, 19th switching/dii 19th, aisle motion 19th, 360° motion	vith photocell; pr pre-wired ^{17,18} pre-wired ^{17,18} pre-wired; prog with photocell, p embedded, higl embedded, low mming module ¹ sensor, pre-wire	re-wired ^{17,18} rammable pre-wired ^{17,18} n bay ^{17,18} bay ^{17,18} a sed ²⁰
Accessories: Or Mounting: IBAC120 M20 IBAC240 M20 IBHMP IBZACVH IBZACVH IBZTFC IBZPMP		0' with hook (or 0' with hook (or nt	ne pair)	Field-installable door DLIBZ14 A12125 DLIBZ14 ACL DLIBZ14 PCL125 DLIBZ19 A12125	4-lamp patte lens, 0.125" 4-lamp clear	ern 12 acrylic ^{13, 24} acrylic lens ^{23, 24} polycarbonate ^{13, 24}	(S1 (S3 (S7 (S1 (S2	WIMP S WIMP Tr WIMP S 1WIMP Tr 5WIMP Tr	nsors for IMP traight plug, wist-lock, 120 traight plug, wist-lock, 277 wist-lock 347 00V S0 white	120V 8, 14, 15 0V 8, 14, 15 277V 8, 14, 15 7V 8, 14, 15	<u>Wireguards</u> WGIBZ14 WGIBZ19 WGIBZ24	Standard 4-la Standard 6-la	mp wireguard mp wireguard mp wireguard

Mounting:		Field-installable do	or and lens assemblies: 23, 24	Cord sets and	sensors for IMP option:	Wireguards:	
IBAC120 M20 IBAC240 M20 IBHMP IBZACVH IBZTFC IBZPMP	Aircraft cable 10' with hook (one pair) Aircraft cable 20' with hook (one pair) Hook monopoint Aircraft 10' V hanger (one pair) Tandem coupler and side panel Pendant monopoint splice box, includes side covers ²²	DLIBZ14 A12125 DLIBZ14 ACL DLIBZ14 PCL125 DLIBZ19 A12125 DLIBZ19 ACL	 4-lamp pattern 12 acrylic lens, 0.125" ^{23,24} 4-lamp clear acrylic lens ^{23,24} 4-lamp clear polycarbonate lens, 0.125" ^{23,24} 6-lamp pattern 12 acrylic lens, 0.125" ^{23,24} 6-lamp clear acrylic lens ^{23,24} 	CS1WIMP CS3WIMP CS7WIMP CS11WIMP CS25WIMP CS93WIMP	Straight plug, 120V ^{8, 14, 15} Twist-lock, 120V ^{8, 14, 15} Straight plug, 277V ^{8, 14, 15} Twist-lock, 277V ^{8, 14, 15} Twist-lock 347V 600V SO white cord, no plug (no voltage required) ¹⁴	WGIBZ14 WGIBZ19 WGIBZ24	Standard 4-lamp wireguard Standard 6-lamp wireguard Standard 8-lamp wireguard
IBZPMPHB HBBS36 IBZSMB	Pendant monopoint splice box, includes side covers (3/4" hub) ²² Chain hanger, 36" (one pair) Surface-mounting bracket (one pair)	DLIBZ19 PCL125 DLIBZ24 ACL DLIBZ24 PCL125	6-lamp clear polycarbonate lens, 0.125" ^{23,24} 8-lamp clear acrylic lens ^{23,24} 8-lamp clear polycarbonate lens, 0.125" ^{23,24}	CS97WIMP MSIIMP MSI360IMP	Twist-lock 480V Aisle sensor ^{8, 25} 360° sensor ^{8, 25}		
	are F54T5H0/841 unless otherwise specified				n used with 54WT5 lamps up to 55°C led. Not available on TIBZ 16-lamp		ature (120 or 277 voltage only). Aust have "IMP" power cord to power

No

2 5/55°F warranty with open fixtures only.

3 Not available with MSE360 option.

4 For wireguard in door frame, add "WG" to shielding. Ex:A12125WG

- 5 Nonstandard configurations may require factory installed BACKPACK[™]. Consult factory.
- 6 Certain ballast may require a BACKPACK™ installed by the factory in order to accommodate the size of the battery The BACKPACK™ is NOT field installable. May only be surface mounted using IBZSMB. Not available with pendant mount using IBZPMP or IBZPMPHB. Not available with IMP.
- 7 Not for use with motion sensors.
- 8 Specify voltage. Consult factory for Canadian applications.
- 9 Not available with 347 voltage
- 10 Battery options require a BACKPACK[™] installed by the factory in order to accommodate the size of the battery. The BACKPACK is NOT field installable. May only be surface mounted using IBZSMB. Not available with pendant mount using IBZPMP or IBZ PMPHB. Not available with IMP.
- 11 Certified to UL1598 (approx. 1100 lumens at 25°C when using 49W lamps, and 911 lumens at 45°C), Single-lamp operation only. 120 or 277 voltage only.

- 14 All cord sets are 18/3, 6' white.
- 15 Cord sets are voltage specific. Specify voltage. Other configurations available. Consult factory.
- 16 One wireguard shipped as separate line item for top installation in field. Not available with IBZPMP.
- 17 Specify voltage

fixture.

- 18 Other configurations available, see page four for additional options
- 19 nPP16D options utilizes nPP16 and a nIO DKO device, CAT5e connector cable alos included. Available 120 or 277V only.
- 20 nMSI option utilizes nPP16 and a nCMB 50, CAT5e cable also include. Available 120 or 277V only.
- 21 nMSI360 option utilizes a nPP16 and a nCMB 6, CAT5e cable also included. Available 120 or 277V only.
- 22 When ordering IBZPMP, two-ballasts configurations are recommended. Ex: 2/2. Not available with tandem units. 23 Not available with any battery pack.
- 24 Not available with MSE360 or MSE360LB.
- 25 Must have "IMP" power cord to power fixture.

Page 2 of 4

LSXR - Fixture Mount Sensor (see <u>www.sensorswitch.com</u> for additional information)

- Four interchangeable lenses.
- Integrated mounting bracket drops lens down 3" from chase nipple.
- Single or dual relay versions designed with robust protection from the harsh switching requirements of T5 and LED loads.
- Photocell and 0-10VDC dimming options.
- No PIR field calibration or sensitivity adjustments required.

LSXR configuration	Comparable CMRB sensor	Old style sensor nomenclature
For shortes	t lead times use one of the follo	owing LSXR configurations
LCOZU	CMRB 50	MSI
LCHOSZU	CMRB 50 D	MSID
LCPZU	CMRB 50 P	MSIPED
LAOZU	CMRB 6	MSI360
LAHOSZU	CMRB 6 D	MSI360D
LAPZU	CMRB 6 P	MSI360PED



SELECTIONS BELOW WILL EXTEND ORDER LEAD TIME. CONSULT YOUR SALES REPRESENTATIVE FOR DETAILS.

SINGLE RELAY

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: LAH0SZU

Series	Lens option	Dimming/Photocell	Max. dim Level	Min. dim level	Temp/Humidity	Default time delay
L LSXR passive infrared indoor occupancy sensor	A High mount, 360° B Low mount, 360° C High mount aisleway	 None¹ High/low occupancy operation Switching photocell(on/off) Dimming and switching photocell Dimming and switching photocell with high/low occupancy operation 	0 10 VDC 9 9 VDC 8 8 VDC 7 7 VDC	 S Minimum dimming level of ballast 1 VDC 2 VDC 3 VDC 4 4 VDC 5 VDC 6 VDC 	Z None T Low temperature	I 30 seconds D 2.5 minutes X 5 minutes R 7.5 minutes U 10 minutes (with minimum 15 minutes on time) V 15 minutes W 20 minutes Y 30 minutes

DUAL RELAY (Available with 120, 277, and 347V only)

ORDERING INFORMATION Lead times will vary depending on options selected. Consult with your sales representative. Example: LA2KZU

Series	Lens option	Poles	Operating mode	Temp/Humidity	Default time delay
L LSXR passive infrared indoor occupancy sensor	A High mount, 360° B Low mount, 360° C High mount aisleway	2 Dual relay	 J None K Alternating off relays (promotes even lamp wear) O Alternating off relays w/photocell P Switching photocell(on/off) E Photocell on/off (pole 1 only) F Photocell on/off - both poles (dual set-point) 	Z None T Low temperature	I30 secondsD2.5 minutesX5 minutesR7.5 minutesU10 minutes (with minimum 15 minutes on time)V15 minutesW20 minutesY30 minutes

Example: LENS 50 J100

l						
	Replacement lens	ses: Ora	ler as separate catalog num	ber.		
	<u>Series</u> Lens	<u>Lens</u> 6 10 50	<u>type</u> High mount 360° Low mount 360° High mount aisleway	<u>Packa</u> U J10 J100	ige quantity Unit 10-pack 100-pack	

1 Dimming level fields not required when this option is chosen.

OPTIONS AND ACCESSORIES

The I-BEAM fixture offers numerous options for almost every electrical and optical component, including a long list of field-installable accessories.



INTEGRATED MODULAR PLUG (IMP)

Must be factory-installed and allows for field installation of various modular accessories including cordsets, motion sensors, photocells and LC&D XPoint[™] relays. Requires IMP cordset for operation.

Order as: IMP





IBZ BACKPACK™

Electrical box must be factory-installed to house additional components such as emergency ballasts, step-down transformers and dimming ballasts. Extended brackets allow air flow for increased heat management of all components.

Factory-installed.



V-SHAPED WIRE GUARD (external)

Flex on impact to absorb shock, reducing damage to the fixture assemblies. Wire guards can be mounted on top and bottom of fixtures to provide full protection.

Factory-installed option:

WGX 2WGX

Field-installed option: WGIBZ14 WGIBZ19 WGIBZ24



TANDEM CAPABILITY

Supports applications requiring high luminance and high mounting heights. The 8' tandem option is factory-assembled with continuous steel side panels and tensioning couplers. Tandem kits are also available for field installation.

Factory-installed option: TIBZ

Field-installed option: IBZTFC

PENDANT MONOPOINT BRACKET

Accepts $\frac{34''}{2}$ rigid conduit for single-point mounting. The bracket can be adjusted to help counterbalance fixture to off set weight variance from end to end.

Order as: IBZPMP IBZPMPHB



An **Acuity**Brands Company

IBZ X54