
# **Lutron Specification Submittal**

# RadioRA. Cordless Tabletop Master Controls

RAMC-10C, RAMC-10C-RL

Model No.	: RAMC-10C- RAMC-10C-RL-* (*features raise/lower function)
Colors:	<u>WH</u> ite <u>BL</u> ack



Dimensions		
	in	mm
A 3 C	3.57 3.23 .70 .98	91 82 18 25



RAMC-10C

Master Control shown with raise/lower option.

# Specifications

POWER Input: 3V DC (2 "AAA" Batteries Included)

The Cordless Master Control is for use in 60Hz countries only.

Consult factory for 50Hz applications.

**BATTERY LIFE** 1 year with typical use

**MOUNTING** Tabletop or wall mount bracket (provided)

**TEMPERATURE** 32-104°F (0-40°C) **SYSTEM MAX.** 12 Master Controls

#### **▶** Features

- Central control for up to 32 Dimmers/Switches/GRAFIK Eye Preset Lighting Controls.
- Controls are field-programmable to select whole-house or single-room preset light levels.
- LEDs show status of lighting after unit has been activated.

#### **▶** Function

Allows master control of up to 32 circuits of lights in a RadioRA system to:


- turn a light or group of lights on to preset levels
- monitor the status of a light or group of lights
- turn all lights on to full
- turn all lights off
- raise and lower room/scene lighting (-RL models only)

### **▶** Flexibility

- Completely portable.
- No line-of-sight limitations.
- Master Control button columns may be set up to monitor lights (Room buttons) or to select presets (Scene buttons).




# ▶ Cordless Tabletop Master Control Operation

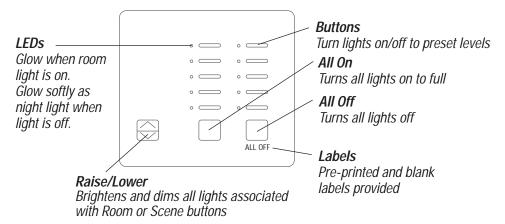

- 1. Press any button to activate the unit.
- 2. LEDs will travel up and down during activation cycle.
- 3. Unit will show status of ROOMS and SCENES.
- 4. Select desired ROOM or SCENE setting.
- 5. Unit will go to "sleep" after 10 seconds without any button presses. LEDs will be off until reactivated.

## RadioRA System Overview

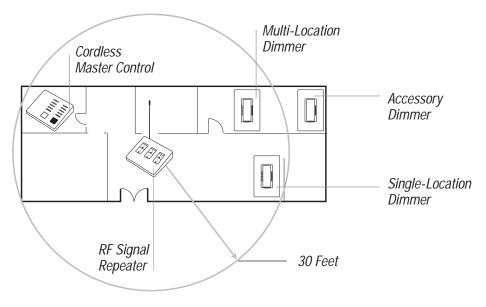

#### Notes:

- RadioRA Master Controls must be located within 30 feet of an RF Signal Repeater.

#### ► Limited Warranty

Lutron will, at its option, repair or replace any unit that is defective in materials or manufacture within one year after purchase. For warranty service, return unit to place of purchase or mail to Lutron at 7200 Suter Rd., Coopersburg, PA 18036-1299, postage pre-paid.

THIS WARRANTY IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES, AND THE IMPLIED WARRANTY OF MERCHANTABILITY IS LIMITED TO ONE YEAR FROM PURCHASE. THIS WARRANTY DOES NOT COVER THE COST OF INSTALLATION, REMOVAL OR REINSTALLATION, OR DAMAGE RESULTING FROM MISUSE, ABUSE, OR IMPROPER OR INCORRECT REPAIR, OR DAMAGE FROM IMPROPER WIRING OR INSTALLATION. THIS WARRANTY DOES NOT COVER INCIDENTAL OR CONSEQUENTIAL DAMAGES. LUTRON'S LIABILITY ON ANY CLAIM FOR DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE MANUFACTURE, SALE, INSTALLATION, DELIVERY, OR USE OF THE UNIT SHALL NEVER EXCEED THE PURCHASE PRICE OF THE UNIT.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

© 2001 Lutron Electronics Co., Inc.