


Shown actual size: Skylark dimmer and 1-gang Claro wallplate in White (WH).

### Product family features

- Rocker switch returns light to your favorite light level
- Slide up to brighten, down to dim (adjust light to suit any activity)
- eco-dim® model available
- 1000 W preset dimmers have voltage compensation which maintains stable light levels, despite line voltage variations
- 100% factory tested
- Coordinating Claro® and Stainless Steel wallplates only available separately
- Custom engraving available for wallplates, see pg. 155

### Control types

 Single-pole (one location)

 3-way or 4-way (two or more locations)

### Direct load type compatibility

-  Incandescent/halogen lighting
-  Magnetic low-voltage lighting
-  Electronic low-voltage lighting
-  Fluorescent lighting
-  LED lighting
-  Dimmable compact fluorescent
-  Ceiling fans
-  Ceiling fan/lights

### Load type requiring load interface

 Neon/cold cathode lighting

Lighting load interfaces may be applicable for some additional load type, voltage and capacity combinations.

For additional information, see pg. 174.

### Available finishes

Use **BOLD** color code in model number (Example: S-600P-**GR**)

Gloss finishes\*



**WH**  
White



**LA**  
Light Almond



**AL**  
Almond



**IV**  
Ivory



**GR**  
Gray



**BR**  
Brown



**BL**  
Black



**SS**  
Stainless Steel

\*Coordinating wallplates only available separately. For wallplate information, see pg. 160.

Stainless Steel wallplate includes black plastic trim/adaptor, visible from side. Match with separate Black (BL) controls.

## Dimmers

### Slide-to-off dimmers



- Slide up to on/brighten; down to dim/off

### Dimmers with on/off switch and locator light



- Rocker switch turns on/off
- Slide up to brighten; down to dim
- Includes amber locator light

### Dimmers with on/off switch



- Rocker switch turns on/off
- Slide up to brighten; down to dim
- **eco-dim**® model guarantees at least 15% energy savings compared to a standard switch

## Fan and fan/light controls

### Slide-to-off fan controls



- Slide up to on/increase speed; down to decrease/off
- 3-quiet fan speeds for increased comfort
- For use with only one ceiling paddle fan
- Quiet 3-speed designed to prevent motor hum
- Fully variable model also available

### Slide-to-off fan controls with on/off light switch



#### Fan control (top)

- Slide up to on/increase fan speed; down to decrease fan speed/off
  - 3-quiet fan speeds for increased comfort
  - For use with only one ceiling paddle fan
  - Quiet 3-speed designed to prevent motor hum
- #### Switch (bottom)
- Rocker switch turns light on/off

## Dual devices

### Dual slide-to-off dimmers (two loads)



#### Dimmers (left/right)

- Slide up to on/brighten; down to dim/off

### Dual slide-to-off fan control and dimmer



#### Fan control (left)

- Slide up to on/increase speed; down to decrease/off
- 3-quiet fan speeds for increased comfort
- Quiet 3-speed designed to prevent motor hum
- Fully variable available for use with multiple paddle or exhaust fans

#### Dimmer (right)

- Slide up to on/brighten; down to dim/off

Connections overview

Load connections\*



Control types (for 2 or more locations)  
Dim from one location, switch from the others



For more information on ballasts, visit [www.lutron.com/ballasts](http://www.lutron.com/ballasts).  
For more information on LED drivers, visit [www.lutron.com/LED](http://www.lutron.com/LED).

\*For illustration purposes only. Consult model number pages for specific voltage and capacity information.

**Dimmer model numbers**

 **Incandescent/halogen dimmers**

**Dimmers with on/off switch**

Single-pole 120V 600W	S-600P- <b>CC</b> <sup>3</sup>
Single-pole 120V 1000W	S-10P- <b>CC</b> <sup>3</sup>
3-way 120V 600W	S-603P- <b>CC</b> <sup>3</sup>
3-way 120V 1000W	S-103P- <b>CC</b> <sup>3</sup>

**eco-dim® dimmer with on/off switch**

3-way/single-pole 120V 600W	S-603PG- <b>EE</b> <sup>2</sup>
--------------------------------	---------------------------------

eco-dim model guarantees at least 15% energy savings compared to a standard switch.

**Dimmers with on/off switch and locator light**

Single-pole 120V 600W	S-600PNL- <b>CC</b> <sup>3</sup>
Single-pole 120V 1000W	S-10PNL- <b>CC</b> <sup>3</sup>
3-way 120V 600W	S-603PNL- <b>CC</b> <sup>3</sup>
3-way 120V 1000W	S-103PNL- <b>CC</b> <sup>3</sup>

**Slide-to-off dimmers**

Single-pole 120V 600W	S-600- <b>CC</b> <sup>3</sup>
Single-pole 120V 1000W	S-1000- <b>CC</b> <sup>3</sup>

For dual slide-to-off dimmers (two loads), see page 111.

 **Magnetic low-voltage dimmers**

**Dimmers with on/off switch**

Single-pole 120V 600VA (450W)	SLV-600P- <b>CC</b> <sup>3</sup>
3-way 120V 600VA (450W)	SLV-603P- <b>CC</b> <sup>3</sup>

The stated VA (Volt-Ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (Watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

 **Electronic low-voltage dimmers\***

**Dimmers with on/off switch**

Single-pole 120V 300W	SELV-300P- <b>CC</b> <sup>3</sup>
3-way 120V 300W	SELV-303P- <b>CC</b> <sup>3</sup>

Certain LED drivers are dimmable using an ELV dimmer, for more information, visit [www.lutron.com/LED](http://www.lutron.com/LED).

**CC**<sup>3</sup>: Gloss color codes, see pg. 105  
**EE**<sup>2</sup>: Available in White (WH), Ivory (IV), Almond (AL) and Light Almond (LA)  
 (Wallplates not included, order separately, see pg. 160)

All models must be derated if ganged unless otherwise noted, see pg. 170.

**\*Requires neutral wire connection.**

### Dimmer model numbers

#### 3-wire fluorescent dimmers\*

##### Dimmers with on/off switch

Single-pole 120V 8A	SF-10P- <b>CC</b> <sup>3</sup>
Single-pole 277V 6A	SF-12P-277- <b>CC</b> <sup>3</sup>
3-way 120V 8A	SF-103P- <b>CC</b> <sup>3</sup>
3-way 277V 6A	SF-12P-277-3- <b>CC</b> <sup>3</sup>

For use with Hi-lume®, Hi-lume® Compact SE, Hi-lume® 3D, Eco-10®, EcoSystem® ballasts.

No derating required if ganged.

Adjustable low-end trim.

#### Hi-lume® LED drivers: 3-wire fluorescent dimmers\*

##### Dimmers with on/off switch

Single-pole 120V 8A	SF-10P- <b>CC</b> <sup>3</sup>
Single-pole 277V 6A	SF-12P-277- <b>CC</b> <sup>3</sup>
3-way 120V 8A	SF-103P- <b>CC</b> <sup>3</sup>
3-way 277V 6A	SF-12P-277-3- <b>CC</b> <sup>3</sup>

For use with Hi-lume LED driver only.

For more information on Hi-lume LED drivers, visit [www.lutron.com/HilumeLED](http://www.lutron.com/HilumeLED).

No derating required if ganged.

Adjustable low-end trim.

#### Tu-Wire® fluorescent dimmers

##### Dimmers with on/off switch

3-way/single-pole 120V 5A	SFTU-5A3P- <b>CC</b> <sup>3</sup>
------------------------------	-----------------------------------

Also compatible with Advance Mark X ballasts, for further information, visit [www.lutron.com/advance](http://www.lutron.com/advance).

For information on use with Universal and OSRAM ballasts, contact Technical Support at 1.800.523.9466.

**CC**<sup>3</sup>: Gloss color codes, see pg. 105  
(Wallplates not included, order separately,  
see pg. 160)

For more information on ballasts, visit [www.lutron.com/ballasts](http://www.lutron.com/ballasts).

All models must be derated if ganged unless otherwise noted, see pg. 170.

\*Requires neutral wire connection.

## Fan control model numbers

### ✂ Fan controls

#### Slide-to-off fan controls—quiet 3-speed

Single-pole SFSQ-F-**CC**<sup>3</sup>  
120V 1.5A

Single-pole SFSQ-F-HO-**CC**<sup>3</sup>  
120V 2.0A

For use with only one ceiling paddle fan.

SFSQ-F-HO- for use with Hunter Original Series.

#### Slide-to-off fan control—fully variable

Single-pole SFS-5E-**CC**<sup>3</sup>  
120V 5A

For use with multiple ceiling paddle fans or exhaust fans.

### ✂ Fan/light controls

#### Fan control—quiet 3-speed and dimmer

Single-pole fan control S2-LFSQ-**CC**<sup>3</sup>  
120V 1.5A (left)

120V single-pole dimmer 300W (right)

For use with only one ceiling paddle fan.

#### Fan control—fully variable and dimmer

Single-pole fan control S2-LF-**CC**<sup>3</sup>  
120V 2.5A (left)

120V single-pole dimmer 300W (right)

For use with multiple ceiling paddle fans.

### ✂ Fan control/light switch

#### Fan control—quiet 3-speed and switch

Single-pole fan control SFSQ-LF-**CC**<sup>3</sup>  
120V 1.5A (top)

120V single-pole switch 360W (bottom)  
(incandescent/halogen loads only)

**CC**<sup>3</sup>: Gloss color codes, see pg. 105  
(Wallplates not included, order separately,  
see pg. 160)

All models must be derated if ganged unless  
otherwise noted, see pg. 170.

**\*Requires neutral wire connection.**



**Dual device model numbers**

 **Incandescent/halogen and  
Incandescent/halogen dimmers**

Dual slide-to-off dimmers (two loads)

Single-pole	S2-L- <b>CC</b> <sup>3</sup>
120V 300W light (left) incandescent/halogen	
120V 300W light (right) incandescent/halogen	

**Replacement knob model numbers**

 **Knobs**

Single-pole	SK- <b>EE</b> <sup>2</sup>
Standard knob	
Split knobs	contact customer service

**CC**<sup>3</sup>: Gloss color codes, see pg. 105  
(Wallplates not included, order separately,  
see pg. 160)

**EE**<sup>2</sup>: Available in White (WH), Ivory (IV),  
Almond (AL) and Light Almond (LA)

All models must be derated if ganged unless  
otherwise noted, see pg. 170.

Accessories

Wallplates




Shown actual size:  
2-gang Claro® wallplate  
in White (WH).

For more information  
about Designer wallplates,  
see pg. 160.

Coordinated electrical devices



Tamper resistant  
GFCI receptacle

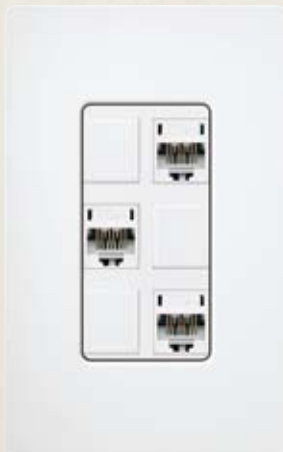

Customizable  
6-port frame



Cable jack

For more information  
about coordinated  
Designer electrical  
devices, see pg. 163.