


Incandescent Lamps

Incandescent LAMPS

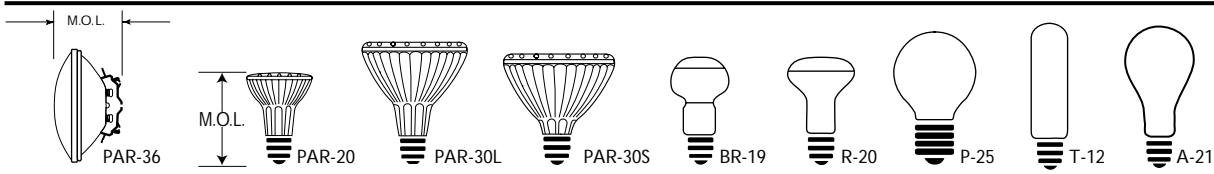

Watts	Bulb	Base	Product Number 046677-	Ordering Code	Volts	Pkg. Qty. *	Description	Class and Filament	L.C.L. (In.)	M.O.L. (In.)	Approximate		Lumens		
											Hours Life	MBCP*			
50	PAR-36	M-P	<input type="checkbox"/> \$\$\$	31170-4	50PAR36Q/VNSP	12	12	*PAR Compact Halogen Very Nar. Spot(5.5 Deg.)	C, C-6		2 3/4	2000	50,000		
	PAR-20	Med.	\$\$\$	22906-2	50PAR20/HAL/NSP9	120	15	N. Spot 9 Deg.(86)	C, CC-8		3 3/8	2000	6200	550	
			\$\$\$	22908-8	50PAR20/HAL/SP16	120	15	Spot 16 Deg.(86)	C, CC-8		3 3/8	2000	3200	550	
			\$\$\$	22911-2	50PAR20/HAL/NFL30	120	15	N. Flood 30 Deg.(86)	C, CC-8		3 3/8	2000	1400	550	
			\$\$\$	22921-1	50PAR20/HAL/NFL30	130	15	N. Flood 30 Deg.(86)	C, CC-8		3 3/8	2000	1400	550	
			\$\$\$	24954-0	50PAR20/HAL/SP16	120	6	Spot 16 Deg.(86)	C, CC-8		4 1/2	2000	3200	550	
		PAR-30L	Med.	<input type="checkbox"/> \$\$\$	22922-9	50PAR30L/HAL/NSP9	120	15	N. Spot 9 Deg.(86)	C, CC-8		4 1/2	2000	9900	530
				<input type="checkbox"/> \$\$\$	22923-7	50PAR30L/HAL/SP16	120	15	Spot 16 Deg.(86)	C, CC-8		4 1/2	2000	4200	530
				<input type="checkbox"/> \$\$\$	22925-2	50PAR30L/HAL/NFL30	120	15	N. Flood 30 Deg.(86)	C, CC-8		4 1/2	2000	1900	530
				<input type="checkbox"/> \$\$\$	22926-0	50PAR30L/HAL/NFL30	130	15	N. Flood 30 Deg.(86)	C, CC-8		4 1/2	2000	1900	530
				<input type="checkbox"/> \$\$\$	22927-8	50PAR30L/HAL/FL40	120	15	Flood 40 Deg.(86)	C, CC-8		4 1/2	2000	1250	530
				<input type="checkbox"/> \$\$\$	22928-6	50PAR30L/HAL/FL40	130	15	Flood 40 Deg.(86)	C, CC-8		4 1/2	2000	1250	530
				<input type="checkbox"/> \$\$\$	23645-5	50PAR30L/HAL/WFL60	120	15	W. Flood 60 Deg.(86)	C, CC-8		4 1/2	2000	550	600
				<input type="checkbox"/> \$\$\$	24955-7	50PAR30L/HAL/WFL60	120	6	W. Flood 60 Deg.(86)	C, CC-8		4 1/2	2000	550	600
				<input type="checkbox"/> \$\$\$	28472-9	50PAR30L/HAL/WFL60	130	15	W. Flood 60 Deg.(86)	C, CC-8		4 1/2	2000	550	600
		PAR-30S	Med.	<input type="checkbox"/> \$\$\$	26349-1	50PAR30S/HAL/NSP10	120	15	N. Spot 10 Deg.(86)	C, CC-8		3 5/8	2000	8250	630
				<input type="checkbox"/> \$\$\$	26357-4	50PAR30S/HAL/NSP10	130	15	N. Spot 10 Deg.(86)	C, CC-8		3 5/8	2000	8250	630
				<input type="checkbox"/> \$\$\$	26358-2	50PAR30S/HAL/NFL30	120	15	N. Flood 30 Deg.(86)	C, CC-8		3 5/8	2000	1950	630
				<input type="checkbox"/> \$\$\$	26362-4	50PAR30S/HAL/NFL30	130	15	N. Flood 30 Deg.(86)	C, CC-8		3 5/8	2000	1950	630
				<input type="checkbox"/> \$\$\$	26364-0	50PAR30S/HAL/FL40	120	15	Flood 40 Deg.(86)	C, CC-8		3 5/8	2000	1500	630
				<input type="checkbox"/> \$\$\$	26384-8	50PAR30S/HAL/FL40	130	15	Flood 40 Deg.(86)	C, CC-8		3 5/8	2000	1500	630
		BR-19	Med.	<input type="checkbox"/> \$\$\$	28731-8	50BR19/25°/SP	120	12	Spotline Reflector	CC-11		4 1/8	2000		
		R-20	Med.	<input type="checkbox"/> \$\$\$	20166-5	50R20	120	12	Lt. Frost, Reflector(82)	C, CC-6		3 15/16	2000		
	\$\$\$ — CONSIDER 45PAR16/H/NFL 120 VOLT FOR ENERGY SAVINGS														
				<input type="checkbox"/> \$\$\$	22082-2	50R20	130	12	Lt. Frost, Reflector(82)	C, CC-6		3 15/16	2000		
\$\$\$ — CONSIDER 45PAR16/H/NFL 130 VOLT FOR ENERGY SAVINGS															
			<input type="checkbox"/> \$\$\$	26635-3	50R20/PK	120	60	Pink(19)(82)	C, CC-6		3 15/16	2000			
	P-25	3Ct.Mog.		22018-6	50/50P25/28	120	60	Clear, Marine(15)	C, C-5, C-9	3 5/16	5 1/16	750		375	
	T-12	3Ct.Med.		37508-9	50/50T12	115	24	Marine Running Light, Clear(8)	C, C-5, C-9	3	5 5/16	750			
50 100 150	A-21	3Ct. Med. ▲		36671-6	50/150A/W	12/1	120	12	Soft White Three-Way(8)	C, 2CC-8		5 5/16	1200		610 1510 2120
			<input type="checkbox"/>	20453-7	50/150A/WL	12/1	120	12	Longer Life Soft White Three-Way(8)	C, 2CC-8		5 5/16	1500		575 1510 2085
			<input type="checkbox"/>	32359-2	50/150A/DL	12/1	120	12	Director® Three-Way(8)	C, 2CC-8		5 5/16	1200		
			<input type="checkbox"/>	27753-3	50/150A/WL TP	60/1	120	60	Longer Life, Tra-Pak Soft White Three-Way(8)	C, 2CC-8		5 5/16	1500		575 1510 2085
			<input type="checkbox"/>	31736-2	50/150A/STP BL	8/1	120	8	Blue softone Pastel® Three-Way(8)	C, 2CC-8		5 5/16	1200		530 1260 1790
			<input type="checkbox"/>	31716-4	50/150A/STP/PCH	8/1	120	8	Peach softone Pastel Three-Way(8)	C, 2CC-8		5 5/16	1200		610 1510 2120

Exclusive Philips Product

\$\$\$ — Energy Saving Product

*Maximum Beam Candlepower


◆ For more information when operated at 120V see pages 45-47

(E) Means This Bulb Meets US Federal Minimum Efficiency Standard

▲ Aluminum Base

Footnotes located on page 47

Incandescent Lamps



Watts	Bulb	Base	Product Number 046677-	Ordering Code	Volts	Pkg. Qty.	Description	Class and Filament	L.C.L. (In.)	M.O.L. (In.)	Approximate		Lumens
											Hours Life	MBCP*	
50 100 150	A-21	3Ct. Med. ▲	31739-6	50/150A/STP/PK 8/1	120	8	Pink softone Pastel® Three-Way(8)	C, 2CC-8		5 ⁵ / ₁₆	1200		550 1310 1860
50 200 250	A-21	3Ct. Med. ▲	20454-5	50/250A/WL 12/1	120	12	Longer Life Soft White Three-Way(8)	C, 2CC-8		5 ⁵ / ₁₆	1500		575 3250 3825
51	A-19	Med. ☐ \$\$\$	20553-4	51A19/RR/TS	120	20	Clear, Ring Refl. Traffic Sig	C, C-7A	2 ⁷ / ₁₆	3 ³ / ₄	8000		390
		☐ \$\$\$	31756-0	51A19/RR/TS	125	20	Clear, Ring Refl. Traffic Sig.	C, C-7A	2 ⁷ / ₁₆	3 ³ / ₄	8000		385
		☐ \$\$\$	20555-9	51A19/RR/TS	130	20	Clear, Ring Refl. Traffic Sig	C, C-7A	2 ⁷ / ₁₆	3 ³ / ₄	8000		380
52	A-19	Med. ▲ \$\$\$	22237-2	60A-52A/EW	120	48	Frost, Econ-o-watt®	C, CC-6		4 ⁷ / ₁₆	1000		700
		◆ \$\$\$	22239-8	60A-52A/EW	130	48	Frost, Econ-o-watt	C, CC-6		4 ⁷ / ₁₆	1000		680
		* \$\$\$	37459-5	60A-52A/99/EW	120-130	48	Frost, Econ-o-watt, Ext. Sv.	C, CC-6		4 ⁷ / ₁₆	2500		605
54	A-19	Med. \$\$\$	37166-6	K54A19/TS/EW	120-125	120	Clear, Krypton Econ-o-watt Traffic Signal (12)	C, C-11V	2 ⁷ / ₁₆	4 ³ / ₈	8000		530
60	A-19	Med. ▲	27082-7	60A 12/4	120	48	Frost	C, CC-8		4 ⁷ / ₁₆	1000		890
		◆	37469-4	60A	120	48	Frost	C, CC-6		4 ⁷ / ₁₆	1000		890
		◆	37471-0	60A	130	48	Frost (E-Frost)	C, CC-6		4 ⁷ / ₁₆	1000		850
		◆	30038-4	60A/TF	120	120	Frost Silicone Coated	C, CC-6		4 ⁷ / ₁₆	1000		
		◆	22245-5	60A/99	120	48	Frost, Extended Service	C, CC-8		4 ⁷ / ₁₆	2500		800
		◆	22246-3	60A/99	130	48	Frost, Extended Service	C, CC-8		4 ⁷ / ₁₆	2500		790
	Med.	☐	22247-1	60A19/35	120	48	Frost, Industrial Service	C, C-9		4 ⁷ / ₁₆	3500		600
		◆ ☐	22248-9	60A19/35	130	48	Frost, Industrial Service	C, C-9		4 ⁷ / ₁₆	3500		585
		☐	25836-8	60A/35/TF	120	60	Frost Silicone Coated, Industrial Service	C, C-9		4 ⁷ / ₁₆	3500		
	Med. ▲	◆	20148-3	60A/CL 12/2	120	24	Clear	C, CC-6	3 ¹ / ₈	4 ⁷ / ₁₆	1000		855
		◆	37522-0	60A/CL	130	48	Clear	C, CC-8	3 ¹ / ₈	4 ⁷ / ₁₆	1000		880
		◆	36292-1	60A/AGRO 24/1	120	24	Agro-Lite Plant Light	C, C-9		4 ⁷ / ₁₆	1000		
		◆	22086-3	60A/D	120	120	Frost, Daylight	C, CC-6		4 ⁷ / ₁₆	1000		515
		◆	37517-0	60A/Y	120-130	48	Yellow, Bug-A-Way®	C, CC-6		4 ⁷ / ₁₆	1350		
		◆	22099-6	60A19/B	120	60	Blue	C, C-9		4 ⁷ / ₁₆	1000		
		◆	22102-8	60A19/G	120	60	Green	C, C-9		4 ⁷ / ₁₆	1000		
		◆	22106-9	60A19/R	120	60	Red	C, C-9		4 ⁷ / ₁₆	1000		
		◆	23941-8	60A/SB	120	120	Frost, Silvered Bowl(43)	C, CC-6		4 ⁷ / ₁₆	1000		810
	Med.	\$\$\$	21056-7	K60A19/TS/EW	120-125	120	Clear, Krypton Econ-o-watt Traffic Signal (12)	C, C-11V	2 ⁷ / ₁₆	4 ³ / ₈	8000		610

☐ Exclusive Philips Product

\$\$\$ — Energy Saving Product

*Maximum Beam Candlepower


* ◆ For more information when operated at 120V see pages 45-47

▲ Aluminum Base

Footnotes located on page 47

Incandescent Lamps

Incandescent LAMPS

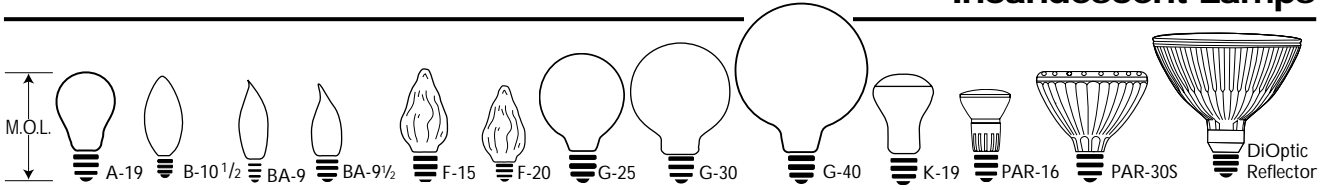

Watts	Bulb	Base	Product Number 046677-	Ordering Code	Volts	Pkg. Qty. *	Description	Class and Filament	L.C.L. (In.)	M.O.L. (In.)	Approximate		Lumens
											Hours Life	MBCP*	
60	A-19	Med.	\$\$\$ 37167-4	K60A19/TS/EW	130	120	Clear, Krypton Econ-o-watt® Traffic Signal (12)	C, C-11V	2 ⁷ / ₁₆	4 ³ / ₈	8000		610
			Med. ▲	28111-3	60A	230	120	Frost	C, RC-9	3 ¹⁵ / ₁₆	1000		545
	B-10½	Cand.	31116-7	60B10½/4M	120	25 BX	Clear, Blunt Tip	C, C-7A	4 ¹ / ₁₆	4000			
			Cand.▲	32969-8	BC-60B10½/LL	6/2	120	12	Clear, Long Lf., Blunt Tip(12)	C, CC-2V	4 ¹ / ₁₆	2000	
	BA-9	Cand.	23195-1	BC-60BA9C/LL	6/2	120	12	Clear, Long Lf., Bent Tip(12)	C, CC-2R	4 ³ / ₁₆	2000		
			27804-4	BC-60BA9C/LL/4	6/4	120	24	Clear, Long Lf., Bent Tip(12)	C, CC-2R	4 ³ / ₁₆	2000		
			22206-7	BC-60BA9C/FLL	6/2	120	12	Frost, Long Lf., Bent Tip(12)	C, CC-2R	4 ³ / ₁₆	2000		
			31095-3	60BA9C/4M	120	25 BX	Clear, Bent Tip	C, C-7A	4 ³ / ₁₆	4000			
	BA-9½	Med.	31099-5	60BA9½/4M	120	25 BX	Clear, Bent Tip(8)	C, C-7A	4 ⁷ / ₁₆	4000			
			32962-3	BC-60BA9½/LL	6/2	120	12	Clear, Long Lf., Bent Tip(12)	C, CC-2V	4 ¹ / ₁₆	2000		
			32963-1	BC-60BA9½/FLL	6/2	120	12	Frost, Long Lf., Bent Tip(12)	C, CC-2V	4 ¹ / ₁₆	2000		
	F-15	Med. ▲	32973-0	BC60F15/LL	6/2	120	12	Clear, Long Lf., Flame(12)	C, C-9	4 ¹ / ₂	2000		
	F-20	Med.	29002-3	60F20/POST LT	6/1	120	6	Clear, Post Light	C,C-9	5	3500		
	G-25	Med. ▲	25046-4	60G25	12/1	120	12	Clear, Globe	C, C-9	4 ⁷ / ₁₆	1500		
			25050-6	60G25	4/3	120	12	Clear, Globe	C, C-9	4 ⁷ / ₁₆	1500		
			25049-8	60G25/W	12/1	120	12	White, Globe	C, C-9	4 ⁷ / ₁₆	1500		
			25051-4	60G25/W	4/3	120	12	White, Globe	C, C-9	4 ⁷ / ₁₆	1500		
	G-30	Med.	28141-0	60G30/4MW	6/1	120	6	White, Globe	C, C-9	5 ¹ / ₂	4000		
	G-40	Med. ▲	20202-8	60G40/4M	6/1	120	6	Clear, Globe	C, C-9	6 ¹⁵ / ₁₆	4000		
			20201-0	60G40/4MW	6/1	120	6	White, Globe	C, C-9	6 ¹⁵ / ₁₆	4000		
			22486-5	60K19/DL	6/2	120	12	Director®	C, CC-6	4 ¹ / ₈	1150		770
	PAR-16	Med.	☐ \$\$\$ 33004-3	60PAR16/HAL/NSP10	120	15	N. Spot 10 Deg.(42)(86)	C, CC-8	3 ¹ / ₈	2000	7500	580	
			☐ \$\$\$ 33005-0	60PAR16/HAL/NSP10	130	15	N. Spot 10 Deg.(42)(86)	C, CC-8	3 ¹ / ₈	2000	7500	580	
			☐ \$\$\$ 33006-8	60PAR16/HAL/NFL27	120	15	N. Flood 27 Deg.(86)	C, CC-8	3 ¹ / ₈	2000	2000	580	
			☐ \$\$\$ 33007-6	60PAR16/HAL/NFL27	130	15	N. Flood 27 Deg.(86)	C, CC-8	3 ¹ / ₈	2000	2000	580	
			☐ \$\$\$ 21388-4	BC60PAR16/HAL/NSP	6/1	120	6	N. Spot 10 Deg.(42)(86)	C, CC-8	3 ¹ / ₈	2000	7500	580
			☐ \$\$\$ 21390-0	BC60PAR16/HAL/NFL	6/1	120	6	N. Flood 27 Deg.(42)(86)	C, CC-8	3 ¹ / ₈	2000	2000	580
	PAR-30S	Med.	ⓔ ☐ \$\$\$ 35751-7	60PAR30S/HAL/NSP10	120	15	N. Spot 10 Deg.(86)	C, CC-8	3 ³ / ₈	2500	10,000	800	
			ⓔ ♦ ☐ \$\$\$ 35752-5	60PAR30S/HAL/NSP10	130	15	N. Spot 10 Deg.(86)	C, CC-8	3 ³ / ₈	2500	10,000	800	
			ⓔ ☐ \$\$\$ 35753-3	60PAR30S/HAL/NFL30	120	15	N. Flood 30 Deg.(86)	C, CC-8	3 ³ / ₈	2500	3300	800	
			ⓔ ♦ ☐ \$\$\$ 35788-9	60PAR30S/HAL/NFL30	130	15	N. Flood 30 Deg.(86)	C, CC-8	3 ³ / ₈	2500	3300	800	
			ⓔ ☐ \$\$\$ 35758-2	60PAR30S/HAL/FL40	120	15	Flood 40 Deg.(86)	C, CC-8	3 ³ / ₈	2500	1850	800	
			ⓔ ♦ ☐ \$\$\$ 35762-4	60PAR30S/HAL/FL40	130	15	Flood 40 Deg.(86)	C, CC-8	3 ³ / ₈	2500	1850	800	
	PAR-38	Med. Skt.	ⓔ ☐ \$\$\$ 23059-9	60PAR38/HAL/SP10/WLL	120	12	Spot 10 Deg.(86)	C, CC-8	5 ⁵ / ₁₆	3000	18,000	880	
			ⓔ ♦ ☐ \$\$\$ 23309-8	60PAR38/HAL/SP10/WLL	130	12	Spot 10 Deg.(86)	C, CC-8	5 ⁵ / ₁₆	3000	18,000	880	
			ⓔ ☐ \$\$\$ 23062-3	60PAR38/HAL/WSP12/WLL	120	12	W. Spot 12 Deg.(86)	C, CC-8	5 ⁵ / ₁₆	3000	13,500	880	
			ⓔ ♦ ☐ \$\$\$ 23330-4	60PAR38/HAL/WSP12/WLL	130	12	W. Spot 12 Deg.(86)	C, CC-8	5 ⁵ / ₁₆	3000	13,500	880	
			ⓔ ☐ \$\$\$ 23065-6	60PAR38/HAL/FL28/WLL	120	12	Flood 28 Deg.(86)	C, CC-8	5 ⁵ / ₁₆	3000	3600	880	
			ⓔ ♦ ☐ \$\$\$ 23356-9	60PAR38/HAL/FL28/WLL	130	12	Flood 28 Deg.(86)	C, CC-8	5 ⁵ / ₁₆	3000	3600	880	

☐ Exclusive Philips Product

\$\$\$ — Energy Saving Product

BX — Boxed


♦ For more information when operated at 120V see pages 45-47

*Maximum Beam Candlepower

▲ Aluminum Base

Footnotes located on page 47

Incandescent Lamps

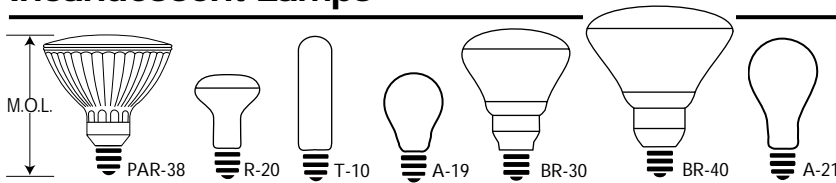

Watts	Bulb	Base	Product Number 046677-	Ordering Code	Volts	Pkg. Qty. •	Description	Class and Filament	L.C.L. (In.)	M.O.L. (In.)	Approximate		Lumens			
											Hours Life	MBCP*				
60	PAR-38	Med. $\text{E} \square$ \$\$\$ Skt.	26385-5	60PAR38/HAL/ WFL60/WLL	120	12	W. Flood 60 Deg.(86)	C, CC-8		5 $\frac{1}{16}$	3000	1000	880			
			28471-1	60PAR38/HAL/WFL60/ WLL	130	12	W. Flood 60 Deg. (86)	C,CC-8		5 $\frac{1}{16}$	3000	1000	880			
	R-20	Med.	30231-5	60R20/SFL/5TB	120	60	Blue Transp. Refl. Sign(10)	C, C-9		3 $\frac{5}{16}$	6000					
	T-10	Med.	22178-8	60T10/64IF	120	60	Frost	B, C-8		5 $\frac{1}{8}$	1000		745			
			22176-2	60T10/64	120	60	Clear	B, C-8		5 $\frac{1}{8}$	1000		745			
	A-19	Med. \blacktriangle	37483-5	60A/W	12/4	120	48	Soft White	C, CC-6		4 $\frac{1}{16}$	1000		860		
			37484-3	60A/W/TP	24/4	120	96	Soft White, Tra-Pak	C, CC-6		4 $\frac{1}{16}$	1000		860		
			26376-4	60A/WL	12/4	120	48	Longer Life Soft White	C, CC-6		4 $\frac{1}{16}$	1250		840		
			26602-3	60A/WL/TP	24/4	120	96	Longer Life Soft White	C, CC-6		4 $\frac{1}{16}$	1250		840		
			34819-3	60A/STP/BL	12/2	120	24	Blue softone Pastel*	C, CC-6		4 $\frac{1}{16}$	1000				
			34820-1	60A/STP/PCH	12/2	120	24	Peach softone Pastel	C, CC-6		4 $\frac{1}{16}$	1000				
			34822-7	60A/STP/PK	12/2	120	24	Pink softone Pastel	C, CC-6		4 $\frac{1}{16}$	1000				
			22573-0	60A/YL	12/2	120	24	Yellow, Longer Life, Bug-A-Way®	C, CC-6		4 $\frac{1}{16}$	1350				
			\$\$\$ — CONSIDER EARTH LIGHT® COMPACT FLUORESCENT 15 WATT UNIVERSAL SLS, 15 WATT TABLE LAMP EL/T OR 15 WATT OUTDOOR EL/O FOR ENERGY SAVINGS													
			\$\$\$ — CONSIDER EARTH LIGHT COMPACT FLUORESCENT 15 WATT UNIVERSAL SLS, 15 WATT TABLE LAMP EL/T OR 15 WATT OUTDOOR EL/O FOR ENERGY SAVINGS													
\$\$\$ — CONSIDER EARTH LIGHT COMPACT FLUORESCENT 15 WATT BUG-A-WAY EL/O BAW FOR ENERGY SAVINGS																
65	BR-30	Med. \blacktriangle	24876-5	65BR30/FL55	12/1	120	12	Reflector Flood(87)	C, CC-6		5 $\frac{3}{8}$	2000	525			
			24884-9	65BR30/FL55		130	12	Reflector Flood(87)	C, CC-6		5 $\frac{3}{8}$	2000	450			
			\$\$\$ — CONSIDER 50PAR30/HAL/FL 120 VOLT FOR ENERGY SAVINGS													
			\$\$\$ — CONSIDER 50PAR30/HAL/FL 130 VOLT FOR ENERGY SAVINGS													
			24882-3	65BR30/FL/LL55	12/1	120	12	Reflector Flood, Longer Life(87)	C, CC-6		5 $\frac{3}{8}$	2500	510			
			24877-3	65BR30/SP20	12/1	120	12	Reflector Spot(87)	C, CC-6		5 $\frac{3}{8}$	2000	1625			
			24880-7	65BR30/SP20		130	12	Reflector Spot(87)	C, CC-6		5 $\frac{3}{8}$	2000	1625			
			22546-6	65BR/SP20		120-130	24	Reflector Spot(87)	C, CC-6		6 $\frac{1}{2}$	2000	1625			
			24885-6	65BR30/SP/LL20	12/1	120	12/1	Reflector Spot(87)	C, CC-6		5 $\frac{3}{8}$	2500	1575			
			24452-5	65BR30/SFL		120	24	Reflector Sign, Frost	C, C-17A		5 $\frac{3}{8}$	5000				
BR-40	Med. \blacktriangle	22536-7	65BR/FL60	8/1	120	8	Reflector Flood(87)	C, CC-6		6 $\frac{1}{2}$	2000	500				
		22535-9	65BR/FL60		120	24	Reflector Flood(87)	C, CC-6		6 $\frac{1}{2}$	2000	500				
		\$\$\$ — CONSIDER 50ER30 or 45PAR38/HAL/FL 120 VOLT FOR ENERGY SAVING IN DEEP RECESSED LUMINAIRES														
		22537-5	65BR/FL60		130	24	Reflector Flood(87)	C, CC-6		6 $\frac{1}{2}$	2000	500				
		\$\$\$ — CONSIDER 50ER30 or 45PAR38/HAL/FL 130 VOLT FOR ENERGY SAVING IN DEEP RECESSED LUMINAIRES														
67	A-19	Med. \blacktriangle • \$\$\$ ◆ • \$\$\$ * • \$\$\$	22240-6	75A-67A/EW		120	48	Frost, Econ-o-watt®	C, CC-6		4 $\frac{1}{16}$	750		1010		
			22241-4	75A-67A/EW		130	48	Frost, Econ-o-watt	C, CC-6		4 $\frac{1}{16}$	750		990		
			37405-8	75A-67A/99/EW		120-130	48	Frost, Econ-o-watt, Ext. Sv.	C, CC-6		4 $\frac{1}{16}$	2500		835		
	A-21	Med.	22192-9	67A21/99TS		120	120	Clear, Traffic Signal(12)	C, C-11V	2 $\frac{1}{16}$	4 $\frac{1}{16}$	8000		610		
			22197-8	67A21/99TS		130	120	Clear, Traffic Signal(12)	C, C-11V	2 $\frac{1}{16}$	4 $\frac{1}{16}$	8000		610		
\$\$\$ — CONSIDER K60A19/TS/EW 120-125 VOLT FOR ENERGY SAVINGS																
\$\$\$ — CONSIDER K60A19/TS/EW 130 VOLT FOR ENERGY SAVINGS																
69	A-21	Med.	22199-4	69A21/TS		120	120	Clear, Traffic Signal(12)	C, C-9	2 $\frac{1}{16}$	4 $\frac{1}{16}$	8000		685		
			\$\$\$ — CONSIDER K60A19/TS/EW 120-125 VOLT FOR ENERGY SAVINGS													
			22202-6	69A21/TS		125	120	Clear, Traffic Signal(12)	C, C-9	2 $\frac{1}{16}$	4 $\frac{1}{16}$	8000		685		
22204-2	69A21/TS		130	120	Clear, Traffic Signal(12)	C, C-9	2 $\frac{1}{16}$	4 $\frac{1}{16}$	8000		685					
\$\$\$ — CONSIDER K60A19/TS/EW 130 VOLT FOR ENERGY SAVINGS																

Exclusive Philips Product
 \$\$\$ — Energy Saving Product
 • — Consider compact fluorescent lamps listed on page 51–54 for energy savings
 *Maximum Beam Candlepower
 *◆ For more information when operated at 120V see pages 45–47
 ▲ Aluminum Base Footnotes located on page 47