

Complete fixture consists of Reflector Trim & Frame-in Kit. Select each separately

Reflector Trim	Frame-in Kit		Lamp		
2005CL Specular clear	2002 Frame Non-IC		50W PAR20	75W PAR16,R20	60W A19
2005BA Black Alzak	2003RS Remodeler Ring Non-IC		50W PAR20	75W PAR16,R20	60W A19
2005CD Clear difused	2002AIC Frame IC AirSeal®		50W PAR/R20	45W PAR16	

Features

Reflector: Hydroformed aluminum. .032" thick ; Anobrite (anodic-processed) semi-specular finish for permanent reflectivity; white trim flange.

Step Baffle: Die-cast aluminum with stepped conical surface for low brightness, black or white finish.

Accessories

1967C 2 in. Thick Ceiling Adaptor.

Frame-in Kit

See Frame-In Kit specification sheets for more details.


Finish

All painted finishes are baked powder or enamel.

Markings

cULus listed, suitable for damp locations.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

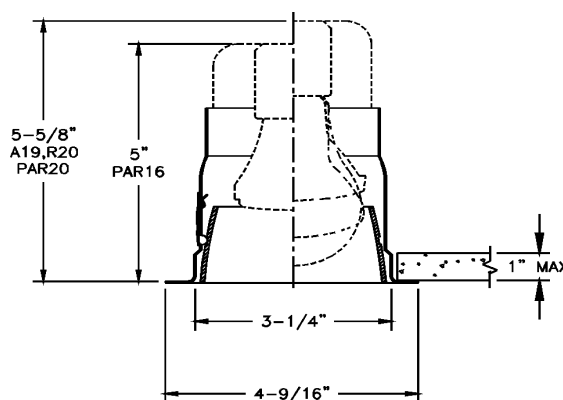

Le luminaire complet comprend la garniture et le cadre de montage : choisir chacun séparément.

Garniture	Cadre de montage		Lampe		
2005CL Spéculaire incolore	2002 2003RS	Cadre Non-IC Anneau Rénovation Non-IC	50W PAR20 50W PAR20	75W PAR16,R20 75W PAR16,R20	60W A19 60W A19
2005BA Alzak noir	2002AIC	Cadre IC AirSeal®	50W PAR/R20	45W PAR16	
2005CD Incolore diffus					

Caractéristiques

Réflecteur : Aluminium hydroformé, .032 po. d'épaisseur ; fini Anobrite (processus anodique) semi-spéculaire pour une grande réflectivité; bordure de garniture fini blanc.

Défecteur à rainures : Aluminium moulé sous pression avec surface conique à faible brillance, fini noir ou blanc.

Cadre de Montage

Pour les caractéristiques des cadres de montage, voir les fiches techniques appropriées.

Fini

Tous les finis peints sont en poudre ou en émail cuit.

Accessoires

1967C Kit plafond de 2 po. max.

Marquage

Homologué cULus ; convient aux endroits humides.

Canlyte

www.canlyte.com

3015 Louis-Amos, Lachine, Québec H8T 1C4 • (514) 636-0670 • (514) 636-0460

Information Projet

Type:

Nom Projet:



No. Cat.:

Lampe(s):

Notes:

PHILIPS
LIGHTOLIER®


LINE VOLTAGE LAMPS

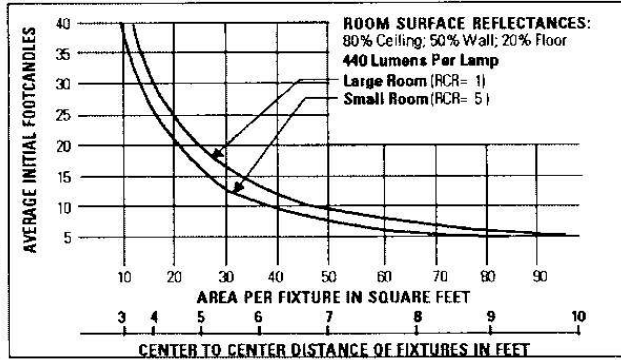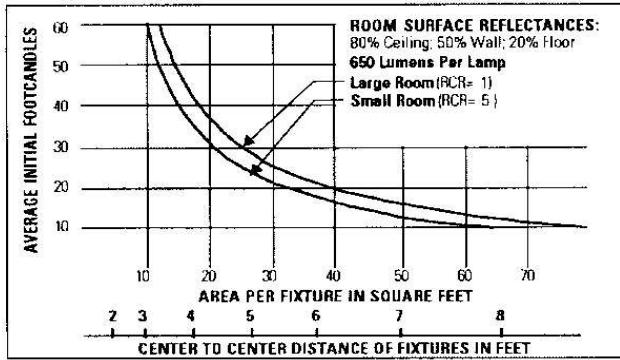


Use quick calculator chart to determine the spacing of 50W PAR20 NFL units (Clear and Gold) for a desired level of illumination. Conversion Factors: 50W PAR20 NFL White, F.C. x 0.9, Black, F.C. x 0.85, 75W PAR16 NFL Clear and Gold, F.C. x 1.5, White, F.C. x 1.4, Black, F.C. x 1.2

Use quick calculator chart to determine the spacing of 50W R20 units (Clear, Gold & White) for a desired level of illumination. Conversion Factors: 75W R20 Clear, Gold and White, F.C. x 1.8, 50W R20 Black, F.C. x 0.65, 75W R20, Black, F.C. x 1.15, 40W A19 (S.R.=1.3) Clear and Gold, F.C. x 0.55, White, F.C. x 0.35, Black, F.C. x 0.2

SPACING RATIO: 0.6

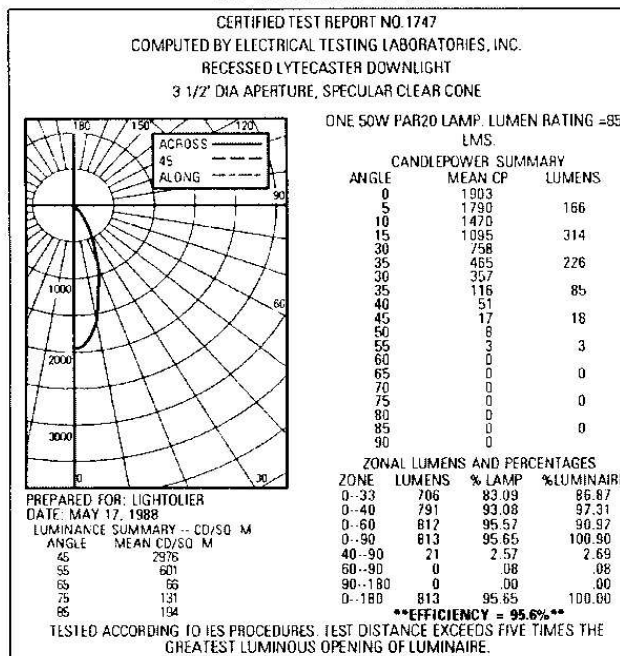

SPACING RATIO: 0.8

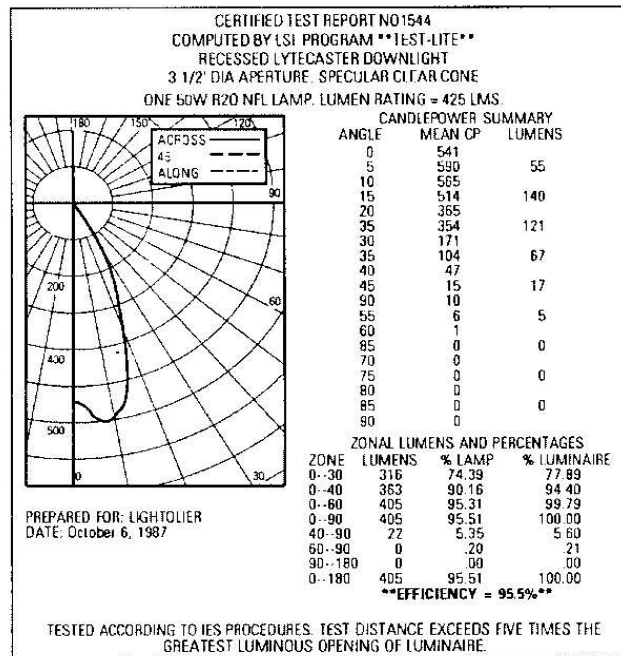

COEFFICIENTS OF UTILIZATION

% EFFECTIVE CEILING CAVITY REFLECTANCE

ROOM CAVITY RATIO	% WALL REFLECTANCE															
	80				70				50				30			
	50	30	10	0	50	30	10	0	50	30	10	0	50	30	10	0
1	1.08	1.07	1.05	1.07	1.05	1.03	1.03	1.01	1.00	.99	.98	.97	.96	.95	.95	.93
2	1.04	1.01	.98	1.02	.99	.97	.95	.99	.97	.95	.96	.95	.94	.93	.92	.90
3	.99	.96	.94	.98	.95	.93	.91	.96	.94	.92	.94	.92	.90	.89	.88	.88
4	.96	.92	.90	.95	.92	.89	.87	.93	.90	.88	.91	.89	.87	.89	.88	.86
5	.92	.88	.85	.91	.88	.85	.83	.90	.87	.84	.88	.86	.84	.87	.85	.83
6	.89	.85	.83	.88	.85	.82	.80	.87	.84	.82	.86	.83	.81	.85	.82	.81
7	.85	.82	.79	.85	.82	.79	.77	.84	.81	.79	.83	.80	.79	.82	.80	.77
8	.83	.79	.76	.82	.79	.76	.74	.81	.78	.76	.81	.78	.75	.80	.77	.74
9	.80	.76	.73	.80	.76	.73	.71	.79	.75	.73	.78	.75	.73	.77	.75	.72
10	.77	.74	.71	.77	.74	.71	.69	.76	.73	.71	.76	.73	.71	.75	.72	.69

20% FLOOR CAVITY REFLECTANCE

Conversion Factors: 50W PAR20 NFL: White, C.U. x 0.9; Black, C.U. x 0.85. 75W PAR16 NFL: Clear and Gold, C.U. x 1.0; White, C.U. x 0.95; Black, C.U. x 0.85.

COEFFICIENTS OF UTILIZATION

% EFFECTIVE CEILING CAVITY REFLECTANCE

ROOM CAVITY RATIO	% WALL REFLECTANCE															
	80				70				50				30			
	50	30	10	0	50	30	10	0	50	30	10	0	50	30	10	0
1	1.08	1.06	1.04	1.06	1.04	1.03	1.02	1.01	1.00	.98	.98	.97	.95	.95	.94	.92
2	1.02	1.00	.97	1.01	.96	.96	.98	.96	.94	.95	.93	.92	.93	.91	.90	.88
3	.97	.94	.91	.96	.93	.90	.89	.94	.91	.89	.92	.90	.88	.90	.88	.86
4	.93	.89	.85	.92	.89	.85	.83	.90	.87	.85	.88	.86	.84	.87	.85	.82
5	.89	.84	.81	.88	.84	.81	.79	.85	.83	.80	.85	.82	.80	.83	.81	.79
6	.85	.81	.78	.84	.80	.77	.75	.83	.80	.77	.82	.79	.76	.81	.78	.75
7	.81	.77	.74	.81	.76	.73	.71	.79	.76	.73	.78	.75	.72	.77	.74	.72
8	.78	.73	.70	.77	.73	.70	.68	.76	.72	.70	.75	.72	.69	.74	.71	.68
9	.74	.70	.67	.74	.70	.67	.65	.73	.69	.65	.72	.68	.65	.71	.68	.65
10	.71	.67	.63	.71	.67	.63	.61	.70	.65	.63	.69	.65	.63	.69	.65	.63

20% FLOOR CAVITY REFLECTANCE

Conversion Factors: 50/75W R20: Clear, Gold and White, C.U. x 1.0; Black, C.U. x 0.65. 40W A19 (S.R.=1.3): Clear and Gold, C.U. x 0.55; White, C.U. x 0.35; Black C.U. x 0.2.



Canlyte www.canlyte.com
3015 Louis-Amos, Lachine, Québec H8T 1C4
(514) 636-0670 • Fax (514) 636-0460

Specifications are subject to charges without notice.
© Koninklijke Philips Electronics N.V., 2010. All rights reserved.

