
Indicator Lights

ROUND INDICATOR LIGHTS 1/2" DIAMETER HOLE

lights

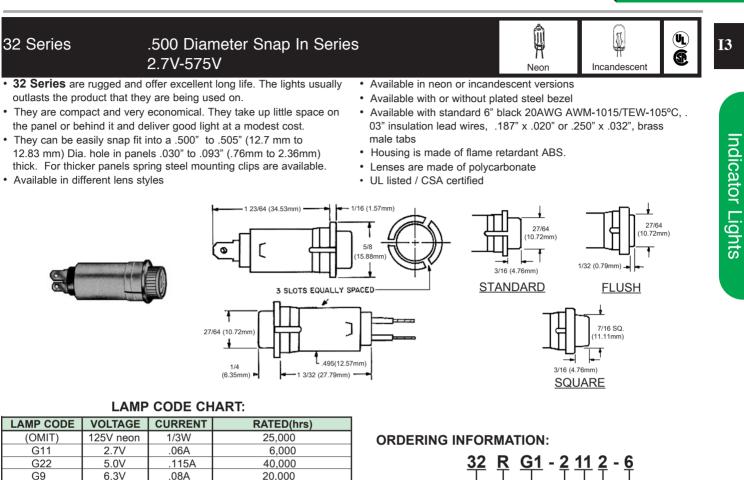

HOUSING COLOUR CODE LENS TYPE CODE LENS COLOUR CODE TERMINATION CODE

LAMP CODE	VOLTAGE	CURRENT	RATED(hrs)		
(OMIT)	125V neon	1/3W	25,000		
G11	2.7V	.06A	6,000		
G22	5.0V	.115A	40,000		
G9	6.3V	.08A	20,000		
G1	6.3V	.20A	20,000		
G6	10.0V	.014A	25,000		
G7	10.0V	.04A	5,000		
G3	14.0V	.08A	15,000		
G4	18.0V	.04A	10,000		
G18	28.0V	.04A	15,000		
G21	36.0V	.02A	20,000		
G31	48.0V	.025A	10,000		
G32	60.0V	.03A	1,000		
Other velteres are evallable places consult factory					

Other voltages are available, please consult factory.

SERIES	BEZEL	LAMPCODE	HOUSING	LENS CODE	LENS COLOUR	TERMINATION
32	R (optional)	See lamp code chart above	1- Black 2- White (Standard)	11-Standard 31-Flush	1-Red 2-Green 3-Amber 4-Blue 6-Yellow 7-Clear	 T3187" x .20" brass male tabs 6- 20AWG Black Wire, 6" long; stripped 1/2" X- specify lead, length, type, colour, termination

FOR HIGH VOLTAGE APPLICATIONS - CHANGE SERIES CODE TO:

	SERIES	VOLTAGE	TERMINATIONS
(U)	35	250V	Tab terminals or wire leads -18 AWG Red
	35XJ	347V	Wire leads only -18 AWG Red
87	35XL	440V	Wire leads only -18 AWG Red
	35XK	575V	Wire leads only -18 AWG Red

Different wire lead types, lengths, end strips and terminations are available. Please consult factory for details.

Indicator Lights

ROUND INDICATOR LIGHTS 5/16" DIAMETER HOLE

39U Series

Snap -mount, wire leads

FLUSH LENS

1 39/64 (40.87mm)

STANDARD LENS

ORDERING INFORMATION

39U H -

2

31 3 - 6

3/32 (2.36mm)

3/32 (2.36mm)

7/64 (2.77mm) (UL) 🚯


21/64

(8.33mm)

13/32

(10.32mm



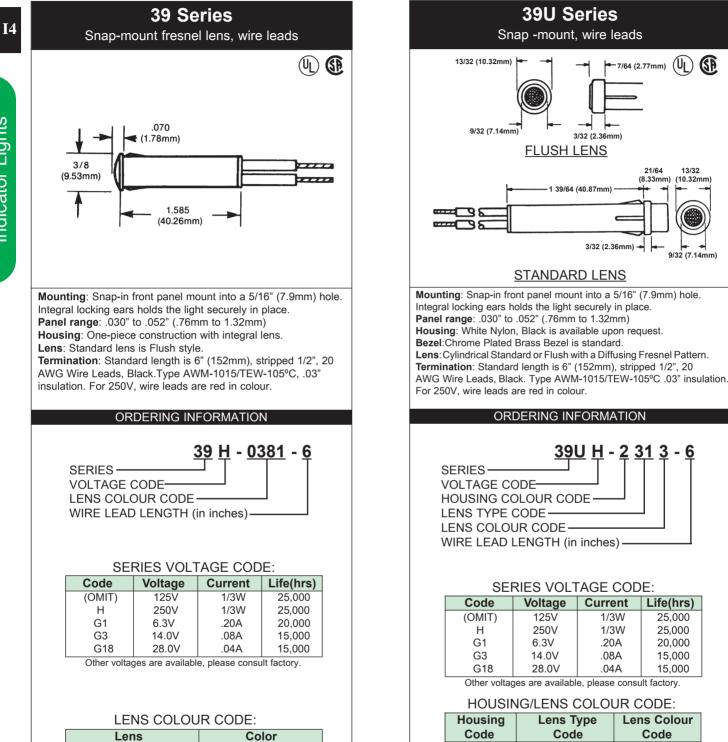

Red

Green

Amber

Yellow

Clear

Blue

SERIES VOLTAGE CODE: Code Voltage Current Life(hrs) (OMIT) 125V 1/3W 25,000 25,000 250V 1/3W н G1 6.3V .20A 20,000 14.0V 15,000 08A G3 G18 28.0V .04A 15,000 Other voltages are available, please consult factory HOUSING/LENS COLOUR CODE: Housing Lens Colour Lens Type Code Code Code 1-Red 2-Green 3-Amber 1-Black 11-Standard 4-Blue 2-White 31-Flush 6-Yellow (Standard) 7-Clear

Different wire lead types, lengths, end strips and terminations are available. Please consult factory for details.

0381

0382

0383

0384

0386

0387