



Surface Mounted Series

Remote Emergency Lighting Fixtures

Project/Location: _____

Contractor: _____

Date: _____

Prepared by: _____

EF18/EF18D/EF18T

Features

- Single, double or triple head
- Positive aim swivel
- Certified CSA C22.2 No.250



Wire Guards

460.0035-E	Wall Mount (EF18)
460.0082-E	Wall Mount (EF18D)
460.0078-E	Wall Mount (EF18T)

Replacement Lamps

Model	Lamp Type	Voltage-Wattage
570.0016-E	Mini Tungsten, Wedge base	6V - 9W
570.0025-E	Tungsten, Wedge base	12V - 9W
580.0023-E	Halogen (quartz), Bi-pin	24V - 20W

See the complete list page 91

Dimensions

Fixture	Length	Height	Depth	Canopy
EF18:	4 3/4" (12.7 cm)	7 7/8" (18.7 cm)	4 1/2" (10.5 cm)	5.0" (12.7 cm) Diameter
EF18D:	11 1/2" (28.2 cm)	6 3/8" (16.8 cm)	4 1/2" (10.5 cm)	Canopy: 5" (12.7 cm) Diameter
EF18T:	14 1/2" (37.8 cm)	6 3/8" (16.2 cm)	14 1/2" (37.8 cm)	Canopy: 9.5" (24.1 cm) Diameter



Ordering Information


Series	Lamp Style	Colour	Lamp Type, Voltage and Wattage	Options*	
EF18= single, par 36 EF18D= double, par 36 EF18T= triple, par 36	Blank= tungsten Q= halogen S= sealed beam H= quartz sealed beam	Blank= factory white B= black C= chrome M= factory white (metal)	-6V9W= 6V - 9 watts, tungsten, wedge base -6V __ W= 6V - 18 or 25 watts, tungsten, D.C.B. -12V __ W= 12V - 9 or 18 watts, tungsten, wedge base -12V25W= 12V - 25 watts, tungsten, D.C.B. -24V __ W= 24V - 9 or 18 watts, tungsten, wedge base -24V25W= 24V - 25 watts, tungsten, D.C.B. -6V __ W= 6V - 8, 12, or 20 watts, halogen, quartz bi-pin -12V __ W= 12V - 8, 12, 20 or 55 watts, halogen, quartz bi-pin NOTE: " __ " = insert wattage required *Only available with metal head.	-24V __ W= 24V - 20 or 70 watts, halogen, quartz bi-pin -6V __ W= 6V - 9, 12, 18 or 25 watts, tungsten, sealed beam -12V __ W= 12V - 12, 18 or 25 watts, tungsten, sealed beam -6V __ W= 6V - 8, 12 or 20 watts, halogen, quartz sealed beam -12V __ W= 12V - 8, 12 or 37 watts halogen, quartz sealed beam -32V __ W= 32V - 18 or 25 watts, tungsten, D.C.B. -120V __ W= 120V, tungsten, D.C.B. -120V35W= 120V35watts, halogen, D.C.B. -120V50W= 120V - 50 watts, quartz, D.C.B. *	FP= teflon coated lens

EXAMPLE: EF18Q-12V12W

EF26/EF26DS/EF26D

Features

- Cubic, vandal-resistant surface-mounted fixture
- Single, double or twin cube with center body
- Frosted polycarbonate cube
- Certified CSA C22.2 No.250

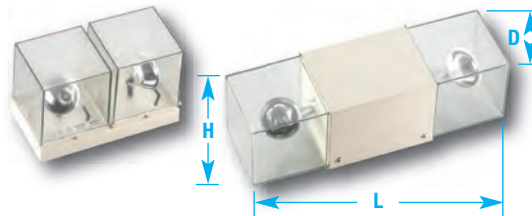

Wire Guards

460.0035-E	Wall Mount (EF26)
460.0100-E	Wall Mount (EF26D)
460.0032-E	Wall Mount (EF26T)

Replacement Lamps

Model	Lamp Type	Voltage-Wattage
570.0016-E	Mini Tungsten, Wedge base	6V - 9W
580.0011-E	Mini Halogen (quartz), Bi-Pin	6V - 12W
580.0079-E	MR16, Flood	6V - 10W

See the complete list page 91

Dimensions

Fixture	Length	Height	Depth
RSQB	4 3/4" (12.1 cm)	4 7/8" (12.4 cm)	4 3/4" (12.1 cm)
RSQBD	9 1/2" (24.1 cm)	5 7/8" (14.9 cm)	4 3/4" (12.1 cm)
RSQB2	14 3/4" (37.4 cm)	4 3/4" (12.1 cm)	4 3/4" (12.1 cm)



Ordering Information

Series	Lamp Style	Colour	Lamp Style and Wattage	Options*
EF26= single cube EF26D= double cube EF26DS= twin cube	Blank= tungsten Q= halogen M= MR16	Blank= factory white B= black	-6V9W= 6V - 9 watts, wedge base -12V9W= 12V - 9 watts, wedge base -12V18W= 12V - 18 watts, wedge base -24V9W= 24V - 9 watts, wedge base -6V8W= 6V - 8 watts, quartz bi-pin -6V12W= 6V - 12 watts, quartz bi-pin -12V8W= 12V - 8 watts, quartz bi-pin -12V12W= 12V - 12 watts, quartz bi-pin -12V20W= 12V - 20 watts, quartz bi-pin -24V20W= 24V - 20 watts, quartz bi-pin 6V6W= 6V - 6 watts, MR16 6V10W= 6V - 10 watts, MR16 12V12W= 12V - 12 watts, MR16 12V20W= 12V - 20 watts, MR16 12V35W= 12V - 35 watts, MR16 12V50W= 12V - 50 watts, MR16 24V20W= 24V - 20 watts, MR16 24V35W= 24V - 35 watts, MR16 24V50W= 24V - 50 watts, MR16	Blank= no options TP= tamper proof screws 690.0454-E= Tamper proof bit* *One bit per order.

EXAMPLE: EF26Q-TP-6V8W