

2000 SERIES® RACEWAY




Two-piece, single-channel raceway. Easy-to-install and ideal for basic power or communication/low voltage installations

CODE REFERENCE

cULus Listed Raceway:
File E4376 Guide RJBT.

Fittings:
File E41751 Guide RJPR.
Meets Article 386 of NEC.
Meets Section 12-1600 of CEC.

System Layout

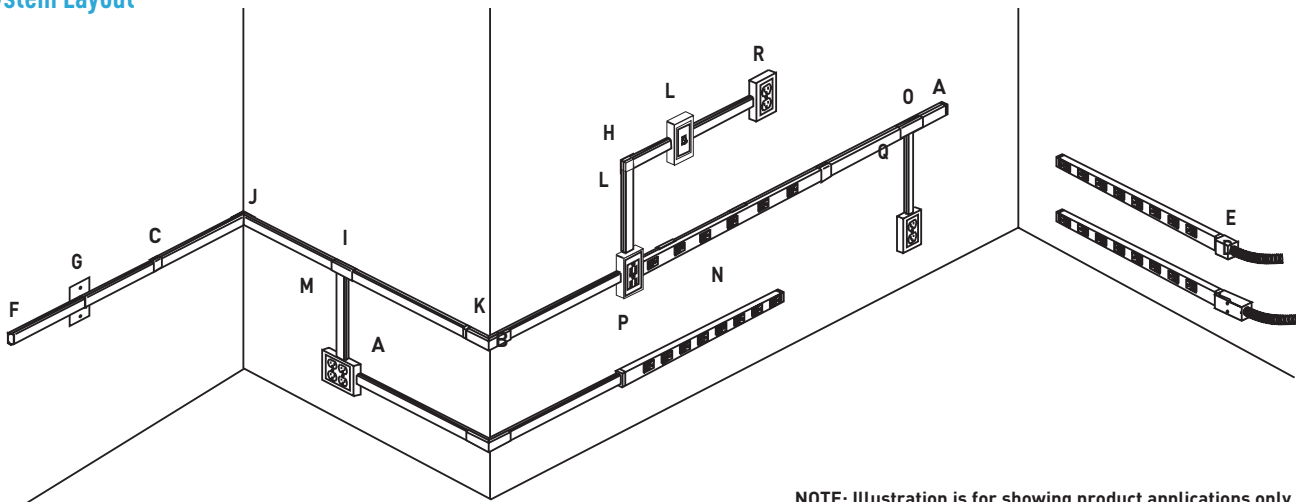

NOTE: Illustration is for showing product applications only.

KEY

- | | | |
|--------------------------------|------------------------------------|---------------------------------|
| A. 500 Series Raceway | G. 2051H Flush Plate Adapter | M. 2048-2 Two-Gang Device Box |
| B. 518 External Elbow Fitting | H. 2011 90° Flat Elbow Fitting | N. 20GB506 Plugmold Strip |
| C. 2006 Cover Clip | I. 2015 Tee Fitting | O. 2089A Flush Plate Adapter |
| D. 2010A3 Entrance End Fitting | J. 2017TC Internal Corner Coupling | P. 2089E End-Reducing Connector |
| E. 2010A2 Entrance End Fitting | K. 2018C External Elbow Cover | Q. 5748 Single-Gang Device Box |
| F. 2010B Blank End Fitting | L. 2048 Single-Gang Device Box | |

COLOR OPTIONS



2000® Series Raceway Part Numbers with a "V" prefix have an ivory finish. Part Numbers with a "G" prefix have a gray finish. Part Numbers without a prefix or suffix have a protective zinc finish.


Custom color options are also available. Consult the factory for more information.

2000 SERIES® RACEWAY

2000 Series Raceway Interconnectivity Fittings

CONNECTION REQUIRED		USE CATALOG NUMBER
FROM	TO	
500 Series Raceway	Side of 2000 Series Raceway	V2089, V2048, V2048-2
500 Series Raceway	End of 2000 Series Raceway	V2089E, V2048, V2048-2
Existing Outlet	2000 Series Raceway	V2051H
1/2" trade size Conduit or Armored Cable	2000 Series Raceway	V2010A2, V2010A3


V2010B, G2010B Blank End Fitting



Closes off the open end of 2000 Series Raceway.


2000 Series Raceway Ordering Information (continued)

V2006, G2006 Cover Clip




Covers seam where two lengths of 2000 Series Raceway come together.

V2011, G2011 Flat Elbow Fitting




For right angle turns on same surface. Cover stop permits neat butting of 2000C Cover. Two couplings included.

2009 Ground Clamp




Connects equipment grounding conductor. Provides an additional ground for raceway.

How 2009 is used.




V2015, G2015 Tee Fitting




For branching raceway at right angles. Three couplings included.

V2010A2, G2010A2 Entrance End Fitting




Connects 2000 Series Raceway to 1/2" trade size conduit or armored cable connectors. 1/2" trade size KOs located on end, sides, and bottom of fitting. Includes ground screw. If more capacity is required, use 2010A3.


2017TC Internal Corner Coupling



Can be used as inside corner coupling or as coupling and straight thru fitting. Furnished with one fiber bushing.




2017TC used as a corner coupling.




2017TC used as a corner coupling and a straight-through fitting.

V2010A3, G2010A3 Entrance End Fitting



1/2" trade size KOs located on end, sides, and bottom of fitting. 3/4" KOs on bottom and rear. Includes ground screw.

V2018C, G2018C External Elbow Cover



Covers gap when external corner is made by notching and bending 2000B Base. Continues raceway runs around outside corners.



Corner gap filler snapped into place in 2018C