

SIRIUS ACT Pushbuttons and Indicator Lights

General data

Modules for actuators and indicators

| Digit of the Article No. | 1 st - 4 th | 5 th | 6 th | 7 th | 8 th | 9 th | 10 th | 11 th | 12 th | 13 th | 14 th | 15 th | 16 th | | |
|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------------------------------|-----------------|-----------------|-----------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------|----------|
| | □□□□ | □ | □ | □ | - | □ | □ | □ | □ | □ | - | □ | □ | | |
| SIRIUS ACT pushbuttons and indicator lights | 3SU1 | | | | | | | | | | | | | | |
| Device type | 4 = modules for actuators and indicators | | 4 | | | | | | | | | | | | |
| Material (front ring) | 0 = plastic, black | | <input type="checkbox"/> | | | | | | | | | | | | |
| Illumination | 0 = non-illuminated 1 = illuminated | | <input type="checkbox"/> | | | | | | | | | | | | |
| Type of mounting | 1 = front plate mounting 2 = base mounting 3 = printed-circuit board | | <input type="checkbox"/> | | | | | | | | | | | | |
| Module type | A = contact module B = LED module C = LED test module D = support terminal E = AS-Interface module G = electronic module for ID key-operated switch | | <input type="checkbox"/> | | | | | | | | | | | | |
| Function/voltage | e.g. B = 24 V AC/DC | | <input type="checkbox"/> | | | | | | | | | | | | |
| Color | e.g. 10 = black, 20 = red | | <input type="checkbox"/> <input type="checkbox"/> | | | | | | | | | | | | |
| Connection method | 1 = screw terminals 2 = screw terminals + insulation piercing method 3 = spring-type terminals 4 = spring-type terminals + insulation piercing method 5 = socket terminals | | <input type="checkbox"/> | | | | | | | | | | | | |
| Module equipment incl. contact material | e.g. A = none B = 1 NO contact, silver C = 1 NC contact, silver | | <input type="checkbox"/> | | | | | | | | | | | | |
| Marking | A = none | | <input type="checkbox"/> | | | | | | | | | | | | |
| Ambient condition | 0 = standard, 1 = ATEX | | <input type="checkbox"/> | | | | | | | | | | | | |
| Example | 3SU1 | 4 | 0 | 0 | - | 1 | A | A | 1 | 0 | - | 1 | B | A | 0 |

Holders

| Digit of the Article No. | 1 st - 4 th | 5 th | 6 th | 7 th | 8 th | 9 th | 10 th | 11 th | 12 th | 13 th | 14 th | 15 th | 16 th | | |
|----------------------------------------------------|--------------------------------------------------------------------------|-----------------|---------------------------------------------------|-----------------|-----------------|-----------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------|----------|
| | □□□□ | □ | □ | □ | - | □ | □ | □ | □ | □ | - | □ | □ | | |
| SIRIUS ACT pushbuttons and indicator lights | 3SU1 | | | | | | | | | | | | | | |
| Device type | 5 = holder | | 5 | | | | | | | | | | | | |
| Material (front ring) | 0 = plastic, black 5 = metal, shiny | | <input type="checkbox"/> | | | | | | | | | | | | |
| Illumination | 0 = non-illuminated 1 = illuminated | | <input type="checkbox"/> | | | | | | | | | | | | |
| Type of mounting | 0 = none 1 = front plate mounting | | <input type="checkbox"/> | | | | | | | | | | | | |
| Holder type | A = 3x A B = 4x B | | <input type="checkbox"/> | | | | | | | | | | | | |
| Function/voltage | A = none G = 6 ... 24 V AC/DC | | <input type="checkbox"/> | | | | | | | | | | | | |
| Color | e.g. 10 = black, 20 = red | | <input type="checkbox"/> <input type="checkbox"/> | | | | | | | | | | | | |
| Connection method | 0 = none 1 = screw terminals | | <input type="checkbox"/> | | | | | | | | | | | | |
| Module equipment incl. contact material and slot | e.g. A = none B = 1 NO contact, silver C = 1 NC contact, silver | | <input type="checkbox"/> | | | | | | | | | | | | |
| Marking | A = none | | <input type="checkbox"/> | | | | | | | | | | | | |
| Ambient condition | 0 = standard, 1 = ATEX | | <input type="checkbox"/> | | | | | | | | | | | | |
| Example | 3SU1 | 5 | 0 | 0 | - | 0 | A | A | 1 | 0 | - | 0 | A | A | 0 |

Note:

The Article No. scheme is presented here merely for information purposes and for better understanding of the logic behind the article numbers.
For your orders, please use the article numbers quoted in the Catalog in the Selection and ordering data.

General data

Benefits

Highlights of SIRIUS ACT

Design

- Improved look of the system
- Combination of design and functionality

Easy handling

- Self-explanatory and fast installation
- One-handed installation
- Components can be mounted with holder removed
- No special tools required, simple size 2 screwdriver (cross-tip DIN ISO 87641PZD1, flat-head DIN ISO 2380-1 A/B 1x4.5) is sufficient
- Simple geometry for mounting holes

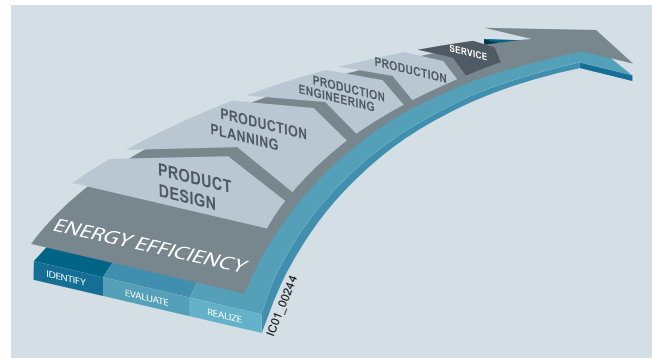
Ruggedness

- Media resistance
- Suitable for use in extreme environments
- Design stability according to use

Communication

- Connection to the most commonly used communication systems (PROFINET, AS-Interface, IO-Link)
- Can be integrated easily via the TIA Portal

Advantages through energy efficiency



Energy management in industry

Overview of the energy management process

We offer you a unique portfolio for industrial energy management, using an energy management system that helps to optimally define your energy needs. We split up our industrial energy management into three phases – identify, evaluate, and realize – and we support you with the appropriate hardware and software solutions in every process phase.

The innovative products of the SIRIUS industrial controls portfolio can also make a substantial contribution to a plant's energy efficiency (see www.siemens.com/sirius/energysaving).

SIRIUS ACT pushbuttons and indicator lights contribute to energy efficiency throughout the plant as follows:

- Lower power consumption by means of LED technology
- Long service life

Application

Environmental conditions

The pushbuttons and indicator lights are climate-proof (KTW 24) and suitable for standard industrial applications and operation in marine applications.

"Intrinsic safety" type of protection EEx i according to ATEX directive 94/9/EC

The pushbuttons and indicator lights can also be used in hazardous areas. Special versions of the 3SU1400 contact modules and 3SU1401 LED modules (only with screw terminals).

Explosion protection category for dust:
II 2D Ex tb IIIC T120°C Db

Safety EMERGENCY STOP pushbuttons according to ISO 13850

For controls according to IEC 60204-1 or EN 60204-1, the SIRIUS ACT mushroom pushbuttons are suitable for use as safety EMERGENCY STOP pushbuttons.

Safety circuits

The IEC 60947-5-1 and EN 60947-5-1 standards require positive opening. This means that for the purposes of personal safety, the assured opening of NC contacts is expressly stipulated for the electrical equipment of machines in all safety circuits and marked according to IEC 60947-5-1 with the symbol (☞).

Category 4 according to EN ISO 13849-1 can be attained with the EMERGENCY STOP mushroom pushbuttons if the corresponding fail-safe evaluation units are selected and correctly installed, e.g. the 3SK11 safety relays, the 3RK3 Modular Safety System (see [Catalog IC 14, Chapter 13, "Safety Systems"](#)) or matching units from the ASIsafe, SIMATIC or SINUMERIK product ranges.

The SIRIUS ACT pushbuttons and indicator lights can be connected to the AS-Interface communication system quickly and safely.

The following solutions are available:

- AS-Interface module
- AS-Interface module in safety-related version for EMERGENCY STOP mushroom pushbutton
- Ready-fitted AS-Interface enclosures with 1 to 6 command points

IO-Link

The SIRIUS ACT pushbuttons and indicator lights can be connected to IO-Link quickly and safely. The connection is made via a special IO-Link-module.

Technical specifications

| Type | 3SU1..0-AA 3SU1..0-JA | | 3SU1..1-AA 3SU1..1-JA | | 3SU1..0-AB 3SU1..0-BB 3SU1..0-CB 3SU1..0-DB 3SU1..0-JB | | 3SU1..1-AB 3SU1..1-BB 3SU1..1-JB | | 3SU1..0-HC | |
|--------------------------------------------------------------------------------------|----------------------------------------------------------------|-------------|--------------------------|--|--------------------------------------------------------------------|--|----------------------------------------|-------|-----------------------------|--|
| Product version | Pushbutton | | | | | | | | | |
| Operating principle of actuating element | Latching | | | | Momentary contact | | | | Momentary contact, latching | |
| Optional expansion of product by light source | No | | Yes | | No | | Yes | | No | |
| Mechanical endurance (operating cycles) typical | 1 000 000 | | | | 10 000 000 | | 3 000 000 | | 1 000 000 | |
| Switching frequency maximum | 1/h | 1 800 | | | 3 600 | | | 1 800 | | |
| Shock resistance for devices without incandescent lamp acc. to IEC 60068-2-27 | 11 ms, 50 g, half-sine | | | | | | | | | |
| Vibration resistance acc. to IEC 60068-2-6 | 20 ... 500 Hz: 5 g | | | | | | | | | |
| IP degree of protection | IP66, IP67, IP69K; NEMA Type 1, 3, 3R, 4, 4X, 12 ¹⁾ | | | | | | | | | |
| Climate class in operation acc. to EN 60721 | 3K6, 3C3, 3S2, 3M6 | | | | | | | | | |
| Ambient temperature | | | | | | | | | | |
| • During operation | °C | -25 ... +70 | | | | | | | | |
| • During storage | °C | -40 ... +80 | | | | | | | | |

| Type | 3SU1.00-AA | | 3SU1.00-BA 3SU1.00-CA 3SU1.30-AA 3SU1.30-BA 3SU1.50-AA 3SU1.50-BA 3SU1.50-CA | | 3SU1.50-EA | | 3SU1.01-AA 3SU1.01-BA 3SU1.51-AA 3SU1.51-BA 3SU1.51-CA | | 3SU1.00-AD 3SU1.00-BD 3SU1.00-CD 3SU1.30-AD 3SU1.30-BD 3SU1.50-AD 3SU1.50-BD 3SU1.50-CD | | 3SU1.50-ED | | 3SU1.01-AD 3SU1.01-BD 3SU1.31-AD 3SU1.31-BD | |
|--------------------------------------------------------------------------------------|--------------------------------------------------|-------------|------------------------------------------------------------------------------------------------|---------|------------|---------|--------------------------------------------------------------------|------------|--------------------------------------------------------------------------------------------------------------|---------|------------|-----------|------------------------------------------------------|--|
| Product version | Mushroom pushbutton | | | | | | | | | | | | | |
| Operating principle of actuating element | Latching | | | | | | Momentary contact | | | | | | | |
| Optional expansion of product by light source | No | | | | | | Yes | | No | | | | Yes | |
| Mechanical endurance (operating cycles) typical | 500 000 | | | 300 000 | | 500 000 | | 10 000 000 | | 300 000 | | 3 000 000 | | |
| Switching frequency maximum | 1/h | 3 600 | | 1 800 | | 3 600 | | | | 1 800 | | 3 600 | | |
| Shock resistance for devices without incandescent lamp acc. to IEC 60068-2-27 | 11 ms, 50 g, half-sine | | | | | | | | | | | | | |
| Vibration resistance acc. to IEC 60068-2-6 | 20 ... 500 Hz: 5 g | | | | | | | | | | | | | |
| IP degree of protection | IP66, IP67, IP69K; NEMA Type 1, 3, 3R, 4, 4X, 12 | | | | | | | | | | | | | |
| Climate class in operation acc. to EN 60721 | 3K6, 3C3, 3S2, 3M6 | | | | | | | | | | | | | |
| Ambient temperature | | | | | | | | | | | | | | |
| • During operation | °C | -25 ... +70 | | | | | | | | | | | | |
| • During storage | °C | -40 ... +80 | | | | | | | | | | | | |

| Type | 3SU1...-N | | 3SU1...-L | | 3SU1...-J | | 3SU1...-H | | 3SU1...-G | |
|--------------------------------------------------------------------------------------|--------------------------------------------------|------------|-----------|--|-----------|--|-----------|--|-----------|--|
| Product version | EMERGENCY STOP mushroom pushbutton | | | | | | | | | |
| Mechanical endurance (operating cycles) typical | 300 000 | | | | | | | | | |
| Switching frequency maximum | 1/h | 600 | | | | | | | | |
| Shock resistance for devices without incandescent lamp acc. to IEC 60068-2-27 | 11 ms, 50 g, half-sine | | | | | | | | | |
| Vibration resistance acc. to IEC 60068-2-6 | 2 ... 500 Hz: 5 g | | | | | | | | | |
| IP degree of protection | IP66, IP67, IP69K; NEMA Type 1, 3, 3R, 4, 4X, 12 | | | | | | | | | |
| Climate class in operation acc. to EN 60721 | 3K6, 3C3, 3S2, 3M6 | | | | | | | | | |
| Ambient temperature | | | | | | | | | | |
| • During operation | °C | -25 ... 70 | | | | | | | | |
| • During storage | °C | -40 ... 80 | | | | | | | | |

¹⁾ UL pending for illuminated and non-illuminated Twin Pushbutton and illuminated Pushbutton NEMA Type 1, 3, 3R, 4 and 4X




SIRIUS ACT Pushbuttons and Indicator Lights




General data

| Type | 3SU1...-2A | 3SU1...-2B 3SU1...-2C 3SU1...-2D 3SU1...-2E | 3SU1...-3E | 3SU1...-4B 3SU1...-4C 3SU1...-4D 3SU1...-4F 3SU1...-4G 3SU1...-4H 3SU1...-4J 3SU1...-4L | 3SU1...-5B 3SU1...-5H 3SU1...-5J 3SU1...-5K 3SU1...-5L 3SU1...-5P 3SU1...-5Q 3SU1...-5R 3SU1...-5S 3SU1...-5T 3SU1...-5X | 3SU1...-7A 3SU1...-7B |
|--------------------------------------------------------------------------------------|----------------------------------------------------------------|------------------------------------------------------|---------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Product version | Rotary knob | Selector switch | Toggle switch | Key-operated switch | | Coordinate switch |
| Mechanical endurance (operating cycles) typical | 1 000 000 | | | | | 250 000 |
| Switching frequency maximum | 1/h | 1 800 | | | | 3 600 |
| Shock resistance for devices without incandescent lamp acc. to IEC 60068-2-27 | 11 ms, 50 g, half-sine | | | | | |
| Vibration resistance acc. to IEC 60068-2-6 | 10 ... 500 Hz: 5 g | | | | | |
| IP degree of protection | IP66, IP67, IP69K; NEMA Type 1, 3, 3R, 4, 4X, 12 ¹⁾ | | | | | |
| Ambient temperature | | | | | | |
| • During operation | °C | -25 ... +70 | | | | |
| • During storage | °C | -40 ... +80 | | | | |

| Type | 3SU1400-.....-1 | 3SU1400-.....-3 | 3SU1400-.....-5 |
|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|
| Product version | Contact module | | |
| Insulation voltage rated value | V | 500 | |
| Pollution degree | 3 | | |
| Impulse withstand voltage rated value | kV | 6 | |
| Operational voltage type | AC/DC | | |
| Operational voltage | | | |
| • At AC | | | |
| - Rated value | V | 5 ... 500 | |
| • At DC | | | |
| - Rated value | V | 5 ... 500 | |
| Thermal current | A | 10 | |
| Operational current, rated value | | | |
| • At AC-12 | | | |
| - At 24 V | A | 10 | |
| - At 230 V | A | 10 | |
| - At 500 V | A | 10 | |
| • At AC-15 | | | |
| - At 24 V | A | 6 | |
| - At 230 V | A | 6 | |
| - At 400 V | A | 3 | |
| - At 500 V | A | 1.4 | |
| • At DC-12 | | | |
| - At 24 V | A | 10 | |
| - At 48 V | A | 5 | |
| - At 110 V | A | 2.5 | |
| - At 230 V | A | 1 | |
| - At 400 V | A | 0.3 | |
| - At 500 V | A | 0.2 | |
| • At DC-13 | | | |
| - At 24 V | A | 3 | |
| - At 48 V | A | 1.5 | |
| - At 110 V | A | 0.7 | |
| - At 230 V | A | 0.3 | |
| - At 400 V | A | 0.1 | |
| - At 500 V | A | 0.07 | |
| Contact reliability | One contact failure per 100 million switching operations (17 V, 5 mA), One contact failure per 10 million switching operations (5 V, 1 mA) | | |
| Mechanical endurance (operating cycles) typical | 10 000 000 | | |
| Switching frequency maximum | 1/s | 1 | |

¹⁾ UL pending for plastic with metal matte front ring and 30 mm flat metal matte Key-operated switch NEMA Type 1, 3, 3R, 4, 4X, 12 and 22 mm shiny metal Key-operated switch NEMA Type 1, 4X (indoor use only) and 12.

| Type | | 3SU1400-.....-1 | 3SU1400-.....-3 | 3SU1400-.....-5 |
|--------------------------------------------------------------------------------------------------------------------|----|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Product version | | Contact module | | |
| Fuse link version required for short-circuit protection of the auxiliary switch with type of coordination 1 | | gG / Dz 10 A, quick-response / Dz 16 A | | |
| Continuous current of miniature circuit breaker C characteristic | A | 10 | | |
| Vibration resistance acc. to IEC 60068-2-6 | | 2 ... 500 Hz: 5 g | | |
| Shock resistance for devices without incandescent lamp acc. to IEC 60068-2-27 | | 11 ms, 50 g, half-sine | | |
| Climate class in operation acc. to EN 60721 | | 3K6, 3C3, 3S2, 3M6 | | |
| Ambient temperature | | | | |
| • During operation | °C | -25 ... +70 | | |
| • During storage | °C | -40 ... +80 | | |
| IP degree of protection | | | | |
| • of the enclosure | | IP40 | | |
| • of the terminal | | IP20 | | |
| Type of electrical connection | | Screw terminals  | Spring-type terminals  | Socket terminals (THT)  |
| Type of connectable conductor cross-sections | | | | |
| • For auxiliary contacts | | | | |
| - Solid | | 2 x (1.0 .. 1.5 mm ²) | 2 x (0.25 .. 1.5 mm ²) | 0.8 mm x 0.8 mm x 4 mm |
| - With end sleeves | | 2 x (0.5 .. 0.75 mm ²) | | -- |
| - Finely stranded | | | | |
| - Without end sleeves | | 2 x (0.5 .. 0.75 mm ²) | 2 x (0.25 .. 1.5 mm ²) | -- |
| - With end sleeves | | 2 x (0.5 .. 1.5 mm ²) | 2 x (0.25 .. 0.75 mm ²) | -- |
| • For AWG cables for auxiliary contacts | | 2 x (18 ... 14) | 2 x (24 ... 16) | -- |
| Tightening torque | | | | |
| • For screw terminals | Nm | 0.8 ... 0.9 | -- | -- |










| Type | | 3SU1401-.....-1 | 3SU1401-.....-3 | 3SU1401-.....-5 |
|--------------------------------------------------------------------------------------|----|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Product version | | LED module | | |
| Light source integrated in product | | Yes | | |
| Type of light source | | LED | | |
| Insulation voltage rated value | V | 320 | | |
| Pollution degree | | 3 | | |
| Impulse withstand voltage rated value | kV | 4 | | |
| Operating time typical | h | 100 000 | | |
| Vibration resistance acc. to IEC 60068-2-6 | | 2 ... 500 Hz: 5 g | | |
| Shock resistance for devices without incandescent lamp acc. to IEC 60068-2-27 | | 11 ms, 50 g, half-sine | | |
| Climate class in operation acc. to EN 60721 | | 3K6, 3C3, 3S2, 3M6 | | |
| Ambient temperature | | | | |
| • During operation | °C | -25 ... +70 | | |
| • During storage | °C | -40 ... +80 | | |
| IP degree of protection of the terminal | | IP20 | | |
| Type of electrical connection | | Screw terminals  | Spring-type terminals  | Socket terminals (THT)  |

SIRIUS ACT Pushbuttons and Indicator Lights

Modules for Actuators and Indicators

Contact modules

Selection and ordering data

| Contact version | Number of NO contacts | Number of NC contacts | Product function positive opening | DT | Screw terminals  | PU (UNIT, SET, M) | PS* | | |
|-----------------------------------------------------------------------------------|-----------------------|-----------------------|----------------------------------------------|-----|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------|---|--------|
| Order No. | | | | | | | | | |
| Contact modules for front plate mounting | | | | | | | | | |
|  | Silver alloy | 1 | 0 | No |  .3 .4 |  | ▶ 3SU1400-1AA10-1BA0 | 1 | 1 unit |
| | | 0 | 1 | Yes |  .1 .2 |  | ▶ 3SU1400-1AA10-1CA0 | 1 | 1 unit |
|  | | 0 | 1 with installation monitoring ¹⁾ | Yes |  .1 .2 |  | ▶ 3SU1400-1AA10-1HA0 | 1 | 1 unit |

1) The NC contact opens automatically upon disconnection of the actuator. On delivery, the contact is open (= safe state). Activation (= NC contacts on the non-actuated commanding device are closed) takes place upon first-time actuation after the contact block is snapped onto the actuator. Unsuitable for mounting in 3SU18 enclosure.