

Centium T5HO

CENTIUM ELE BALLAST (2) F39T5/HO 120-277V

No matter what the conditions require, operating at a variety of line voltages between 120V to 480V, whether located in high ambient temperature environments (requiring a 90° C rating) or not, our family of Philips Advance Centium ballasts are ideal for a wide variety of applications.

Product data

• General Characteristics

Lamp Type F39T5/HO Number of Lamps 1/2 piece Input Voltage 120-277 V Line Frequency 50/60 Hz Ballast Type Electronic Fluorescent Base Model ICN2S39T Housing Housing Dimensions 14.17" x 1.18" x 1.06" Metal Housing Material Suitable for Outdoor Yes **Programmed Start** Starting Method

Centium

10 %

• Operating Characteristics

Family Name

Automatic restart Yes Ignition time 1.5 s Input Power Gear 87-85 W Ballast factor 1 - Ballast Efficacy Factor Power Factor Corest Lamp Current Crest Factor Sound Rating A

Wiring Characteristics

Max THD

Color input terminals
Color output terminals
RED, YEL & BLU
RED, YEL & BLU
RED, YEL & BLU

Connector type Poke-In
Wire Striplength 0.375 mm
Lamp Connection Series
Wire Gauge 18AWG

Wire Length by No wires Color Solid Wire Type Allowed Wiring Yes Config(Remote) Allowed Wiring Yes Config(Tandem) Allowed Wiring Yes Config(Through) Max Dist. Ball to 20' Lamp(Remote) Max Dist. Ball to Blue = 20' Lamp(Tandem) Blue = 20' Max Dist.Ball to Lamp(Through)

• System Chars on driver level

Rated Lamp Watts 39W

• Temperature Characteristics

T-case maximum 70 C

• Product Dimensions

 Length A1
 14.17 in

 Length A2
 13.78 in

 Width B1
 1.18 in

 Height C1
 1.06 in

• Approval & Application Chars

EMC Immunity FCC Non-Consumer
Approbation Marks UL, CSA, RoHS
UL Listed Yes
CSA certificate Yes



Centium T5HO

CEC Listing	No
CEE Rated	No
Circle E logo	No
CSA E	No
cUL certificate	No
DOE	No
Energy Star	No
FIDE Certificate	No
NEMA Premium	No
NOM certificate	No
RoHS Compliant	Yes
SASO Certificate	No
UL Recognized	No

• Product Data

Product number
Full product name
ELE BALLAST (2) F39T5/HO
120-277V
Short product name
ELE BALLAST (2) F39T5/HO
120-277V
Pieces per Sku
1
Skus/Case
18
Bar code on pack
Par code on pack
F0781087131756
F0781087131758

Bar code on case 50781087131768 Logistics code(s) 913701253202 eop_net_weight_pp 0.441 kg

CENTIUM ELE BALLAST (2) F39T5/HO 120-277V

14,17

13.78

ELE BALLAST (2) F39T5/HO


120-277V


A1 (Norm) A2 (Norm) A3 (Norm) B1 (Norm) C1 (Norm)

1.18

1.06

Dimensional drawing

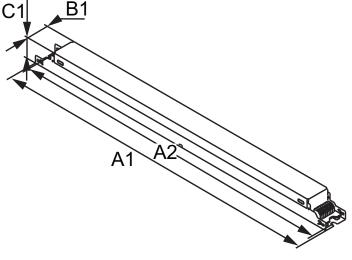



For I lamp operation, do not use yellow leads

