

FEATURES & SPECIFICATIONS

INTENDED USE — Ideal one-for-one replacement of conventional lighting systems such as HID and fluorescent. For use in light Industrial applications such as, warehousing and other large indoor spaces with mounting heights ranging from 10' — permitted . **Certain airborne contaminants can diminish integrity of acrylic and LED's.** <u>Click here for Acrylic Environmental Compatibility table for suitable uses.</u>

 $\textbf{CONSTRUCTION} \ -- \ \text{Solid aluminum channel enables superior thermal performance at warm ambient temperatures}.$

Acrylic Textured Clear (ATC) and semi-diffuse lens optional to provide glare control and LED protection.

ELECTRICAL — 70% lumen maintenance at >100,000 hours. Thermally protected driver standard with 0-10V dimming, 3kA/6kV surge protection is standard on MVOLT. 5kA/10kV surge protection is standard on HVOLT. Optional 5kA/10kV available on MVOLT. Surge protection is tested in accordance with IEEE/ANSI standards.

LSXR Sensor option provides increased energy savings.


INSTALLATION — Suitable for suspension by chain, cable, surface-mounting bracket, hook monopoint or single (pendant) monopoint. Surface mounting not recommended. 2" offset mounting can be accomplished with the optional THUN mounting bracket. To maintain ambient listing, fixture should be mounted at a minimum plenum height of 18".

LISTINGS — UL, CUL listed. Damp location listed. Listed for use in ambient operating temperatures from -40°C to 45°C. Thermal management system allows for safe operation during times when temperatures rise to 55°C*.

DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms and conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

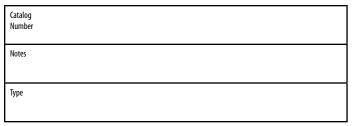

LED High Bay





















A - 7/8" KNOCK OUT

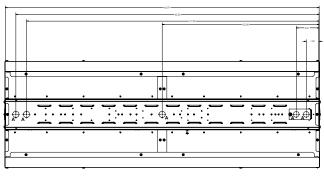

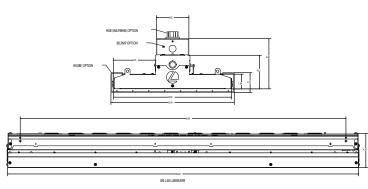

^{*}Prolonged use at 55°C may impact long-term performance.

IBE LED High Bay



ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative. **Example**: IBE L24 18000LM ATC MD MVOLT GZ10 40K 80CRI DWH

IBE				MD		GZ10	
Series	Fixture length	Lumens	Lens	Distribution	Voltage	Driver	Color temperature
IBE LED bay light	L24 24"	12000LM 12,000 lumens 15000LM 15,000 lumens 18000LM 18,000 lumens 22000LM 22,000 lumens 18000LM 18,000 lumens 22000LM 22,000 lumens 30000LM 30,000 lumens	ATC Acrylic Textured semi- diffuse lens, .040" thick L/LENS Less lens SD080 Semi-Diffuse acrylic, .080" thick	MD Medium	MVOLT 120-277V HVOLT 347V-480V ² 120 120V 208 208V 240 240V 277 277V 347 347V ⁴ 480 480V ⁴	GZ10 0-10V dimming	40K 4000 K 50K 5000 K

Color rendering index	Options		Finish
80 CRI	EM self-diagnostics battery pack, 15W, constant power CEC compliants Fixture back pack (required with E15WCP) OUTCTR Wiring leads pulled through back center of fixture (not available with back pack) SPD Surge protection device 4 OCS RELOC® OnePass® 5' installed 5 RRL RELOC®-ready luminaire. See page 5 for ordering information (must be ordered separately) IMP Integrated modular plug (not available with 347V or 480V) 5.6 WGX Standard wire guard, installed Cord sets: CS1W 6' white cord with straight-blade plug, 120V 7.8 CS3W 6' white cord with twist-lock plug, 120V 7.8 CS11W 6' white cord with straight-blade plug, 277V 7.8 CS11W 6' white cord with twist-lock plug, 347V 7.8 CS25W 6' white cord with twist-lock plug, 347V 7.8 CS97W 6' white cord with twist-lock plug, 347V 7.8 CS97W 6' white cord with twist-lock plug, 347V 7.8 CS97W 6' white cord with twist-lock plug, 347V 7.8 CS93W 6' white cord, 600V SE00W, no plug (no voltage required) 7	Motion sensors: LCOZU Aisle motion sensor, pre-wired 5.9 LCHOSZU Aisle motion sensor, pre-wired; programmable dimming 5.9 LCPZU Aisle motion sensor with photocell; pre wired 5.9 LAOZU 360° motion sensor, pre-wired 5.9 LAHOSZU 360° motion sensor, pre-wired; programmable dimming 5.9 LAPZU 360° motion sensor with photocell, pre-wired 5.9 LAMOSZU 360 motion sensor, dimming and switching photocell, pre-wired (T24 compliant) 5.9 LCMOSZU Aisle motion sensor, dimming and switching photocell, pre-wired (T24 compliant) 5.9	DWH Gloss white

Accessories: Or	der as separate catalog number.				
Mounting: IBAC120 M20 IBAC240 M20 IBHMP ZACVH IBLPMP IBLPMPHB HC36 THUN	Aircraft cable 10' with hook (one pair) Aircraft cable 20' with hook (one pair) Hook monopoint Aircraft 10' V hanger (one pair) Pendant monopoint splice box, includes side covers (not available with fixtures utilizing back pack when ordered with 347, 480 & HVOLT) 10 Pendant monopoint splice box with 3/4" hub, includes side covers (not available with fixtures utilizing back pack when ordered with 347, 480 & HVOLT) 10 Hanger chain, 36" (one pair) Tong hanger bracket (order 2 per fixture) 11	Wire guar WGIBE WGIBE4	ds: Wire guard for use with L24 fixtures Wire guard for use with L48 fixtures	Cord sets for IM CS1WIMP CS3WIMP CS7WIMP CS11WIMP CS93WIMP	AP option: Straight plug, 120V ^{7,8,12} Twist-lock, 120V ^{7,8,12} Straight plug, 277V ^{7,8,12} Twist-lock, 277V ^{7,8,12} 600V SO white cord, no plug (no voltage required) ^{8,12}

Notes

- $1\quad \ \ Visible\ pixilation\ is\ present\ when\ choosing\ L/LENS\ option.\ Not\ recommended\ for\ applications\ where\ direct$ viewing of high intensity LED's will be unacceptable.
- Ships standard with surge protection.
- $Utilizes fixture\ backpack.\ 30000LM\ only\ for\ use\ in\ ambient\ temperatures\ up\ to\ 35^\circ C.\ Not\ available\ with\ IMP$ option or cord with plug options. Utilizes <u>PS1555CP</u>.
- 4 Ships standard on HVOLT, 347, and 480V and all Motion sensors.
- $Must be factory installed. \ Must have "IMP" power cord to power fixture. Cordsets may be ordered with fixture and the fixture of the fixtu$ or as accessory. Not available with E15WCP option.
- $7 \quad \text{All cord sets are 18/3, 6', white. Additional lengths available 10', 15' and 20'. (ex. CS1WL10)} \\$
- $8 \quad \text{Cord sets are voltage specific. Specify voltage. Other configurations available. Consult factory.} \\$
- $9 \quad \hbox{Other configurations available, see page four for additional options. Not available 208 or 240.}\\$
- 10 Additional support cables required when used with L48.
- $11 \quad \text{For use in applications with ambient temperatures up to } 35^{\circ}\text{C for } 12000\text{LM} 22000\text{LM fixtures, } 30^{\circ}\text{C for } 12000\text{LM} + 12000\text{LM fixtures, } 30^{\circ}\text{C for } 30^{\circ}\text{C for } 12000\text{LM fixtures, } 30^{\circ}\text{C for } 30^{\circ}\text{C f$ 30000LM fixtures. Not for use on fixtures with E15WCP.
- 12 Fixtures must have IMP option.

IBH/IBE CONVERSION

IBH Existing			IBE Contract Select Offering			Need IBE 18L and 24L in a 2X4 to match existing IBH form factor?		
IBH Nomenclature	Size	UPC	IBE Nomenclature	Size	UPC	IBE Nomenclature	Size	
IBH 12L MVOLT	2X2	889804709100	IBE 12LM MVOLT 40K	2X2	191848491010			
IBH 12000LM SD080 MD MVOLT 0Z10 50K 80CRI WH	2x2	889804681499	IBE 12LM MVOLT 50K	2x2	191848491096			
IBH 15000LM SD080 MD MVOLT OZ10 40K 80CRI WH	2x2	889804708370	IBE 15LM MVOLT 40K	2x2	191848194133			
IBH 15000LM SD080 MD MVOLT OZ10 50K 80CRI WH	2x2	889804708370	IBE 15LM MVOLT 50K	2x2	191848491058			
IBH 18L MVOLT	2X4	889804710472	IBE 18LM MVOLT 40K	2X2	191848491027	IBE L48 18000LM ATC MD MVOLT GZ10 40K 80CRI DWH	2X4	
IBH 18000LM SD080 MD MVOLT OZ10 50K 80CRI WH	2X4	889804711738	IBE 18LM MVOLT 50K	2x2	191848491072	IBE L48 18000LM ATC MD MVOLT GZ10 50K 80CRI DWH	2X4	
IBH 24L MVOLT	2X4	889804710335	IBE 22LM MVOLT 40K	2x2	191848491195	IBE L48 22000LM ATC MD MVOLT GZ10 40K 80CRI DWH	2X4	
IBH 24000LM SD080 MD MVOLT 0Z10 50K 80CRI WH	2X4	889804712032	IBE 22LM MVOLT 50K	2x2	191848491133	IBE L48 22000LM ATC MD MVOLT GZ10 50K 80CRI DWH	2X4	

PHOTOMETRICS

See www.lithonia.com.

OPERATIONAL DATA

Fixture Length	Lumen Package	Lens Option	40K, 80CRI	50K, 80CRI
		ATC	11,306	11,652
	12000LM	SD080	11,377	11,726
		L/LENS	12,267	12,643
		ATC	13,967	14,395
	15000LM	SD080	14,055	14,486
L24		L/LENS	15,155	15,619
LZ4	18000LM	ATC	17,762	18,306
		SD080	17,874	18,422
		L/LENS	19,272	19,863
		ATC	21,067	21,712
	22000LM	SD080	21,200	21,850
		L/LENS	22,859	23,559
		ATC	18,052	18,605
	18000LM	SD080	18,166	18,723
		L/LENS	19,587	20,188
		ATC	22,564	23,256
L48	22000LM	SD080	22,707	23,403
		L/LENS	24,486	25,234
		ATC	27,845	28,698
	30000LM	SD080	28,021	28,880
		L/LENS	30,213	31,139

LUMENS VS. AMBIENT TEMPERATURE

Ambient °C	Ambient °F	Lumen multiplier
0	32	1.035
10	50	1.021
25	77	1.000
30	86	0.993
35	95	0.986
40	104	0.978
45	113	0.971

CHARACTERISTICS

Length	Lumen	Wattage				Dimensions - Inches (centimeters)			Weight with ATC Lens	Comparable light source
Length	package	120V	277V	347V	480V	Length	Width	Depth	in Carton	Comparable light source
	12000LM	83	82	81	81	22 (55.9)	15-1/4 (38.7)	4-3/8 (11.1)	8.2 lbs (3.7 kg)	175W MH, 4-lamp T8 HBF, 2-lamp T5H0
L24	15000LM	107	105	104	104	22 (55.9)	15-1/4 (38.7)	4-3/8 (11.1)	8.2 lbs (3.7 kg)	200W MH, 6-lamp T8 NBF
LZ4	18000LM	137	137	131	132	22 (55.9)	15-1/4 (38.7)	4-3/8 (11.1)	8.2 lbs (3.7 kg)	250W MH, 6-lamp T8 HBF, 4-lamp T5H0
	22000LM	166	165	161	161	22 (55.9)	15-1/4 (38.7)	4-3/8 (11.1)	8.2 lbs (3.7 kg)	400W MH, 6-lamp T5H0
	18000LM	136	136	133	133	44 (111.8)	15-1/4 (38.7)	4-3/8 (11.1)	18 lbs (8.2 kg)	250W MH, 6-lamp T8 HBF, 4-lamp T5H0
L48	22000LM	166	165	161	161	44 (111.8)	15-1/4 (38.7)	4-3/8 (11.1)	18 lbs (8.2 kg)	400W MH, 6-lamp T5H0
	30000LM	215	213	205	204	44 (111.8)	15-1/4 (38.7)	4-3/8 (11.1)	18 lbs (8.2 kg)	575W MH, 10-lamp T8 HBF

PROJECTED LUMEN MAINTENANCE

Operating hours	0	10,000	20,000	30,000	40,000	50,000	60,000	70,000	80,000	90,000	100,000
Lumen maintenance factor	100%	96%	94%	91%	89%	87%	85%	82%	80%	78%	76%

LSXR - Fixture Mount Sensor (see www.sensorswitch.com for additional information)

- · Four interchangeable lenses.
- Integrated mounting bracket drops lens down 3" from chase nipple.
- Single or dual relay versions designed with robust protection from the harsh switching requirements of T5 and LED loads.
- Photocell and 0-10VDC dimming options.
- No PIR field calibration or sensitivity adjustments required.
- Not available 208 or 240V.

LSXR configuration	Comparable CMRB sensor	Old style sensor nomenclature
For shortes	t lead times use one of the foll	owing LSXR configurations
LCOZU	CMRB 50	MSI
LCHOSZU	CMRB 50 D	MSID
LCPZU	CMRB 50 P	MSIPED
LAOZU	CMRB 6	MSI360
LAHOSZU	CMRB 6 D	MSI360D
LAPZU	CMRB 6 P	MSI360PED



SELECTIONS BELOW WILL EXTEND ORDER LEAD TIME. CONSULT YOUR SALES REPRESENTATIVE FOR DETAILS.

SINGLE RELAY

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: LAHOSZU

Series	Lens option	Dimming/Photocell	Max. dim Level	Min. dim level	Temp/Humidity	Default time delay
L LSXR passive infrared indoor occupancy sensor	A High mount, 360° B Low mount, 360° C High mount aisleway	O None 1 H High/low occupancy operation P Switching photocell (on/off) M Dimming and switching photocell G Dimming and switching photocell with high/low occupancy operation	0 10 VDC 9 9 VDC 8 8 VDC 7 7 VDC	S Minimum dimming level of ballast 1 1 VDC 2 2 VDC 3 3 VDC 4 4 VDC 5 5 VDC 6 6 VDC	Z None T Low temperature	I 30 seconds D 2.5 minutes X 5 minutes R 7.5 minutes U 10 minutes (with minimum 15 minutes on time) V 15 minutes W 20 minutes Y 30 minutes

DUAL RELAY (Available with 120, 277, and 347V only)

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: LA2KZU

Series	Lens option	Poles	Operating mode	Temp/Humidity	Default time delay
L LSXR passive infrared indoor occupancy sensor	A High mount, 360° B Low mount, 360° C High mount aisleway	2 Dual relay	J None K Alternating off relays (promotes even lamp wear) O Alternating off relays w/photocell P Switching photocell (on/off) E Photocell on/off (pole 1 only) F Photocell on/off - both poles (dual set-point)	Z None T Low temperature	I 30 seconds D 2.5 minutes X 5 minutes R 7.5 minutes U 10 minutes (with minimum 15 minutes on time) V 15 minutes W 20 minutes Y 30 minutes

Example: LENS 50 J100

Replacement lenses: Order as separate catalog number.							
<u>Series</u>	Lens	type	<u>Packa</u>	nge quantity			
Lens	6	High mount 360°	U	Unit			
	10	Low mount 360°	J10	10-pack			
	50	High mount aisleway	J100	100-pack			

Notes

1 Dimming level fields not required when this option is chosen.

RRL - RELOC®-Ready Luminaire

- RRL connectors can be used with Quick-Flex®, System 820 and OnePass® systems.
- · Load side of connector factory installed to luminaire.
- 4-pole mating connector with push-in terminations allows for simple installation.
- Touch-safe design on both halves meets UL/CSA requirement.
- Wiping contact design allows safe disconnect under load.



ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: RRLA

Series		Wiring instructions				
RRL	RELOC®-ready luminaire	A	Hot conductor wired to position #1 (phase A)	AE	Hot conductor wired to position #1 (phase A), hot conductor #2 wired to position #2 (phase B) $^{\rm 2}$	
		В	Hot conductor wired to position #2 (phase B)	ABE	Hot conductor wired to position #1 (phase A), hot conductor #2 wired to position #2 (phase B), inverter conductor wired to position #3 (phase C) 1.2	
		С	Hot conductor wired to position #3 (phase C) ¹	C12S	Hot conductor in position #1 (phase A), low voltage conductor #1 in position #2,low voltage conductor #2 in position #3 1.3	
		AB	Outboard hot conductor wired to position #1 (phase A), inboard hot conductor wired to position #2 (phase B)			

Compatible RELOC® Cables for Industrial Luminaires (shipped and ordered separately)



Notes

- C, ABE, and C12S options are not used with Quick-Flex QFC, QSFC, QPT, and QD.
- 2 AE and ABE commercial fixtures should disconnect the TSPL before unplugging the RRL so it does not go into discharge mode.
- 3 C12S option is used with the OnePass OD and 820 SSC, PT, and DC for 0-10V/DALI applications.

IMP - Integrated Modular Plug

- The integrated modular plug (IMP) option allows the installer to plug and play.
- Cord sets connect quickly to any fixture with IMP option.

IMP compatible cord sets ¹			
CS1WIMP	Straight plug, 120V		
CS3WIMP	Twist-lock, 120V		
CS7WIMP	Straight plug, 277V		
CS11WIMP	Twist-lock, 277V		
CS25WIMP	Twist-lock, 347V		
CS93WIMP	600V SE00W white cord, no plug		
CS97WIMP	Twist-lock, 480V		

Notes

1 Cord set required for fixture operation. All cord sets are 18/3, 6' white.