
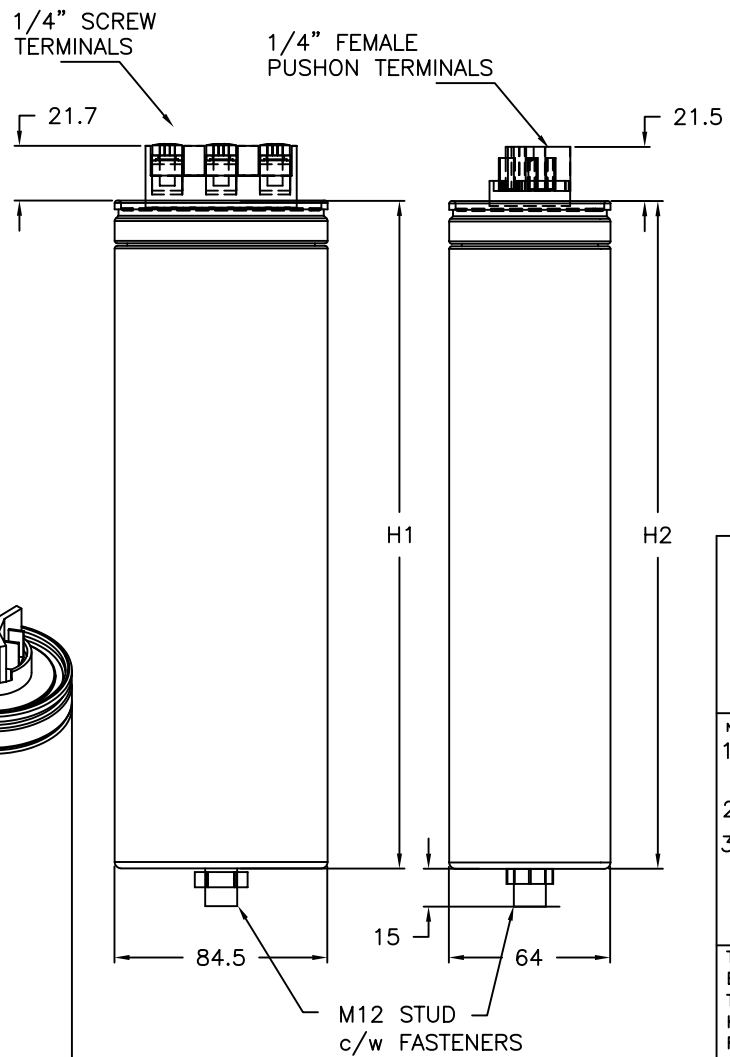


Volts	kVAr	uF per phase	H1	H2	CONNECTION
240	6.5	100.3		190	Δ
	13	200.6	265		Δ
525	3	9.6		190	Δ
	3.6	11.5		190	Δ
	6.5	19.2		190	Δ
	8.3	25.7		190	Δ
	10	32.1		190	Δ
	12	38.5	190		Δ
	15.0	48.1	190		Δ
	18.0	57.7	190		Δ
	24.0	77	265		Δ
	30.0	96.3	265		Δ
690	6.6	12.3		190	Δ
	8.3	15.4		265	Δ
	11.0	20.4		265	Δ
	13.1	24.2	190		Δ
	16.5	30.7	265		Δ
	19.7	37.2	265		Δ
	26.2	48.7	340		Δ
	30.0	55.7	340		Δ
816	24.0	95.7	340		Y
999	20.5	54.5	265		Y
	28.8	76.5	340		Y

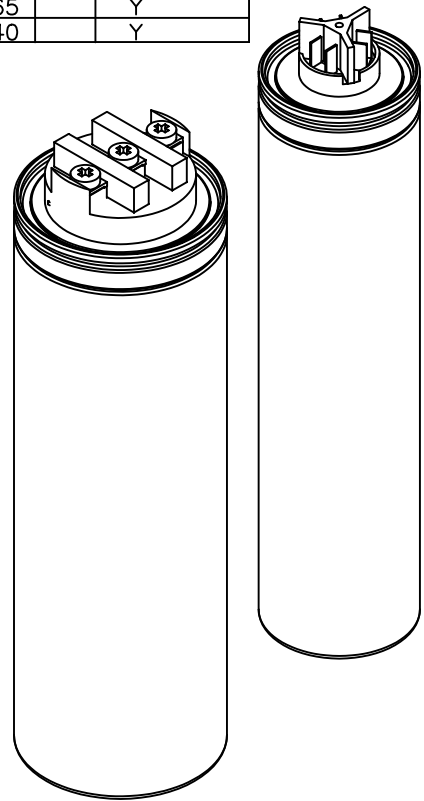

**ELECTROTEK LTD.**  
 1016 34 AV SE CALGARY, AB  
 CANADA T2G 1V4  
 TEL +403 287 2200  
 FAX +403 287 3808

- NOTES**
- 1) Discharge resistors provided on each capacitor
  - 2) All dimensions in mm
  - 3) Allow 25mm extra height for casing expansion

THIS DRAWING IS THE PROPERTY OF ELECTROTEK LTD. THE INFORMATION AND TECHNOLOGY HERE-ON MAY NOT BE USED NOR REPRODUCED WITHOUT THE WRITTEN PERMISSION OF ELECTROTEK LTD. ALL REPRODUCTIONS, IN WHOLE OR IN PART, INCLUDING SHOP DRAWINGS, SHALL REFER TO THIS CLAUSE.

SCALE 1 : 3  
 DATE 03/19/03

DRAWING TITLE  
 TYPICAL  
 LOOSE CAPACITOR

MODEL/SERIAL #  
 R300

PAGE # 2