Catalog Number: Date: Project:

OVERVIEW

The Blue Box LT series is a cost-effective, simple alternative to traditional time clocks, twist timers, and contractor packages. The Blue Box LT comes in three enclosure sizes, each with a compact footprint that saves valuable space in retail settings, open offices, and other small-to-medium sized projects.

The Blue Box LT arrives pre-assembled and ready for installation. The Master Panel may be networked with up to 16 digital devices including remote relay panels, switches and photocells. The additional input for an outdoor photosensor may be programmed to control any relay(s) on the bus, allowing the Blue Box LT to replace expensive line-voltage cabling for override switches and photocells.

The Blue Box LT series is compatible with LC&D's GR 2400 system and accessories.

FEATURES

- 100% digital
- UL listed 30A Ballast/HID, 20A Tungsten, 18,000A Short Circuit Current Rating (SCCR) @ 277V Normally Closed latching relays (NCL)
- Simple networking via Cat. 5 cable with RJ45 connectors
- Hinged locking door




3-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms and conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

ORDERING INFORMATION

ENCLOSURE and INTERIOR must be ordered on separate lines, see Examples.

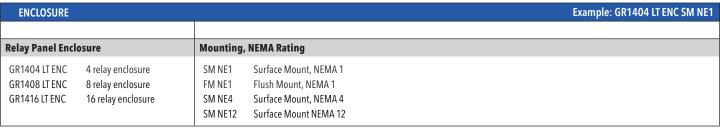

INTERIOR Example: GR1404 LT INT 4NCL DTC					
Relay Panel Interior	Relays	Clock Option	Transformer	Input Card	Voltage Barrier ⁶
GR1404 LT INT 4 relay interior GR1408 LT INT 8 relay interior GR1416 LT INT 16 relay interior	(qty)NCL Normally closed latching¹ (qty)NOL Normally open latching¹ (qty)DPNC Double pole normally closed².³ (qty)DPNO Double pole normally open².³ (qty)RRNO Reed relay normally open (pair)³ (qty)SPTD Single pole double throw² (qty)SPDTC Single pole double throw contactor².³	DTC Digital time clock DTCMOD Digital time clock with modem REMOTE Remote panel, no clock	DV Dual voltage 120/277V CNDV Canadian dual voltage ⁴ 347 347V ⁵	[blank] none D14 14 inputs	[blank] none 1VB 1 barrier 2VB 2 barriers

Relay Panel Enclosure PCELL 2WO BB 2-Wire Outdoor Photosensor



Blue Box...


Blue Box™ LT



Notes

- 1. If GR1404 then (4), If GR1408 then (8), and If GR1416 then (16)
- 2. If GR1404 then (2), If GR1408 then (4), and If GR1416 then (8)
- 3. Only available in remote panels
- 4. GR1408 and GR1416 only
- 5. GR1404 only
- Acceptability of internal barrier for normal and emergency power separation is up to the discretion of the authority having area jurisdiction.

ONE PRODUCT... THREE SOLUTIONS

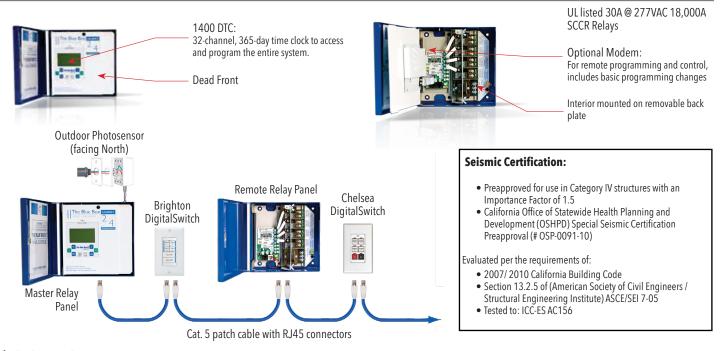

Title 24 System Component

SPECIFICATIONS

Enclosure dimensions: GR1404LT (2 or 4 relays)

NEMA 1 - 8.4" w x 8.4" h x 3.125" d NEMA 4/4X/12 - 12" w x 16" h x 6" d

GR1408LT (4 or 8 relays)

NEMA 1 - 8.4" w x 13.4" h x 3.125" d NEMA 4/4X/12 - 16" w x 20" h x 6" d

GR1416LT (8 or 16 relays)

NEMA 1 - 10.6" w x 17.1" h x 3.125" d NEMA 4X - 16" w x 24" h x 8" d NEMA 4/12 - 16" w x 24" h x 6" d

Enclosure type: Surface mount, hinged locking door

Optional enclosures: Surface mount NEMA 4, NEMA 4X and NEMA 12

Flush mount NEMA 1

Relay: Normally Closed (NCL)

30A @ 277VAC Ballast and HID 20A @ 120VAC Tungsten 20A @ 347VAC Ballast SCCR 18kA @ 277VAC Rated 250,000 Cycles Optional relays: Normally Open (NOL)

2-Pole, NO or NC (480VAC) remote panel only

Contact Inputs: Optional (14) contact inputs are pull low
Max. devices per bus: 16 digital devices w/ Blue Box LT Master Panel
Addresses used: GR 1404 (1), GR 1408 (1), GR 1416 (2)
Power supply inputs: 120/277VAC (for all), 120/347VAC (for 1408 &

1416), 347VAC (for 1404 only)

Programming: Via DTC or with GX2 lighting control software

Max. humidity: 10–90% non-condensing
Ambient temperature: 32–104° F (0–40° C)
Bus physical layer: RS485 (GR 2400 bus)
Bus connector: RJ45 connectors

Listings: UL and cUL 916 listed, ETL listed to UL 924

(for emergency circuit use)

PCELL SPECIFICATIONS

Operating range: 0-1000 fc

Addresses: 1 (with PCC1 card only)

Power supply inputs: 120/277VAC

Programming: Via DTC or with GX2 lighting control software

Max. humidity: 10% – 90% non-condensing Ambient temperature: 32–104° F (0–40° C)