# Tamper resistant self-test **GFCI** receptacles

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Туре:





TRSGF20

# **Description**

2-Pole, 3-Wire Grounding 15A, 125V/AC; 20A, 125V/AC NEMA 5-15, 5-20





5-20R

5-15R

## **Design features**

- Performs periodic self-tests to ensure integrity of GFCI protection. If no ground-fault protection is detected, the device will trip, will not reset, and the status indicator light will glow amber
- Meets and exceeds 10 kA short circuit testing and underwriters laboratories (UL) 2006 UL943 safety standards
- Large visual trip indicator light gives quick notification of a tripped or "end of life" condition
- Automatic grounding system eliminates need for bonding jumper in grounded metal enclosure, provides redundant measure of ground continuity where jumper is used
- Ground termination with back wire clamp provides secure wiring and reduces installation time
- Tamper resistant shutters resist the insertion of foreign objects
- Line side terminals are backed out and staked for fast installation
- Horizontal test/reset button alignment provides larger unobstructed area
- Test and reset buttons are color matched to provide superior
- Tapered back wire openings handle multiple wire sizes and types for applications up to #10 AWG solid or stranded wire
- When downstream receptacles are wired from load side, a 20 amp feed-through rating offers full protection
- Line-load miswiring protection: GFCI's will not provide power downstream when wired incorrectly
- Tri-combo head terminal and mounting screws

Table 1. Tamper Resistant Self-Test GFCI Receptacles, **Back & Side Wire** 

Catalog No.	Description	Amps	Volts	Color Suffix
□ TRSGF15	NEMA 5-15R Duplex self-test GFCI, back & side wire	15	125	A, B, BK, GY, LA, RB, SG, V, W
□ TRSGF20	NEMA 5-20R Duplex self-test GFCI, back & side wire	20	125	A, B, BK, GY, LA, RB, RD, SG, V, W



	Project Name:	Prepared By:	
	Project Number:	Date:	
	Catalog Number:	Type:	

# **Applications**

GFCI receptacles are designed with the safety of the user in mind. In commercial and industrial areas like public bathrooms, breakrooms and food service areas, the NEC® requires GFCI receptacles. Arrow Hart Self-Test GFCI receptacles are UL Listed and fully compliant with all of the latest UL943 Class A GFCI and UL498 requirements. The Self-Test GFCIs conduct an automatic test periodically to ensure GFCI protection. The device will trip and will not reset if GFCI protection is not available. Additionally, GFCIs incorporate a safety lock-out function to protect against mis-wired line-load connections and GFCI circuitry damage.

Table 2. Specifications

Catalog No.	TRSGF		
Device Type	Specification grade tamper resistant duplex self-test GFCI, 15A & 20A		
Wiring Type	Back & side wire		
Testing & Code Compliance	<ul> <li>cULus Listed to UL498 and UL943, file no. E60120</li> <li>Meets all UL943 (GFCI), UL498 (Receptacles), UL498 and applicable CSA requirements</li> <li>NOM certified</li> </ul>		
Environmental Specifications	Flammability: Meets UL 94 requirements; V2 rated Temperature Rating: -35°C to 66°C (-31°F to 150.8°F).		
Electrical Specifications	Dielectric Voltage: Withstands 2000V per UL498 Current Interrupting: Yes, at full-rated current Temperature Rise: Max. 30°C (86°F) after 100 cycles of overload @ 150% of rated current (DC) Trip time: 0.025 seconds (Class A) Frequency: 60 Hz; voltage: 125V; amperage: 15A/20A 20A feed through Short circuit testing: Meets and exceeds 10 kA Maximum interrupting capacity: 20 amps		
Mechanical Specifications	Terminal Accommodation: #14 - 10 AWG Voltage Ratings: Permanently marked on device		

#### Table 3. Materials

atalog No.	TRSGF
op Housing	Nylon PC (Oil Rubbed Bronze and Silver Granite colors only)
Bottom Housing	PVC
Strap	0.040" thick steel, zinc plated
ine Contacts	0.030" thick 3-leaf brass
erminal Screws	#8-32 steel, brass plated, hot neutral screw nickel plated
iround Screw	#8-32 steel, zinc plated (green)
erminal Clamps	Brass-plated steel;

## **Table 4. Color Ordering Information**

For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Lt. Almond), RB (Oil Rubbed Bronze), RD (Red), SG (Silver Granite), V (Ivory), W (White)



Project Name:	Prepared By:		
Project Number:	Date:		
Catalog Number:	Type:		

# **Wiring Diagrams**

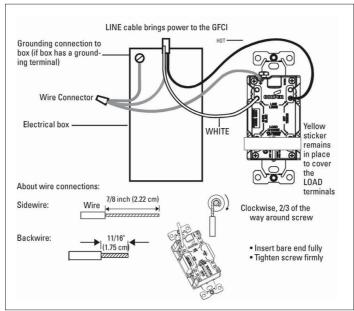


Figure 1. One cable (2 or 3 wires) entering the box

## Grounding connection to LINE cable brings power to the GFCI box (if box has a grounding terminal) Wire Connector < Electrical box LOAD cable feeds power to other receptacle(s) About wire connections: Clockwise, 2/3 of the Sidewire: 7/8 inch (2.22 cm) way around screw Backwire: 11/16" • Insert bare end fully Tighten screw firmly

Figure 2. Two cables (4 or 6 wires) entering the box

## **Product Dimensions**

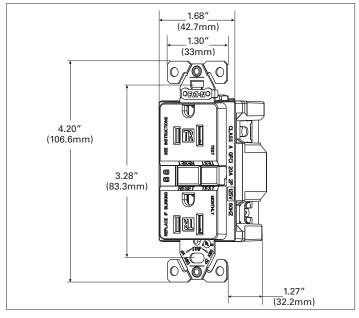


Figure 3. TRSGF15 Line art with dimensions

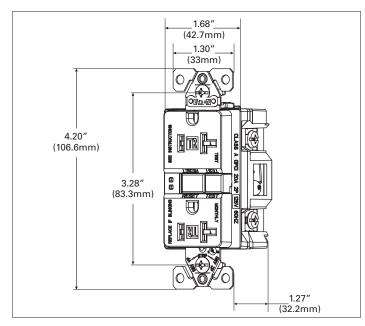


Figure 4. TRSGF20 Line art with dimensions

# Technical Data

# Effective March 2016

	Project Name:	Prepared By:
	Project Number:	Date:
	Catalog Number:	Type:

# **Certifications & Compliances**

Catalog No.	¢∭us	<u>NOM</u> 421	<b>&gt;</b>	<b>(P</b> )
TRSGFH15	•	•	•	•
TRSGFH20	•	•	•	•

**KEY:** ₀௵₅ cULus ₩₩ NOM ▶ Arrowlink № Build-To-Spec

Build-To-Spec Customizable Devices

Electrical Sector 203 Cooper Circle Peachtree City, GA 30269 United States Eaton.com Eaton.com/arrowhart Electrical Sector Canada Operations 5925 McLaughlin Road Mississauga, Ontario, L5R 1B8 Canada EatonCanada.ca Eaton.com/arrowhart

© 2016 Eaton All Rights Reserved Printed in USA Publication No. SB610002EN March 2016

Eaton is a registered trademark.

Cerrada 8 de Mayo Cuautitlán, México CP 54800 México

Electrical Sector Mexico Operations Carr. Tlalnepantla -Cuautitlán Km 17.8 s/n Col. Villa Jardín esq.

Eaton.mx Eaton.com/arrowhart

All other trademarks are property of their respective owners.

