

# Typical AQ/AL Panelboard

## Installation

Consult instructions NEMA PB-1.1 located in the circuit directory on the front door before installing this panelboard. If necessary, order replacement manual from supplier.

## Wiring Guidelines (Cu or Al)

- Use 60°C or 75°C ampacity sized wire on line and neutral and equipment ground terminals.
  - Standard wire sizes listed in this publication may be changed by using alternate terminal kits.
  - Refer to circuit breakers for allowable wire temperature rating, wire size and tightening torque.
  - Neutral rated for 200% panelboard phase current option.
    - Use copper wire only at neutral main lugs
      - 125A (1) neutral cables 250 mcm maximum
      - 225A (2) neutral cables 250 mcm maximum
      - 400A (2) neutral cables 600 mcm maximum
      - 600A (4) neutral cables 350 mcm maximum
- Suitable for nonlinear loads, 200% rated neutral, additional "Y" lugs provided for 200% neutral.

## Short Circuit Current Rating

The panelboard's maximum short circuit interrupting rating in rms symmetrical amperes, is equal to the lowest interrupting rating of any device installed, except as noted in the series rating listed in DEH-40007, with integral or remote main circuit breaker or fusible switch installed upstream of the panelboard. Devices to be installed or replacement units shall be from the same manufacturer, of the same type, and have equal or greater interrupting capacity.

Maximum continuous loads on main or branch circuits shall not exceed 80% of the ratings of the listed circuit breakers. Branch breaker straps suitable for 180A maximum.

## Tripped Breaker

If the breaker trips, handle will be in intermediate position.

## Instructions To Restore Power

1. Move handle to OFF position.
2. Then move handle to ON position.

## Seismic Rating

Meets or Exceeds the Requirements According to

- **IEEE-693-2005**  
High Level with 1.8 Application Factor
- **IBC-2006**  
Sds = 1.3g, Ss = 200%, Ip = 1.5, for z/h > 0  
Sds = 2.0g, Ss = 300%, Ip = 1.5, for z/h = 0  
In accordance with ICC-ES-AC156

## Polybag Contents

A polybag of goods supplied with every panelboard interior contains:

- Arc flash label
- DEH-40007 Series Ratings, Wiring Diagrams & Circuit Directory
- Series rating sticker
- Front installation instructions
- ANSI PB1 documentation
- Circuit numbering stickers (1-84)
- Front and shield mounting screws



imagination at work

## Torque

### Tightening Torque

Applies to line, neutral and equipment ground terminal

Slotted Screw		
AWG Wire	Lbs-Ins	
	Min	Max
14-10	32	35
8	36	40
6-4	41	45
3-2/0	45	50

Internal Hex		
Hex Size	Lbs-Ins	
	Min	Max
3/16	108	120
1/4	180	200
5/16	240	275
3/8	330	375
1/2	450	500

### Torque Values for Hardware

Screw Size	Torque (In-Lbs)
#4 Steel	16
#10 Plastic	16
#8 Cu/Al/Steel	24
#10-32 Cu/Al/Steel	32
1/4-20 Al/<.150 Thick Cu	44
1/4-20 .150 Thick Cu	60
5/16-18 Cu/Al/Steel	110
3/8-16 Cu/Al/Steel	220
1/2-13 Cu/Al/Steel	220

## Lug Kits

### Lug Kits for A-Series II Panelboards

Rating	Pressure Lug Kit		Crimp Lug Kit		Pressure Lug Kit	
	Cat. No.	Wire Range Al/Cu	Cat. No.	Wire Range Al/Cu	Cat. No.	Wire Range Cu Only
125A	MLA1	6-350	MLT1	4-300	MLR1	4-350
225A	MLA2	1/0-250	MLT2	2/0 - 500	MLR2	1/0-600
400A	Standard - MLA41	4-600	MLT41	500-750 (Cu Only)	MLR41	1/0-600
	Oversize - MLA62	3/0 - 800 (Main) & 4-600 (Neutral)	-	-	-	-
600A	Standard -MLA61	4-500	-	-	MLR61	1/0-600

### Crimp Tools

Wire	Crimp Tool
All Al & Up to 500 MCM Cu	Hubbell Anderson VC6
500-750 MCM Cu	Hubbell Anderson VC7
Up to #6-1000 MCM Cu & #5-750 Kcmil Al	Burndy Tool Y644HS

### Neutral Lug Z

Holes	Wire Size - Cu / Al
Large	2 / 0 - 14
Small	No. 4 - 14



Arc fault label included with all interiors to be applied by electrical contractor.

## Interrupting Ratings - Molded Case Circuit Breakers

Molded Case Circuit Breakers						Federal Spec	UL Listed Interrupting Ratings in kA						
Construction	Frame	Trip Range (Amps)	Pole	AC	DC	C/B Class W-C-375B	RMS Symmetrical AC Volts						
							120	120/ 240	240	277	480Y/277	480	600
HQ Frame	THQB	15-70	1	120/240		12a	10	10					
	THQL	15-125	2	120/240		12a		10					
		15-100	2,3	240		12a			10				
	THQL-GF	15-30	1,2	120/240				10					
	THQL-HID	15-20	1,2	120/240				10					
	THQB-GF	15-30	1,2	120/240				10					
	THQB-HID	15-20	1,2	120/240				10					
TXQB	15-30	1,2	120/240				65						
HHQ Frame	THHQB	15-70	1	120/240		14a	22	22					
	THHQL	15-125	2	120/240		14a		22					
		15-100	2	240		14b			22				
		15-100	3	240		14b			22				
	THHQL-GF	15-30	1	120/240				22					
	THHQL-HID	15-20	1,2	120/240				22					
	THHQB-GF	15-30	1	120/240				22					
THHQB-HID	15-20	1,2	120/240				22						
Standard Frames	TQD	125-225	2,3	240		12b			10				
	TJD	250-400	2,3	240	250 (1)	14b			22				
Hi-Break Frames	THQD	125-225	2,3			N/A			22				
Spectra RMS	SEH (2)	15-150	2	480		13b, 15b			65			25	
			3	600		22a			65			25	18
	SEL	15-150	2	480		13b, 15b			100			65	
			3	600		21a, 22a, 23a			100			65	25
	SEP	15-150	2	480		16a			200			100	
			3	600		16a, 23a			200			100	25
	SFH	70-250	2	480		13b			65			35	
			3	600		20a, 22a			65			35	22
	SFL	70-250	2	480		13b			100			65	
			3	600		21a, 23a			100			65	25
	SFP	70-250	2	480		16a			200			65	
			3	600		16a, 23a			200			65	25
	SGH4 (2)	125-400	2,3	600		21a, 23a			65			35	25
	SGH6 (2)	250-600	2,3	600		23a			65			35	25
	SGL4	125-400	2,3	600		23a			100			65	65
	SGP4	125-400	2,3	600		23a			200			100	65
	SGL6	250-600	2,3	600		24a			100			65	65
SGP6	250-600	2,3	600		25a			200			100	65	
SKH8	300-800	2,3	600		21a, 23a			65			50	25	
SKL8	300-800	2,3	600		24a			100			65	42	
SKP8	300-800	2,3	600		25a			200			100	65	

(1) 3 Poles are not DC rated

(2) Not current limiting breaker type


## Circuit Breaker Terminals (Cu-Al)

Frame		Poles	No. per Pole	Cat. No.	Wire Cu-Al (Unless otherwise specified)	
Standard	Current Limiting / High Interrupting				Per Lug	Range
THQB, TXQB, THHQB, THQL, THHQL, TXQL	-	1,2,3	1	Fixed to Breaker Terminal	1	(15-30A) #14-4 Cu or #12-4 Al, (35-100A) #14-10 Cu or #12-1/0 Al
-	SEH, SEL, SEP	2,3	1	TCAL18	1	#12-3/0 Al; #12-3/0 Cu
SFHA	SFLA, SFPA	2,3	1	TCAL129	1	#8-350kcmil
SGHA	SGL, SGP	2	1	TCLK265	-	2 (2/0-400kcmil, Cu) or 2 (2/0-500kcmil, Al) or #6-600kcmil
		3	1	TCLK365	-	2 (2/0-400kcmil, Cu) or 2 (2/0-500kcmil, Al) or #6-600kcmil
-	FGN4, FGH4	2,3	1	FCALK318H	-	Top Hole #8-400kcmil Cu or #6-500kcmil Al. Bottom hole #2/0-600kcmil Cu & Al
SKHA8	SKLA8, SKPA8	2,3	1	TCAL41	1	#4-600kcmil or 2(1/0-250kcmil)
				TCAL61	2	2/0-500kcmil
				TCAL81	3	3/0-500kcmil

# Wiring Space


## Typical Panelboard

Front view with trim removed

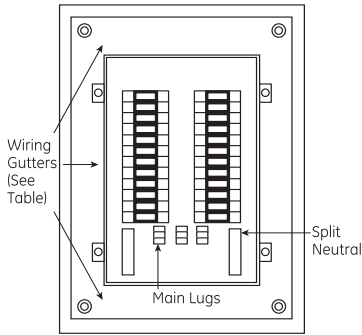


## Typical Front w/Concealed Hinges and Trim Adjusting Screws

Surface mounting – add 1/4" to inside box dimensions  
Flush mounting – add 1 1/2" to inside box dimensions



## Typical Box

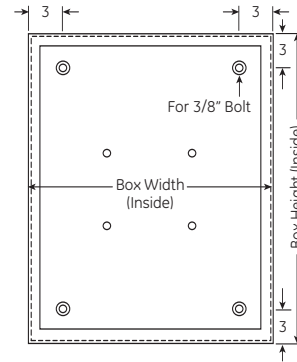

## Minimum Wiring Space, From End of Lug to Box Wall, in Inches

Main rating in amps	Main Lugs Only, to End Wall		Frame Type	Mounting	Main Circuit Breaker		
	Phase Lug	Neutral Lug			Phase Lug		Neutral Lug
					To Side Wall (20" Wide box)	To End Wall	
125A MLO, 100A Main Breaker	6	6	TEY, SE	Horizontal	5	-	6
225A	12	12	TFJ, SF	Vertical	-	6	12
400A	15	11 (1)	SF, SG, FG	Vertical	-	15	11 (1)
600A	15	11 (1)	SG	Vertical	-	16	-
800A (2)	15	11 (1)	SK	Vertical	-	18	-

(1) To side wall

(2) Box width is 30" and 7.81" deep

## Wiring Space – Branch Circuit Breakers

Branch Circuit Devices	Frame	No. of Poles	Minimum Wiring Spaces To Side Wall (20" Wide Box)
Double Branched Bolt-on Devices	THQL, THHQL, THQB, THQB	1,2,3	6.5"
Horizontal Subfeeds Single Branch Mounted	TQD, THQD	2,3	5.5"

## Enclosures

Panel Size	Box Cat. No. (1)	Size Inches (2)	Front Cat. No. (3)
0-25.5	AB25B	25.5	AF25F,S
28.5-31.5	AB31B	31.5	AF31F,S
34.5-37.5	AB37B	37.5	AF37F,S
40.5-43.5	AB43B	43.5	AF43F,S
46.5-49.5	AB49B	49.5	AF49F,S
52.5-55.5	AB55B	55.5	AF55F,S
57.5-64.5	AB64B	64.5	AF64F,S
67.5-76.5	AB76B	76.5	AF76F,S

(1) "B" suffix provides blank end walls. Order "K" suffix for endwalls with knockouts.

(2) Standard boxes are 20" wide by 5.81" deep.

(3) Flush fronts are 1 1/2" larger than box. Surface fronts are 1/4" larger.

## Front Options

Description	Cat. No. Suffix (1)
Screw cover	C
Front hinged to box	D
Yale 5116 w/Rosette Lock	Y
Corbin 15767 Lock	L
GE 75 Key Lock	E
Corbin 60 Key Lock	J
Door within a door (2)	P
Stainless steel (3)	S
30" wide	W
Nameplate	N
Screw on nameplate	U
Metal directory	M

(1) Add to base front catalog number.

(2) Consists of two lockable doors—one over panel interior and one over box wiring gutters. Yale locks not available.

(3) Flush only. Available with C and N options.

## Box Options

Description	Cat. No. Suffix (1)
Painted Box	P
30" wide (2)	W
NEMA 3R/12/4S/4X	3 or 4
NEMA 4X (316 Stainless Steel)	4S

(1) Add to base box product number.

(2) Includes field installable gutter barrier.

## Permanent Circuit Number Kits

Description	Cat. No.
1-48	APN48
43-84	APN84
85-126	APN126

## Stainless Steel Enclosures

Dimensions (inches)			Cat No.	
H	W	D	UL Standard	CSA Labeled
25.5	20	6	AB254S	AB254AS
25.5	30	8	AB254DWS	AB254DWS
31.5	20	6	AB314S	AB314AS
31.5	30	8	AB314DWS	AB314DWS
37.5	20	6	AB374S	AB374AS
37.5	30	8	AB374DWS	AB374DWS
43.5	20	6	AB434S	AB434AS
43.5	30	8	AB434DWS	AB434DWS
49.5	20	6	AB494S	AB494AS
49.5	30	8	AB494DWS	AB494DWS
55.5	20	6	AB554S	AB554AS
55.5	30	8	AB554DWS	AB554DWS
64.5	20	6	AB644S	AB644AS
64.5	30	8	AB644DWS	AB644DWS
76.5	20	6	AB764S	AB764AS
76.5	30	8	AB764DWS	AB764DWS

## Accessories

Field Installed Kits/Replacement Parts

### Filler Plates

Breaker Type	Cat. No.
THQB/THHQB/THQL/THHQL/TEY	TQLFP1
TQD/THQD/TED4/SE/FB	TEDFP1

### Endwall Kits

Field installed.  
1 each, for  
standard 20"w x  
5.81"d boxes.

Type	Cat. No.
Blank	ABEW2
Knockout	ABEW2

### Breaker Mounting Hardware Kits

For mounting breaker in existing space

Breaker Type	Cat. No.
TED/THED4/SE	ASPTED3P
TQD/THQD	ASPTQD3P
FB	ASPFB12P

### Equipment Grounds



AEBG



AEIG



ASPGIBC



AEBGC



AEIGC

Item	Description	Wire Range	Cat. No.
Metal Equipment Ground	Bonded	#14-#8 Cu, #12-#8 Al (small holes); #14-#4 Cu, #6-#4 Al (large holes)	TGL2
	Extruded Bonded	#14-#8 Cu, #12-#8 Al (small holes); #14-#4 Cu, #6-#4 Al (large holes)	EGS12
Aluminum Equipment Ground	Extruded Bonded	(1) #6-350MCM	AEBG
	Extruded Isolated	(2) #6-250MCM	AEIG
	Main Lug	#14-#8 Cu, #12-#8 Al (small holes); #14-#4 Cu, #6-#4 Al (large holes)	TGL2
Copper Equipment Ground	Bonded	#14-#8 Cu, #12-#8 Al (small holes); #14-#4 Cu, #6-#4 Al (large holes)	TGC2
	Extruded Bonded	(1) #4-350MCM	AEBGC
	Extruded Isolated	(1) #6-250MCM	AEIGC
	Insulated Isolated	2/0 max.	ASPGIBC

### Bonding Kits

Description	Cat. No.
For Split & Load End Neutral	343L886G16
For 225A Horizontal Neutrals	343L886G13
225A Horizontal Neutral To Convert 3W to 4W	ASP225HNCP
125/225A Horizontal Neutral Conversion from Service Entrance to Non-Service Entrance	ASPHNCPSENOT
125/225A Horizontal Neutral to Convert from Non-Service Entrance to Service Entrance.	ASPHNCPSE

### Installation & Maintenance Kit

Order catalog number PROCARE. Kit includes:

- (5) filler plate hardware kits
- (9) bus stud nuts
- (5) MLA1 filler plates
- (2) 225A phase barriers
- (2) feed-thru barriers
- (1) 400/600A phase barrier
- (50) directory cards/rating books
- (50) circuit number strips (1-48)
- (50) circuit number strips (43-84)
- (5) standard locks & keys
- (50) deadfront screws
- (10) AQ/AE front hardware kits
- (10) AD front hardware kits
- (50) service disconnect labels
- (50) main labels

## Parts

Description	Cat. No.
Directory Card	139C5612P3
Replacement Lock with Std. Key	569B737P1
Replacement Lock with GE75 Key	569B737P2
Additional Keys for Above Lock	569B737P5
Circuit Numbering Strips 1-48	569B806G1
Circuit Numbering Strips 49-84	569B806G2
Circuit Numbering Strips 85-126	569B806G3
Adhesive Backed Lamicoide Nameplate 3/4" x 3"	315A7190P1
Metal Directory Card Holder	139C5491G1
Directory Card Holder	139C5491P4
Delta Hi-leg Conversion Kit, to Add B-Phase Plug on AL Panels	APHBL
Bolt on AE/AQ Panels	APHBQ
NEMA 3R/12 Tamper Proof Tork Screw Kit	NEMATRIX
2P to 3P TQD Conv. Kit	ASP2PTQD3P
2P to 3P SF Conv. Kit for horizontal subfeed	ASP2PTFJ3P
AD 25 to 65 kAIC Barrier kit	ASP25AD65KA1
Service Entrance Kit	ASPSERENT
2 wire Relay Kit	ASP2WRelay
Yale Lock Kit	ASPYALE47
Corbin Lock Kit	ASPCORBNTU1
2-3 pole TQD Mechanical Interlock	TQDFM1
AQ/AL/AE Rail Bracket	ASPAQLEBKT
Front Flush Adjust Kit	ASPFLUSHADJ
AE Front Mounting Kit	139C5720G3
AQ/AL Front Mounting Kit	139C5720G6
AD Front Mounting Kit	139C5728G9
Front Hinge to Box Mounting Kit	139C5700G6
Front Extension Mounting Kit	139C5700G11

### Box Extensions

Bolts to box with or without endwall in place. Extensions can be combined to obtain lengths greater than 18 and 24 inches.

Box Width and Depth	Box Mounting	Box Extension Length (Inches)	Cat. No.
20 x 5.81	Flush	9	ABX2509F
		18	ABX2518F
		24	ABX2524F
	Surface	9	ABX2509S
		18	ABX2518S
		24	ABX2524S
		31	ABX2531S
		37	ABX2537S
		43	ABX2543S
		49	ABX2549S
		55	ABX2555S
		64	ABX2564S
76	ABX2576S		
30 x 5.81	Flush	18	ABX3518F
		24	ABX3524F
	Surface	18	ABX3518S
		24	ABX3524S
30 x 7.81	Flush	18	ABX3718F
		24	ABX3724F
	Surface	18	ABX3718S
		24	ABX3724S

### Box Extension Covers Only

10 covers per kit

Description	Cat. No.
9" Covers Surface	ASPABX09S
9" Covers Flush	ASPABX09F
18" Covers Surface	ASPABX18S
18" Covers Flush	ASPABX18F
64" to 76" Covers Surface	ASPABX20S
64" to 76" Covers Flush	ASPABX20F

## Specifications

A-Series Panelboards and branch breakers meet or exceed the following standards and specifications:

- UL 50 Cabinets and Boxes
- UL 67 Panelboards
- UL 489 Circuit Breakers
- NEMA AB-1 Circuit Breakers
- NEMA PB-1 and PB-1.1 Panelboards
- US Federal Spec W-P.115B Panelboards
- US Federal Spec W-C375b Gen Circuit Breakers

### Boxes

- Galvanized steel
- Blank end walls are standard; knockouts are available when specified
- Boxes furnished with provisions for ground bus as standard

### Fronts

- Finished in ANSI-61 grey polyester powder coat paint.
- Equipped with corrosion-resistant Valox combination catch and lock door latch (doors over 48" high provided with 2 latches)
- Equipped with concealed hinges and trim adjusting screws
- Directory holder permanently mounted to door

### Panels

- Dead front construction
- Interiors are factory assembled on rigid steel frames
- Metal gages in accordance with UL and NEMA standards
- Solderless, anti-turn main lugs suitable for copper or aluminium wires are front removable and branch straps are silver-plated copper fully rated at 100 amperes
- Main bus is aluminum with copper branch connections unless otherwise specified
- Main disconnect device is identified when supplied, and numbers are provided for branch circuits
- Interior base assemblies are Noryl and provide breaker mounting and busbar insulation

## Publications

E-DET-465	Certification of Seismic Compliance
DE-42A	Typical AL/AQ Panelboard Technical Information
DEH 40007	Lighting Panels Rating Labels, Wiring Diagrams and Circuit Directory
DEH 047	TED, THED, SED, SHE, SEL, SEP Circuit Breaker Mounting Instructions
DEH 059	SGH, SFL, SFP Circuit Breaker Mounting Instructions
DEH 060	SGH, SGL, SGP Circuit Breaker Mounting Instructions
DEH 061	SKH, SKL, SKP Circuit Breaker Mounting Instructions
DEH 065	TQD, THQD Circuit Breaker Mounting Instructions

### GE

41 Woodford Avenue, Plainville, CT 06062

[www.geelectrical.com](http://www.geelectrical.com)

© 2008 General Electric Company



imagination at work