

FEATURES & SPECIFICATIONS

INTENDED USE — The FS Series recessed LED luminaire combines modern aesthetics and performance in a general lighting product that enables the transformation from fluorescent to LED. The high efficacy light engine delivers long life and excellent color to ensure a quality lighting installation. Integrated controls options provide for design flexibility and optimum energy savings. Multiple lumen packages and driver options provide solutions for all your lighting applications. Certain airborne contaminants can diminish integrity of acrylic. Click here for Acrylic Environmental Compatibility table for suitable uses.

CONSTRUCTION — Rugged, one-piece cold-rolled steel coated polyester, painted after fabrication. The satin white lens provides excellent shielding and wide distribution. End plates include integral T-bar clips. Fixture may be mounted and wired in continuous rows. Total fixture height is only 4-3/8".

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide superior illumination for extended service life. 90% LED lumen maintenance at 60,000 hours (L90/60,000). The LEDs have a CRI of 82. eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Optional integrated nLight® controls make each luminaire addressable - allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Simply connect all the nLight enabled control devices and the FSL luminaires using standard CAT-5 cabling. Unique plug-and-play convenience allows devices and luminaires to automatically discover each other and self-commission.

Lumen Management: Unique lumen management system (option N80) provides onboard intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

Driver disconnect provided where required to comply with US and Canadian codes.

INSTALLATION — Unique grid interfacing arrangement provides mounting into standard 1" and 9/16" tee bar or screw slot grids. 9/16" allows fixture trim to hang level with architectural ceiling tiles. Drywall ceiling adaptors available. Suitable for damp location.

LISTINGS — CSA certified to meet US and Canadian standards. ICrated. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms and conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 $^{\circ}$ C. Specifications subject to change without notice.

Catalog Number
Notes
Гуре



eldoLED

Stock Configurations

Example: 2FSL4 40L EZ1 LP835 N100

2FSL4 40L EZ1 LP835 2FSL4 40L EZ1 LP840

ORDERING INFORMATION Lead times will vary depending on options selected. Consult with your sales representative.

2FSL4								
Series	Air function	Lumens	Lens	Voltage	Driver	Color temperature	Controls ⁵	Options
2FSL4 2X4 FSL	(blank) Static H Heat removal	30L 3000¹ 40L 4000¹ 48L 4800¹ 60L 6000¹ 72L 7200¹	(blank) Satin white	(blank) MVOLT 347 347 ²	EZ1 eldoLED dims to 1%, 0-10V EZB eldoLED dims to black, 0-10V EDB eldoLED DALI ³ EXB eldoLED DMX/RDM ³ SLD Step-level dimming ^{3,4} EXA1 Dims to 1%, XPoint wireless enabled EXAB Dims to dark, XPoint wireless enabled EOHN On/Off (nondim)	LP830 3000 K LP835 3500 K LP840 4000 K LP850 5000 K	(blank) No controls N80 nlight® with 80% lumen management N80EMG nlight® with 80% lumen management. For use with generator supply EM power. N100 nlight® without lumen management N100EMG nlight® without lumen management. For use with generator supply EM power.	EL7L 700 lumen battery pack EL14L 1400 lumen battery pack CP Chicago plenum PWS1836 6' prewire, 3/8" diameter, 18-gauge, 1-circuit PWS1846 6' prewire, 3/8" diameter, 18-gauge, 2-circuit RRL RELOC®-ready luminaire6 NPLT Narrow pallet

Accessories: *Order as separate catalog number.*

2FS4 F916 Trim to adjust fixture mounting flush with

9/16" T-bar; for 2x4 fixture

DGA24 FS/VT Drywall ceiling adaptor, unit installation

Notes

- 1 Approximate lumen output.
- 2 Consult factory for availability. Not available with SLD, EL7L, or EL14L.
- 3 Not available with N80, N80EMG, N100 or N100EMG.
- 4 When using prewire option, use PWS1846.
- 5 nIO access limitations on 30L or EZB.
- 6 For ordering logic consult: RRL 2013.


LED 2FSL4-2X4

2FSL4 LED Recessed Lighting 2'x4'


Performance Data						
Lumen package	Input watts 1	Lumens	LPW			
30L LP830	30.7	3170	103			
30L LP835	30.8	3341	108			
30L LP840	30.9	3430	111			
30L LP850	31.0	3664	118			
40L LP830	39.2	3994	102			
40L LP835	39.4	4247	108			
40L LP840	39.5	4368	111			
40L LP850	39.6	4637	117			
48L LP830	46.2	4596	100			
48L LP835	46.4	4856	105			
48L LP840	46.6	4995	107			
48L LP850	46.7	5347	115			
60L LP830	52.0	5071	98			
60L LP835	52.2	5373	103			
60L LP840	52.4	5531	106			
60L LP850	52.5	5867	112			
72L LP830	69.5	6758	97			
72L LP835	70.0	6847	98			
72L LP840	70.2	7433	106			
72L LP850	70.3	7823	111			

PHOTOMETRICS

2FSL4 40L LP835, test no. LTL24699P5, tested in accordance to IESNA LM-79

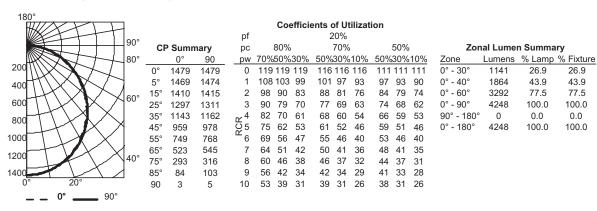


2FSL4 48L LP835, test no. LTL24699P9, tested in accordance to IESNA LM-79

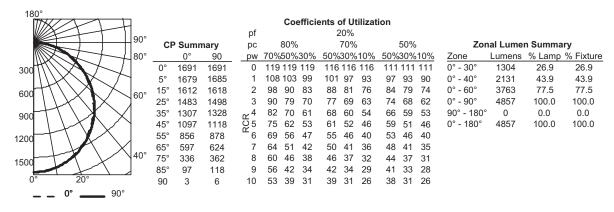



2FSL4-2X4


MOUNTING DATA

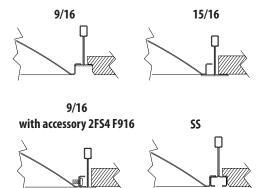

DIMENSIONS

All dimensions are inches (centimeters) unless otherwise specified.


Specifications
Length: 48 (122.0)
Width: 24 (61.0)
Depth: 4-3/8 (11.1)




nLight* Control Accessories: Order as separate catalog number. Visit <u>www.sensorswitch.com/nLight</u> for complete listing of nLight controls.							
WallPod stations	Model number	Occupancy sensors	Model number				
0n/0ff	nPODM [color]	Small motion 360°, ceiling (PIR / dual tech)	nCM 9 / nCM PDT 9				
On/Off & Raise/Lower	nPODM DX [color]	Large motion 360°, ceiling (PIR / dual tech)	nCM 10 / nCM PDT 10				
Graphic Touchscreen	nPOD GFX [color]	Wide view (PIR / dual tech)	nWV 16 / nWV PDT 16				
Photocell controls	Model number	Wall Switch w/ Raise/Lower (PIR / dual tech)	nWSX LV DX / nWSX PDT LV DX				
On/Off & Dimming	nCM ADCX	Cat-5 cables (plenum rated)	Model number				
		10', CAT5 10FT	CAT5 10FT J1				
		15', CAT5 15FT	CATS 15FT J1				

Constant Lumen Management

Enabled by the embedded nLight control, the FSL actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.

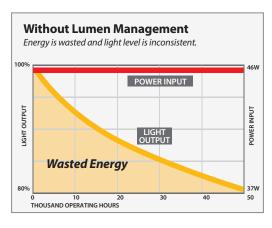

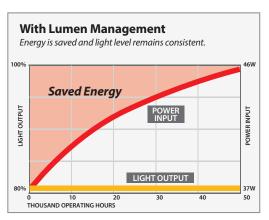

Notes

 $With nlight 80\% \ lumen \ management input \ watts \ start \ at \ 37 \ and \ gradually increasing \ to \ 46 \ at \ 50,000 \ hrs \ when \ using \ 48L \ system.$

