


## Heavy Duty Safety Switch

400A 600V, Type 12

Data Sheet

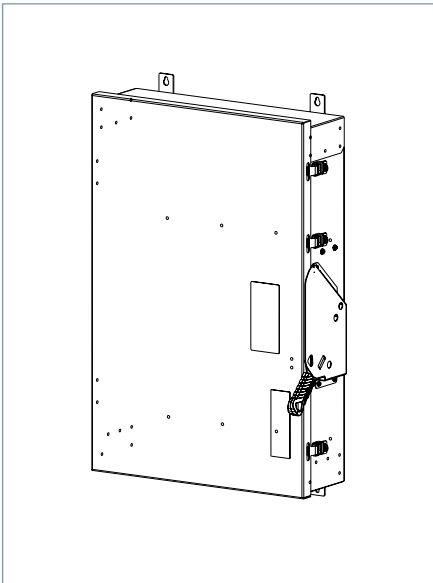

### Standards and Ratings

- UL listed under file #E4776
- CSA listed under file #154852
- Meets NEMA Standard KS-1 for enclosed switches
- Meets NEC wire bending space requirements
- Rated 10,000 AIC as standard or 200,000 when protected by Class R, T or J fuses rated 400 amp maximum
- I2t rated (Amps<sup>2</sup> x Seconds = 6,000,000)
- 12X overload current rating exceeds 10X industry standard
- Suitable for use as service entrance equipment

### Features

- Quick-make and break switching action
- Visible blade design
- Highly visible ON/OFF indication
- Modular design allows quick and easy replacement of parts
- Defeatable dual cover interlock
- Compact one piece light weight construction enables easier installation
- Can utilize either one large or two small wires
- Spring loaded heat sink fuse clip
- One piece line and load base for consistent phase-to-phase alignment
- Extra ground lug on neutral
- Tangential knock out
- Lay in Lugs for easy wiring
- Window permits viewing of visible blade

# Product Specifications

## Heavy Duty 400A 600V, Type 12

### General Information

Catalog Number	Description	Shipping Weight
HNF365JA	Heavy Duty Non-Fused 3 Pole 600V 400A Type 12, Industrial	75
HF365JA	Heavy Duty Fused 3 Pole 600V 400A Type 12, Industrial	93
HFC365NJWA	CSA Heavy Duty Fused 3 Pole 600V 400A Neutral Type 12, Industrial, Viewing Window	94.6
HF365JWA	Heavy Duty Fused 3 Pole 600V 400A Type 12, Industrial, Viewing Window	93
HNF365JWA	Heavy Duty Non-Fused 3 Pole 600V 400A Type 12, Industrial, Viewing Window	75
HFC365NJA	CSA Heavy Duty Fused 3 Pole 600V 400A Neutral Type 12, Industrial	94.6

### Maximum Horsepower Ratings

Catalog Number	1 Phase, 240V AC	3 Phase, 240V AC	1 Phase, 480V AC	3 Phase, 480V AC	1 Phase, 600V AC	3 Phase, 600V AC	250V DC	600V DC
HNF365JA	—	125	—	250	—	350	50	50
HF365JA	—	125	—	250	—	350	50	50
HFC365NJWA	—	125	—	250	—	350	50	50
HF365JWA	—	125	—	250	—	350	50	50
HNF365JWA	—	125	—	250	—	350	50	50
HFC365NJA	—	125	—	250	—	350	50	50

### Accessories & Hub Kits

Catalog Number	Description
HA161234	Aux. Switch (1NO - 1NC)
HA261234	Aux. Switch (2NO - 2NC)
HA361234	Low Voltage Aux. SW. (1NO - 1NC)
HN656A	Neutral
HN656A	200% Neutral
HG656A	Ground Lug
HG2656A	Isolated Ground
HR65A	R Fuse (400A)
HT65A	T Fuse (400A, 600V)
HCU65A	Copper Lug (400A, fused)
HCM65A	Field Replacement Kit (400A, fused)
SSH250	2.50" Hub Kit
SSH300	3.00" Hub Kit
SSH350	3.50" Hub Kit
HCU656A	Copper Lug Kit <sup>Ⓞ</sup>
SSH400	4.00" Hub Kit

### Replacement Parts

Catalog Number	Description
HFB65A	Line Base Fused 400A
HBB65A	Load Base Fused 400A
HL656A	Lug Cap Kit (AL) 400-600A
HM656A	Mechanism 400A-600A
HH656A	Handle/Handle Guard 400A-600A
Catalog Number + "DOOR"	Door


### Mechanical Lug Wire Ranges

Description	Wire Range
Line, Load, & Main Neutral (Fusible)	(1) 1/0 AWG - 600 kcmil or (2) 1/0 AWG - 500 kcmil
100% Neutral	(2) 1/0 - 600 Kcmil or (2) 6 - 300 Kcmil
200% Neutral	(2) 1/0 - 600 Kcmil or (2) 6 - 300 Kcmil
Equipment Ground	(2) 14 - 2/0 AWG

<sup>Ⓞ</sup> Purchase field replacement kit along with lugs. (See Speedfax pg. 4-20)

# Dimension Drawings

## Heavy Duty 400A 600V, Type 12 (Fusible)

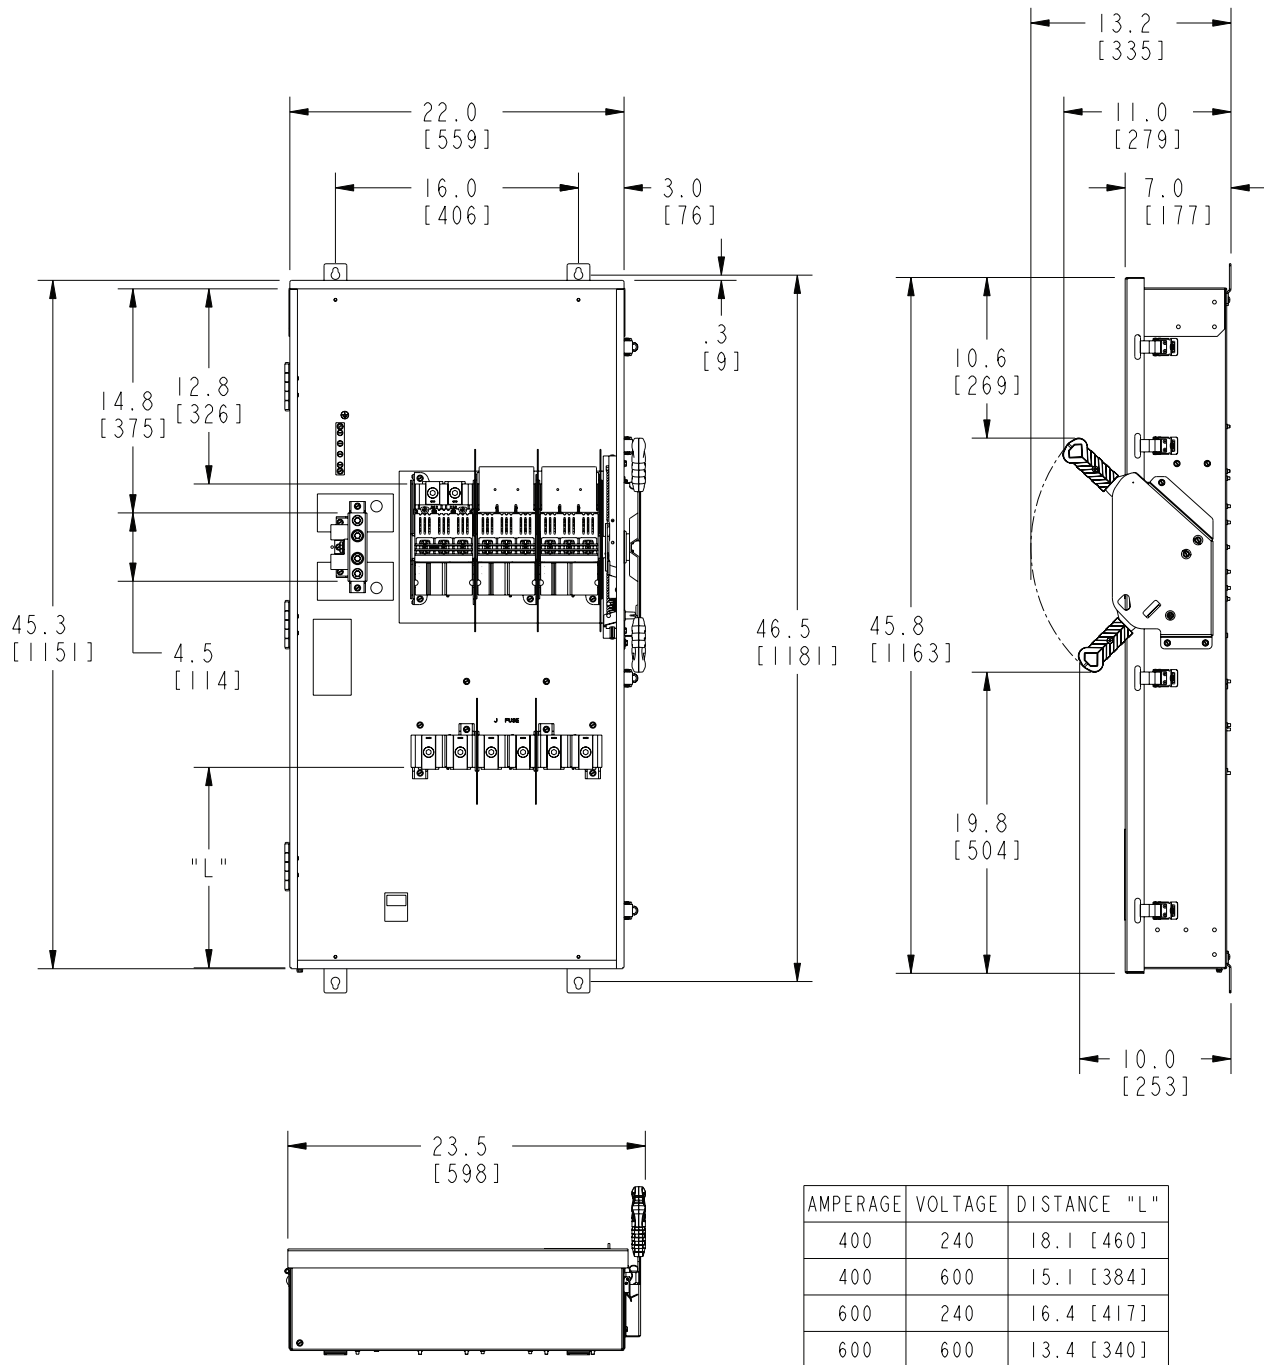

Dimensions shown in inches  
and millimeters [ ].  
Dimensions shown accurate to  $\pm 1/8$  inch.

Enclosure: Galvanized Steel  
.060 thick (16 gauge)  
Finish: ANSI Grey #61 Paint