

VAPOR TIGHT LED LUMINAIRE INSTALLATION INSTRUCTIONS



IMPORTANT: READ ALL INSTRUCTIONS BEFORE THE INSTALLATION.

NOTE: SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE:

- Installation and maintenance must be performed by licensed electricians only.
- To avoid risk of electric shock, make sure to turn off main power switch prior to installation or maintenance.
- Must be installed in compliance with National Electrical Code (NEC) in the US or Canadian Electrical Code in Canada.
- Ensure that frequency and input voltage are compatible with the fixture.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION

- Do not look directly at the LED when the light is on.
- Before installation inspect luminaire for any exterior damages or other defects.
- Before installation confirm luminaire is the correct rated voltage for application.
- During installation do not damage luminaire with drill or by external impact.
- Do not expose luminaire directly to high heat.
- Beware of shock when installing the luminaire.
- Do not install in areas where flooding may occur.
- Do not clean or expose the luminaire to detergent, chemical cleaners or pesticides.
- Upon completion of installation, ensure the luminaire is tight and secure.
- Turn power off when disassembling.
- Do not exchange components in the luminaire.
- Do not operate the fixture where ambient temperature is over 50 °C / 122 °F or in confined spaces. This is a fire hazard.
- Do not install luminaire in applications where high vibrations or external shock may occur.
- In the event of product failure resulting from negligence of above mentioned instructions, limited warranty will not be applicable.

NOTICE


Suitable for wet locations.

INCLUDED ACCESSORIES


- Screws
- Mounting clips
- Rubber ring (for chain mounting)
- V-Hook



General Wiring Diagram

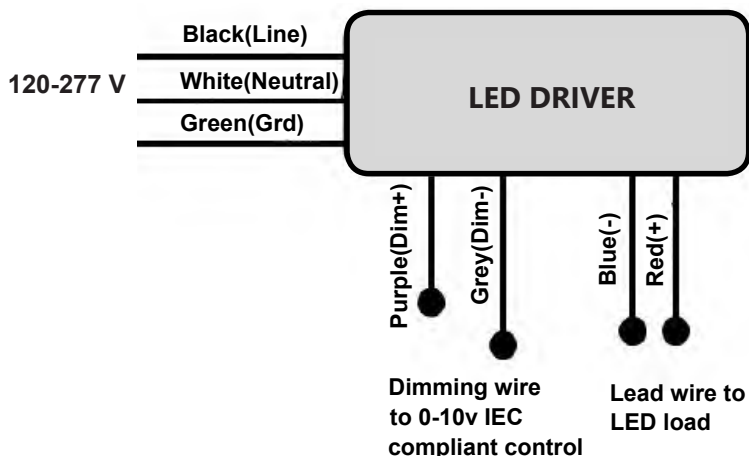



VAPOR TIGHT LED LUMINAIRE INSTALLATION INSTRUCTIONS

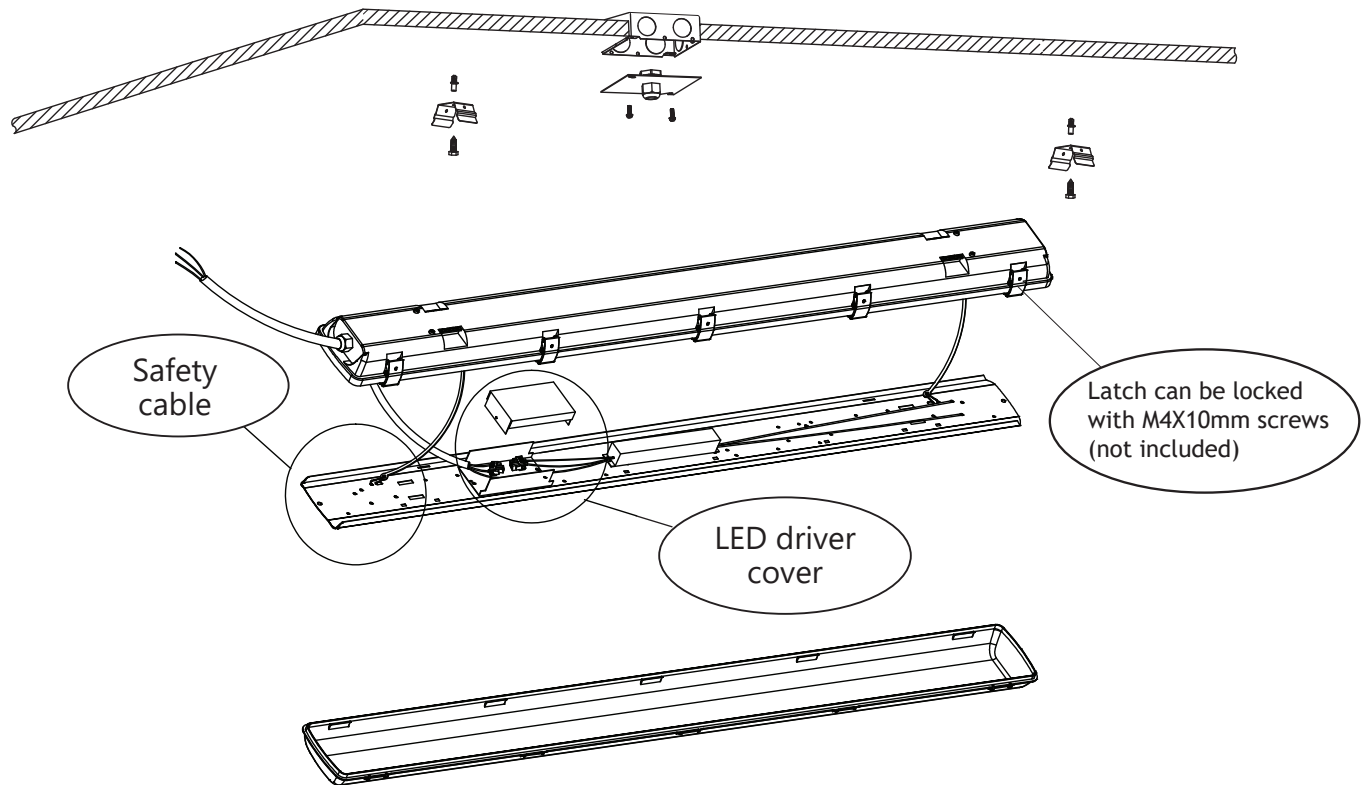

INSTALLATION: **Turn off the power before installation.**

Surface Mounting

1. Indicate the ceiling with two marks to match the surface mounting clips. Drill two holes using appropriate drill and insert anchors into the holes.
2. Install the mounting clips (included accessories) directly to the ceiling using the provided screws. Align the luminaire with the mounting clips; press to snap. (fig.1)
3. Open the lens by opening the housing buckles; one side of the lens will be hanging.
4. Squeeze the pieces located on each side of the luminaire to remove the LED board. (fig.2)
5. Make the electrical connection according to the wiring diagram.
6. Secure LED board back in place and reinstall the lens. Make sure to clip the buckles on the side of the lens.

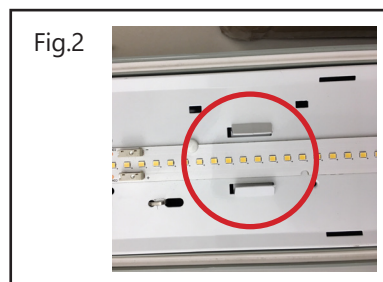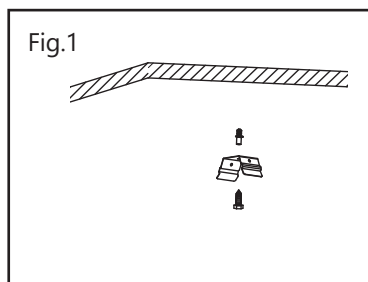

Chain Mounting (chains & cables are not included)

1. Clip the mounting clips on the luminaire and attach the V-hooks in the dedicated opening at each end.
2. Open the lens by opening the housing buckles; one side of the lens will be hanging.
3. Squeeze the pieces located on each side of the luminaire to remove the LED board.
4. Make the electrical connection according to the wiring diagram.
5. Secure LED board back in place and reinstall the lens. Make sure to clip the buckles on the side of the lens.

VAPOR TIGHT LED LUMINAIRE INSTALLATION INSTRUCTIONS



OPTIONAL ACCESSORY (SOLD SEPERATELY) *Mounting bracket*



1. Install the mounting clip on the bracket. (fig.1)
2. Install the mounting bracket into the existing drill holes. (fig.2)
3. Align the luminaire with the mounting clips; press to snap. (fig.3)

