

Project: _____

Type: _____

Drawn by: _____ Catalogue #: _____

Date: _____

Individual Spec Sheet

L2TLV

TRI-LEVEL MOTION SENSOR LED STRIP

ORDERING INFORMATION

Order code: 68023
Model number: L2TLV-48LS1-Q/40K
UPC: 069549013575
Case quantity: 6
DLC unique ID: S-Y1RTAZ (DLC Premium) / IN PROCESS (DLC Standard)

PHYSICAL DATA

Length: 47 3/8" (1 202 mm)
Lens material: Frosted PMMA
Housing material: 24 gauge white powder painted steel
Mounting: Surface, suspended or row mounted (V-Hooks included in the box)
Sensor: Integrated tri-level microwave (high frequency) motion sensor

PERFORMANCE DATA

Watts (W): 35
Volts (VAC): 120-347
Color temperature (K): 4 000
Lumen output (lm): 4 585
Efficiency (lm/W): 131
CRI: 80+
Life L70 (h): 155 000
Tested LM-80 (h): 9 000
Power factor: 0.90
THD (%): 10
Frequency (Hz): 50/60
Surge protection (kV): 2.5
Input current (A): 0.101-0.292
Operating temp. range: -20°C to 50°C (-4°F to 122°F)

¹ Typical colour temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

ACCESSORIES (order separately)

Order code	Type
68676	Suspension kit - 2 chains (1 m)
68677	Continuous row mounting connector
68679	Replacement lens 48"
68622	Wireguard kit 48"
68681	Remote control for motion sensor



¹ 5 year warranty for the LINK module.
 Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

SENSOR ON-OFF DIMMING SETTING OPTIONS

DETECTION AREA

The detection area can be reduced by selecting the combination on the DIP switches to fit precisely each application.

DIP Switch Options: 100% - 75% - 50% - 25%

Remote Control Options: 100% - 75% - 50% - 25%

	1	2
100%	●	●
75%	●	○
50%	○	●
25%	○	○

HOLD TIME

The time period the luminaire remains at 100% illumination after no motion is detected.

DIP Switch Options: 8s - 30s - 1 min - 5 min - 10 min - 15 min - 30 min

Remote Control Options: 8s - 1 min - 5 min - 15 min - 30 min

	3	4	5
8 s	●	●	●
30 s	●	○	●
1 min	○	●	●
5 min	●	○	○
10 min	○	●	○
15 min	○	○	●
30 min	○	○	○

STANDBY PERIOD

The time period the luminaire remains at a low light output level before it completely switches off in the long absence of motion. When set to Disable mode, the low light is maintained until motion is detected (Bi-Level).

DIP Switch Options: 0s - 1 min - 3 min - 5 min - 10 min - 30 min - +∞ (DISABLE)

Remote Control Options: 0s - 1 min - 5 min - 30 min - +∞ (DISABLE)

Note: "0s" means on/off control;

"+∞" means bi-level dimming control, luminaire never switches off when daylight sensor is disabled.

	6	7	8
0 s	●	●	●
1 min	●	○	●
3 min	○	●	●
5 min	●	○	○
10 min	○	●	○
30 min	○	○	●
+ ∞	○	○	○

STANDBY DIMMING LEVEL

The level of dimmed low light output after the hold time in the long absence of motion.

DIP Switch Options: 10% - 20% - 30% - 40%

Remote Control Options: 10% - 20% - 30% - 40% - 50%

	1	2
10%	●	●
20%	●	○
30%	○	●
40%	○	○

DAYLIGHT SENSOR


The daylight threshold can be captured and configured on the DIP switches to fit a particular application.

DIP Switch Options: 5 lux - 15 lux - 30 lux - 50 lux - 100 lux - 150 lux - +∞ (DISABLE)

Remote Control Options: 5 lux - 15 lux - 50 lux - 150 lux - +∞ (DISABLE)

	3	4	5	6
5 lux	●	●	●	●
15 lux	○	●	●	●
30 lux	●	○	●	●
50 lux	○	○	●	●
100 lux	●	●	○	●
150 lux	●	●	●	○
+ ∞	○	○	○	○

PROGRAMMING SETTINGS

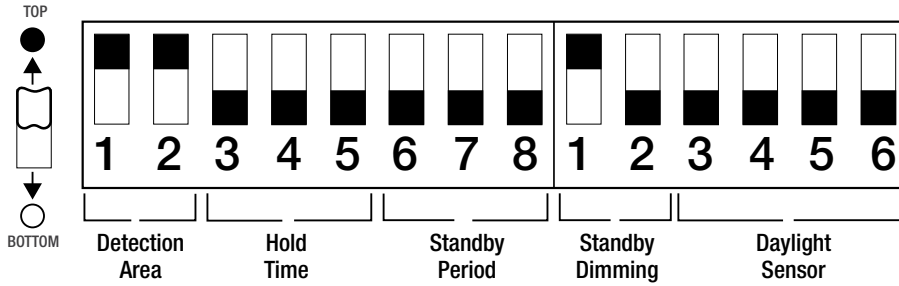

DEFAULT PROGRAMMING

Detection Area: 100%
Hold Time: 30 min
Standby Period: +∞
Standby Dimming: 20%
Daylight Sensor: Disable

DETECTION PATTERN

Detection Distance	12m x 8m (Max.)
Detection Angle – Wall Mounting	150°
Detection Angle – Ceiling Mounting	360°


CONTINUOUS ROW MOUNTING FEATURE

The L2TLV series luminaires can be continuously row mounted (daisy-chained) together with a 4ft L2STN luminaire to create an 8ft or longer run. The integrated microwave motion sensor in the L2TLV luminaire will also control the L2STN luminaire. Refer to the installation guide for proper wiring instructions.

Recommended luminaire pairings:

L2TLV Series		L2STN Series		Continuous Row Mounting Maximum	
Order Code	Model Number	Order Code	Model Number	120V	347V
68023	L2TLV-48LS1-Q/40K	68123	L2STN-48LS3-Q/40K	11 Luminaires (1 L2TLV + 10 L2STN)	29 Luminaires (1 L2TLV + 28 L2STN)

DIMENSIONS

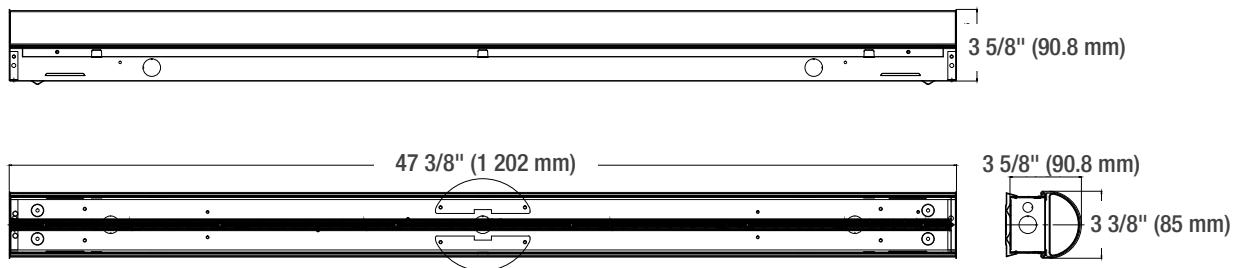

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____


Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

PHOTOMETRIC DATA¹

68023 • L2TLV-48LS1-Q/40K • 4 665.8 lm

Polar candela distribution

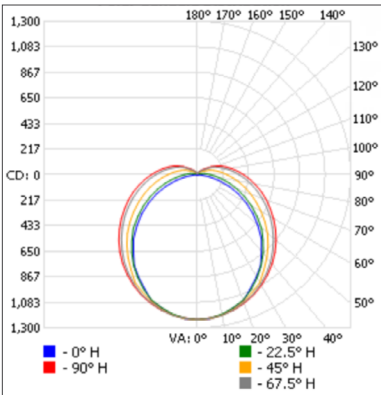

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	954.9	20.5%
0-40	1 569.9	33.7%
0-60	2,846.5	61.1%
60-90	1 266.3	27.2%
70-100	939.6	20.2%
90-120	442.1	9.5%
0-90	4 112.8	88.3%
90-180	543.0	11.7%
0-180	4 655.8	100%

Illuminance at a distance

Center beam fc		Beam width	
1.7'	426 fc	4.5'	9.7'
3.3'	113 fc	8.7'	18.8'
5.0'	49.2 fc	13.2'	28.4'
6.7'	27.4 fc	17.7'	38.1'
8.3'	17.9 fc	21.9'	47.2'
10.0'	12.3 fc	26.4'	56.9'

■ Vert. spread: 105.7°
■ Horiz. spread: 141.2°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.