

# ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- Lumen packages suitable for ceiling heights ranging from 8' to in excess of 100'
- Efficiencies up to 124 lm/w
- Superior-quality white LED light output using Chip on Board technology
- Patented Hyperbolic Reflector (U.S. Patent No. 10,670,227 B2)
- **Low UGR:** UGR of zero for fixtures aimed at nadir with a cut-off equal to or less than 60deg per CIE 117-1995 Discomfort Glare in Interior Lighting.

## PRODUCT SPECIFICATIONS

**Atrius™ - Ready Product:** Select models of the L-series product line deliver valuable data and connectivity to the Atrius IoT location based platform services. For more information, please refer to [www.acuitybrands.com/Atrius](http://www.acuitybrands.com/Atrius).

### OPTICS

**Hyperbolic:** Patented hyperbolic shape (U.S. Patent No. 10,670,227 B2) optimized for small, directional LED source, maximizes fixture efficiency while creating the "Silent Ceiling" appearance by reducing lamp image and aperture brightness • Geometry of hyperbolic curve provides unique aperture appearance and smoother light distribution

**Parabolic/Lens:** Computer-optimized parabolic reflector with frosted convex lens regressed into cone provides uniform distribution with no striations

**Wall Wash:** Available in Hyperbolic and Parabolic. Both providing uniform distributions with no striations

### ELECTRICAL

**LED Light Engine:** Compact light source delivers uniform illumination without pixilation, enabling excellent beam control • 2SDCM (5000K within 3SDCM) • 80, 90 & 97 CRI • Replaceable light engine with push in wire connections mounts directly to heat sink and is easily replaceable


**Passive Cooling:** Aluminum heat sink integrated directly with housing provides superior thermal management to ensure the long life of LED

**LED Driver:** Power factor >0.9 • Easily replaceable from above or below the ceiling

**Dimming:** Dimmable via 0-10V protocol standard • Optional drivers available for use with eldoLED, Lutron EcoSystem, 2-wire dimmers, DMX, or DALI • For a list of compatible dimmers, see [LED-DIM](#).

**Life:** Rated for 60,000 hours at 70% lumen maintenance

**Emergency Battery Pack (Optional) output:** Provides a minimum of 600 (BR & BRT20C), or 1000 (HBR) lumens for a minimum duration of 90 minutes • BRT20C option is CEC Title 20 compliant



**J7.1.1G4**

**800 TO 9000 LUMEN 6" LED  
NEW CONSTRUCTION/REMODEL/FLANGELESS  
HYPERBOLIC / PARABOLIC / WALLWASH  
L6 / LRM6 SERIES**

Type	Cat. No.
_____	_____
Project: _____	
Notes: _____	

**BUY AMERICAN ACT:** This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**Warranty:** 5 years when used in accordance with manufacturing guidelines. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed.

**Note:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.



**NEW CONSTRUCTION**

**REMODEL**

## ORDERING INFORMATION Complete Catalog# Example Includes (Rough-In, option, reflector, accessory) Ordering Example: L6 08LM 35K MVOLT G4 80CRI ZI HW CS PF HBTL

### ROUGH-IN

Series	Light Engine	Color Temperature	Voltage	Generation	CRI	Driver	Rough-In Options	
L6	6" L-Series New Construction Downlight	08LM	27K 2700K	G4	80CRI	DALI	F <sup>8</sup> Fuse and Fuse Holder	
		13LM	30K 3000K		90CRI	DMXR		CP <sup>9</sup> Chicago Plenum
		15LM	35K 3500K		97CRI <sup>2</sup>	EDAB <sup>21</sup>		BR <sup>3,11</sup> 600 Lumen Emergency Battery Pack w/Remote Test Switch
	17LM	40K 4000K	MVOLT <sup>1</sup> (120-277)		EDXB <sup>5</sup>	BRT20C <sup>3,11</sup> 600 Lumen Emergency Battery Pack w/ Remote Test Switch, CEC Title 20 Compliant		
23LM	50K 5000K	EZ10 <sup>21</sup>		HBR <sup>3,11</sup> 1000 Lumen Emergency Battery Pack w/Remote Test Switch				
28LM		EZ1 <sup>21</sup>		NL <sup>8,10</sup> nLight® Dimming Pack Controls				
33LM		EZB <sup>21</sup>		NLER <sup>8,10</sup> nLight® dimming pack controls. nLER controls fixtures on emergency circuit				
40LM		FD <sup>4,6</sup>		NLTAIR2 <sup>3,10,19</sup> nLight® AIR Dimming Pack Wireless Controls				
45LM		ECOD <sup>7,16,22</sup>		NLTAIRER2 <sup>3,10,19</sup> nLight® AIR Dimming Pack Wireless Controls. Controls fixtures on emergency circuit				
50LM		ZT		AE2CD <sup>18,19</sup> Atrius™ - Ready, VLC Commissioning, Radio (BT Positioning)				
55LM		GZ1 <sup>4</sup>						
60LM								
65LM								
70LM								
75LM								
80LM								
85LM								
90LM								

\*For Flangeless, "FM" option must be included on both Rough-In and Reflector Order Lines at the end of the nomenclature.

**REFLECTOR** To order reflector separately, use "L6" prefix before reflector option values. Ex: L6 HW CS PF

Trim Style	Finish	Trim Options	Mounting
<b>HM</b> <sup>11</sup> Hyperbolic Medium <b>HN</b> <sup>11</sup> Hyperbolic Narrow <b>HW</b> <sup>11</sup> Hyperbolic Wide <b>HWS</b> <sup>11</sup> Hyperbolic Single Wall Wash	<b>P</b> Parabolic <b>NPR</b> <sup>12,19</sup> Parabolic Narrow <b>WPR</b> <sup>12,19</sup> Parabolic Wide <b>WC</b> <sup>11</sup> Corner Wall Wash <b>WD</b> <sup>11</sup> Double Wall Wash <b>WS</b> <sup>11</sup> Single Wall Wash	<b>BD</b> Black Diffuse <b>BS</b> Black Specular <b>CD</b> Clear Diffuse <b>CS</b> Clear Specular <b>CSS</b> Clear Semi-Specular <b>GD</b> Gold Diffuse <b>GS</b> Gold Specular <b>PTD</b> Pewter Diffuse <b>PTS</b> Pewter Specular <b>WH</b> White, White Flange <b>WTD</b> Wheat Diffuse <b>WTS</b> Wheat Specular	<b>PF</b> <sup>14</sup> White Flange <b>WET</b> Wet Location <b>Blank</b> Flanged <b>FM</b> <sup>11,13,15</sup> Flangeless, drywall ceilings only

Accessories <sup>17</sup>	
<b>IFMA6</b> <sup>13,17</sup> 6" Flangeless Adapter for Drywall Ceilings Only	<b>INSA6/05</b> <sup>12,17</sup> 6" Sloped Ceiling Adapter, 5° Angle
<b>HB28</b> <sup>17</sup> 28" C-Channel Bar Hangers, Pair	<b>INSA6/10</b> <sup>12,17</sup> 6" Sloped Ceiling Adapter, 10° Angle
<b>HB52</b> <sup>17</sup> 52" C-Channel Bar Hangers, Pair	<b>INSA6/15</b> <sup>12,17</sup> 6" Sloped Ceiling Adapter, 15° Angle
<b>HBTL</b> <sup>17</sup> 25" Tru-Lock Grid Ceiling Bar Hanger, Pair	<b>INSA6/20</b> <sup>12,17</sup> 6" Sloped Ceiling Adapter, 20° Angle
<b>LB27</b> <sup>17</sup> 27" Linear Bar Hangers, Pair	<b>INSA6/25</b> <sup>12,17</sup> 6" Sloped Ceiling Adapter, 25° Angle
	<b>INSA6/30</b> <sup>12,17</sup> 6" Sloped Ceiling Adapter, 30° Angle

**Ordering Notes**

- 1 MVOLT not available for 85LM and up.
- 2 2700K & 3000K only.
- 3 Not available with 347V.
- 4 Not available for 60LM and up.
- 5 Not available for 40LM and 55LM and up.
- 6 120V only.
- 7 Not available for 50LM and up.
- 8 Specify voltage.
- 9 See CP notes in following table for compatibility with other options.
- 10 Only compatible with the following driver options: EZ1, EZB, EZ10, GZ1; ZT (for 60LM - 90LM only).
- 11 Not compatible with WET.
- 12 Not compatible with FM.
- 13 IFMA6 required for FM.
- 14 PF not available with BL or WH finishes. When specifying BL or WH finishes, flange is always painted white.
- 15 When ordering rough-in and trim separately FM designator must be applied to the end of both part numbers.
- 16 Not compatible with BR, BRT20C, or HBR
- 17 Not compatible with LRM6.
- 18 See AE2CD notes in following table for compatibility with other options.
- 19 NLTAIR2, NLTAIRER2, AE2CD not recommended for metal ceiling installations.
- 20 NPR, WPR available with CS, CSS, CD, WH finishes only.
- 21 Not available for 85LM and up.
- 22 ECOD with MVOLT only available for 08LM - 17LM.

**CP Notes**

CP with MVOLT only available for 08LM - 17LM.  
 BR, BRT20C, HBR, EDXB, NL, NLER, NLTAIR2, NLTAIRER2, AE2CD not compatible with CP.  
 DALI, DMXR, ZT not available for CP with FM at 85LM and up.

**AE2CD Notes**

Not available with 347 for LRM6 series.  
 Only compatible with EZ1 driver for 55LM and below.  
 CP, BR, BRT20C, HBR, NL, NLER, NLTAIR2, NLTAIRER2 not compatible with AE2CD.  
 Recommended ceiling height of 30' and under; not intended for use on ceilings greater than 40' or metal ceiling installations.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Acuity Brands Lighting is under license.

**PRODUCT SPECIFICATIONS** (cont.)

**MECHANICAL**

**New Construction Housing:** Low profile, universal housing design installs in suspended grid, plaster or drywall • Integral heat sink conducts heat away from LED light engine • Driver is accessible from above and below ceiling and can be upgraded to accommodate future technology improvements

**Mounting Frame:** Heavy gauge steel lower housing ring accommodates ceilings up to 2" thick • For thicker ceilings; consult factory


**Mounting Bracket:** New Construction mounting brackets have 3" vertical adjustment and accepts most commercial bar hangers, including our proprietary Tru-Lock bar hangers • Our one-piece Tru-Lock bar hangers have integral T-bar locking screws and alignment notches for locating and locking fixture in the center or 1/4" tile increments

**Junction Box:** Over size 4" x 6" galvanized steel junction box with (6) 1/2" (2) 3/4" knockouts facilitate quick wiring • New Construction junction box rated for four (4) No. 12 AWG 90° C branch circuit conductors (2-in, 2-out)

**Flangeless Adapter:** Must specify IFMA6 when flangeless, "FM" option, is specified. Suitable for drywall installations only.


**Remodel Housing:** Housing installs from below ceiling in applications where above ceiling access is not available • Secured in place by factory installed remodel springs • Remodel springs accommodate ceilings from 1/2" to 1-1/8" thick • Integral heat sink conducts heat away from LED light engine • Driver is accessible from below the ceiling and can be upgraded to accommodate future technology improvements.

**TRIMS:**

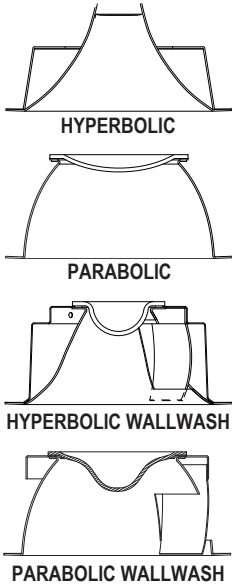


APERTURE: 6-1/8" Dia.  
 CEILING CUTOUT: 6-7/8" Dia.  
 OVERLAP TRIM: 7-3/8" Dia.


**NEW CONSTRUCTION**

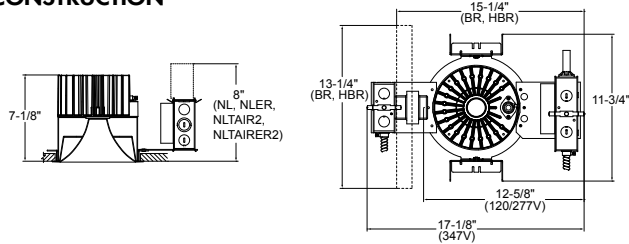


**Atrius Enabled**

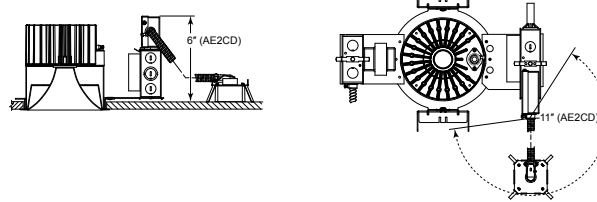


**Flangeless Chicago Plenum**

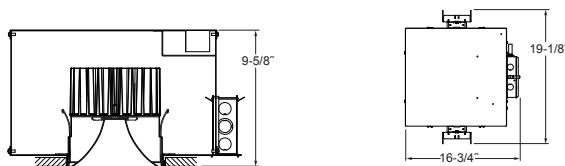


**REMODEL**

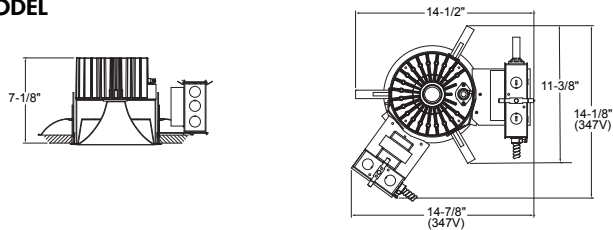


**Atrius Enabled**

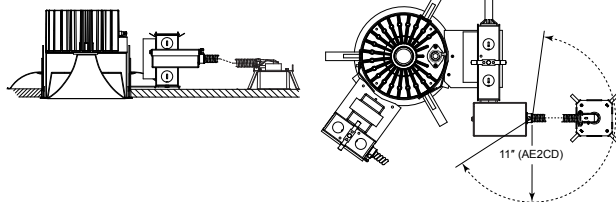

**ENERGY STAR® certified**

	PRODUCT#	FIXTURE CONFIGURATIONS = ENERGY STAR
	(S) (WW)LM (XX)K (V) G4 (YY)CRI (UU) (ZZ) (CC)	Series: S = L6, LRM6 Lumen Package: WW = 08, 13, 15, 17, 23, 28, 33, 40, 45, 55, 65, 75, 80, 85, 90 CCT: XX = 27, 30, 35, 40, 50 Voltage: V = MVOLT, 120, 277 CRI: YY = 80, 90, 97 Trim: UU = FD, DALI, EZ1, EZ10, EZB, ZT, GZ1 Trim Type: ZZ = HN, HM, HW, P, NPR, WPR Trim Color/Finish: CC = CS, CSS, CD

**LABELS AND LISTINGS**

• Tested to UL1598 and CSA C22.2 250 and listed for feed through and damp locations • Spacing requirement for 40LM and above: minimum of 4' between fixture centers, 3" overhead clearance, 2' from fixture center to side wall • RoHS compliant • EMI complies with FCC 47, Part 15, Class A • ENERGY STAR® certified, see table for designated products • I.B.E.W. Union made • ARRA Compliant 

## PERFORMANCE

LIGHT ENGINE	08LM	13LM	15LM	17LM	23LM	28LM	33LM	40LM	45LM	50LM	55LM	60LM	65LM	70LM	75LM	80LM	85LM	90LM
<b>120V (50/60HZ)</b>																		
<b>INPUT CURRENT</b>	0.063	0.098	0.115	0.132	0.197	0.238	0.280	0.351	0.345	0.381	0.427	0.439	0.483	0.541	0.573	0.607	0.656	0.710
<b>INPUT WATTAGE</b>	7.53	11.74	13.66	15.82	23.52	28.46	33.62	42.14	41.41	45.54	51.08	52.51	58.11	64.59	68.84	72.83	78.87	85.03
<b>THD%</b>	6.42	5.19	4.61	3.86	5.09	5.46	4.43	4.53	6.03	6.03	6.23	6.44	6.54	7.32	7.58	7.75	8.37	8.05
<b>POWER FACTOR</b>	0.993	0.993	0.992	0.994	0.994	0.995	0.997	0.998	0.996	0.996	0.996	0.996	0.996	0.995	0.995	0.996	0.996	0.996
<b>277V (50/60HZ)</b>																		
<b>INPUT CURRENT</b>	0.031	0.048	0.056	0.063	0.093	0.108	0.131	0.158	0.161	0.175	0.195	0.202	0.221	0.251	0.265	0.268	0.290	0.310
<b>INPUT WATTAGE</b>	7.87	11.84	13.81	15.89	23.65	28.19	33.83	41.68	41.74	45.80	51.02	52.35	57.64	64.22	68.40	71.29	77.27	83.16
<b>THD%</b>	12.00	11.62	11.31	11.34	9.93	9.04	10.48	8.79	9.15	8.07	9.85	11.12	10.97	13.07	12.83	12.96	13.53	12.56
<b>POWER FACTOR</b>	0.904	0.885	0.887	0.907	0.918	0.943	0.932	0.953	0.934	0.943	0.944	0.933	0.942	0.921	0.931	0.957	0.962	0.965
<b>HYPERBOLIC REFLECTOR: L6 HW CS (35K 80CRI)</b>																		
<b>DELIVERED LUMENS (L6 HW CS)</b>	842	1,404	1,622	1,847	2,486	2,998	3,489	4,242	4,511	4,936	5,466	5,677	6,215	6,803	7,123	7,556	8,342	8,782
<b>EFFICACY (LPW)</b>	112	120	119	117	106	105	104	101	109	108	107	108	107	105	103	104	106	103
<b>PARABOLIC REFLECTOR: L6 P CS (35K 80CRI)</b>																		
<b>DELIVERED LUMENS (L6 P CS)</b>	666	1,111	1,284	1,462	1,968	2,373	2,762	3,358	3,657	4,002	4,431	4,602	5,038	5,515	5,774	6,125	6,762	7,119
<b>EFFICACY (LPW)</b>	89	95	94	92	84	83	82	80	88	88	87	88	87	85	84	84	86	84

## OPTICAL DISTRIBUTIONS

HYPERBOLIC BEAM SPREAD		
Trim	08LM - 40LM	45LM-90LM
L6 HN CS	16°	25°
L6 HN CSS	19°	30°
L6 HN CD	44°	55°
L6 HM CS	53°	60°
L6 HM CSS	53°	60°
L6 HM CD	65°	65°
L6 HW CS	71°	73°
L6 HW CSS	71°	73°
L6 HW CD	71°	73°

PARABOLIC BEAM SPREAD		
Trim	08LM - 40LM	45LM-90LM
L6 NPR CS	46°	46°
L6 NPR CSS	52°	55°
L6 NPR CD	64°	68°
L6 P CS	65°	66°
L6 P CSS	62°	63°
L6 P CD	72°	72°
L6 WPR CS	78°	78°
L6 WPR CSS	78°	78°
L6 WPR CD	78°	78°

## LUMEN MULTIPLIERS

CCT	MULTIPLIER
2700K	0.90
3000K	0.96
3500K	1.00
4000K	1.01
5000K	1.04

CRI	MULTIPLIER
80CRI	1.00
90CRI	0.83
97CRI	0.77

HYPERBOLIC TRIM	MULTIPLIER
L6 HN CS	0.94
L6 HN CSS	0.89
L6 HN CD	0.81
L6 HM CS	0.98
L6 HM CSS	0.95
L6 HM CD	0.84
L6 HW CS	1.00
L6 HW CSS	0.97
L6 HW CD	0.89


PARABOLIC TRIM	MULTIPLIER
L6 NPR CS	0.92
L6 NPR CSS	0.88
L6 NPR CD	0.86
L6 P CS	1.00
L6 P CSS	0.96
L6 P CD	0.88
L6 WPR CS	0.98
L6 WPR CSS	0.96
L6 WPR CD	0.91

Applying Lumen Multipliers to Calculate Delivered Lumens								
Base Fixture Delivered Lumens (from Performance Table)	x	CCT Multiplier	x	CRI Multiplier	x	Trim Multiplier	=	Delivered Lumens for Desired Fixture and Reflector
<b>Hyperbolic Reflector Example: L6 23LM 30K MVOLT 90CRI G4 ZT HM CD</b>								
2486 Lumens	x	0.96	x	0.83	x	0.84	=	1664 Lumens
<b>Parabolic Reflector Example: L6 23LM 30K MVOLT 90CRI G4 ZT NPR CSS</b>								
1968 Lumens	x	0.96	x	0.83	x	0.88	=	1380 Lumens


**HYPERBOLIC PHOTOMETRICS**

**Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire**


**L6 13LM 35K + L6 HN CS, 3500K LEDs, input watts: 11.74, delivered lumens: 1223.7, LM/W = 104.2, Spacing Criteria: 0.3, test no. PR07172052, tested in accordance to IESNA LM-79.**

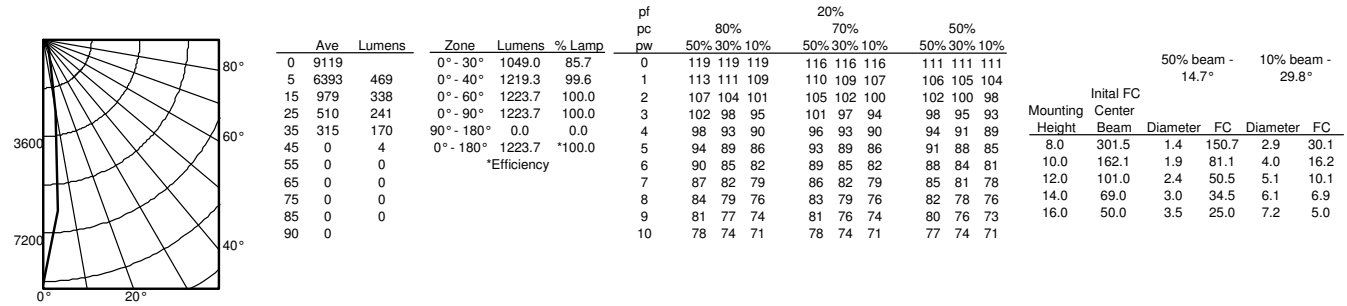

**L6 13LM 35K + L6 HM CS, 3500K LEDs, input watts: 11.74, delivered lumens: 1355.1, LM/W = 115.4, Spacing Criteria: 0.7, test no. PR07172088, tested in accordance to IESNA LM-79.**

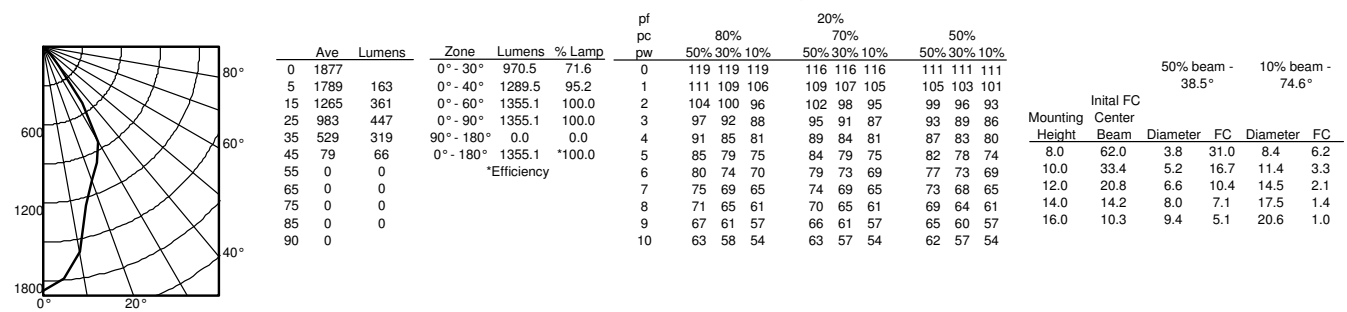


**L6 13LM 35K + L6 HW CS, 3500K LEDs, input watts: 11.74, delivered lumens: 1354.4, LM/W = 115.4, Spacing Criteria: 1.1, test no. PR07172089, tested in accordance to IESNA LM-79.**

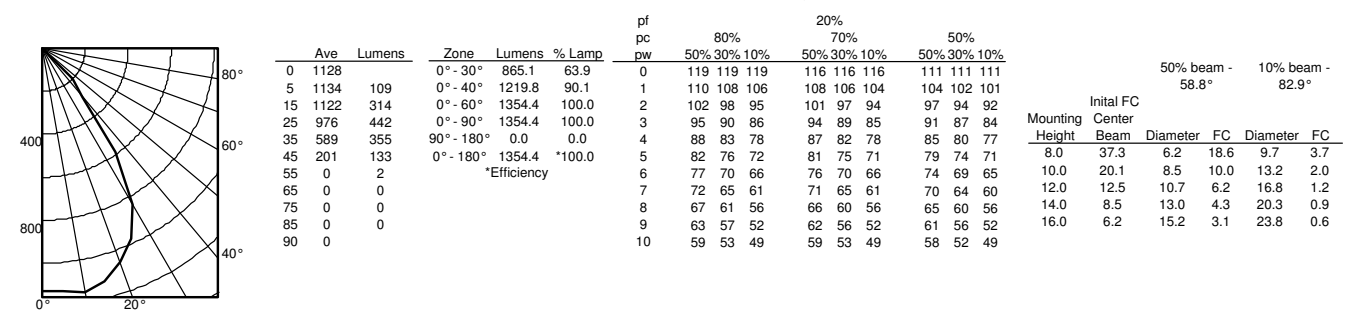


**HYPERBOLIC PHOTOMETRICS**

**Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire**


**L6 45LM 35K + L6 HN CS, 3500K LEDs, input watts: 41.41, delivered lumens: 4147.0, LM/W = 100.1, Spacing Criteria: 0.4, test no. PR07172081, tested in accordance to IESNA LM-79.**

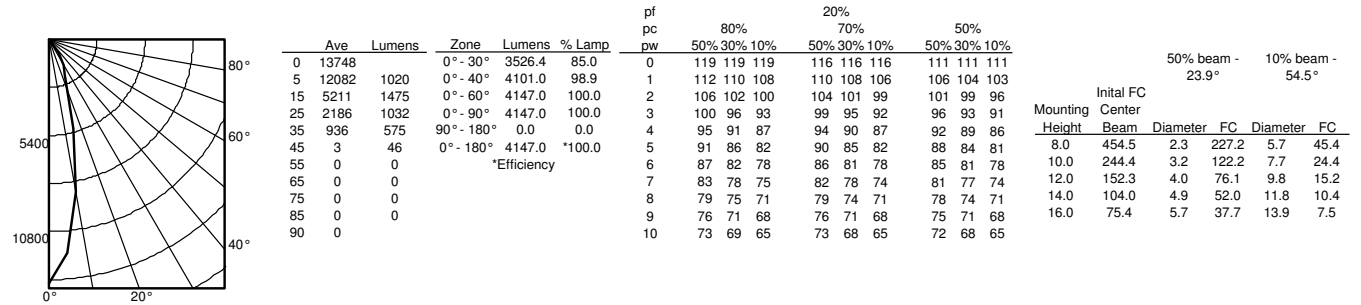

**L6 45LM 35K + L6 HM CS, 3500K LEDs, input watts: 41.41, delivered lumens: 4461.1, LM/W = 107.7, Spacing Criteria: 0.9, test no. PR07172082, tested in accordance to IESNA LM-79.**

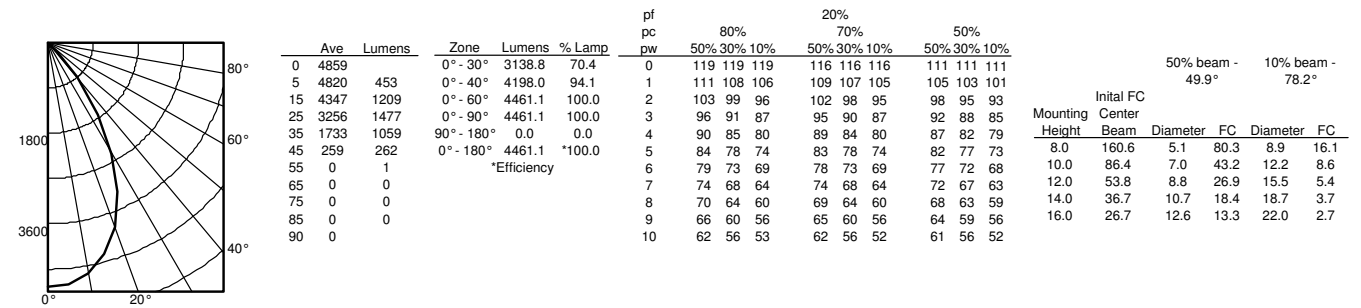


**L6 45LM 35K + L6 HW CS, 3500K LEDs, input watts: 41.41, delivered lumens: 4436.5, LM/W = 107.1, Spacing Criteria: 1.2, test no. PR07172083, tested in accordance to IESNA LM-79.**

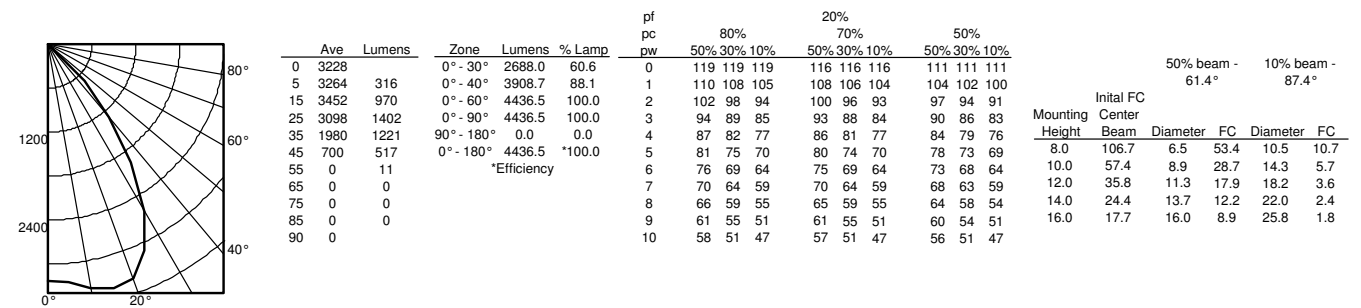


**HYPERBOLIC PHOTOMETRICS**

**Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire**


**L6 90LM 35K + L6 HN CS, 3500K LEDs, input watts: 85.03, delivered lumens: 8174.9, LM/W = 95.0, Spacing Criteria: 0.4, test no. PR07172091, tested in accordance to IESNA LM-79.**

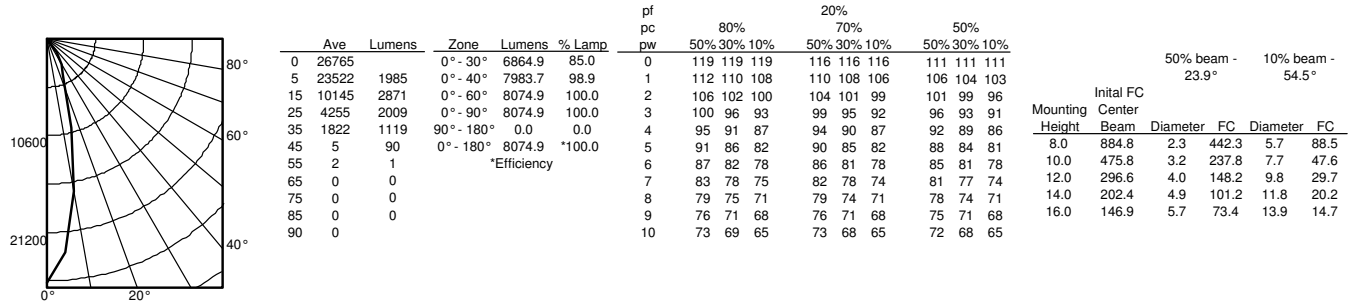

**L6 90LM 35K + L6 HM CS, 3500K LEDs, input watts: 85.03, delivered lumens: 8686.7, LM/W = 102.2, Spacing Criteria: 0.9, test no. PR07172092, tested in accordance to IESNA LM-79.**

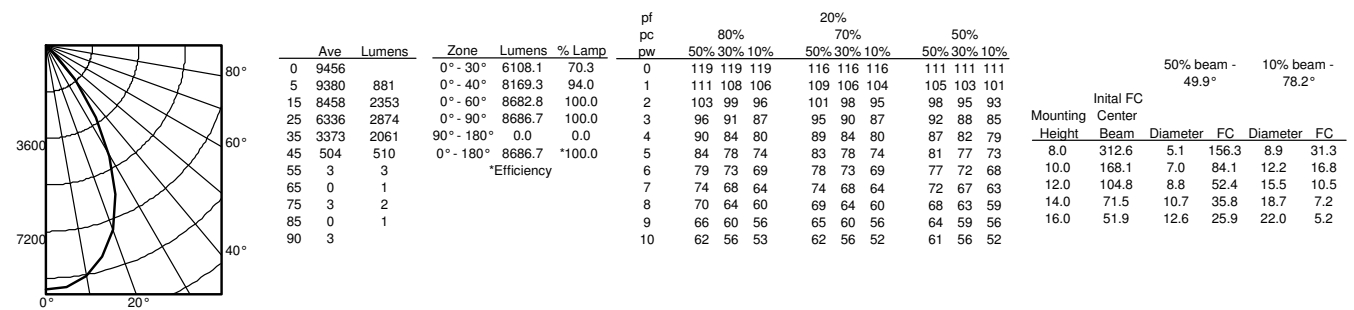

**L6 90LM 35K + L6 HW CS, 3500K LEDs, input watts: 85.03, delivered lumens: 8638.5, LM/W = 101.6, Spacing Criteria: 1.2, test no. PR07172093, tested in accordance to IESNA LM-79.**

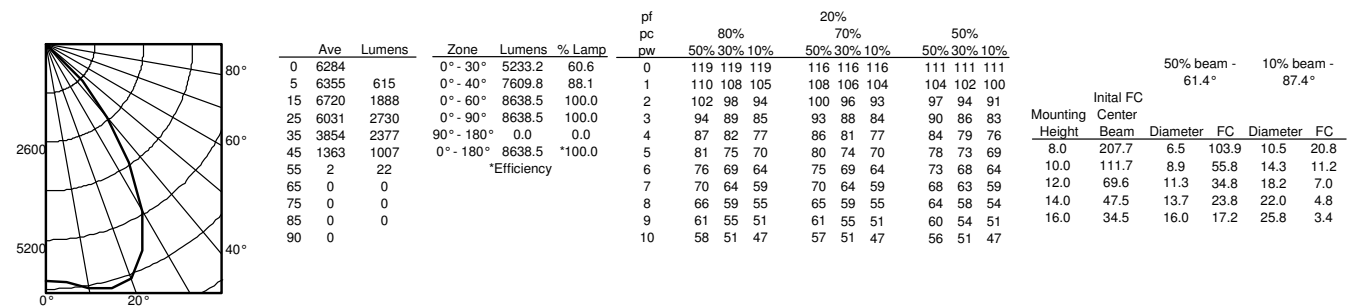





PARABOLIC PHOTOMETRICS

Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire


L6 13LM 35K + L6 NPR CS, 3500K LEDs, input watts: 11.74, delivered lumens: 1025.3, LM/W = 87.3, Spacing Criteria: 0.8, test no. PR11171391P8, tested in accordance to IESNA LM-79.

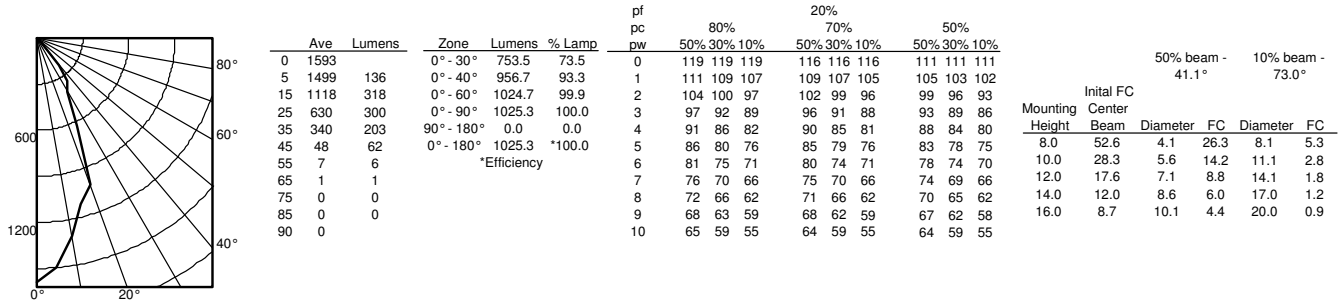

L6 13LM 35K + L6 P CS, 3500K LEDs, input watts: 11.74, delivered lumens: 1118.7, LM/W = 95.3, Spacing Criteria: 1.0, test no. PR07172051, tested in accordance to IESNA LM-79.

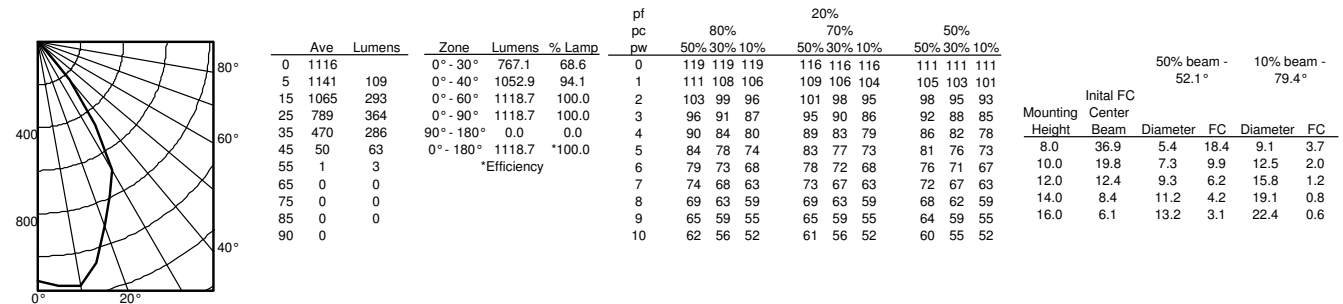


L6 13LM 35K + L6 WPR CS, 3500K LEDs, input watts: 11.74, delivered lumens: 1086.2, LM/W = 92.5, Spacing Criteria: 1.4, test no. PR11171491P8, tested in accordance to IESNA LM-79.

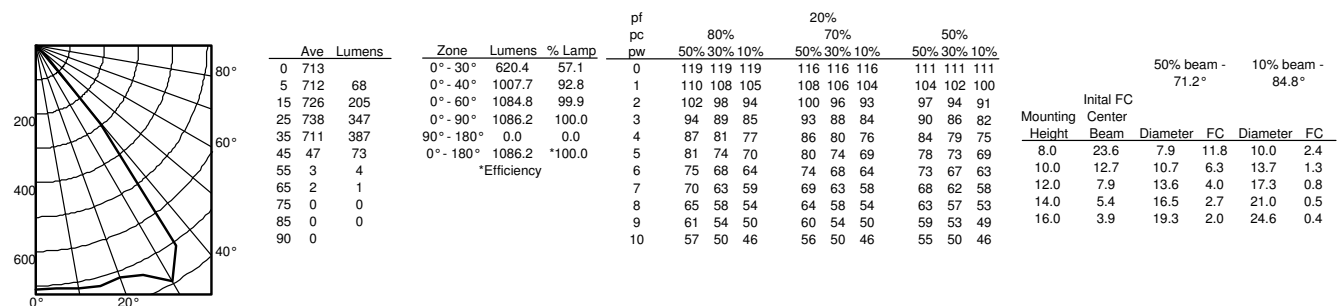


PARABOLIC PHOTOMETRICS

Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire


**L6 45LM 35K + L6 NPR CS**, 3500K LEDs, input watts: 41.41, delivered lumens: 3480.7, LM/W = 84.1, Spacing Criteria: 0.8, test no. PR11170891P3, tested in accordance to IESNA LM-79.

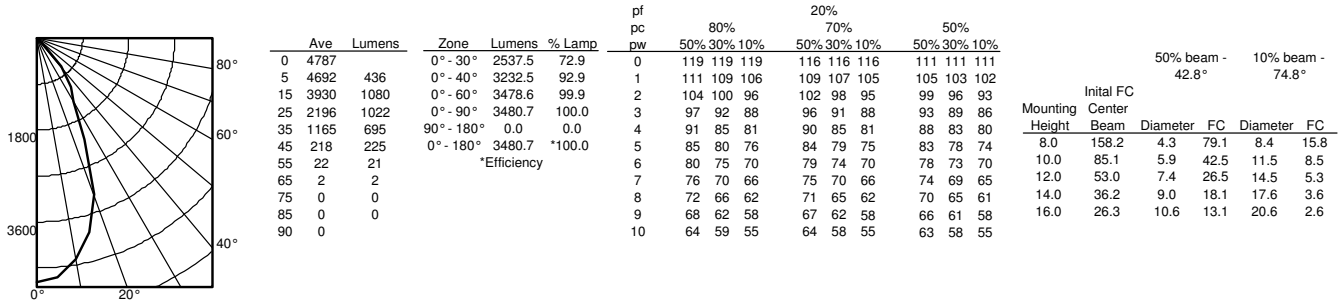

**L6 45LM 35K + L6 P CS**, 3500K LEDs, input watts: 41.41, delivered lumens: 3636.4, LM/W = 87.8, Spacing Criteria: 1.0, test no. PR07172084, tested in accordance to IESNA LM-79.

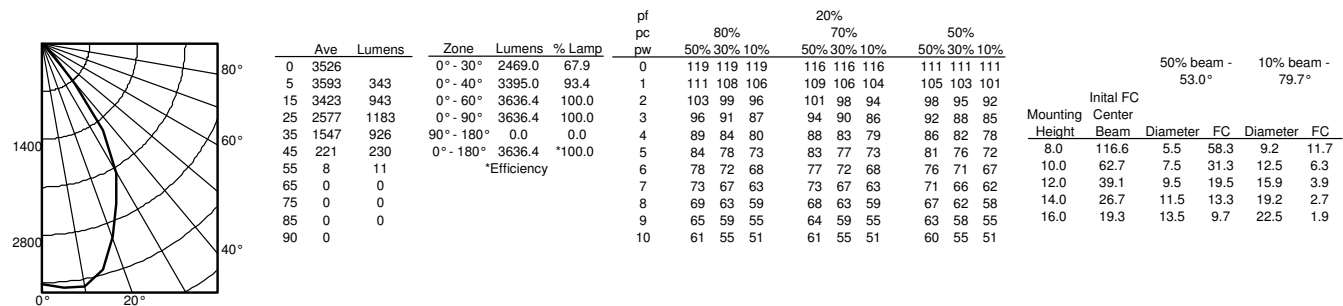


**L6 45LM 35K + L6 WPR CS**, 3500K LEDs, input watts: 41.41, delivered lumens: 3613.7, LM/W = 87.3, Spacing Criteria: 1.4, test no. PR11170991P3, tested in accordance to IESNA LM-79.

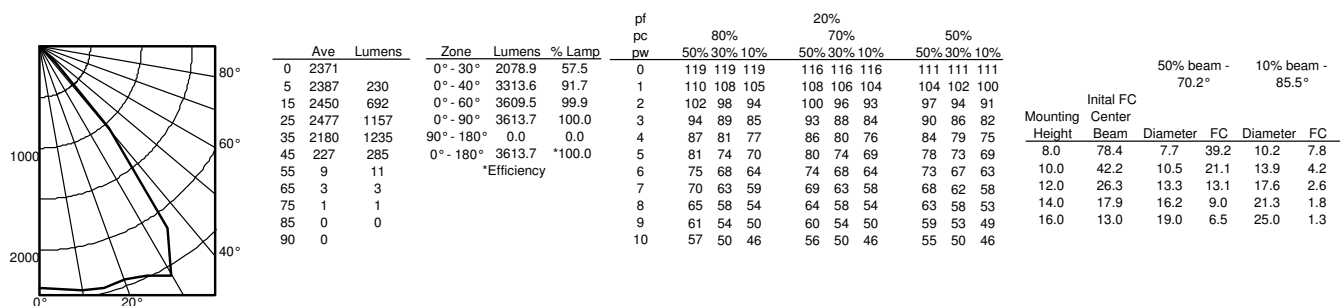


PARABOLIC PHOTOMETRICS

Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire


**L6 90LM 35K + L6 NPR CS**, 3500K LEDs, input watts: 85.03, delivered lumens: 6825, LM/W = 80.3, Spacing Criteria: 0.8, test no. PR11170891, tested in accordance to IESNA LM-79.

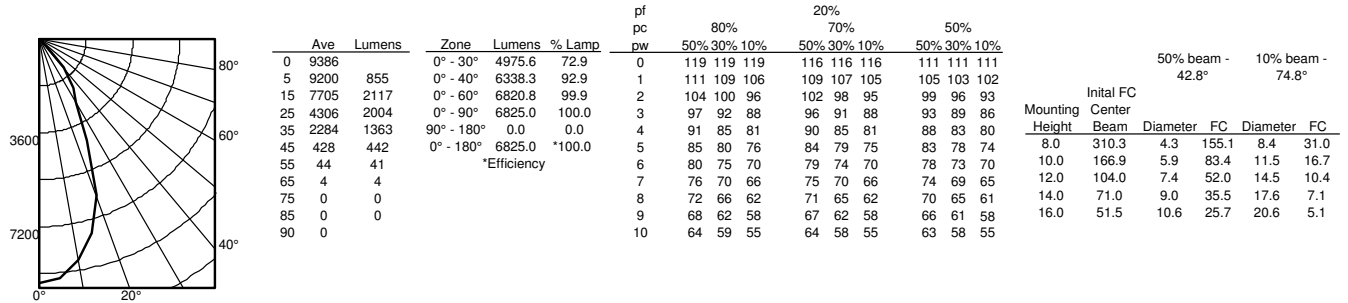

**L6 90LM 35K + L6 P CS**, 3500K LEDs, input watts: 85.03, delivered lumens: 7081.2, LM/W = 83.3, Spacing Criteria: 1.0, test no. PR07172094, tested in accordance to IESNA LM-79.

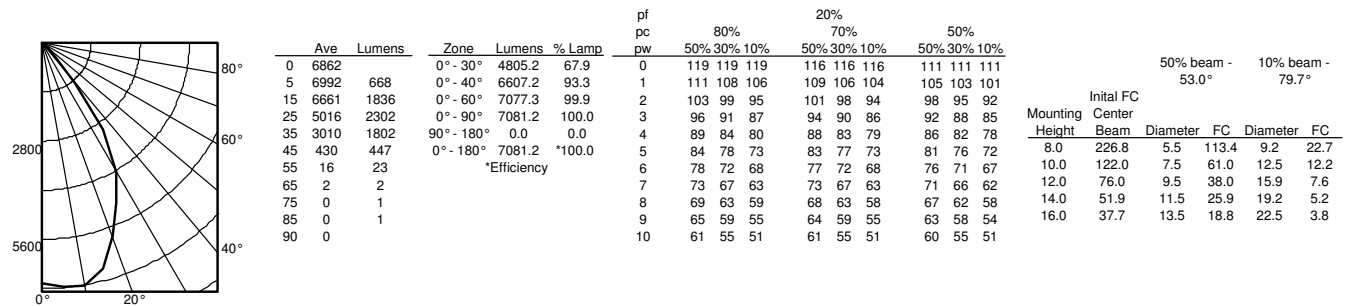

**L6 90LM 35K + L6 WPR CS**, 3500K LEDs, input watts: 85.03, delivered lumens: 7085.7, LM/W = 83.3, Spacing Criteria: 1.4, test no. PR11170991, tested in accordance to IESNA LM-79.

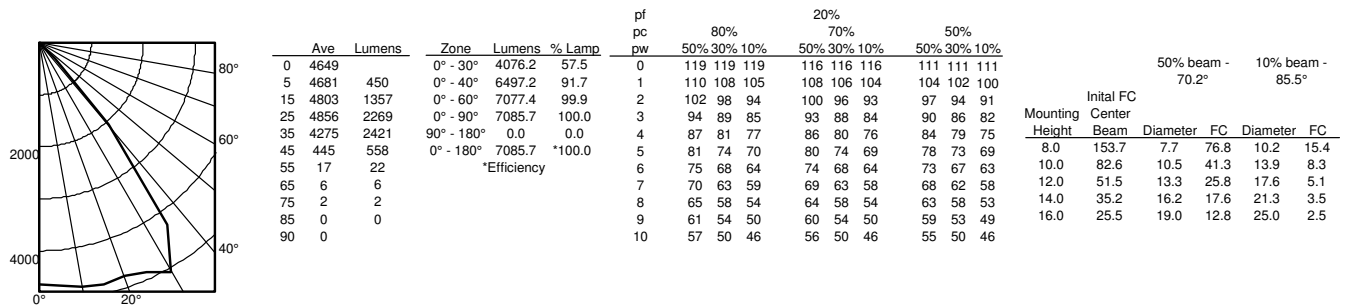

**PERFORMANCE DATA**

**LUMINAIRES SPACED 2' FROM WALL**

Catalog Number: L6 90LM 35K 120 G4 80CRI ZT; L6 HWS CS Spread: Single Wall Test #: PR07172096

Single Unit						Lamp	Multiple Units On 2' Centers*			Multiple Units On 3' Centers*			Multiple Units On 4' Centers*		
Lateral Distance From Fixture 2' From Wall						BXRC-35E1OK0-D-73-SE	Spaced 2' From Wall			Spaced 2' From Wall			Spaced 2' From Wall		
0'	1'	2'	3'	4'	5'	Distance From Ceiling	CL	CL	CL	CL	CL	CL	CL	CL	
90	66	31	12	6	6	1'	154	149	154	111	100	111	100	60	100
142	107	54	21	10	8	2'	257	252	257	182	166	182	157	109	157
110	86	47	22	12	9	3'	215	212	215	153	142	153	129	97	129
81	71	44	23	12	9	4'	179	182	179	124	127	124	100	90	100
50	54	40	23	14	10	5'	141	154	141	95	108	95	71	83	71
36	42	33	23	15	11	6'	119	130	119	81	94	81	60	70	60
28	34	28	21	15	11	7'	103	113	103	71	82	71	54	61	54
23	29	24	18	14	12	8'	89	99	89	62	73	62	47	51	47
18	22	19	15	12	10	9'	71	80	71	50	61	50	38	42	38
12	16	14	11	10	7	10'	53	60	53	38	47	38	28	34	28

**LUMINAIRES SPACED 3' FROM WALL**

Catalog Number: L6 90LM 35K 120 G4 80CRI ZT; L6 HWS CS Spread: Single Wall Test #: PR07172096

Single Unit						Lamp	Multiple Units On 3' Centers*			Multiple Units On 4' Centers*			Multiple Units On 6' Centers*		
Lateral Distance From Fixture 3' From Wall						BXRC-35E1OK0-D-73-SE	Spaced 3' From Wall			Spaced 3' From Wall			Spaced 3' From Wall		
0'	1'	2'	3'	4'	5'	Distance From Ceiling	CL	CL	CL	CL	CL	CL	CL	CL	
31	28	19	12	8	7	1'	54	54	54	44	42	44	34	20	34
67	58	40	25	14	10	2'	116	113	116	91	86	91	72	43	72
67	60	43	28	17	12	3'	124	123	124	97	91	97	73	51	73
57	51	38	26	17	13	4'	108	108	108	85	83	85	63	47	63
50	45	34	25	17	12	5'	98	98	98	78	75	78	57	45	57
40	40	32	24	17	13	6'	87	92	87	67	72	67	48	44	48
30	33	29	23	17	14	7'	77	86	77	57	67	57	39	42	39
24	28	25	21	16	14	8'	68	78	68	51	61	51	34	38	34
19	22	20	17	14	12	9'	56	66	56	42	51	42	29	32	29
13	17	16	12	11	10	10'	45	50	45	33	40	33	22	26	22

**LUMINAIRES SPACED 4' FROM WALL**

Catalog Number: L6 90LM 35K 120 G4 80CRI ZT; L6 HWS CS Spread: Single Wall Test #: PR07172096

Single Unit						Lamp	Multiple Units On 3' Centers*			Multiple Units On 4' Centers*			Multiple Units On 6' Centers*		
Lateral Distance From Fixture 4' From Wall						BXRC-35E1OK0-D-73-SE	Spaced 4' From Wall			Spaced 4' From Wall			Spaced 4' From Wall		
0'	1'	2'	3'	4'	5'	Distance From Ceiling	CL	CL	CL	CL	CL	CL	CL	CL	
17	16	13	10	8	7	1'	35	36	35	29	29	29	22	18	22
36	32	26	19	14	11	2'	75	74	75	60	57	60	44	37	44
45	42	34	26	19	14	3'	98	99	98	78	76	78	56	50	56
42	39	32	25	19	15	4'	95	96	95	76	74	76	54	49	54
38	35	30	24	19	15	5'	86	89	86	69	69	69	49	45	49
35	32	28	22	18	15	6'	82	83	82	65	65	65	46	43	46
33	30	26	22	17	14	7'	78	79	78	62	62	62	44	41	44
26	27	24	20	16	14	8'	70	76	70	55	59	55	38	38	38
20	21	20	17	14	13	9'	58	65	58	45	51	45	31	33	31
14	16	16	14	12	11	10'	46	50	46	35	40	35	24	29	24

\*Based on minimum of five luminaires. Reflectances: 80, 50, 20. Values are rounded to nearest whole footcandle.

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.

**PERFORMANCE DATA**

**LUMINAIRES SPACED 2' FROM WALL**

Catalog Number: L6 90LM 35K 120 G4 80CRI ZT; L6 WS CD Spread: Single Wall Test #: PR07172097

Single Unit						Lamp	Multiple Units On 2' Centers*			Multiple Units On 3' Centers*			Multiple Units On 4' Centers*		
Lateral Distance From Fixture 2' From Wall						BXRC-35E1OK0-D-73-SE	Spaced 2' From Wall			Spaced 2' From Wall			Spaced 2' From Wall		
0'	1'	2'	3'	4'	5'	Distance From Ceiling	CL	CL	CL	CL	CL	CL	CL	CL	
60	43	20	9	6	6	1'	99	96	99	74	63	74	68	38	68
118	86	42	17	9	8	2'	205	199	205	149	130	149	131	83	131
119	89	45	21	12	9	3'	213	211	213	157	139	157	136	91	136
88	79	50	24	13	10	4'	195	200	195	133	142	133	107	100	107
50	55	45	27	16	11	5'	152	161	152	102	116	102	73	92	73
36	40	34	27	18	13	6'	124	133	124	87	95	87	63	74	63
27	31	28	23	18	14	7'	104	111	104	74	82	74	57	61	57
22	25	23	19	16	14	8'	88	95	88	63	71	63	50	50	50
17	19	18	15	13	12	9'	69	75	69	51	58	51	40	40	40
11	14	13	11	11	8	10'	50	55	50	38	43	38	29	33	29

**LUMINAIRES SPACED 3' FROM WALL**

Catalog Number: L6 90LM 35K 120 G4 80CRI ZT; L6 WS CD Spread: Single Wall Test #: PR07172097

Single Unit						Lamp	Multiple Units On 3' Centers*			Multiple Units On 4' Centers*			Multiple Units On 6' Centers*		
Lateral Distance From Fixture 3' From Wall						BXRC-35E1OK0-D-73-SE	Spaced 3' From Wall			Spaced 3' From Wall			Spaced 3' From Wall		
0'	1'	2'	3'	4'	5'	Distance From Ceiling	CL	CL	CL	CL	CL	CL	CL	CL	
20	18	13	9	7	6	1'	35	35	35	29	28	29	23	13	23
51	44	29	18	11	9	2'	85	82	85	68	63	68	54	30	54
59	51	36	24	15	11	3'	103	101	103	83	76	83	63	41	63
60	52	37	24	16	12	4'	105	104	105	85	79	85	65	44	65
56	51	38	26	17	13	5'	106	107	106	83	82	83	62	46	62
43	43	36	27	19	14	6'	95	100	95	72	80	72	50	50	50
30	33	31	26	20	16	7'	83	90	83	63	71	63	40	48	40
24	27	25	23	18	16	8'	72	80	72	56	63	56	36	42	36
18	21	20	18	16	14	9'	59	67	59	46	52	46	31	33	31
13	16	15	12	13	12	10'	47	51	47	36	41	36	24	26	24

**LUMINAIRES SPACED 4' FROM WALL**

Catalog Number: L6 90LM 35K 120 G4 80CRI ZT; L6 WS CD Spread: Single Wall Test #: PR07172097

Single Unit						Lamp	Multiple Units On 3' Centers*			Multiple Units On 4' Centers*			Multiple Units On 6' Centers*		
Lateral Distance From Fixture 4' From Wall						BXRC-35E1OK0-D-73-SE	Spaced 4' From Wall			Spaced 4' From Wall			Spaced 4' From Wall		
0'	1'	2'	3'	4'	5'	Distance From Ceiling	CL	CL	CL	CL	CL	CL	CL	CL	
12	11	9	8	7	7	1'	24	25	24	20	20	20	16	13	16
27	24	19	15	11	10	2'	53	53	53	44	42	44	34	27	34
37	34	27	21	16	12	3'	77	77	77	61	60	61	46	39	46
38	35	28	22	17	14	4'	82	82	82	65	64	65	47	42	47
38	35	29	22	18	14	5'	83	84	83	66	66	66	49	43	49
39	36	30	23	18	15	6'	86	86	86	68	67	68	50	44	50
35	33	29	24	19	15	7'	85	86	85	67	68	67	47	45	47
27	28	26	22	19	16	8'	76	82	76	60	64	60	41	43	41
20	21	21	19	17	15	9'	63	69	63	49	55	49	33	36	33
14	16	17	15	14	12	10'	50	54	50	39	43	39	27	32	27

\*Based on minimum of five luminaires. Reflectances: 80, 50, 20. Values are rounded to nearest whole footcandle.

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.

**CONTROLS**

**EXAMPLE**

Group Fixture Control\*

\*Application diagram applies for fixtures with eldoLED drivers only.



**nPS 80 EZ** Dimming/Control Pack (qty: 2 required)

**nPODM 2P DX** Dual On/Off/Dim Push-Button WallPod

**nCM ADCX** Daylight Sensor with Automatic Dimming Control

**nCM PDT 9** Dual Technology Occupancy Sensor

**Description:** This design provides a dual on/off/dim wall station that enables manual control of the fixtures in Row A and Row B separately. Additionally, a daylight harvesting sensor is provided so the lights in Row B can be configured to dim automatically when daylight is available. An occupancy sensor turns off all lights when the space is vacant.

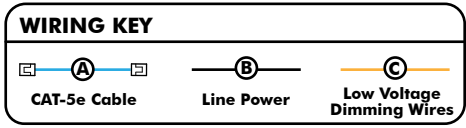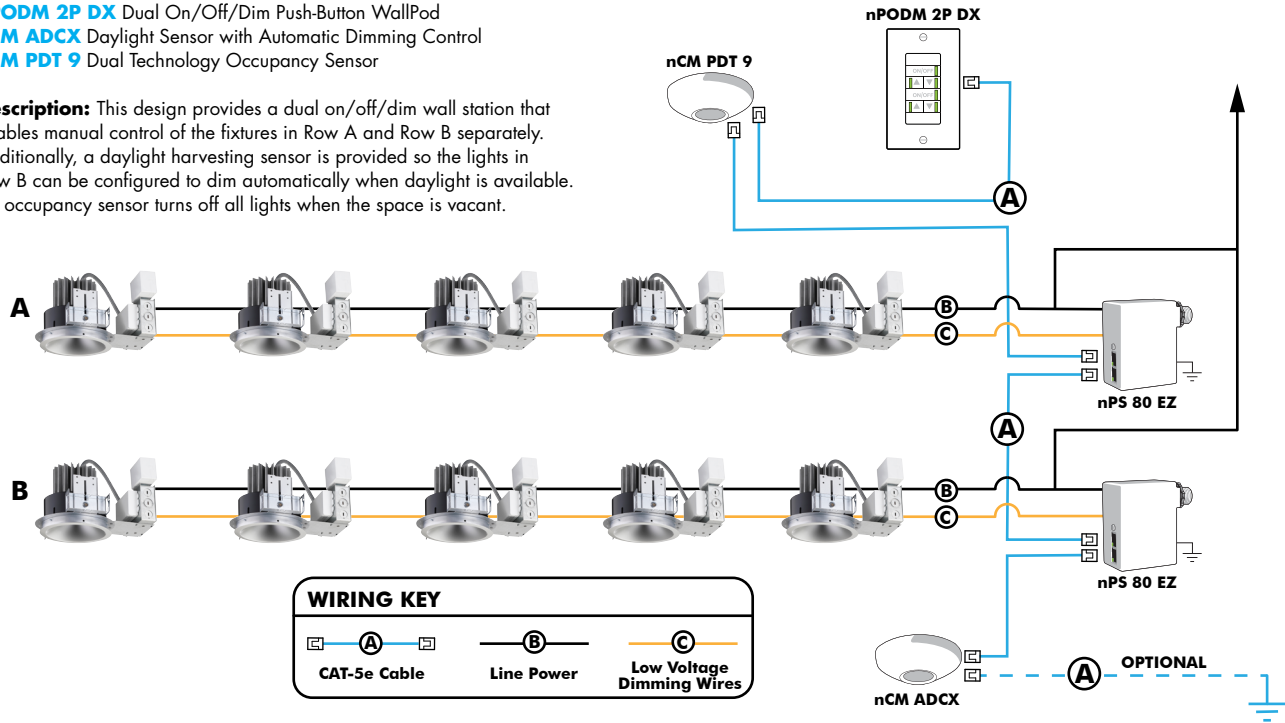

**Choose Wall Controls**

nLight offers multiple styles of wall controls - each with varying features and user experience.



**Push-Button Wallpod**  
Traditional tactile buttons and LED user feedback



**Graphic Wallpod**  
Full color touch screen provides a sophisticated look and feel

**nLight® Wired Controls Accessories:**

Order as separate catalog number. Visit <a href="http://www.acuitybrands.com/products/controls/nlight">www.acuitybrands.com/products/controls/nlight</a> for complete listing of nLight controls.			
WallPod Stations	Model number	Occupancy sensors	Model Number
On/Off	nPODM (Color)	Small motion 360°, ceiling (PIR/dual Tech)	nCM 9 / nCM PDT 9
On/Off & Raise/Lower	nPOD DX (Color)	Large motion 360°, ceiling (PIR/dual tech)	nCM 10 / nCM PDT 10
Graphic Touchscreen	nPOD GFX (Color)	Wide View (PIR/dual tech)	nWV 16 / nWV PDT 16
<b>Photocell controls</b>	<b>Model Number</b>	Wall Switch w/ Raise/Lower (PIR/dual tech)	nWSX LV DX / nWSX PDT LV DX
Dimming	nCM ADCX	<b>Cat-5 cables (plenum rated)</b>	<b>Model Number</b>
		10', CAT5 10FT	CAT5 10FT J1
		15, CAT5 15FT	CAT5 15FT J1



**Capable Luminaire**

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brand's specification for chromatic consistency.
- This luminaire is part of an A+ Certified solution for nLight control networks when ordered with drivers marked by a Shaded background\*
- This Luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a shaded background\*

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

\*See ordering tree for details

**nLight® AIR Control Accessories:**

Order as separate catalog number. Visit [www.acuitybrands.com/products/controls/nlightair](http://www.acuitybrands.com/products/controls/nlightair).

Wall switches	Model number
On/Off single pole	rPODB [color]
On/Off two pole	rPODB 2P [color]
On/Off & raise/lower single pole	rPODB DX [color]
On/Off & raise/lower two pole	rPODB 2P DX [color]
On/Off & raise/lower single pole	rPODBZ DX WH <sup>1</sup>

**Notes**

- 1 Can only be ordered with the RES7Z zone control sensor version.

**nLight AIR**

nLight AIR is the ideal solution for retrofit or new construction spaces where adding communication is cost prohibitive. The integrated nLight AIR rPP20 Power Pack is part of each Indy L-Series Luminaire. These individually addressable controls offer the ultimate in flexibility during initial setup and for space repurposing.



Simple as 1,2,3

1. Install the nLight® AIR fixtures with embedded smart sensor
2. Install the wireless battery-powered wall switch
3. With CLAIRITY app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome

