SIEMENS

Data sheet 3RU2116-1GC0



Overload relay 4.5...6.3 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Spring-type terminal Auxiliary circuit: spring-type terminal Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	
•	6.6 W
• per pole	2.2 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	440 V
 between auxiliary and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
between main and auxiliary circuit	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Lead - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-40 +70 °C
 during storage 	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	4.5 6.3 A
operating voltage	
rated value	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	6.3 A
operational current at AC-3e at 400 V rated value	6.3 A
operating power	

• at AC-3	2.2 IAM
— at 400 V rated value	2.2 kW
— at 500 V rated value	3 kW
— at 690 V rated value	4 kW
• at AC-3e	
— at 400 V rated value	2.2 kW
— at 500 V rated value	3 kW
— at 690 V rated value	4 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	
•	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	
•	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1 A
• at 690 V	0.75 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.3 A
• at 110 V	0.22 A
• at 125 V	0.22 A
● at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
contact rating of auxiliary contacts according to UL	
contact rating of auxiliary contacts according to UL Protective and monitoring functions	B600 / R300
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release	B600 / R300 CLASS 10
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings	B600 / R300 CLASS 10
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release	B600 / R300 CLASS 10
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor	B600 / R300 CLASS 10 thermal
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	B600 / R300 CLASS 10 thermal 6.3 A
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection	B600 / R300 CLASS 10 thermal 6.3 A
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link	CLASS 10 thermal 6.3 A 6.3 A
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required	B600 / R300 CLASS 10 thermal 6.3 A
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm 70 mm
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm 70 mm
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm 70 mm
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	B600 / R300 CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm 70 mm
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm 70 mm No
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit	B600 / R300 CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm 70 mm No spring-loaded terminals spring-loaded terminals
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current	B600 / R300 CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm 70 mm No spring-loaded terminals spring-loaded terminals
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit	B600 / R300 CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm 70 mm No spring-loaded terminals spring-loaded terminals
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	B600 / R300 CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm 70 mm No spring-loaded terminals spring-loaded terminals
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm 70 mm No spring-loaded terminals spring-loaded terminals Top and bottom
contact rating of auxiliary contacts according to UL Protective and monitoring functions trip class design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded	CLASS 10 thermal 6.3 A 6.3 A fuse gG: 6 A, quick: 10 A any Contactor mounting 87 mm 45 mm 70 mm No spring-loaded terminals spring-loaded terminals Top and bottom

for AWG cables for main contacts	1x (20 12)
type of connectable conductor cross-sections	
 for auxiliary contacts 	
— solid or stranded	2x (0.5 2.5 mm²)
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 finely stranded without core end processing 	2x (0.5 1.5 mm²)
for AWG cables for auxiliary contacts	2x (20 14)
design of screwdriver shaft	Diameter 3 mm
size of the screwdriver tip	3,0 x 0,5 mm
Safety related data	
failure rate [FIT] with low demand rate according to SN 31920	50 FIT
MTTF with high demand rate	2 280 a
IEC 61508	
T1 value	
 for proof test interval or service life according to IEC 61508 	20 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Display	
display version for switching status	Slide switch
Approvals Certificates	
General Product Approval	

EG-Konf.





Confirmation





For use in hazardous locations

Test Certificates

Marine / Shipping





Type Test Certificates/Test Report Special Test Certificate





Marine / Shipping





LRS







Miscellaneous

other

other

Confirmation

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1GC0

Cax online generator


 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RU2116-1GC0}\\$


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1GC0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1GC0/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1GC0&objecttype=14&gridview=view1



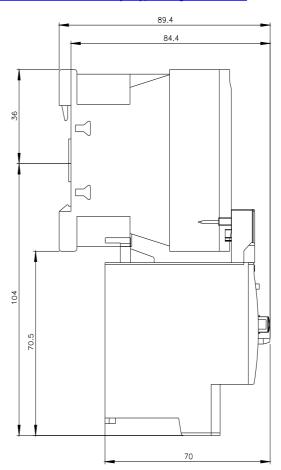

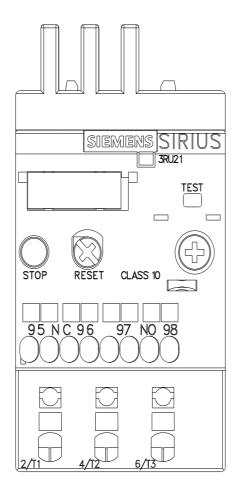

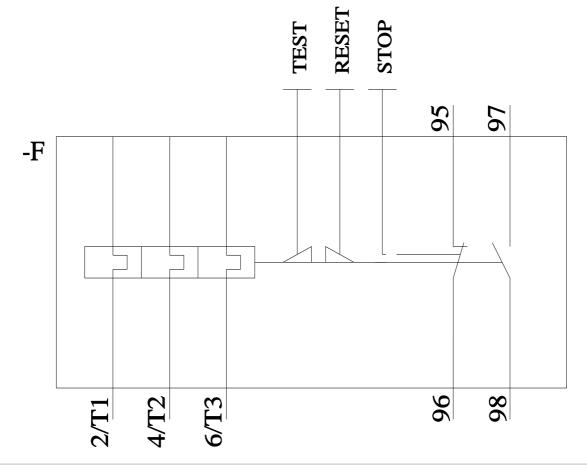

last modified: 3/11/2024 🖸