LIGHTOLIER

Downlighting

LyteProfile 6"

P6R Round Downlight & Wall Wash



LyteProfile downlights and wall washers provide a perfect balance of functionality with glare control. The robust and versatile UniFrame frame-in kit makes changes and updates easy to manage and install. High optical efficiency reinforced with Accurender technology provides an optimum balance of performance and quality of light. Ideal for use in a variety of applications including open office, institutional, healthcare, and retail.

Standard luminaire: Complete luminaire = Frame + Engine + Trim + Accessories (optional) Flex install luminaire: Complete luminaires = Engine (F) + Trim + Accessories (optional) Buy American Act of 1933 (BAA)** Compliant luminaire*: Complete luminaire = Frame-BAC + Engine/Trim-BAC

Project:		
Location:		
Cat.No:		
Туре:		
Qty:		
Notes:	 	

Frame			Standard example: 6RN BAC Example: 6RN-BAC
Series	Aperture R	Installation	Options
6 Uniframe 6" Non-IC	R Round	N New construction (Non-IC)	 Universal 120/277/347V LC Chicago Plenum EM6 Emergency, 6W Self-Test/Self-Diagnostic (not available for BAC)¹
		R Remodeler (Non-IC)	- Universal 120/277/347V
		A AirSeal (IC)	- Universal 120/277/347V

Engine/	Trim			St	andard example: F	6RDL20935WCD	Z10U BAC exan	nple: P6RDL2	0935WCDZ10U-BAC
Series	Style	Lumen	CRI/CCT	Beam	Reflector	Flange	Dimming / Options	Voltage	Options
P6R LyteProfile 6" round downlight	DL Downlight LW Lensed Wall Wash ² SL Shower light ³ (non-conductive lens)	10 1000 lm 15 1500 lm 20 2000 lm ⁴ 25 2500 lm ⁴ 30 3000 lm ⁴ 35 3500 lm ⁴ 40 4000 lm ⁵ 45 4500 lm ⁵ 50 5000 lm ⁵	927 90CRI/2700K 930 90CRI/3000K 935 90CRI/3500K 940 90CRI/4000K 9D2W 3000-1800K (dim to warm) ⁶ 96T 2700-6500K (tunable white) ⁷	N Narrow M Medium W Wide ^{2.3}	 CL Specular clear CC Comfort clear CD Comfort clear diffuse WH White (matte) BK Black (matte) 	 White (matte) B Black (matte)⁸ P Polished (matches aperture) F Flangeless (requires CA6RFT)⁸ White (matte) B Black (matte)⁸ F Flangeless 	Z10 0-10V 1% Z10D20 0-10V 1% (dim to Off) (up to 3500lm) L1 Lutron LDE1 EcoSystem 1% RA Integral Interac RF sensor (up to E Forward &		 None R Retrofit¹⁰ (not compatible with IEM6) F Flex install (no frame required)¹¹ IEM6 Trim mounted EM test switch (for DL style only)
		WHAMF White — White (gloss antimicrobial) ⁸ F Flangeles	(requires CA6RFT) ⁸ — White (gloss) F Flangeless (requires CA6RFT) ⁸	Revserse Phase (up to 3000lm)		BAC Meets the requirements of the Buy American Act of 1933 (BAA)*			

Accessories

SBA	Interact Ready System Bridge Accessory with integral occupancy and daylight sensor (compatible with all 0-10V options, see SBA spec sheet) 13
CAEM6	Field installable Bodine BSL6 6W battery pack with self-test/self-diagnostic for use with new construction frames, 120-277V
CA6RFT	Mud-in ring for use in 6" round flangeless trim installations (ordered with a flangeless (F) light engine).
CAEM6TSCP	Remote switch cover plate. Order with EM6 frame for remote mounted test switch.
C6RVPWH	IP65 rated vandal proof matte white accessory mounts onto flangeless light engines (F) and non-IC (N) frame only.
6RNSR	6" round/square non-IC frame with Flex (F) light engine (provides mechanical support for rough-in construction only, no junction box)
LCEM6	Field installable Bodine BSL06 emergency battery pack (for Flex (F) light engine only, includes switch mounting plate)
T347-75VA	347:120V step-down transformer for non-IC (N) frame only (see page 2 for details)
7925	6" sloped ceiling adapter (refer to SCA spec sheet for slope options)

Emergency (EM6) frame is compatible with reflector mounted test switch when light engine is ordered with IEM6 (not compatible w/347V).

2. Lensed wall wash (LW) style only available with Wide (W) beam.

- 3. Shower light (SL) in only available with White (WH) reflector finish, and wide (W) beam.
- 4. Not available with AirSeal (A) frame.
- 5. Not available with AirSeal (A) frame. Available with CL, CC, and CD reflector finishes only.
- Specify 9D2W with Z10U dimming only (up to 3000lm max). Not compatible with Z10D20 or 347V (3) options. Not available with wide (W) beam. 7. Specify 96T with Z10U or RAU dimming only (up to 2500lm max).
- Not compatible with Z10D20 or 347V (3) options. Not available with wide (W) beam. 8. Consult factory with ETO request for antimicrobial reflector finish (WHAMF)
- and black (B) flange for all styles, and flangeless (F) for LW style.
- Linear driver profile. See dimensional data following. Specify only with non-IC (N) frame, not for use with LC or EM6 options.
- 10. Retrofits select legacy Lightolier luminaires (see pages 2 for details).

- 11. Flex install requires light engine & trim only (up to 4000lm only). Accessory frames available. Not compatible with standard frames and
- associated options. Not available with Interact (RA) dimming and IEM6 trim. 12. Requires IRT9015 IR remote and Interact Pro App for commissioning
 - (requires above ceiling access).
- * BAA compliance requires that BAC option be selected for each of frame, engine/trim. Frame and engine will be ordered/shipped together; trim will be ordered/shipped separately. Accessories (optional) are not currently BAA-compliant.
- ** Failure to properly select the "BAC" suffix could result in you receiving product that is not BAA compliant product with no recourse for an RMA or refund. This BAC designation hereunder does not address (i) the applicability of, or availability of a waiver under, the Trade Agreements Act, or (ii) the "Buy America" domestic content requirements imposed on states, localities, and other non-federal entities as a condition of receiving funds administered by the Department of Transportation or other federal agencies.









Round Downlight & Lensed Wall Wash

Features

Optics

- Provides a 60° cutoff (physical and reflected)
- Available in wide (85°), medium (65°), and narrow (55°) beam options.
- Spun and anodized reflectors available in specular (clear), semi-specular (comfort clear and diffuse finishes. Also available in white and black painted finishes.
- Consult factory for RAL finishes

Quality of light

- Color consistency: 2 SDCM
- 90 CRI minimum (Accurender)

Construction (New Construction)

- Galvanized stamped steal for dry / plaster ceilings.
- Pre-installed telescoping mounting bars (13"-24")
- Frame accommodates C- channel, black iron, and 3/4" EMT for mounting distances greater than 24" between joists.
- Manufactured from 20 gage galvanized steel construction with rolled edge aperture to guide cutting tools for perfect hole cutting.

Max ceiling thickness is 2" (51 mm).

Patented install Mounting frame

- Pre-installed mounting bars allow for fast and tool-less install into T-grid & hat channel ceilings
- Close-cut aperture design eliminates an undesired gap between ceiling material and reflector.
- Simple plug-and-play connection between frame and light engine from below the ceiling allows for:
- Easy upgrades
- Technology changes
- Repairs and troubleshooting

Retrofit

 Easily updates legacy LyteProfile LED downlights to the latest technology. Includes light engine, trim, and driver mounted on cover plate that mounts to previous generations of LyteProfile LED luminaires. Order with R option code at end of light engine/trim catalog number.

Dimming

- Advance 0-10v 1% (Z10) logarithmic curve is standard. Specify D2O for factory-set dimto-off function (consult factory for linear dimming curve).
- Lutron LDE1 (L1) EcoSystem 1%
- Electronic low voltage (E) offers forward or reverse phase dimming
- Dim to Warm (D2W): changes CCT from 3000-1800K gradually as it dims. Use with Z10U dimming only. Fixture-to-fixture consistency of ≤3SDCM at 2700K & 3000K, & ≤5SDCM at 1800K
- Tunable white (6T): 2700K to 6500K CCT. Use with Z10U or RAU dimming only. Fixture-tofixture consistency of ≤3SDCM at 2700K, 5000K, & 6500K CCT.

Light engine

Quick connect power pack allow for easy installation and replacement from below ceiling with no need for additional wiring. This allows for:

- Frame and ceiling installation to be performed while still finalizing details such as lumen packages, CCT and control type.
- Easy replacement of electronics at end of life with minimal wasted material and labor required.
- Ease and upgradability of technology.
- Lumen Maintenance: L80 at 60,000 hours.
- 347V light engines are Z10 dimming only and include dedicated 347V driver. For 347V non-Z10 dimming, order T347-75VA field-installed stepdown transformer accessory.

Emergency

Bodine BSL6 6W battery pack with self-test/ diagnostic functionality. Factory or field mounted to frame.

- For trim with integral emergency test switch, order light engine with IEM6 option (ex: P6RDL20935WCDZ10UIEM6). DL style only.
- For remote ceiling mounted test switch, order standard light engine (ex: P6RDL20935WCDZ10U). Optional accessory ceiling mounting plate available (CAEM6TSCP) for remote mounted test switch.
- Refer to Calculite-LyteProfile-EasyLyte Emergency Battery Pack specification sheet for more details.
- CEC Title 24 JA8 Certified.

Options and Accessories

Sloped ceilings: Compatible with sloped ceiling adapters (see SCA spec sheet).

Flangeless mud-in ring: Use CA6RFT For use with flangless plaster installations.

Field Installed Emergency: Refer to Calculite-LyteProfile-EasyLyte Emergency Battery Pack specification sheet for more details.

• CAEM6: Field install EM6 kit with Bodine BSL6 6W battery pack with self-test/self-diagnostic, mounts to new construction frames. Includes remote ceiling plate for test switch. To mount test switch to trim for new construction frame, order downlight light engine with IEM6 option code (e.g. P6RDL20935WCDZ10UIEM6).

C6RVPWH: includes machined aluminum ring painted white, gasketed for IP65 protection, and impact resistant polycarbonate lens (IK10). Locks in place with discrete setscrew (key included). Available also with antimicrobial finish (C6RVPWHAMF).

CAEM6TSCP: Ceiling cover plate for remote mounted EM6 test switch. 1/2" (25mm) hole, 4 3/8" (109mm) x 2 3/4" (69mm) rectangular. Includes two mounting screws. Required for lensed wall wash (LW) and shower light (SL) styles.

T347-75VA: Field installable 347:120V 75VA stepdown transformer, attaches to knock out on frame junction box, for use with non-IC (N) or remodel (R) frames.

ENERGY STAR® exceptions

- Black finishes

Labels and Listings

- cULus listed for wet locations
- CCEA (frames with *LC suffix)
- ENERGY STAR® certified
- RoHS certified

Warranty



5 year limited warranty Visit Signify.com/warranties for more information on Signify's standard 5-year limited warranty on complete luminaire systems.


Round Downlight & Lensed Wall Wash

interact				
		Standalone	Gateway	Gateway + IoT
Dimming, grouping, and zoning			✓	✓
Bluetooth and ZigBee enabled		✓		✓
Motion sensing and daylight harvesting		✓		✓
Integration with 0-10V and phase dimming fixtures		\checkmark	\checkmark	\checkmark
Code compliance		\checkmark	\checkmark	\checkmark
Granular dimming and dwell time		\checkmark	\checkmark	
Correlated color temperature (CCT) tuning by switch	New	\checkmark	\checkmark	
Support for sensor-based Tunable White luminaires	New	\checkmark	\checkmark	
Energy reporting and monitoring			\checkmark	
Scheduling			 	
Demand response			\checkmark	 ✓
BMS integration (BACnet)				 ✓
Floor plan visualization				 ✓
IoT sensors for wellness				
IoT Apps for productivity				

Currently supported maximum system size

To be able to design the lighting system correctly for the customer, it is important to know the prime characteristics of the system, its possibilities and limitations.

System level	
Total number of gateways	Unlimited
Total number of devices	200 per network
Luminaires with integrated sensors	150
• Smart TLEDS	150
• Zones + groups	64
Total number of ZGP devices (sensors and switches)	50
• Sensors	30
• Switches	50
Group level	
Recommended number of lights	40 (maximum 150)
Number of ZGP devices	5
Number of scenes	16

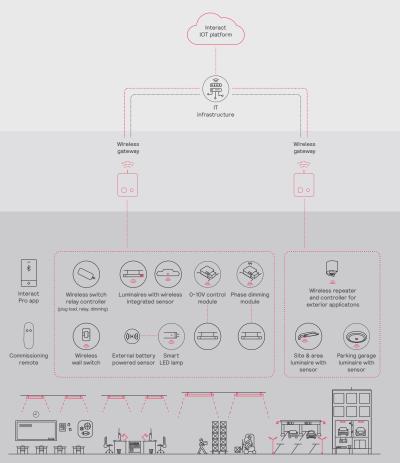

P6R LyteProfile 6" Round Downlight & Lensed Wall Wash

Wireless controls options

Interact

- SWZCS is a connected sensor with integral occupancy and daylight sensing and supports wireless mesh connectivity.
- The sensor works in the standalone mode (similar to SpaceWise) when configured without a gateway or in a cloud connected mode if a compatible gateway is used.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & BlueTooth connectivity. The App provides flexibility to choose between a gateway or non gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely and use IRT9015 remote on-site to identify and group devices together.

Compatible with:

- SWS200 & UID8465 wireless scene switch
- Battery powered IP42 presence sensor OCC sensor IA CM WH 10/1
- Battery powered IP42 presence & daylight sensor OCC-DL sensor IA CM IP42 WH
- LCN3110: battery powered IP65 presence sensor, OCC sensor IA CM IP65W
- LCN3120: battery powered IP65 presence & daylight sensor, OCC-DL sensor IA CM IP65 WH
- For more information on Interact visit: interact-lighting.com/interactproscalablesystem

Radio only sensor (RA or RADIO)

- Integral RA or RADIO only sensor simply enables wireless mesh connectivity to the luminaire without any occupancy or daylight sensing.
- Ideal for applications where sensing functionality is managed by other Interact devices and the luminaire only needs to have wireless connectivity.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & Bluetooth connectivity. The App provides flexibility to choose between a gateway or non-gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely, identify and group devices together onsite.
- Compatible with SWS200 and UID8465 wireless scene switch, wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1).
- For more information on Interact visit: interact-lighting.com/interactproscalablesystem

Sensor bundle (IAOSB or SB)

- A wireless IoT connected lighting solution for large enterprises that span across multiple floors, buildings and require multiple gateways.
- View all your projects under one dashboard and easily compare insights from multiple projects in one view.
- Compatible with SWS200 wireless scene switch, wireless Occ sensor (OCC SENSORIA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1) and wireless Occupancy or Daylight & Occupancy sensors available.• Use Interact software and insights to increase building efficiency, achieve building wide integration and optimize space through occupancy analytics.
- IAOSB or SB option in addition to occupancy and daylights sensing supports advanced IoT capabilities, such as people estimation analysis, desk level temperature & humidity sensing, noise classification, and BLE beacon.
- Requires compatible Gateway and internet connectivity for commissioning.
- For more information, visit: interact-lighting.com/interactproscalablesystem

Emergency Options (ER100)

- Power Sensing (factory default) Recommended UL924 option requires unswitched power sense line, absence of voltage on the normal circuit triggers luminaire to 100% output.
- Power Interruption Detection (field option) Detects AC power interruption >30ms triggers 90 minute emergency mode with luminaire at 100% output.

Interact supported sensor option codes across Genlyte product lines

	Evokit	Day-Brite	Ledalite	Lightolier
ZigBee + Bluetooth + Sensing	SWZCS	SWZCS	CS	SBA accessory (external)
ZigBee + Bluetooth	RADIO	RADIO	RA	RA
ZigBee + Bluetooth + Sensing + Environmental data	IAOSB	IAOSB	SB	SB
ZigBee + Highbay + Sensing	-	SWZCSH	-	-

Round Downlight & Lensed Wall Wash



AccuRender Technology (CRI 90+)

The right light brings colors to life. Our new AccuRender technology helps ensure colors are rendered more accurately and consistently, while doing so as efficiently as CRI 80 products.



Good color rendering and high efficacy



Standard CRI 90 Better color rendering and low efficacy



AccuRender Best color rendering, color preference and high efficacy

Enjoy design flexibility

- Full range of products and options:
- Available soon in across Lightolier portfolio for application flexibility
- Multiple color temperatures (CCTs) and lumen packages offered

Promote savings

- High efficacy, with no penalty:
- Energy efficacy compares well to conventional 80 CRI
- Up to 25% more energy savings vs competitor 90 CRI1
- · Helps meet Title 24 requirements

Show your true colors

High color rendering:


· True to life colors to help energize your environment and render better flesh tones critical for healthcare hospitality and retail applications.


R_a up to 94 CRI • R_f up to 92 TM-30 R_{f,h1} up to 91 TM-30 R₉ up to 67 CRI G_a up to 99 CRI C₉ up to 94 CRI R_{cs,h1} up to -5% TM-30

 $\rm R_9$ up to 100 TM-30

Achieve color balance

- Best in class color consistency:
- Promote aesthetic harmony in your space with ≤ 2 SDCM





Round Downlight & Lensed Wall Wash

Electrical - Static White

Input frequency of 50/60Hz, Power Factor @ Max Load >0.9

	Input	Input	Input	LED Drive	Input	LED	THD
Desiduat	Volts	Freq.	Current	Current	Power	Power	Factor @
Product	(V)	(Hz)	(A)	(A)	(W)	(W)	Max Load
	120V	0.081A	0.23A	9.8W	8.0W	<10%	>0.9
P6RDL10_Z10U/3	277V	0.036A	0.23A	10.0W	8.0W	<20%	>0.9
	347V	0.033A	0.23A	11.4W	8.0W	<30%	>0.9
	120V	0.121A	0.35A	14.5W	12.1W	<10%	>0.9
P6RDL15_Z10U/3	277V	0.053A		14.6W	12.1W	<10%	>0.9
	347V	0.048A	0.35A	16.6W	12.1W	<25%	>0.9
	120V	0.154A	0.45A	18.4W	15.6W	<10%	>0.9
P6RDL20_Z10U/3	277V	0.067A	0.45A	18.5W	15.6W	<10%	>0.9
	347V	0.059A	0.45A	20.5W	15.6W	<20%	>0.9
	120V	0.195A	0.58A	23.4W	19.9W	<10%	>0.9
P6RDL25_Z10U/3	277V	0.085A	0.58A	23.5W	19.9W	<10%	>0.9
	347V	0.072A	0.58A	24.9W	19.9W	<20%	>0.9
	120V	0.236A	0.70A	28.3W	24.2W	<10%	>0.9
P6RDL30_Z10U/3	277V	0.102A	0.70A	28.2W	24.2W	<10%	>0.9
	347V	0.079A	0.65A	27.4W	22.5W	<15%	>0.9
	120V	0.285A	0.85A	34.2W	29.4W	<10%	>0.9
P6RDL35_Z10U/3	277V	0.123A	0.85A	34.2W	29.4W	<10%	>0.9
	347V	0.101A	0.85A	35.0W	29.4W	<10%	>0.9
	120V	0.296A	0.88A	35.5W	30.5W	<10%	>0.9
P6RDL40_Z10U/3	277V	0.128A	0.88A	35.5W	30.5W	<10%	>0.9
	347V	0.105A	0.88A	36.4W	30.5W	<10%	>0.9
	120V	0.307A	0.92A	36.8W	31.7W	<10%	>0.9
P6RDL45_Z10U/3	277V	0.133A	0.92A	36.8W	31.7W	<10%	>0.9
	347V	0.109A	0.92A	37.7W	31.7W	<10%	>0.9
	120V	0.342A	1.02A	41.0W	35.3W	<10%	>0.9
P6RDL50_Z10U/3	277V	0.148A	1.02A	41.0W	35.3W	<10%	>0.9
	347V	0.120A	1.02A	41.5W	35.3W	<10%	>0.9

Electrical - Dim-to-Warm (9D2W)

Input frequency of 50/60Hz, Power Factor @ Max Load >0.9

Des durat	Input Volts	Input Freq.	Input Current	LED Drive Current	Input Power	LED Power	THD Factor @
Product	(V)	(Hz)	(A)	(A)	(W)	(W)	Max Load
P6RDL109D2W_Z10U	120V	0.122A	0.325	14.6W	11.7W	<10%	>0.9
P6RDL109D2W_Z10U	277V	0.056A	0.325	15.6W	11.7W	<20%	>0.9
P6RDL159D2W_Z10U	120V	0.164A	0.460	19.7W	16.6W	<10%	>0.9
P6RDL159D2W_Z10U	277V	0.076A	0.460	21.0W	16.6W	<20%	>0.9
P6RDL209D2W_Z10U	120V	0.212A	0.600	25.4W	21.6W	<10%	>0.9
P6RDL209D2W_Z10U	277V	0.094A	0.600	26.0W	21.6W	<10%	>0.9
P6RDL259D2W_Z10U	120V	0.256A	0.725	30.7W	26.1W	<15%	>0.9
P6RDL259D2W_Z10U	277V	0.111A	0.725	30.7W	26.1W	<25%	>0.8
P6RDL309D2W_Z10U	120V	0.300A	0.850	36.0W	30.6W	<15%	>0.9
P6RDL309D2W_Z10U	277V	0.130A	0.850	36.0W	30.6W	<25%	>0.8


Electrical - Tunable White (96T)

Input frequency of 50/60Hz, Power Factor @ Max Load >0.9


Product	Input Volts	Input Freq. (Hz)	Input Current	LED Drive Current	Input Power (W)	LED Power (W)	THD Factor @ Max Load
FIGUUCE	(V)	(112)	(A)	(A)	(**)	(**)	Max Luau
P6RDL1096T_Z10U	120V	0.080A	0.220	9.5W	7.9W	<15%	>0.9
P6RDL1096T_Z10U	277V	0.037A	0.220	10.2W	7.9W	<15%	>0.8
P6RDL1596T_Z10U	120V	0.119A	0.332	14.2W	12.0W	<15%	>0.9
P6RDL1596T_Z10U	277V	0.055A	0.332	15.1W	12.0W	<15%	>0.8
P6RDL2096T_Z10U	120V	0.158A	0.447	18.9W	16.1W	<15%	>0.9
P6RDL2096T_Z10U	277V	0.073A	0.447	20.1W	16.1W	<15%	>0.9
P6RDL2596T_Z10U	120V	0.200A	0.566	24.0W	20.4W	<15%	>0.9
P6RDL2596T_Z10U	277V	0.091A	0.566	25.2W	20.4W	<15%	>0.9
P6RDL3096T_Z10U	120V	0.241A	0.692	29.0W	24.9W	<15%	>0.9
P6RDL3096T_Z10U	277V	0.110A	0.692	30.4W	24.9W	<10%	>0.9

Round Downlight & Lensed Wall Wash


New construction

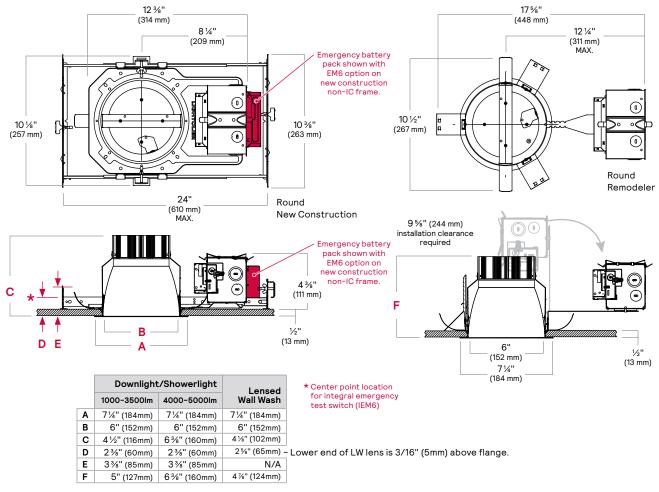


Flangeless mud-in ring (CA6RFT) accessory




Retrofit (R) with round trim




Vandal Proof (VP) accessory




Round Downlight & Lensed Wall Wash

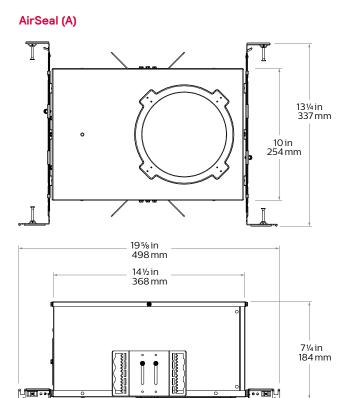

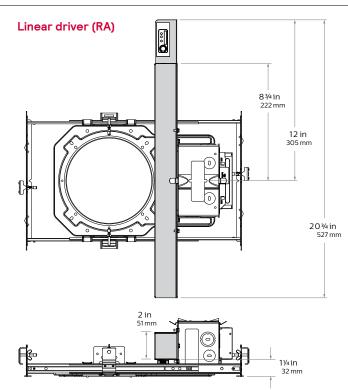

Requires either top access or 19" plenum space without sensor, and 22" with sensor.

Flex Install (F)

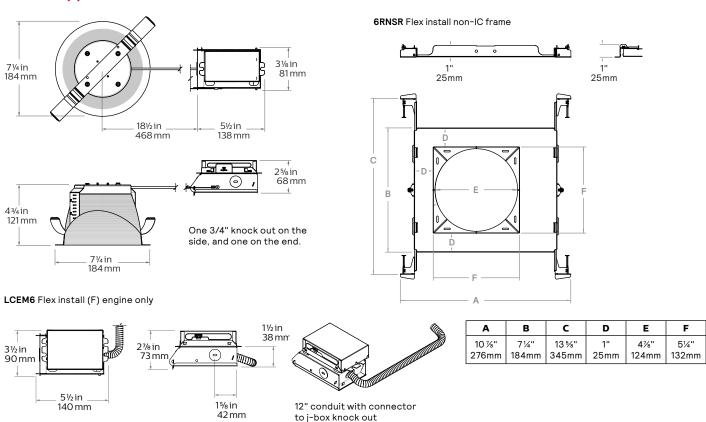

Round Downlight & Lensed Wall Wash

Reflectors



Specular clear (CL): Most specular and most efficient finish, delivers maximum photometric performance but can produce a mirror image effect of the interior space.



Comfort clear (CC): Semi-specular finish that softens the light at the source of the reflector and creates a subtle, even luminance from the reflector cone.



Comfort clear diffuse (CD): Slightly diffuse clear finish, which eliminates iridescence and reduces the mirror image effect inherent with a specular finish.



Vandal proof (VP): Provides an elegant solution for vandal resistant needs. One piece machined aluminum ring with impact resistant clear lens. Flangeless (F) flange must be ordered. Provides the luminaire with an IK10 impact and IP65 rating.




White (-): (matte) Brightest aperture when illuminated and provides the smoothest transition to most ceilings when off (white is only available with a white flange).



Black (BK): Painted matte finish that provides the lowest aperture brightness possible and reduces source identification in a ceiling significantly.



Shower light (SL): Wet location rated shower light applicable in any installation requiring dead front trims, interior or exterior non-corrosive applications, or where a diffused lens at the ceiling is required (non-conductive).

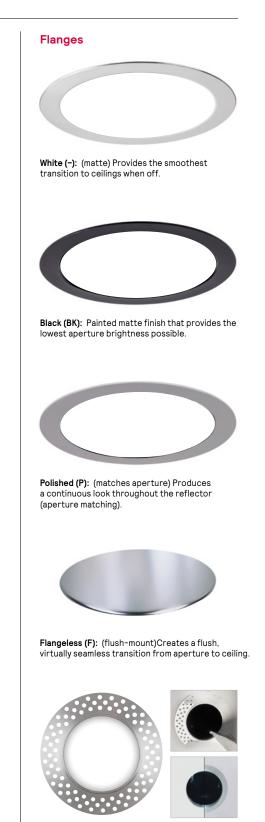

Mud-in ring (FT): Low profile, machined aluminum mud-in ring provides a raised rib to plaster up to and a 3/16" flange thickness. The ring is attached to the ceiling material as opposed to the frame-in kit to avoid conduction of heat and vibration which can cause yellowing or cracking of the plaster.

Round Downlight & Lensed Wall Wash

Adjustment Factors

Finish	CRI/CCT	Lumens	
CL =100%	90CRI 4000K = 106%	5000lm = 167%	2500lm = 83%
CC = 86%	90CRI 3500K = 104%	4500lm = 150%	2000lm = 67%
CD = 91%	90CRI 3000K = 100%	4000lm = 133%	1500lm = 50%
WH = 90%	90CRI 2700K = 96%	3500lm = 117%	1000lm = 33%
BK = 54%		3000lm = 100%	

Downlight, Narrow beam, 29W LED, 90 CRI, 3000 K

Candela Curves



			Angle
Report P6RDL	0 5		
Outpu	tims 2	2992 lms	10
		0.92	15 20
Beam /		58°	20
Input V	Vatts²: 2	28.8W	30
Efficad	:y: 1	03.91m/w	35
CCT ³ :	-	3000K	40
CRI:	ę	90 min	45
			50
Zonal li	umens & r	percentages	55
			60
Zone	Lumens	%Luminaire	65 70
0-30	1861	62.2%	75
0-40	2415	80.7%	80
0-60	2982	99.7%	85
0-90	2992	100.0%	90

Mean CP	Lms	Single unit dat	a	
3015 2903			al center beam oot-candles	Beam dia. (ft)*
2670 2585	268	5'	121	4.6'
2369 1942	722	6' 7'	84 62	5.5' 6.4'
1357 854	871	8' 9'	47 37	7.4' 8.3'
597	554	*Beam diamete		
489 399	378	dles drop to 5	0% of maxim	um.
213 32	188	Multiple unit da	ta - RCR 2	
53	8		al center beam oot-candles	Watts per sq.ft
2 1 0	2	5' 6'	134.0 88.0	1.28 0.84
0	0	7' 8'	63.0	0.60
	•	8' 9'	53.0 42.0	0.50 0.40

Mean

Coefficients of utilization

Beam

dia. (ft)*

4.5 5.4'

6.3'

7.2' 8.1'

ere foot-can-

obernic	ienta	oru	unza	cion							
Ceiling		80%			70%		50%		30%		0%
Wall	70	50	30	10	50	10	50	10	50	10	0
RCR	Zon	al cav	ity m	ethoo	I – Eff	ectiv	e floo	r refl	ectan	ce = :	20%
0	119	119	119	119	116	116	111	111	106	106	100
0 1	113	110	107	105	108	103	104	100	100	97	92
Ratio 5 C	107	101	97	93	100	92	96	90	93	88	85
<u>∝</u> "3	101	94	88	84	92	83	90	82	87	81	78
Room Cavity & 2 9 G 4	95	87	81	76	85	76	83	75	81	74	71
ç 5	90	80	74	69	79	69	78	68	76	68	66
<u>6</u>	85	75	68	64	74	63	72	63	71	63	61
57	80	70	63	59	69	59	68	58	67	58	56
£ 8	76	65	59	54	65	54	64	54	63	54	52
9	72	61	55	51	61	51	60	50	59	50	49
10	68	58	52	47	57	47	56	47	56	47	45

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Downlight, Medium beam, 29W LED, 90 CRI, 3000K

90 min

Zonal lumens & percentages

Zone Lumens %Luminaire

1935

2734

3112

3118

CCT3:

0-30

0-40

0-60

0-90

CRI:

Candela	Curves
813	60°
1615	Y
2438	30°
3250	

		Angle	Mean CP
Report ¹ :		0	3161
P6RDL30930M	ICLZ10U.ies	5	3048
		10	2789
Output Lms:		15	2498
Spacing Crit.:		20	2178
Beam Angle:	66°	25	2065
Input Watts ² :	28.8W	30	1942
Efficacy:	108.31m/w	35	1298
CCT ³ :	3000K	40	650

45

50 55

60 65

70 75

80

85

90

62.1%

87.7%

99.8%

100.0%

2 1

1 0

õ

2498	202	5'	126	4
2178	698	6'	88	5
2065		7'	65	6
1942	955	8'	49	7.
1298		9'	39	8
650	799	*Beam dia	meter is where for	
349			to 50% of maximu	
224	288	ules ul op		
93		Multiple un	it data - RCR 2	
13	90			
4		Spacing	Initial center beam	Wa

Single unit data

lighted plane

Height to Initial center beam

foot-candles

Lms

282

5

2

0

		tial center beam foot-candles	Watts per sq.ft.
	5'	140.0	1.28
(6'	92.0	0.84
-	7'	66.0	0.60
1	8'	55.0	0.50
9	9'	44.0	0.40

Coefficients of utilization

Ceiling		80%			70	70% 50%		30%		0%	
Wall	70	50	30	10	50	10	50	10	50	10	0
RCR	Zon	Zonal cavity method - Effective floor reflectance = 20							20%		
0	119	119	119	119	116	116	111	111	106	106	100
0 1	113	110	107	105	108	103	104	100	100	97	92
	107	101	97	93	100	92	96	90	93	88	85
ഷ്ദ	101	94	88	84	92	83	90	82	87	81	78
£`4	95	87	81	76	85	76	83	75	81	74	71
a 5	90	80	74	69	79	69	78	68	76	68	66
0 6	85	75	68	64	74	63	72	63	71	63	61
57	80	70	63	59	69	59	68	58	67	58	56
Room Cavity Ratio 8 2 9 5 4 2 7 -	76	65	59	54	65	54	64	54	63	54	52
9	72	61	55	51	61	51	60	50	59	50	49
10	68	58	52	47	57	47	56	47	56	47	45

38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

1. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products. 2. Wattage: controlled to within 5%


3. Correlated Color Temperature: within specs as defined in ANSI_NEMA_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

Round Downlight & Lensed Wall Wash

Adjustment Factors

Finish	CRI/CCT	Lumens	
CL =100%	90CRI 4000K = 106%	5000lm = 167%	2500lm = 83%
CC = 86% CD = 91%	90CRI 3500K = 104% 90CRI 3000K = 100%	4500lm = 150% 4000lm = 133%	2000lm = 67% 1500lm = 50%
WH = 90%	90CRI 2700K = 96%	3500lm = 117%	1000lm = 33%
BK = 54%		3000lm = 100%	

Downlight, Wide beam, 29W LED, 90 CRI, 3000K



Zone	Lumens	%Luminaire
0-30	1464	47.3%
		99.8%
0-90	3095	100.0%
Repor	+ 1•	
		CLZ10U.ies
P6RDL Outpu	- 30930W it Lms:	CLZ10U.ies 30951ms
P6RDI Outpu Input	L30930W It Lms: Watts ² :	30951ms 28.3W
Outpu Input Effica	.30930W It Lms: Watts ² : cy:	30951ms 28.3W 109.41m/w
P6RDL Outpu Input Effica CCT ³ :	L30930W It Lms: Watts ² : cy:	30951ms 28.3W 109.41m/w 3000K
P6RDL Outpu Input Effica CCT ³ : CRI:	L30930W It Lms: Watts ² : cy:	30951ms 28.3W 109.41m/w 3000K 90min
P6RDL Outpu Input Effica CCT ³ : CRI: Beam	_30930W It Lms: Watts ² : cy: Angle:	30951ms 28.3W 109.41m/w 3000K
	0-40 0-60 0-90	0-30 1464 0-40 2427 0-60 3088 0-90 3095

Zonal lumens & percentages

	Initial center beam foot-candles	Beam dia. (ft) ³
5'	69	7.1'
6'	48	8.5'
7'	35	9.9'
8'	27	11.4'
9'	21	12.8'
* Beam diam	eter is where fo	ot-can
dles drop	neter is where for to 50% of maximi t data - RCR 2	
dles drop	to 50% of maxim	
dles drop Multiple unit	to 50% of maximi t data - RCR 2 Initial center beam	um. Watts

Coefficients of utilization

Coerric	Tents	oru	unza	lion							
Ceiling		80%			70%		50%		30%		0%
Wall	70	50	30	10	50	10	50	10	50	10	0
RCR	Zonal cavity method - Effective floor reflectance = 20%							20%			
0	119	119	119	119	116	116	111	111	106	106	100
0 1	113	109	107	104	107	102	103	99	99	96	92
Ratio c c -	106	100	95	92	98	90	95	88	92	87	83
<u>۳</u> 3	99	92	86	81	90	80	87	79	85	78	75
<u>,</u> ≩ 4	93	84	77	72	83	72	80	71	78	70	68
<u>₹</u> 5	87	77	70	65	76	65	74	64	72	64	61
Room Cavity 8	81	71	64	59	70	58	68	58	67	58	56
57	76	65	58	53	65	53	63	53	62	52	51
<u>8</u> 2	72	60	53	49	60	48	59	48	57	48	46
9	67	56	49	44	55	44	54	44	53	44	42
10	63	52	45	41	52	41	51	41	50	40	39

43.0 38'x38'x10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

64.0


53.0

0.59

0.49

0.39

Lensed Wall Wash, Wide beam, 29W LED, 90CRI, 3000K Report¹:



$\begin{array}{c c c c c c c c c c c c c c c c c c c $	Report ¹ : P6RLW30930WCLZ10U.IES		Multiple unit data Footcandles on wall				Multiple unit data Footcandles on wa		
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Input Watts ² : Efficacy:	29.4W 85.6lm/w		5		Ъ		5	' f 3'
	CRI:	90min	ceiling in feet 0 G + C C	87 73 54 38 28 21 16 13 11	79 71 54 39 28 22 17 13 11	87 73 54 38 28 21 16 13 11		49 55 50 41 32 26 20 16 14	

 Mean CP Lms

7'

8'

Angle

80

Multiple unit data Footcandles on wall

wall ' from wall 3' from wall E Ъ 3' on ctr 4' on ctr. Distance from ceiling in feet Distance f 10 6 ø

1. Tested using absolute photometry as specified in LM79: IESNA Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products. 2. Wattage: controlled to within 5%

3. Correlated Color Temperature: within specs as defined in ANSI_NEMA_ANSLG C78.377-2008: Specifications for the Chromaticity of Solid State Lighting Products.

© 2024 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.



Signify North America Corp. 400 Crossing Blvd, Suite 600 Bridgewater, NJ 08807 Telephone: 800-555-0050

Signify Canada Ltd. 281 Hillmount Road Markham, ON, Canada L6C 2S3 Telephone: 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.