

# I-CONNECTOR CONNECTEUR DROIT

For use with Gallery® TK-6000 series track / Ne convient qu'au rail d'éclairage Gallery® TK-6000

IC6101

#### IMPORTANT SAFETY INSTRUCTIONS


When installing or using the lighting system, basic safety precautions should always be followed, including the following:


- 1. Read all instructions before attempting to install this item.
- 2. Do not install this lighting system in a damp or wet location.
- 3. Do not cut any track sections.
- 4. Do not install any part of a track system less then five (5) feet above the floor
- 5. Do not install any fixture assembly closer than six (6) inches from any curtain, or similar combustible material.
- Disconnect electrical power before adding to or changing the configuration of the track.
- Do not attempt to energize anything other than lighting track fixtures on the track. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, and the like to the track.


# **DIRECTIVES DE SÉCURITÉ IMPORTANTES**


Des précautions élémentaires, dont les suivantes, doivent être prises lors de l'installation et de l'utilisation d'un appareil d'éclairage:


- 1. Lisez toutes les directives avant d'installer cette appareil.
- 2. N'installez pas l'appareil d'éclairage dans un endroit humide ou détrempé.
- 3. Ne coupez pas les sections de rail.
- 4. Toute partie du rail d'éclairage doit se trouver au moins 1,5 m (5 pi) du sol.
- 5. Toute lampe doit se trouver au moins 15 cm (6 po) des rideaux ou de toute autre matière combustible du genre.
- Coupez l'alimentation du secteur avant d'ajouter un rail ou d'en modifier la configuration.
- 7. Ne branchez rien d'autre que les lampes pour rail d'éclairage sur les rails. Pour réduire le risque d'incendie ou de choc électrique, ne connectez jamais d'outil électrique, de rallonge, d'électroménager ou autres du genre sur le rail.

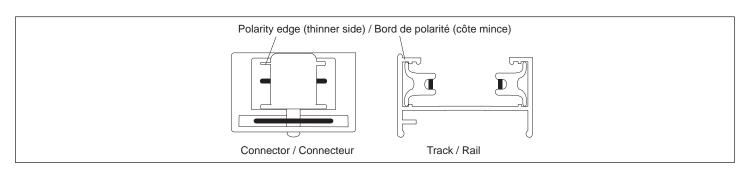









# **INSTALLATION INSTRUCTIONS**

- Loosen set screw on end cap and remove from end of track "A" which will receive I-Connector (diagram 1).
- Repeat step 1 for track "B".
- 3. Position open ends of tracks in "I" formation as shown in diagram 2.
- Ensure polarity edges of tracks and connector align. Insert I-Connector into open end of track "A" and tighten positioning screw. Do not force connector into track (diagram 3).
- 5. Repeat step 4 and 5 for track "B".

FOR USE WITH GALLERY TRACK SYSTEM ONLY.

# **DIRECTIVES D'INSTALLATION**

- 1. Enlever l'embout du rail "A" où l'on posera le raccord droit (schéma 1).
- 2. Faire de même pour le rail "B".
- 3. Placer les extrémités ouvertes des rails en ligne droite, comme au schéma 2.
- 4. S'assurer de faire concorder les bords de polarité des deux rails. Insérer le raccord droit dans l'extrémité ouverte du rail "1" et resserrer la vis de fixation. Ne pas forcer le raccord dans le rail (schéma 3).
- 5. Faire de même pour le rail "B".

NE CONVIENT QU'AU RAIL D'ÉCLAIRAGE GALLERY.



rev.4.16.07





Halogène Gallery Halogen is a Registered Trademark of •
Halogène Gallery Halogen est une marque déposée de : Liteline Corporation
Imported exclusively by • Importateur en exclusivité : Liteline Corporation
Brampton, Ontario, Canada L6T 5B7
Email • Courrier élec. : info@liteline.com
Website • Site web : www.liteline.com

Website • Site web : www.liteline.com Toll free technical support •

Soutien technique téléphonique sans frais : 1-866-730-7704

Made in China • Fabriqué en China