


How to use the charger

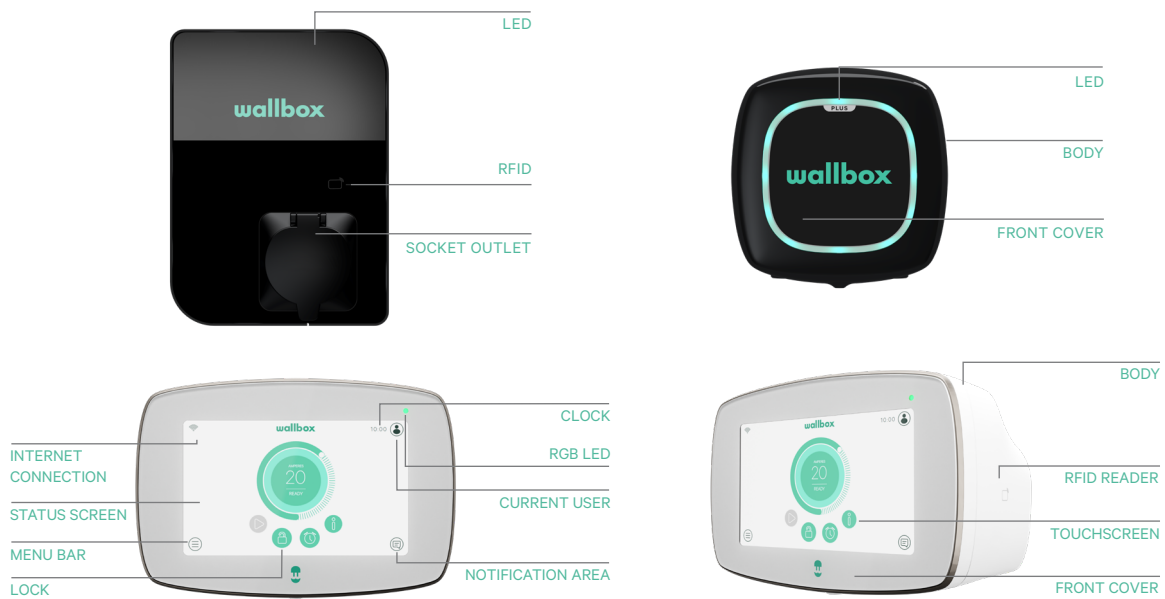

Action	Copper SB	Pulsar Plus	Commander 2
Charge point will be locked while available.	Yellow circle	Yellow circle	Yellow circle
Show your authorized RFID card to the RFID reader or unlock the charger with the CPO App.	RFID icon / App	App	RFID icon / App
Once authorized, the charger will unlock.	White circle	Green circle	
Connect your EV charging cable to the Charge Point.	Green circle	N/A	N/A
Connect your EV cable to the EV.	Blue circle	Blue circle	Blue circle
Charge process will start.	Concentric circles (outer blue, inner white)	Concentric circles (outer blue, inner white)	Concentric circles (outer blue, inner white)
Use the same RFID card, or the CPO App, to stop the charging process.	Blue circle	Blue circle	Blue circle
Disconnect your EV cable from the Charge Point and from the EV.	Yellow circle	Yellow circle	Yellow circle

Notes: Other procedures could be defined by your Charge Point Operator.
Mifare UID shall be introduced in Central System's authorization whitelist as little-endian and no separators.

OCPP and myWallbox

To keep aligned with the OCPP specification, some Wallbox functionalities are not available when OCPP is enabled. Non-conflicting functionalities will always remain available at myWallbox App and Portal.

myWallbox cloud will continue gathering all the information regarding the Charge Point status and usage for a faster and better after sales service as well as managing the remote updates of the Charge Point.

Wallbox functionalities not available when OCPP is enabled:

Some of the myWallbox functionalities will still be available when OCPP is activated. They can be performed by the Charge Point Operator (CPO) though the myWallbox App or Portal:

- Charger status monitoring
- Anonymous charging sessions
- Set Power Sharing
- Set Power Boost
- Set MID Meter
- Set the current limit
- Update the charger software
- Restart (charger reboot)
- Restore (factory conditions)
- Set charging schedules
- Set TN/TT Ground system

Note: These features will not be available if the network connection is in a VPN.

Note: Wallbox functionalities will remain available according to your myWallbox plan: “Basic”, “Standard” and “Business”.